
FED. SUP CLASS
5306

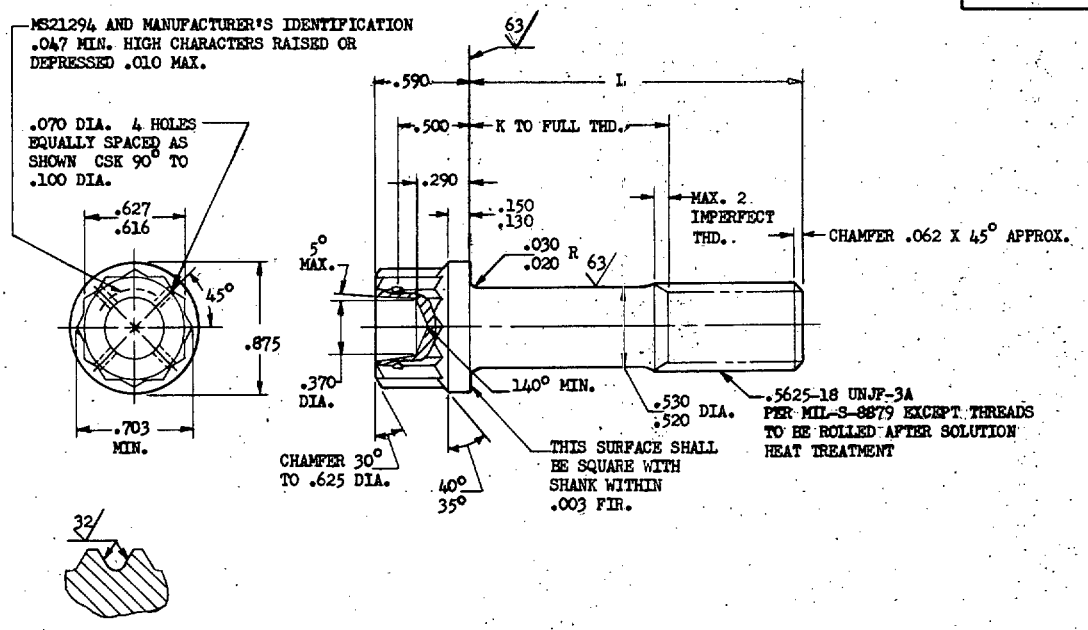

SECTION THRU THREAD PROFILE

PART NO.	L	K +.000 -.060	APPROX. WEIGHT LB/100	PART NO.	L	K +.000 -.060	APPROX. WEIGHT LB/100	PART NO.	L	K +.000 -.060	APPROX. WEIGHT LB/100
MS21294-06	1.000	(a)	11.91	MS21294-23	2.375	1.000	19.63	MS21294-41	4.625	3.250	32.32
MS21294-07	1.062	(a)	12.26	MS21294-24	2.500	1.125	20.34	MS21294-42	4.750	3.375	33.03
				MS21294-25	2.625	1.250	21.04	MS21294-43	4.875	3.500	33.73
MS21294-08	1.125	(a)	12.61	MS21294-26	2.750	1.375	21.75	MS21294-44	5.000	3.625	34.44
MS21294-09	1.188	(a)	12.96	MS21294-27	2.875	1.500	22.45	MS21294-45	5.125	3.750	35.14
MS21294-10	1.250	(a)	13.31	MS21294-28	3.000	1.625	23.16	MS21294-46	5.250	3.875	35.85
MS21294-11	1.312	(a)	13.66	MS21294-29	3.125	1.750	23.86	MS21294-47	5.375	4.000	36.55
MS21294-12	1.375	(a)	14.01	MS21294-30	3.250	1.875	24.57	MS21294-48	5.500	4.125	37.26
MS21294-13	1.438	(a)	14.36	MS21294-31	3.375	2.000	25.27	MS21294-49	5.625	4.250	37.96
MS21294-14	1.500	.125	14.71	MS21294-32	3.500	2.125	25.98	MS21294-50	5.750	4.375	38.67
MS21294-15	1.562	.188	15.06	MS21294-33	3.625	2.250	26.68	MS21294-51	5.875	4.500	39.37
MS21294-16	1.625	.250	15.41	MS21294-34	3.750	2.375	27.39	MS21294-52	6.000	4.625	40.08
MS21294-17	1.688	.312	15.76	MS21294-35	3.875	2.500	28.09				
MS21294-18	1.750	.375	16.11	MS21294-36	4.000	2.625	28.80				
MS21294-19	1.875	.500	16.81	MS21294-37	4.125	2.750	29.50				
MS21294-20	2.000	.625	17.51	MS21294-38	4.250	2.875	30.21				
MS21294-21	2.125	.750	18.21	MS21294-39	4.375	3.000	30.91				
MS21294-22	2.250	.875	18.93	MS21294-40	4.500	3.125	31.62				

(a) THREAD TO HEAD. MAXIMUM TWO IMPERFECT THREADS. EXCEPT INCOMPLETE THREADS NOT TO ENTER FILLET RADIUS.

NOTE: (1) SHANK SHALL BE STRAIGHT WITHIN .002 FIR. PER INCH OF BOLT LENGTH.
(2) THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
(3) THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND DOUBLE HEXAGON OD SHALL BE WITHIN .026 FIR.

MATERIAL: CORROSION AND HEAT RESISTANT STEEL AMS 5735.
MANUFACTURING SPECIFICATION: AMS 7478 EXCEPT HEADS TO BE FORMED BY HOT OR COLD UPSETTING.
PART SUBJECT TO FLUORESCENT PENETRANT INSPECTION PER AMS 2645.
SURFACE ROUGHNESS: MIL-STD-10 . UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES.
BREAK SHARP EDGES .003-.015 UNLESS OTHERWISE SPECIFIED.
DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED; TOLERANCES; LINEAR DIMENSIONS ±.010, ANGULAR DIMENSIONS ±5°
DO NOT USE UNASSIGNED PART NUMBERS.

APPROVED 1 May 61 REVISED (A) 23 Oct 61 (B) 17 Sep 63

P.A. Navy - Wep Other Cust Air Force - ASD	TITLE BOLT, MACHINE - STEEL, DRILLED DOUBLE HEXAGON, EXTENDED WASHER, .5625-18 (B) (MIL-S-8879 THREAD)	MILITARY STANDARD MS21294 (ASG)
PROCUREMENT SPECIFICATION NONE	SUPERSEDES:	SHEET 1 OF 1

DD FORM 1 SEP 57 672-1 (Limited coordination) Previous editions are obsolete

This standard has been approved by the BuWep (Department of the Navy) and the Department of the USAF and is mandatory for use by that activity. All other military activities are required to employ this standard where suitable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:31Z
Check the source to verify that this is the current version before use.