
FED. SUP CLASS
6240

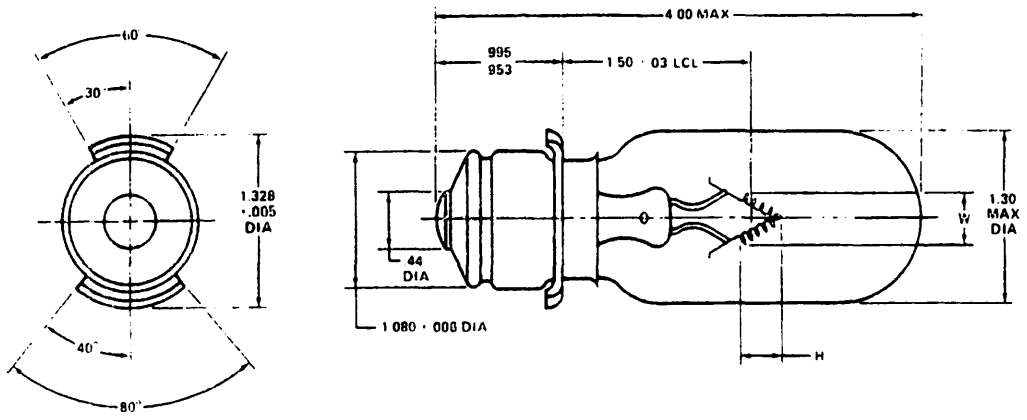

PART NO	INITIAL WATTS	RATED AMPERES	AVERAGE INITIAL LUMENS (MINIMUM)	INITIAL EFFICACY (LPW) (MINIMUM)	FILAMENT			AVERAGE LABORATORY LIFE (HOURS MIN)	FINISH
					TYPE	H	W		
MS25012 1	30 · 3	6 6	400	15 · 2	C 2V	3 5 · 6MM	5 · 75MM	1000	CLEAR
MS25012 2	45 4		650	16 2 · 2		4 0 · 6MM			
MS25012 3	30 · 3		280	——		3 5 · 6MM			(a) REFLECTOR

(a) SEE SHEET 2 FOR DETAILS OF REFLECTOR

MAXIMUM DISTANCE OF BULB WALL FROM EXTENDED BASE AXIS 0 8

MINIMUM MARKING FOR MS25012 1 AND 3 30W 6 6A BASE DOWN AND MANUFACTURER S (NAME, ABBREVIATION OR TRADE MARK)
MS25012 2 45W 6 6A BASE DOWN AND MANUFACTURER S (NAME ABBREVIATION OR TRADE MARK)

MAXIMUM EXCURSION RADIUS OF THE GEOMETRIC CENTER OF THE FILAMENT FROM EXTENDED BASE AXIS 0 03

MAXIMUM WATTAGE INCREASE DURING LIFE 10

DIMENSIONS IN INCHES, EXCEPT AS SPECIFIED UNLESS OTHERWISE SPECIFIED, TOLERANCES AND DECIMALS · 0 02, ANGLES · 0°30'

NOT MORE THAN 20 PLUS 2 LAMPS OF THE TEST SAMPLE SHALL FALL BELOW THE SPECIFIED MINIMUM INITIAL EFFICACY

FOR DESIGN FEATURE PURPOSES THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN

REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID

(B) ENTIRE STANDARD REVISED

(B) FOR CHANGES SEE SHEETS 1 AND 2

APPROVED 8 May 52 REVISED (A) 25 Feb 69 (B) 6 Oct 71

REVIEW ACTIVITIES: ARMY - ME USER ACTIVITIES: NAVY - MC, CH


This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repair of units shall be made from this document


P A USAF 82 Other Cust Army - ME Navy AS	TITLE LAMP - INCANDESCENT T 10 BULB, MEDIUM PREFOCUS BASE	MILITARY STANDARD MS25012	
PROCUREMENT SPECIFICATION MIL L 6363	SUPERSEDES	SHEET 1 OF 2	


DD FORM 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:00Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
6240

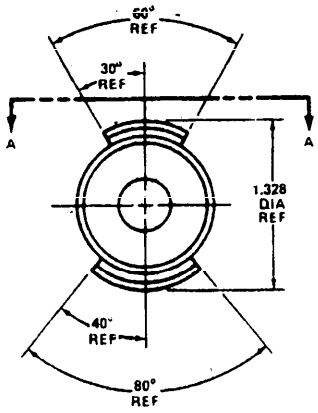

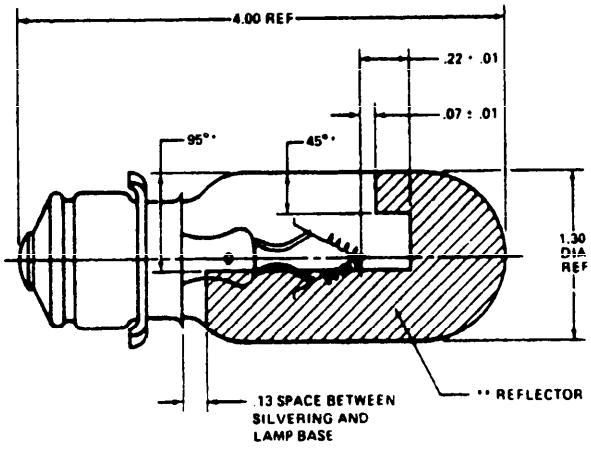



VIEW A A

* INDICATES TRUE DIMENSION

** REFLECTOR AREA EXTERNAL OPAQUE SILVER REFLECTOR WITH ALUMINUM PROTECTIVE COATING ON AREAS SHOWN BY CROSS HATCHING

USER ACTIVITIES:

REVIEW ACTIVITIES:

APPROVED 8 May 52 REVISED (B) FOR CHANGES SEE SHEETS 1 AND 2

This military standard is approved by the Department of Defense and is mandatory on all activities. Selection for all new engineering and design applications and for repair/rework use shall be made from this document.

P A. USAF - 82 Other Cust Army - ME Navy - AS	TITLE LAMP - INCANDESCENT, T 10 BULB MEDIUM PREFOCUS BASE	MILITARY STANDARD MS25012
PROCUREMENT SPECIFICATION MIL L-6363	SUPERSEDES	SHEET 2 OF 2

DD FORM 1 SEP 67 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

☆ U. S. GOVERNMENT PRINTING OFFICE: 1971-714-160 3318

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T15:00Z
Check the source to verify that this is the current version before use.