INCH-POUND

MS27499J
w/AMENDMENT 1
12 September 2019
SUPERSEDING
MS27499J
24 November 2008

DETAIL SPECIFICATION SHEET

CONNECTORS, RECEPTACLE, ELECTRICAL, BOX MOUNTING FLANGE, CRIMP TYPE, BAYONET COUPLING, SERIES II

Reactivated after 24 May 2004 and may be used for new and existing designs and acquisitions.

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-DTL-38999.


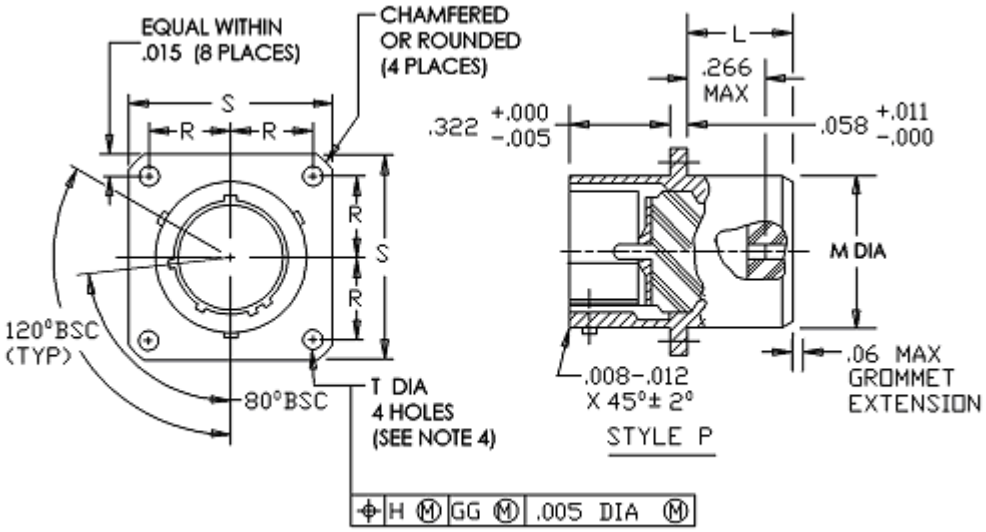


FIGURE 1. Receptacle, class E.

AMSC N/A

FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:42Z
Check the source to verify that this is the current version before use.

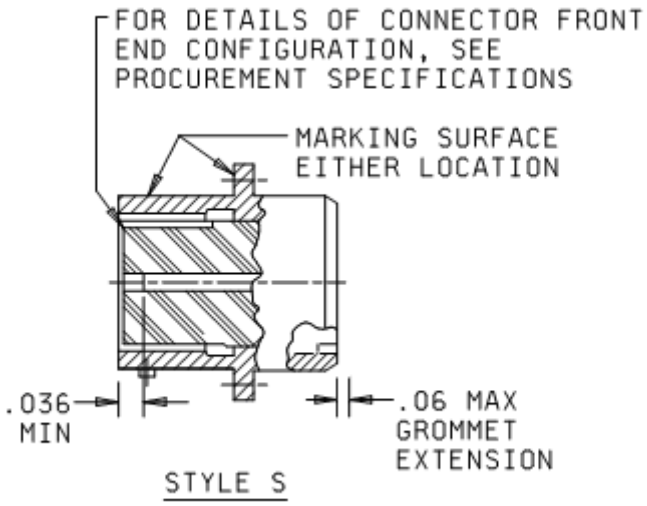

Shell size	L max	M max	R BSC	S max	T +.010 -.005
8	.312	.453	.297	.828	.120
10		.578	.3595	.954	
12		.703	.406	1.047	
14		.828	.453	1.141	
16		.953	.4845	1.234	
18		1.062	.531	1.328	
20		1.188	.578	1.453	
22		1.312	.625	1.578	
24		1.438	.6875	1.703	.147

FIGURE 1. Receptacle, class E – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:42Z
Check the source to verify that this is the current version before use.

Inches	mm	Inches	mm	Inches	mm	Inches	mm
.005	0.13	.147	3.73	.6875	17.45	1.328	33.73
.007	0.18	.223	5.66	.703	17.85	1.391	35.33
.008	0.20	.266	6.76	.828	21.03	1.438	36.53
.010	0.25	.297	7.54	.953	24.21	1.453	36.91
.011	0.28	.312	7.92	.954	24.23	1.516	38.51
.012	0.30	.322	8.18	1.047	26.59	1.578	40.08
.015	0.38	.3595	9.13	1.062	26.97	1.641	41.68
.036	0.91	.406	10.31	1.078	27.38	1.703	43.26
.058	1.47	.453	11.51	1.141	28.98	1.766	44.86
.06	1.5	.4845	12.31	1.188	30.18	1.891	48.03
.120	3.05	.531	13.49	1.234	31.34	2.016	51.21
.123	3.12	.578	14.68	1.266	32.16	2.204	55.98
.139	3.53	.625	15.88	1.312	33.32		

NOTES:

1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. For main key and key positions, see MIL-DTL-38999.
4. The gauge feature for GG shall be .010 inch (0.25 mm) smaller than the MMC size at base location.
5. Dimensioning and tolerances are in accordance with ASME-Y14.5.


FIGURE 1. Receptacle, class E – Continued.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:42Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

Dimensions and configurations: See figure 1.
Interface dimensions shall conform to MIL-DTL-38999.
This receptacle mates with MS27473, MS27480, MS27484 and MS27500.
Procurement specification: MIL-DTL-38999.
Insert arrangements: See MIL-STD-1560.

Part or Identifying Number (PIN) example:

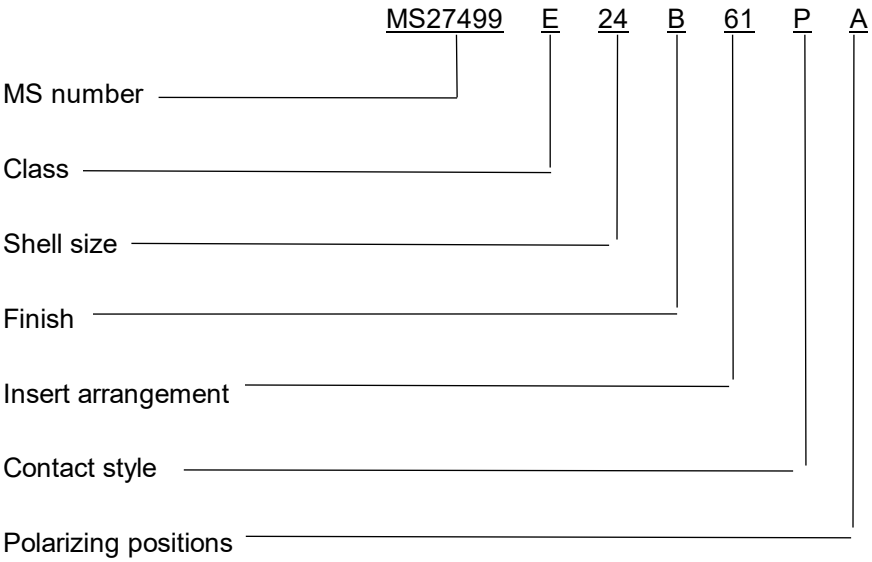

(Note: For the normal polarizing position only, no letter designator is marked on the part, and no letter designator is included in the PIN to indicate the “normal” position. A letter designator is required for all other polarization positions.)

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents. In addition to MIL-DTL-38999, this document references the following:

MS27473
MS27480
MS27484
MS27500
MIL-STD-1560
ASME-Y14.5

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:42Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Army – CR
Navy – AS
Air Force – 85
DLA – CC

Preparing activity:
DLA – CC

(Project 5935–2019-109)

Review activities:
Army – AR, MI
Navy – EC, MC, OS
Air Force – 19

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T16:42Z
Check the source to verify that this is the current version before use.