This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Review activities: Army - AR, MI
Navy - EC
Air Force - 99

User activities: Army - AV, ME
Navy - SH, MC
Air Force - 11

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Procurement Specification MIL-C-26482

P.A Navy - AS

Other Cust
USAF - 85
Army - CR

International interest

SUPERSEDES:

TITLE
COVER, PROTECTIVE, ELECTRICAL CONNECTOR
PLUG, BAYONET COUPLING FOR MIL-C-26482
CONNECTORS


MILITARY STANDARD

MS3180

PAGE 1 OF 2

5935-3130-1

Ⓕ DENOTES CHANGES

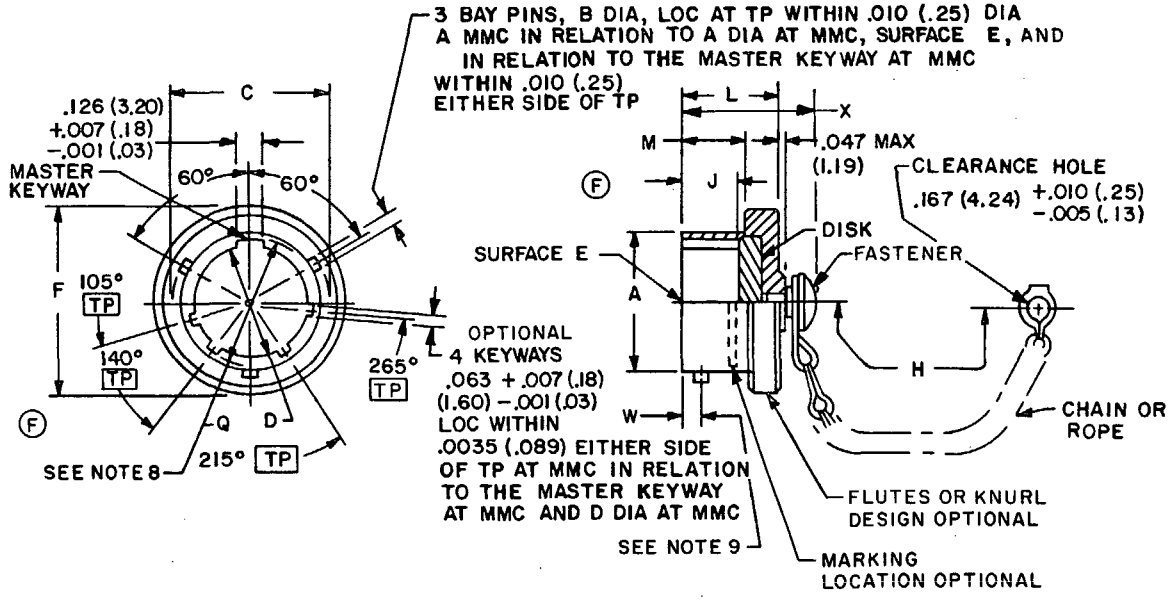

COVER-WITH CHAIN OR ROPE

Ⓕ Requisitions for covers without chain will be filled with covers with rope.
For design feature purposes, this standard takes precedence over procurement documents referenced herein.
Referenced documents shall be of the issue in effect on date of invitations for bid.

FED. SUP CLASS
5935

APPROVED 25 Apr 61

REVISED Ⓐ 10 Sep 62 Ⓑ 15 Feb 67 Ⓒ 29 May 68 Ⓓ 19 Aug 70 Ⓔ 1 Dec 77 Ⓕ 8 JUL 1980

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:00Z
Check the source to verify that this is the current version before use.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Review activities: Army - AR, MI
Navy - EC
Air Force - 99

User activities: Army - AV, ME
Navy - SH, MC
Air Force - 11

Ⓕ

DASH NO. (WITH CHAIN)	DASH NO. (WITH ROPE)	A +.001 (.03) -.005 (.13) DIA	B +.006 (.15) -.002 (.05) DIA BAY PIN	C +.000 (.00) -.016 (.41) DIA OVER BAY PINS	D +.005 (.13) -.001 (.03) DIA	F MAX DIA OVERALL	H +.500 (12.70) -.250 (6.35) STD. CHAIN/ ROPE LENGTH	J +.010 (.25) -.020 (.51) DISK LOC.	L MAX LENGTH	M +.031 (.25) -.000 (.00) SHLDR LOC.	Q +.005 (.13) -.006 (.15) DIA OVER KWYS	W BAY PIN LOC.	X MAX LENGTH OVERALL
-8C	-8R	.473 (12.01)		.563 (14.30)	.362 (9.19)	.719 (18.26)	3.000 (76.20)				.412 (10.46)		
-10C	-10R	.590 (14.99)		.680 (17.27)	.490 (12.45)	.844 (21.44)					.540 (13.72)		
-12C	-12R	.750 (19.05)		.859 (21.82)	.607 (15.42)	1.000 (25.40)		.328 (8.33)	.562 (14.27)	.368 (9.35)	.689 (17.50)		
-14C	-14R	.875 (22.22)		.984 (24.99)	.732 (18.59)	1.125 (28.58)					.814 (20.68)		
-16C	-16R	1.000 (25.40)	.078 (1.98)	1.108 (28.14)	.857 (21.77)	1.250 (31.75)	3.500 (88.90)				.939 (23.85)	.100 (2.54)	
-18C	-18R	1.125 (28.58)		1.233 (31.32)	.962 (24.43)	1.375 (34.92)					1.039 (26.39)		.781 (19.84)
-20C	-20R	1.250 (31.75)		1.358 (34.49)	1.087 (27.61)	1.500 (38.10)					1.164 (29.57)		
-22C	-22R	1.375 (34.92)		1.483 (37.67)	1.212 (30.78)	1.625 (41.28)	4.000 (101.60)	.390 (9.91)	.625 (15.88)	.430 (10.92)	1.289 (32.74)		.844 (21.44)
-24C	-24R	1.500 (38.10)	.125 (3.18)	1.610 (40.89)	1.337 (33.96)	1.750 (44.45)			.658 (16.71)	.463 (11.76)	1.414 (35.92)	.109 (2.77)	.875 (22.22)

NOTES:
1. Unless otherwise specified, dimensions in inches. Dimensioning and tolerancing in accordance with ANSI Y-14.5-1973.
Ⓕ 2. Materials: Cover - Aluminum alloy: Bayonet pins (B dia) stainless steel, passivated.
Chain - Stainless steel, passivated in accordance with RR-C-271, type II, class 3.
Disk - Silicone elastomer.
Fasteners - Stainless steel, passivated.
Rope - 7 strand stainless steel, passivated.
3. The chain or rope shall rotate freely on the fastener.
Example of part number:

MS3180 - 12C A L

MS3180 — BASIC PART NUMBER; 12C — DASH NO.; A — FINISH; L — LENGTH - L-5 inches +.500, -.250 chain or rope in lieu of standard length. Leave blank for standard lengths.

4. Finish - A-hard, anodic, non-conductive in accordance with MIL-A-8625, type III, .0008 inch minimum thickness.
5. This cover must meet the fluid resistance requirements of MIL-C-26482, series 1 and 2 connectors.
6. Metric equivalents are given for general information only and are based upon 1.00 inch = 25.4 mm.
7. Metric equivalents are in parentheses.
Ⓕ 8. When keyways are not used the inside diameter shall be Q, not D.
9. Values applies to "W" dimension are true position.

APPROVED 25 Apr 61 REVISED Ⓕ For changes see pages 1 and 2 8 JUL 1980

FED. SUP CLASS 5935

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

Procurement Specification MIL-C-26482

P.A Navy - AS
Other Cust USAF - 85 Army - CR

International interest

SUPERSEDES:

TITLE COVER, PROTECTIVE, ELECTRICAL CONNECTOR PLUG, BAYONET COUPLING FOR MIL-C-26482 CONNECTORS

MILITARY STANDARD

MS3180

PAGE 2 OF 2

5935-3130-1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:00Z
Check the source to verify that this is the current version before use.