
FED SUP CLASS
5930

Reviewer - AF 11, AV EC ES

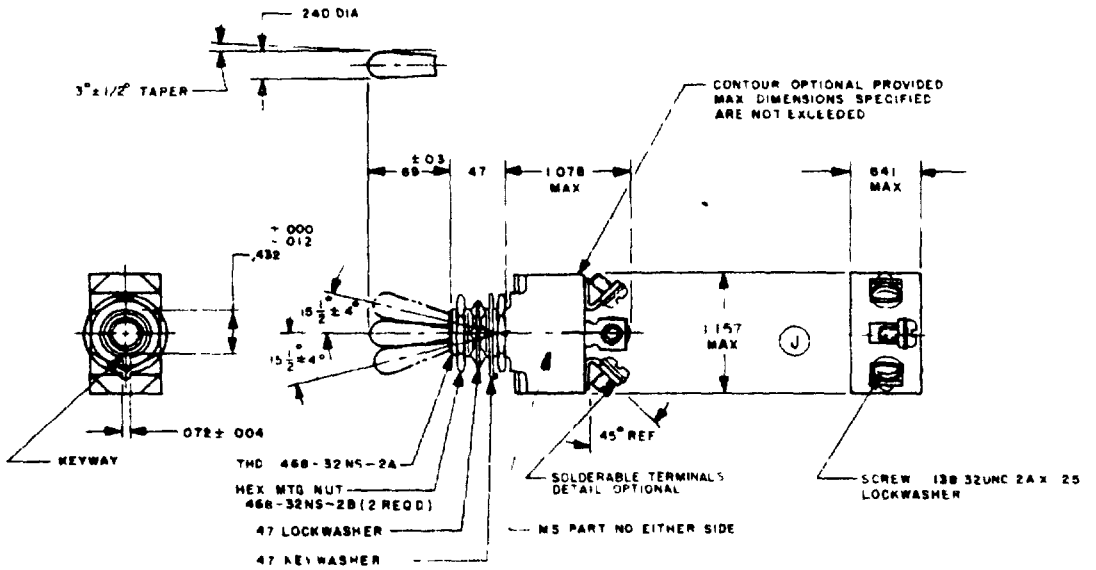

DRAWING NOTES

1. FOR HARDWARE AND TERMINAL SCREW DETAIL SPECIFICATIONS SEE SUPPLEMENT OF MIL S 83731
2. ALL DIMENSIONS ARE IN INCHES
3. IN FSS OTHERWISE SPECIFIED TOLERANCE IS ± .02 ON TWO PLACE DECIMALS AND ± .005 ON THREE PLACE DECIMALS

APPROVED 24 JULY 1951 REVISED (J) 15 NOV 80

(J) INACTIVE FOR DESIGN AFTER 16 SEP 1969
USE MS24523 OR MS 25306

P A AF-85 Other Cust ARMY-ER NAVY-AS	International interest	TITLE SWITCH, TOGGLE ONE POLE, SEALED TOGGLE	MILITARY STANDARD MS 35058
Preparing Specification MIL-S-83731		SUPERSEDES	PAGE 1 OF 3

DD FORM 1 MAY 672 (Recommended) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5930-1146-5

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Negotiations for all new engineering and design applications will be governed by this document when applicable

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:09Z
Check the source to verify that this is the current version before use.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

Reviewer -AF 11, AV, EC, ES

DD FORM 1 MAY 71 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Procurement Specification MIL-S-83731

Other Cust ARMY-ER NAVY-AS

P A AF-85

International interest

SUPERSEDES

TITLE

SWITCH, TOGGLE ONE POLE, SEALED TOGGLE

MILITARY STANDARD

MS 35058

PAGE 2 OF 3

FED SUP CLASS 5930

DETAIL REQUIREMENTS

MS Part No	Circuit with toggle lever in			Current capacity (amperes per pole)													
				Direct current							Alternating current 400 HERTZ			Alternating current 60 HERTZ			
				Lamp-load circuit	Resistive circuit			Inductive circuit			Lamp-load circuit	Resis-tive circuit	Induc-tive circuit	Resistive circuit		Induc-tive circuit	Lamp load circuit
	Keying side	Center	Opposite keying side	28 volts	28 volts	125 volts	250 volts	28 volts	125 volts	250 volts	115 volts	115 volts	115 volts	115 volts	220 volts	115 volts	115 volts
MS35058-21	ON	OFF	ON														
MS35058-22	OFF	NONE	ON	7	25	---	---	15	---	---	3	10	10	10	---	10	---
MS35058-23	ON	NONE	ON														
MS35058-24	NONE	OFF	ON														
MS35058-25	NONE	MOM-OFF	ON														
MS35058-26	MOM-ON	NONE	ON														
MS35058-27	MOM-ON	OFF	MOM-ON														
MS35058-28	MOM-ON	OFF	NONE	5	20	---	---	10	---	---	2	10	7	10	---	7	---
MS35058-29	MOM-OFF	NONE	ON														
MS35058-30	MOM-ON	NONE	OFF														
MS35058-31	MOM-ON	OFF	ON														

NOTES
1. All switches on this standard are designed so that the movement of the switch mechanism is opposite to that of the toggle lever
2. Maximum weight is 0.10 pounds
3. Endurance Electrical 10,000 cycles
   Mechanical 20,000 cycles
4. Referenced documents shall be of the issue in effect on the date of invitation for bid
5. For design feature purposes, this standard takes precedence over procurement document referenced herein

APPROVED 24 JULY 1951 REVISED (J) See page 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:09Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5930

MS PART NO	FORMER MS PART NO		FORMER AN PART NO	FORMER JAN TYPE DESIGNATION
	SCREW LUG TERMINAL	SOLDER LUG TERMINAL 1/		
MS35058 21	MS35058 - 5	-	AN3021 - 1	ST40E
	-	MS35058 - 16	-	ST42E
MS35058 - 22	-	-	AN3021 2	ST40A
	-	MS35058 - 9	-	ST42A
MS35058 23	MS35058 - 4	-	AN3021 3	ST40D
	-	MS35058 - 15	-	ST42D
MS35058-24	MS35058 - 1	-	AN3021 10	-
	-	MS35058 12	-	-
MS35058-25	MS35058 - 3	-	AN3021 12	-
	-	MS35058 14	-	-
MS35058 26	MS35058 - 6	-	-	ST40F
	-	MS35058 - 17	-	ST42F
MS35058-27	MS35058 - 7	-	AN3021 - 7	ST40G
	-	MS35058 18	-	ST42G
MS35058 28	MS35058 - 2	-	AN3021 11	
	-	MS35058 13		-
MS35058-29	-	-	AN3021 - 9	ST40B
	-	MS35058 10	-	ST42B
MS35058-30	-	-	AN3021 8	ST40C
	-	MS35058 11	-	ST42C
MS35058-31	MS35058 - 8	-	AN3021 - 6	ST40H
	-	MS35058 19	-	ST42H

1/ THESE MS PART NUMBERS ARE SUPERSEDED BY PART NUMBERS MS35058 21 THRU MS35058 31 AS APPLICABLE BY REMOVING THE SCREWS AND LOCK WASHERS FROM THE APPLICABLE PART A SWITCH WITH SOLDER LUG TERMINAL IS FORMED

Reviewer AF 11 AV EC, ES

APPROVED REVISED (J) See page 1

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable

PA AF-85 Other Cust ARMY-ER NAVY-AS	International interest	TITLE SWITCH, TOGGLE ONE POLE SEALED TOGGLE	MILITARY STANDARD MS35058
Procurement Specification MIL-S-83731		SUPERSEDES	PAGE 3 OF 3

DD FORM 1 MAY 73 672 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T17:09Z
Check the source to verify that this is the current version before use.