
FED. SUP CLASS
2330

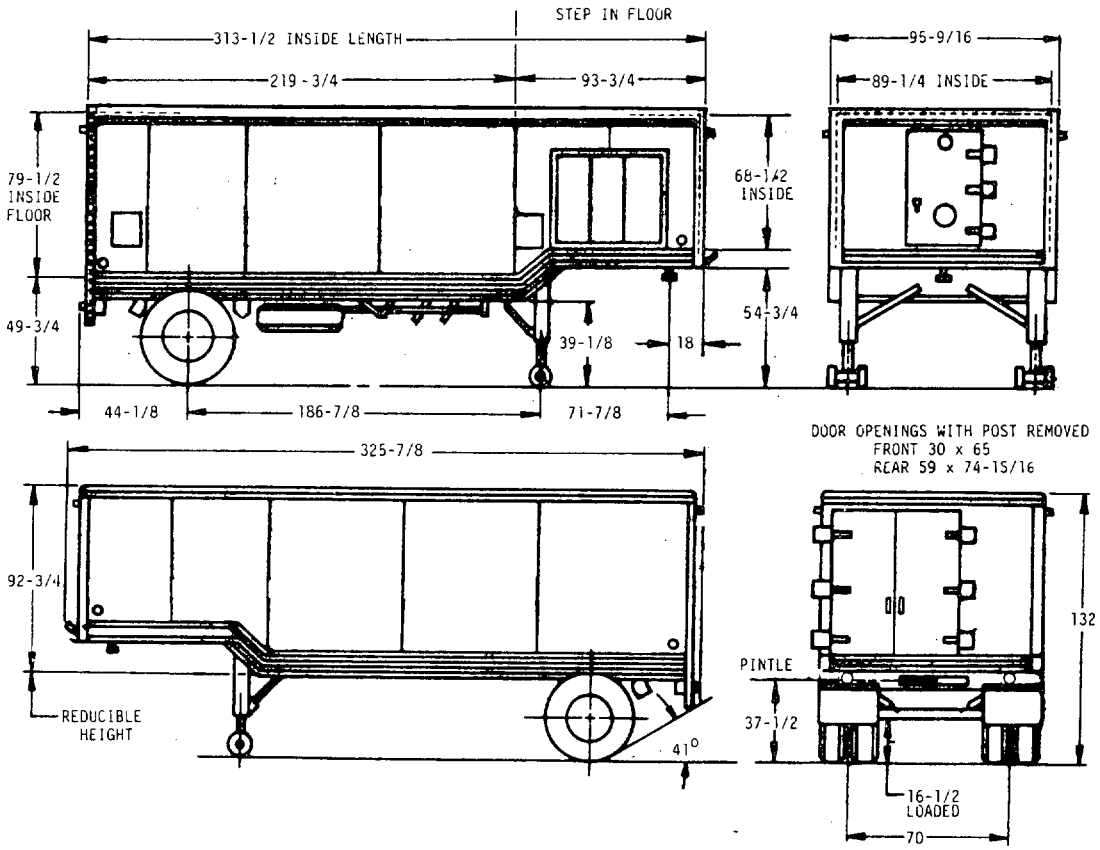

USER ACTIVITIES:

REVIEWER ACTIVITIES

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

APPROVED 24 MAY 1967 REVISED © 13 MAR 85

© ENTIRE STANDARD REVISED

MS PART NO.	ENGINEERING DWG NO
MS 500082-1	8736437

P. A. ARMY-AT Other Cust	INTERNATIONAL INTEREST	TITLE SEMITRAILER, VAN: ELECTRONIC, TACTICAL, 6 TON, 2 WHEEL, 26 FT, M348A2H	MILITARY STANDARD MS500082(AT)
PROCUREMENT SPECIFICATION MIL-S-46714	SUPERSEDES:		SHEET 1 OF 2

DD FORM 1 MAY 73 672-1 LIMITED COORDINATION

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:47Z
Check the source to verify that this is the current version before use.

VEHICLE CHARACTERISTICS

FED. SUP CLASS 2330

GENERAL USAGE: SEMITRAILER VAN IS USED TO TRANSPORT AND HOUSE ELECTRONIC EQUIPMENT OVER ALL TYPES OF ROADS AND LIMITED CROSS-COUNTRY TERRAIN.

GENERAL: M348A2H IS A MODIFIED M348A2 VAN EQUIPPED WITH THREE COMPACT, LIGHT-WEIGHT AIR CONDITIONER UNITS. THE CURB-SIDE DOOR HAS BEEN REMOVED AND AN OPEN-ING ADDED, LOCATED AT FRONT, CURBSIDE OF VAN BODY. FOR INSTALLATION OF THE AIR CONDITIONERS, A DOOR HAS ALSO BEEN ADDED IN THE FRONT WALL OF VAN BODY.

AIR CONDITIONERS: THREE, ELECTRIC POWER; 208 VOLT, 3 PHASE, 400 CYCLE.

UNIT DIMENSIONS;17 IN. WIDE, 21-1/16 DEEP, 45-1/2 HIGH
UNIT CAPACITY; 18000 BTU/HR
OPERATING TEMPERATURE CONDITIONS:
COOLING CYCLE, +50 F TO +125 F
HEATING CYCLE, -65 F TO +80 F
TOTAL CAPACITY; 3 UNITS, 54000 BTU/HR
CONFORMING TO MIL-A-52344

PRIME MOVER: TRUCK, TRACTOR, 5-TON, 6 X 6, M52 SERIES OR M818 SERIES.

CURB WEIGHT: (W/MISC EQUIPMENT) 10780 LBS.

PAYLOAD: 12000 LBS.

WEIGHT DISTRIBUTION: SEMITRAILER COUPLED TO TRUCK AND EMPTY:

KINGPIN	4255 LBS.
REAR AXLE	6525 LBS.

WEIGHT DISTRIBUTION: SEMITRAILER COUPLED TO TRUCK PAYLOAD EVENLY DISTRIBUTED.

	LOADED
KINGPIN	8378 LBS
REAR AXLE	14402 LBS

MISCELLANEOUS EQUIPMENT:

CHOCK BLOCKS	2
BOARDING LADDERS	1, 3 STEP
	1, 4 STEP
MANUAL BOX	1
MUD PLATES, LANDING GEAR	2
DOOR PADLOCKS	3, KEYED ALIKE
LANDING GEAR CRANK HANDLE	1
LEVELING JACK PADS	2
LEVELING JACK CRANK HANDLES	

VAN BODY ASSEMBLY: ALUMINUM CONSTRUC-TION, WATERTIGHT, AND AIR TIGHT. VAN BODY IS PROVIDED WITH TWO VENTS AND IS INSULATED WITH URETHANE FOAM INSULATION, COMPOSITE THERMAL CONDUCTIVITY OF VAN IS: .23 BTU/HR/SF/F. EXTERIOR SKIN IS ALUMINUM. THE FLOOR IS LINOLEUM OVER 3/4 INCH THICK PLYWOOD.

KINGPIN: TWO INCH DIAMETER, STD.

DOOR LOCKS: ON INBOARD SURFACE OF DOORS (TAMPER RESISTANT), SIDE DOOR WITH ES-CAPE - TYPE DOOR LOCK PERMITTING OPEN-ING OF DOOR FROM INSIDE EVEN WHEN DOOR IS PADLOCKED FROM OUTSIDE.

LANDING GEAR: ADJUSTABLE, CRANK OPERATED.

VEHICLE ELECTRICAL SYSTEM: 24 VOLT SYS-TEM, LIGHTING SYSTEM AND REFLECTORS COMPLY WITH DOT. FVMSS NO 108.

PINTLE: ONE, AT REAR, CENTER, P/N MS51335-1,
CAPACITY 14000 LBS

LIFTING EYES: TOTAL QUANTITY - FOUR: TWO FRONT (ONE EA SIDE), TWO REAR (ONE EA SIDE). PULL OUT/PUSH IN TYPE. LIFTING EYES EXCEED MIL-STD-209 REQUIREMENTS FOR SEMITRAILER, VAN, WITH RATED PAY-LOAD.

RAIL CAR TIE DOWNS: TOTAL QUANTITY - SIX; FOUR ON DOLLY FRAME (TWO EA SIDE), TWO ON UNDERCARRIAGE, FRONT (ONE EA SIDE);

ALSO FOR AIRCRAFT TIE DOWN OF DOLLY ASS-EMBLY.

AIRCRAFT VAN BODY TIE DOWNS: TOTAL QUAN-TITY - 12; TWO FRONT, FOUR EA SIDE, AND TWO REAR. VAN BODY WITH RATED PAYLOAD CAN BE TIED DOWN TO MEET APPLICABLE REQUIREMENTS OF MIL-A-8421.

AFORDING DEPTH (W/AIR CONDITIONER OPEN-ING SEALED): FIVE FEET.
MAXIMUM TOWING SPEEDS:

PAVED HIGHWAY	55 MPH
GRAVEL AND DIRT (SEC. RDS.)	30 MPH
BELGIAN BLOCK	20 MPH
LEVEL CROSS-COUNTRY	30 MPH
HILLY CROSS-COUNTRY	30 MPH

TIRE SIZE: 9.00 X 20, 8 PLY, W/TUBE, NDCC TREAD DESIGN.

SUSPENSION: LEAF SPRINGS.

LEVELING JACKS: TWO, REAR, ONE EACH SIDE: TO BE USED IN CONJUNCTION WITH LANDING GEAR.

DOLLY: REMOVABLE, W/SPARE TIRE ASSEMBLY, W/ONE AXLE ASSEMBLY.

DOOR HINGES: TAMPER PROOF.

INTERIOR LIGHTS: 110 VOLT FLUORESCENT, QUANTITY - THREE.

AXLE RATING: (TATICAL). CAPACITY 14000 LBS,

WHEELS: DUAL, SIZE 20 X 7-1/5, 6-1/4 OFFSET.

BRAKE SIZE: 16-1/2 X 5-1/2.

BRAKES ACTUATION: AIR-OVER HYDRAULIC SERVICE.

REAR DOOR POST: REMOVABLE.

SPARE TIRE HOLDER: HAS CAPABILITY TO LIFT UP/LET DOWN SPARE TIRE ASSEMBLY, USING PRIME MOVER'S SPARE TIRE WRENCH.

RADIO FREQUENCY SHIELDING: LOW DECIBLE ATTENUATION BETWEEN 15KHZ - 18GHZ

NOTES:
1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES OF WHICH MAY BE OBTAINED FROM: US ARMY TANK-AUTOMOTIVE COMMAND, WARREN MICH. 48090.
4. SUBJECT OF NATO STANAG 2805 -A (EDITION 3). DO NOT REVISE OR CHANGE.

APPROVED 24 MAY 1967 REVISED (C) 13 MAR 85

MS PART NO.	ENGINEERING DWG NO
MS 500082-1	8736437

P. A. ARMY-AT Other Cust	INTERNATIONAL INTEREST	TITLE SEMITRAILER, VAN: ELECTRONIC, TACTICAL, 6 TON, 2 WHEEL, 26 FT, M348A2H	MILITARY STANDARD MS500082(AT)
PROCUREMENT SPECIFICATION MIL-S-46714	SUPERSEDES:		SHEET 2 OF 2

DD FORM 1 MAY 73 672-1 LIMITED COORDINATION

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

USER ACTIVITIES

REVIEWER ACTIVITIES

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:47Z
Check the source to verify that this is the current version before use.