FED SUP CLASS
53GP

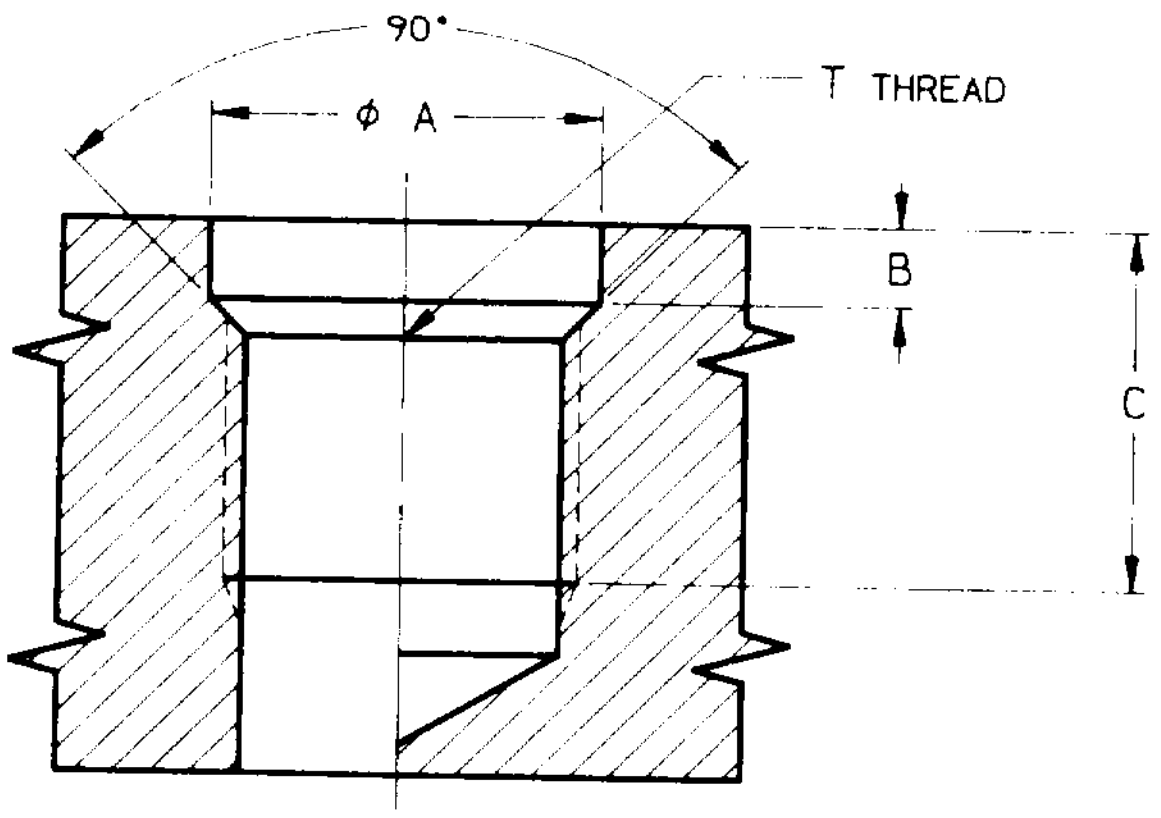

REQUIREMENTS:

1. DIAMETER "A" AND MINOR DIAMETER OF THREAD TO BE CONCENTRIC WITHIN .003 FIM.
2. AXIS OF HOLE TO BE NORMAL TO ENTRY SURFACE OR PROVIDE SPOTFACE WHEN REQUIRED.
3. THREAD AS SHOWN PER MIL-S-8879 IS PREFERRED. ALTERNATE THREAD PER MIL-S-7742 CLASS 3B OR NATIONAL CLASS 3 IS ACCEPTABLE WHEN SPECIFIED BY DESIGN ACTIVITY.
4. UNLESS OTHERWISE SPECIFIED MACHINED SURFACES TO BE 125 MICROINCHES IN ACCORDANCE WITH ANSI/ASME B46.1.
5. REMOVE ALL BURRS AND SHARP EDGES.
6. TOLERANCES FOR LINEAR DIMENSIONS ±.005, ANGULAR DIMENSIONS ±5°.

NOTES:

1. DIMENSIONS ARE IN INCHES.
2. PROCEDURE AND INSTALLATION OF RING LOCKED INSERTS, STUDS AND LOCKRINGS, SEE MS51995.
3. GENERAL USE: FOR INSTALLATION OF RING LOCKED INSERTS (TABLE I) AND STUDS (TABLE II).
4. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE.
5. REFERENCED GOVERNMENT (OR NON-GOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DoDISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN.

TABLE I - INSERT MS51991

INSERT DASH NUMBER MS51991	T THREAD CLASS 3B (SEE REQT 3)	Φ A +.003 -.000		B +.030 -.000	C MIN FULL THREAD DEPTH
		AL	MAG		
102 & 202	0.1900-24UNJC	.250	.258	.094	.285
103 & 203	0.2160-24UNJC	.281	.291	.109	.345
104 & 204	0.2500-20UNJC	.328	.337	.109	.415
105 & 205	0.3125-18UNJC	.375	.381	.141	.475
106 & 206	0.3750-16UNJC	.437	.448	.156	.535
107 & 207	0.5000-13UNJC	.515	.526	.172	.595
108 & 208	0.5625-12UNJC	.593	.601	.172	.655
109 & 209	0.6250-11UNJC	.734	.747	.218	.725
110 & 210	0.7500-10UNJC	.875	.888	.203	.785
311	0.8750-14UNJF	1.000	1.015	.203	.915
312.1	1.0000-12UNJF	1.125	1.139	.203	1.035
312	1.0000-14UNJS	1.125	1.139	.203	1.035
313	1.1250-12UNJF	1.281	1.298	.219	1.155
314	1.2500-12UNJF	1.406	1.427	.219	1.285
315	1.3750-12UNJF	1.562	1.579	.219	1.415

THIS IS A DESIGN STANDARD. NOT TO BE USED AS A PART NUMBER.
Ⓐ ENTIRE STANDARD REVISED

APPROVED 17 AUG 66
REVISED Ⓐ 12 FEB 88

P A AR Other Cust AS 99	INTERNATIONAL INTEREST	TITLE HOLE PREPARATION- RING LOCKED INSERTS AND STUDS, STANDARD DIMENSIONS FOR	MILITARY STANDARD MS51994
PROCUREMENT SPECIFICATION NOT APPLICABLE	SUPERSEDES		PAGE 1 OF 2

User activities:
Army - MI
Navy - MC, OS

Review activities:
Army - AT, AV, ER, GL
Air Force - 11, 82
NSA - NS
DLA - IS

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

AMSC N/A

DD 672-1 (COORDINATED)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:16Z
Check the source to verify that this is the current version before use.

FED SUPPLY CLASS
53GP

TABLE II, STUD MS51551 & MS51989

STUD DASH NUMBER (REF)		T THREAD CLASS 3B (SEE REQT 3)	Φ A +.003 -.000		B +.030 -.000	MIN FULL THREAD DEPTH			
						MS51551			MS51989
MS51551	MS51989		AL	MAG		DASH 100 & 200 SERIES	DASH 100A & 200A SERIES	DASH 100B & 200B SERIES	DASH 100 THRU 400 SERIES
---- ---- ---- ----	102 302 202 402	0.1640-32UNJC 0.1640-36UNJF	.250	.258	.094	----	-----	-----	.285
103 103A, 103B 203 203A, 203B	103 303 203 403	0.1900-24UNJC 0.1900-32UNJF	.281	.291	.109	.415	.535	.655	.415
104 104A, 104B 204 204A, 204B	104 304 204 404	0.2500-20UNJC 0.2500-28UNJF	.328	.337	.109	.475	.595	.725	.475
105 105A, 105B 205 205A, 205B	105 305 205 405	0.3125-18UNJC 0.3125-24UNJF	.375	.381	.141	.595	.725	.845	.595
106 106A,106B 206 206A, 206B	106 306 206 406	0.3750-16UNJC 0.3750-24UNJF	.437	.448	.156	.725	.915	1.095	.725
107 107A, 107B 207 207A, 207B	107 307 207 407	0.4375-14UNJC 0.4375-20UNJF	.515	.526	.172	.785	.975	1.155	.785
108 108A, 108B 208 208A, 208B	108 308 208 408	0.5000-13UNJC 0.5000-20UNJF	.593	.601	.172	.845	1.035	1.225	.845
109 109A, 109B 209 209A, 209B	109 309 209 409	0.5625-12UNJC 0.5625-18UNJF	.734	.747	.188	.915	1.095	1.345	.915
---- ---- ---- ----	110 310 210 410	0.6250-11UNJC 0.6250-18UNJF	.734	.747	.188	----	-----	-----	1.035
---- ---- ---- ----	111 311 211 411	0.7500-10UNJC 0.7500-16UNJF	.875	.888	.203	----	-----	-----	1.155
---- ---- ---- ----	112 312 212 412	0.8750-9UNJC 0.8750-14UNJF	1.000	1.015	.203	----	-----	-----	1.345

APPROVED 17 AUG 66 REVISED Ⓐ FOR CHANGES SEE PAGES 1 AND 2

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document when applicable.

Review activities:
Army - AT, AV, ER, [illegible]
Air Force - 11, [illegible]
[illegible]

User activities:
Army - [illegible]
Navy - [illegible]

PA AR Other Cust AS 99	INTERNATIONAL INTEREST	TITLE HOLE PREPARATION- RING LOCKED INSERTS AND STUDS, STANDARD DIMENSIONS FOR	**MILITARY STANDARD** **MS51994**
PROCUREMENT SPECIFICATION NOT APPLICABLE	SUPERSEDES		PAGE 2 OF 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:16Z
Check the source to verify that this is the current version before use.