

FED. SUP CLASS
2320

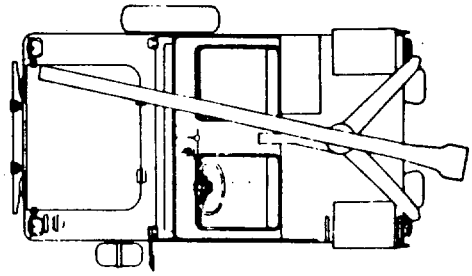

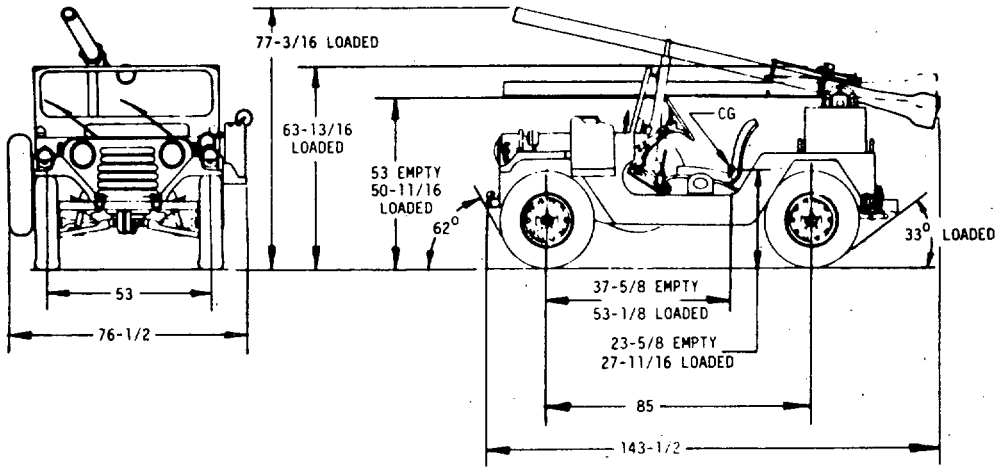

VEHICLE CHARACTERISTICS

WEIGHT:CURB FULLY EQUIPPED:

	LESS PAYLOAD & CREW	WITH PAYLOAD & CREW 106 MM RIFLE
FRONT AXLE	1445 LBS	1620 LBS
REAR AXLE	1145 LBS	2700 LBS
TOTAL	2590 LBS	4320 LBS

GROSS LOAD, LOADED: 1730 LBS AND 106 MM RIFLE.

TOWED LOAD ALLOWANCE, LOADED: NONE AUTHORIZED (PINTLE HOOK FOR RETRIEVING VEHICLE ONLY)

SERVICE BRAKES: TYPE - DUO-SERVO SINGLE ANCHOR; DRUM SIZE - 9-1/8 X 2 IN. FRONT & REAR; EFFECTIVE AREA - 115 SQ. IN. FRONT & REAR; ACTUATION - HYDRAULIC; SINGLE BRAKE LINES; 60% FRONT - 40% REAR.

PERFORMANCE: MI. PER GAL - 16.4 WITH 1730 LB PAYLOAD SPEED - 50 MPH; GRADEABILITY -

4TH GEAR 6.5% FOR GVW OF	4320 LBS.
1ST GEAR 50% FOR GVW AT	4320 LBS.
CRUISING RANGE	265 MI.

WINCH: NONE

MS PART NO.	ENGINEERING DRAWING NO.	DESCRIPTION
MS 52166-1	8736907	LESS WINCH

APPROVED 8 MAY 85 REVISED

P.A. ARMY-AT Other Cust	TITLE TRUCK 1/4 TON 4x4 W/106 MM RIFLE MOUNT M825	MILITARY STANDARD MS52166(AT)
PROCUREMENT SPECIFICATION MIL-T-45331	SUPERSEDES:	SHEET 1 OF 2

DD FORM 672-1 LIMITED COORDINATION

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:21Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
2320

SHIPPING DIMENSIONS:
CU. FT. - 405.0 REDUCIBLE TO 284.0 (W/O GUN & FUEL CAN BRACKET).
SQ. FT. - 76.0 REDUCIBLE TO 64.2 (W/O GUN & FUEL CAN BRACKET).
LENGTH - 143-1/2 IN. REDUCILBE TO 139-15/16 IN. (W/O GUN).
WIDTH - 76-1/2 IN. REDUCIBLE TO 69 IN. (W/O FUEL CAN BRACKET),
HEIGHT - 63-13/16 IN. REDUCIBLE TO 53 IN. (W/O GUN).

CENTER OF GRAVITY (AT CURB WEIGHT):
ABOVE GROUND - 23-5/8 IN.
REAR OF CENTERLINE OF FRONT AXLE - 37-5/8 IN.

CENTER OF GRAVITY (W/PAYLOAD):
ABOVE GROUND - 27-11/16 IN.
REAR OF CENTERLINE OF FRONT AXLE - 53-1/8 IN.

TREAD: FRONT 53 IN., REAR 53 IN.

CAB TO REAR AXLE N.A.: 20-7/16 IN.

MINIMUM GROUND CLEARANCE: REAR AXLE 9-5/8* IN.; UNDER CHASSIS 8-1/4** IN. *AT FULL PAYLOAD WEIGHT, **AT REAR SHOCK BRACKET.

ANGLE OF APPROACH: 62°

ANGLE OF DEPARTURE: 33°

RAMP BREAKOVER ANGLE 41° (WITH SPARE TIRE MOUNTED)

MINIMUM TURNING DIA: LEFT 38-1/2 FT.
(WALL TO WALL) RIGHT 38-1/2 FT.
OUTERMOST POINT - FRONT FENDER

FORDING DEPTH: 21 IN.
FORDING KIT NOT APPLICABLE

ENGINE: TYPE-GASOLINE, LIQUID COOLED OHV; DISPLACEMENT - 141.5 CU. IN., BORE AND STROKE - 3-7/8 X 3.00; COMPRESSION RATIO-7.5:1; FUEL - REGULAR GRADE, 91 RON MINIMUM (REASEARCH OCTANE NUMBER); LUBRICATION - WET SUMP; CRANKCASE CAP. - 5 QTS. DRY - 4 QTS. REFILL; GOVERNOR - NONE, COLLING SYSTEM CAP. - 9 QTS. PUMP DRIVE V-BELT. (PRE-EMISSION) 11660425
HORSEPOWER - MAX. GROSS 71 @ 4000 RPM; MAX. NET 61 @ 3600 RPM.
TORQUE MAX. GROSS 128 LB-FT @ 1800 RPM; MAX NET 119 LB-FT. @ 1700 RPM.
11613729
-73/74 EMISSION ENGINE
HORSEPOWER - MAX. GROSS 65 @ 4000 RPM; MAX. NET 55 @ 3600 RPM.
TORQUE MAX. GROSS 113 LB-FT @ 1800 RPM; MAX NET 104 LB-FT. @ 2000 RPM.

ELECTRICAL SYSTEM: WATERPROOF - YES; RADIO SUPPRESSED PER MIL-STD-461; POTENTIAL - 24 VOLT; STARTING MOTOR - 7017646
ALTERNATOR 10929868
RATING - 60 AMPERES; DRIVE - V-BELT;
BATTERY - MS35000-1;
1; TYPE -2HN; QUANTITY - 2; COIL 11663066

PINTLE HOOK: CAPACITY 8380198 2000 LBS

ACCESSORY KITS: 12302575

BASIC ISSUE ITEMS DRAWING NO. 12300877-5

TIEDOWNS: NO. - 4; LOCATION - 2 @ FRONT BUMPER; 2 @ REAR SILL.

FUEL SYSEM: CARBURETOR (EMISSION CARB.) 11681709
TYPE - SIDE DRAFT; FUEL PUMP - 11640994
TYPE - MECHANICAL; FUEL CAPACITY 15.8 GALS

CLUTCH: 1169136
TYPE - SINGLE DRY DISC.; DIA. - 8-7/16 IN.
EFFECTIVE AREA - 68.11 SQ IN.

TRANSMISSION: 7536199
NO OF SPEEDS - 4 FWD. & 1 REV.; 1 REV.; RATIOS - 1ST 5.172, 2ND 3.179 3RD 1.674 4TH 1.0, REV. 7.497; PTO OPENINGS - NONE; LUBRICANT CAPACITY - 5.5 PTS. INCLUDING TRANSFER CASE.

TRANSFER CASE: 10885542
(INTEGRAL WITH TRANSMISSION); SINGLE SPEED RATIO - 1:1, CONTROL OF FRONT AXLE DRIVE SPLINED COLLAR WITH SPRING LOADED FORK; LUBRICANT CAPACITY - (SEE TRANSMISSION) PTS.

FRONT & REAR DIFFERENTIAL: 7536140
TYPE - SUSPENDED CARRIER WITH CARDAN JOINTS; RATIO - 4.86 LUBRICANT CAPACITY - 1 QT.

FRAME: TYPE - UNIT BODY & FRAME; NO OF CROSSMEMBERS - 4; SECTION MODULUS - VARIABLE; DIMENSIONS - MAIN RAIL 7-7/8 X 1-3/4 X 1/16 IN.; REINFORCED - YES.

FRONT SUSPENSION: TYPE - COIL SPRING: 5/8 WIRE; 4 IN DIA., 12 IN. FREE LENGTH; NO. COILS - 8; RATE - 515 ± 16 LB/IN.; SHOCK ABSORBERS - TELESCOPIC SECONDARY SPRING.

REAR SUSPENSION: TYPE - PRIMARY; 9/16 WIRE; 3-13/16 IN DIA., 12-7/8 IN. FREE LENGTH
NO. COILS - 9-1/8; RATE - 337 ± 15 LB IN.; SHOCK ABSORBERS - TELESCOPIC:

WHEELS: 10921860
TYPE - DROP CENTER; DIA. - 16 IN.; BEAD - LOCK - HUMP TYPE; SINGLE REAR - YES: RIM SIZE - 5-1/2 IN.

TIRES: TYPE - LIGHT TRUCK; SIZE - 7.00 X 16; PLY - 4 (6 PLY RATING); LOAD RANGE C; TREAD - NON-DIRECTIONAL, CROSS COUNTRY; NO. SPARES - 1.

PARKING BRAKES: 8754237
TYPE - EXTERNAL BAND ON TRANSMISSION OUTPUT SHAFT; DRUM SIZE - 6 IN. DIA. X 1 IN. WIDE; EFFECTIVE AREA - 25.6 SQ. IN.

STEERING: 11639799
TYPE - WORM & DOUBLE ROLLER;
RATIO - 16.4 TO 1; POWER ASSIST - NONE.

LIGHTING: HEADLAMPS - 8741462
B.O. DRIVING LAMP - 8747988
TRAILER COUPLING SOCKET - 8712356
COMPOSITE LIGHT, FRONT - 11614156
COMPOSITE LIGHT, TAIL - 11614157
TURN SIGNALS, FLASHER TYPE, CONTROL UNIT 11613532
FLASHER 11613631

OVE DRAWING NO. 12300998-4

NOTES:
1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES WHICH MAY BE OBTAINED FROM: US ARMY TANK-AUTOMOTIVE COMMAND, WARREN, MICH. 48090.

MS PART NO.	ENGINEERING DRAWING NO	DESCRIPTION
MS 52166 -1	8736907	LESS WINCH

APPROVED 8 MAY 85 REVISED

P.A. ARMY - AT Other Cust	TITLE TRUCK 1/4 TON 4x4 W/106 MM RIFLE MOUNT M825	MILITARY STANDARD MS52166(AT)
PROCUREMENT SPECIFICATION MIL-T-45331	SUPERSEDES:	SHEET 2 OF 2

DD FORM SEP 87 672-1 LIMITED COORDINATION

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:21Z
Check the source to verify that this is the current version before use.