
FED. SUP CLASS
2320

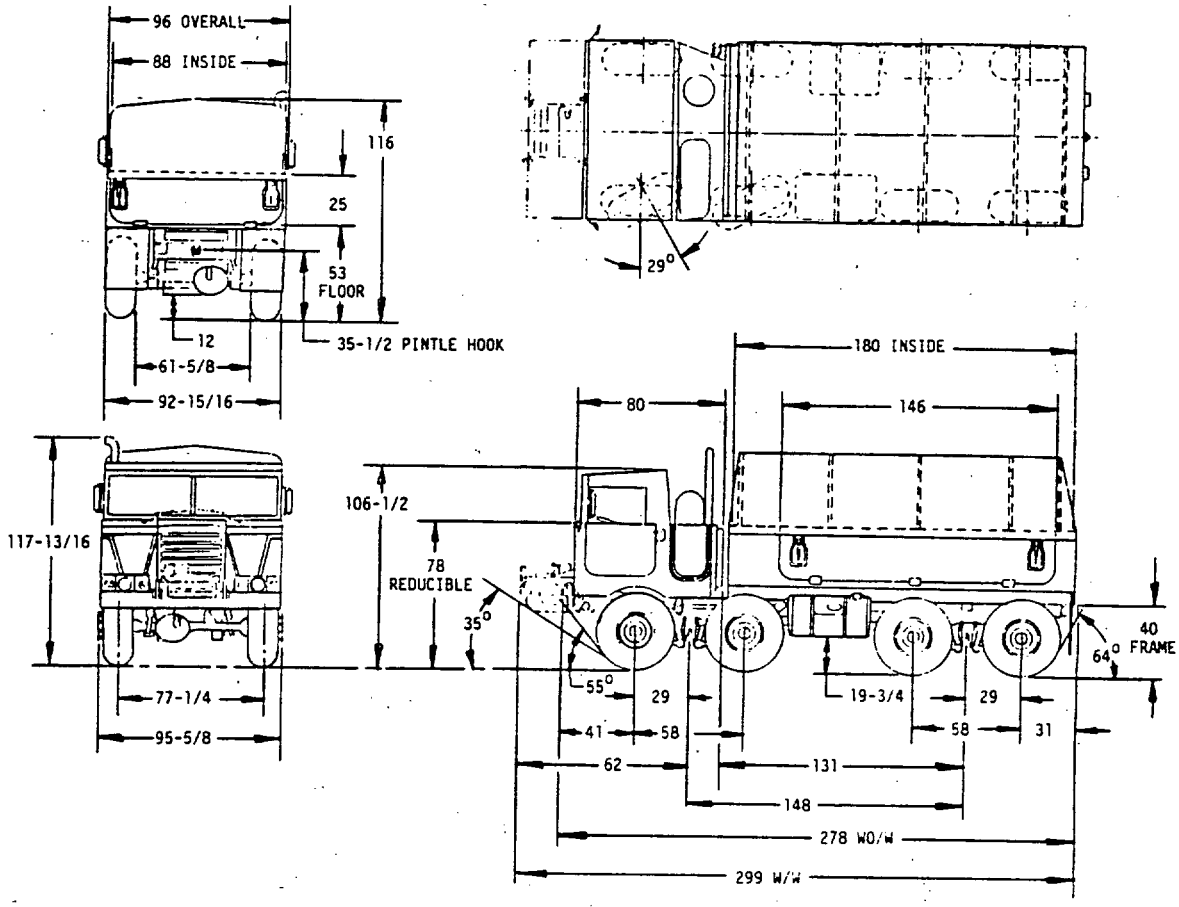

NOTES:

1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES WHICH MAY BE OBTAINED FROM: US ARMY TANK-AUTOMOTIVE COMMAND, WARREN, MICH. 48090.

APPROVED 8 MAY 81 REVISED

MS PART NO.	ENGINEERING DRAWING NO.	DESCRIPTION
MS52169-1	8736751	WITH WINCH
MS52169-2	8736700	LESS WINCH

P.A. ARMY - AT
Other Cust

TITLE
TRUCK CARGO 5 TON
8x8 M656

MILITARY STANDARD
MS52169(AT)

PROCUREMENT SPECIFICATION
MIL-T-62070

SUPERSEDES:

SHEET 1 OF 2

DD FORM 1 SEP 67 672-1 LIMITED COORDINATION

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:21Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
2320

VEHICLE CHARACTERISTICS

CURB WEIGHT FULLY EQUIPPED

LESS PAYLOAD & CREW:	W/O/W	W/W
FRONT BOGIE	10,500 LBS	12,200 LBS
REAR BOGIE	5,600 LBS	5,100 LBS
TOTAL	16,150 LBS	17,300 LBS

GROSS LOAD LOADED:	W/O/W	W/W
	26,550 LBS	27,700 LBS

TOWED LOAD ALLOWANCE:	W/O/W	W/W
LOADED	13,000 LBS	13,000 LBS
	W/O/W	W/W
SHIPPING DIMENSIONS: CU.FT	1,205	1,296
SQ.FT	186	200
LENGTH	278	299
WIDTH	96	96

HEIGHT WITH RING MOUNT 116 IN
LESS RING MOUNT 116 IN
REDUCIBLE TO 80 IN

TREAD: FRONT BOGIE 77-1/4
REAR BOGIE 77-1/4
CAB TO CENTERLINE OF REAR BOGIE 131
CENTERLINE OF REAR AXLE TO FRAME END 31

MINIMUM GROUND CLEARANCE: UNDER AXLE OR BOGIE 12
UNDER CHASSIS 19-3/4

	W/O/W	W/W
ANGLE OF APPROACH:	55°	35°
ANGLE OF DEPARTURE:	64°	64°

MIN TURNING RADII (OVER BUMPER)
LEFT 496 506
RIGHT 496 506

FORDING DEPTH: VEHICLE FLOATS

ENGINE: 11610102
TYPE: 6 CYL OHV. LIQUID COOLED MULITFUEL COMPRESSION IGNITION
GOV. SPEED 2800 RPM COMPRESSION RATIO 22:1
DISPLACEMENT 478 CU. IN BORE & STROKE 4.56 X 4.87
HORSEPOWER: MAX. GROSS 200 @ 2800 RPM
4.56 X 4.87 NET 175@ 2800 RPM
TORQUE MAX. GROSS 450 LB FT @ 1800 RPM
MAX. NET 430 LB FT @ 1800 RPM
LUBRICATION: FULL PRESSURE CRANKCASE CAPACITY 20 QTS
GOVERNOR TYPE; MECHANCIAL CENTRIFUGAL INTEGRAL WITH INJECTION PUMP
COOLING CAPACITY: 36 QTS BELT DRIVE PUMP

FUEL SYSTEM: INJECTION; PUMP ELECTRIC
IN TANK: CAPACITY 80 GALS

TRANSMISSION: 8357182
NO. OF SPEEDS: 6 FORWARD 1 REVERSE
RATIOS: 1ST 5.296; 2ND 3.810; 3RD 2.690; 4TH 1.936; 5TH 1.390; 6TH 1.000; REVERSE 6.042; CONVERTER 3.0
PTO OPENINGS: 2 INPUT TORQUE RATING: 150 LB FT
LUBRICANT CAPACITY: W/PTO 19 QTS
WO/PTO 19 QTS

TRANSFER CASE: 11601806
NO OF SPEEDS: 1 RATIO: 1.044
CONTROL OF FRONT AXLE DRIVE: AIR
LUBRICANT CAPACITY 3 QTS.

WINCH: 11613973
CAPACITY 20,000 LBS @ 1ST DRUM LAYER
CABLE DIA 5/8
CABLE LENGTH 200 FT PTO SPEEDS 1 FWD. 1 REV

WHEELS: 11600643 TYPE; SEMI DROP CENTER,
SIZE; 20 DIA. X 12 IN
FRONT: SINGLE REAR: SINGLE

CENTER OF GRAVITY

LOCATION: (INCHES)	EMPTY	LOADED
REAR OF FRONT	W/O/W 51-13/16	73-5/16
BOGIE	W/W 43-5/8	67-5/16
ABOVE GROUND	W/O/W 36	
	W/W 36-5/16	

AXLES: FRONT 11614033 RATIO: 6.400:1
LUBRICATION; CAPACITY 8 QTS
TYPE: FULL FLOATING, SINGLE SPEED, DOUBLE REDUCTION
REAR 11614034 RATIO 6.400:1 LUB CAP 8 QTS
TYPE FULL FLOATING, SINGLE SPEED, DOUBLE REDUCTION

FRONT BOGIE SPRINGS: 10945189 SIZE: 3-1/2 WIDE X 63 IN. LONG
3 TAPERED LEAVES RATE 2500 LB IN
WHEEL BASE 58 IN
SHOCK ABSORBERS 11601499 TYPE: TELESCOPIC
NO REQ'D: 4
REAR BOGIE SPRINGS: 10945189 SIZE: 3-1/2 WIDE X 63 IN LONG
3 TAPERED LEAVES RATE 2500 LB WHEELBASE 58 IN
SHOCK ABSORBERS 11601499 TYPE TELESCOPIC
NO REQ'D 4

STEERING: FRONT 4 WHEELS TYPE WORM & ROLLER W/POWER ASSIST
RATIO: 20.6:1 CRAMPING ANGLE 29° RT. 29° LT. (F 1 AXLE)

BRAKES: SERVICE 11602480 TYPE; SEALED INTERNAL-EXPANDING
DRUM SIZE FRONT 14 DIA X 3 WIDE REAR 14 DIA. X 3 WIDE
TOTAL EFFECTIVE AREA FRONT BOGIE 324 SQ IN.
REAR BOGIE 324 SQ. IN ACTUATION; AIR PRESSURE

BRAKES PARKING: 11602247 TYPE INTERNAL- EXPANDING
DRUM SIZE 12 DIA X WIDE EFFECTIVE AREA: 83 SQ IN

FRAME: TYPE LADDER, DIMENSIONS 9 X 2-13/16 X 3/16 IN
SECTION MODULUS 8 NO OF CROSSMEMBERS: 5
REINFORCE: NONE

CAB TYPE, OPEN - OVER ENGINE CAPACITY 2
SOFTTOP 11600454 HARDTOP 11600453

ELECTRICAL SYSTEM: WATERPROOF YES; RADIO SUPPRESSED YES
POTENTIAL 24 VOLT STARTING MOTOR: 10951385-2
ALTERNATOR 11613630 RATING 30-80 AMP BELT DRIVE
BATTERIES TYPE 6TN NO. REQ'D: 2 MS35000-4
TURN SIGNAL 11613631&2 MS75021-2

PERFORMANCE: MILES PER GALLON 4.1 WITH DF-2,
FUEL CRUISING RANGE 310 MILES WITH DF- 2
FUEL GRADE ABILITY
4TH GEAR 1.5% @ 37 MPH FOR GVW OF 27,000 LBS
1STGEAR 60% @ 3 MPH FOR GVW OF 27,000 LBS
MAXIMUM SPEED 50 MPH AT ENGINE GOV SPEED 2800 RPM

PINTLE HOOK: 11614111 CAPACITY 100,000 LBS

TIE DOWNS: QTY 12 LOCATION FRAME, 4 EACH SIDE 2 FRONT 2 REAR

TIRES: 11602256 TYPE; LOW PROFILE SIZE; 16-20 RATING: 10 PLY
TREAD DESIGN NDCC NO SPARES; 1

BODY: CARGO 11600307

MS PART NO.	ENGINEERING DRAWING NO.	DESCRIPTION
MS52169-1	8736751	WITH WINCH
MS52169-2	8736700	LESS WINCH

APPROVED 8 MAY 85 REVISED

P.A. ARMY-AT Other Cust	TITLE TRUCK CARGO 5 TON 8x8 M656	MILITARY STANDARD MS52169(AT)
PROCUREMENT SPECIFICATION MIL-T-62070	SUPERSEDES:	SHEET 2 OF 2

DD FORM SEP 87 672-1 LIMITED COORDINATION

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

This military standard is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:21Z
Check the source to verify that this is the current version before use.