

This specification is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product(s) described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the DoDISS specified in the solicitation:

Form Approved
OMB No. 0704-0188

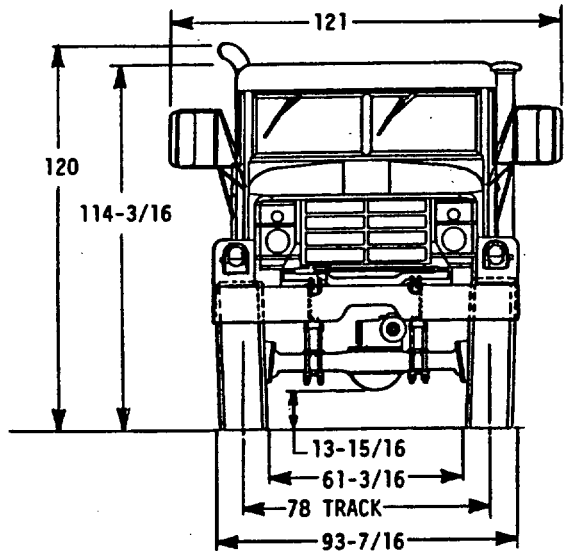

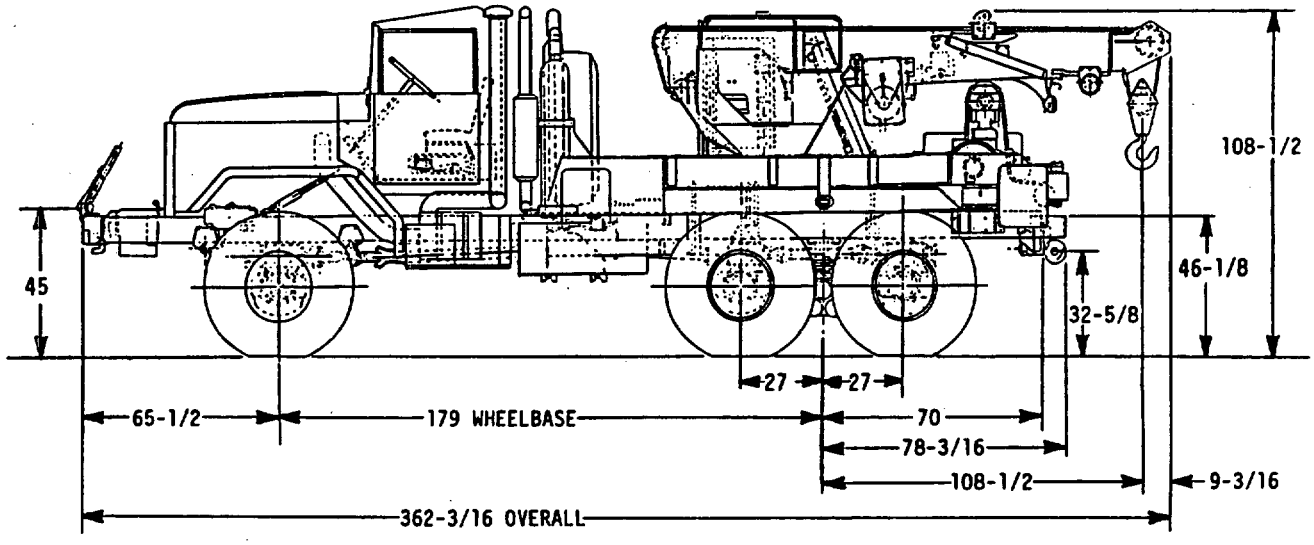

MS PART NO.	ENGINEERING DRAWING NO.	DESCRIPTION
MS52236-1	8750163	WITH WINCH

Ⓐ DENOTES CHANGES

PREPARING ACTIVITY: ARMY-AT CUSTODIANS: ARMY- NAVY- AIR FORCE- REVIEW: USER: PROJECT NUMBER: 2320-A385	MILITARY SPECIFICATION SHEET TITLE: TRUCK, WRECKER: 5 TON, 6x6, M936A1	SPECIFICATION SHEET NUMBER: MS52236A(AT) 30 OCTOBER 1989 SUPERSEDING: MS52236(AT), 4 OCTOBER 1985 AMSC-NA FSC-2320
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.		Page 1 of 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-23118:232
Check the source to verify that this is the current version before use.

This specification is approved for use by the US Army Tank-Automotive Command, Department of the Army, and is available for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product(s) described herein shall consist of this specification sheet and the issue of the following specification listed in that issue of the DoDISS specified in the solicitation:

Form Approved
OMB No. 0704-0188

VEHICLE CHARACTERISTICS

CHASSIS MODEL: M940A1

BRIDGE CLASSIFICATION (SHORT TONS): W/W
- EMPTY 18
- WITH PAYLOAD 24

CURB WEIGHT, FULLY EQUIPPED LESS PAYLOAD & CREW:
- FRONT 12,075 LBS
- REAR BOGIE 26,080 LBS
- TOTAL 38,155 LBS

PAYLOAD: 7,000 LBS

GROSS WEIGHT, FULLY EQUIPPED WITH PAYLOAD, LESS CREW:
- FRONT 7,835 LBS
- REAR BOGIE 37,320 LBS
- TOTAL 45,155 LBS

(ADD 600 LBS FOR 3-MAN CREW W/EQUIPMENT)

TOWED LOAD ALLOWANCE: 20,000 LBS

MAXIMUM VERTICAL LOAD ON PINTLE: 2,000 LBS

SHIPPING DIMENSIONS:
- CUBIC FEET 2,203
- SQUARE FEET 246

(A) LENGTH: 362-3/16

WIDTH: (EXCLUDING MIRRORS) 97-7/16

HEIGHT:
- OVERALL 120
- WITH MACHINE GUN RING MOUNT 126-13/16
- REDUCIBLE TO LOWEST OPERABLE 108-1/2

(A) ENGINE (DIESEL):
6 CYL - 240 HP @ 2100 RPM

(A) TRANSMISSION:
AUTOMATIC; 5 FWD, 1 REV

(A) ELECTRICAL SYSTEM:
24 VOLT

(A) TIRES:
14.00R20, 12 PLY

(A) BRAKES:
AIR

CENTER OF GRAVITY: (AT CURB WEIGHT)
- ABOVE GROUND 52-15/16
- REAR OF CENTERLINE OF FRONT AXLE 122-7/16

CENTER OF GRAVITY: (W/PAYLOAD)
- ABOVE GROUND N/A
- REAR OF CENTERLINE OF FRONT AXLE 148

PERFORMANCE:
AT GROSS WEIGHT W/O TOWED LOAD
- MAXIMUM SPEED 63 MPH
- MAXIMUM GRADE 60%
- CRUISING RANGE 500 MILES

AT GROSS WEIGHT W/TOWED LOAD
- MAXIMUM SPEED 63 MPH
- MAXIMUM GRADE 50%
- CRUISING RANGE 400 MILES

(A) BODY: CRANE ASSEMBLY 12256615
REVOLVING HYDRAULIC CRANE TYPE WITH SELF SUPPORTED EXTENSIBLE BOOM, BOOM TO GROUND, SUPPORTS AND OUTRIGGERS ARE PROVIDED TO STABILIZE CRANE OPERATIONS; 45,000 LB CAPACITY WINCH ON REAR OF BODY.

ON-VEHICLE EQUIPMENT: (OVE)
- BASIC ISSUE ITEMS 12300877
- ADDITIONAL AUTHORIZATION LIST ITEMS 12300998

ACCESSORY SUPPLEMENTAL KITS: 12302863

(A) FORDING:
- W/KIT 78 IN
- WO/KIT 32 IN

(A) APPROACH ANGLE: 31°

NOTES:
1. DIMENSIONS ARE IN INCHES AND ARE SHOWN FOR ENGINEERING REFERENCE ONLY.
2. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
3. THIS VEHICLE SHALL BE IN ACCORDANCE WITH REFERENCED ENGINEERING DRAWINGS, COPIES OF WHICH MAY BE OBTAINED FROM: US ARMY TANK-AUTOMOTIVE COMMAND, WARREN, MI 48397-5000.

MS PART NO.	ENGINEERING DRAWING NO.	DESCRIPTION
MS52236-1	8750163	WITH WINCH

PREPARING ACTIVITY: ARMY-AT

CUSTODIANS: ARMY- NAVY- AIR FORCE-

REVIEW:

USER:

PROJECT NUMBER: 2320-A385

MILITARY SPECIFICATION SHEET

TITLE:
TRUCK, WRECKER: 5 TON, 6x6, M936A1

SPECIFICATION SHEET NUMBER:
MS52236A(AT)
30 OCTOBER 1989

SUPERSEDING:
MS52236(AT), 4 OCTOBER 1985

AMSC-NA FSC-2320

DISTRIBUTION STATEMENT A: Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T18:23Z
Check the source to verify that this is the current version before use.