FED SUP CLASS
· 6140

ELECTRICAL & PHYSICAL REQUIREMENTS

Class	Sealed Cell
Voltages	
Nominal	1.20 volts
Final (Unless otherwise specified)	1.00 volt
Rated Capacity (C_5)	5.50 A.H. (amp hr)
Charge Rate ($0.2C_5$)	1.10 amps
Discharge Rates	
$0.2C_5$	1.10 amps
$3C_5$	16.5 amps
Terminals	Button Type
Max. Weight	9.5 oz.
Container	Nickel-Cadmium Cold Rolled Steel, or equa
Number & Type of Cells	1 "F" Cell

PRODUCTION SAMPLING TESTS

Tests	Test Para.	Min. Test Value
Initial Full Capacity Discharge	4.9.1.1	5.50 A. H.
Full Capacity Discharge	4.9.1	5.50 A. H.
Low Temp. Discharge	4.9.2	
Test I	4.9.2.1	4.95 A. H.
Test II	4.9.2.2	2.75 A. H.
High Rate Discharge	4.9.4	
5-second voltage		1.15 volts
Minutes to 1.0 volt		15 minutes
* Intermittent Discharge	4.9.3	1300 minutes
Overcharge Test	4.14	5.50 A. H.
Cycle Life Test-Test I	4.12.1	400 cycles

* Discharge through 5 ohms for 4 hours per day- Battery on open circuit for 20 hours, 5 days per week to a cut-off voltage of 0.93 volt.

Retention of charge		
Test I	4.15.1	4.10 A. H.
Test II	4.15.2	1.90 A. H.


APPROVED 19 May 1961 REVISED

P.A. Sig C Other Cust	TITLE Battery, Storage BB-411( )/U	MILITARY STANDARD MS 75030 (SigC)
Preparing Activity MIL-B-55130(SigC)	SUPERSEDES	SHEET 2 OF

DD FORM 672 (Limited coordination) previous editions of this form are obsolete.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:27Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
6140

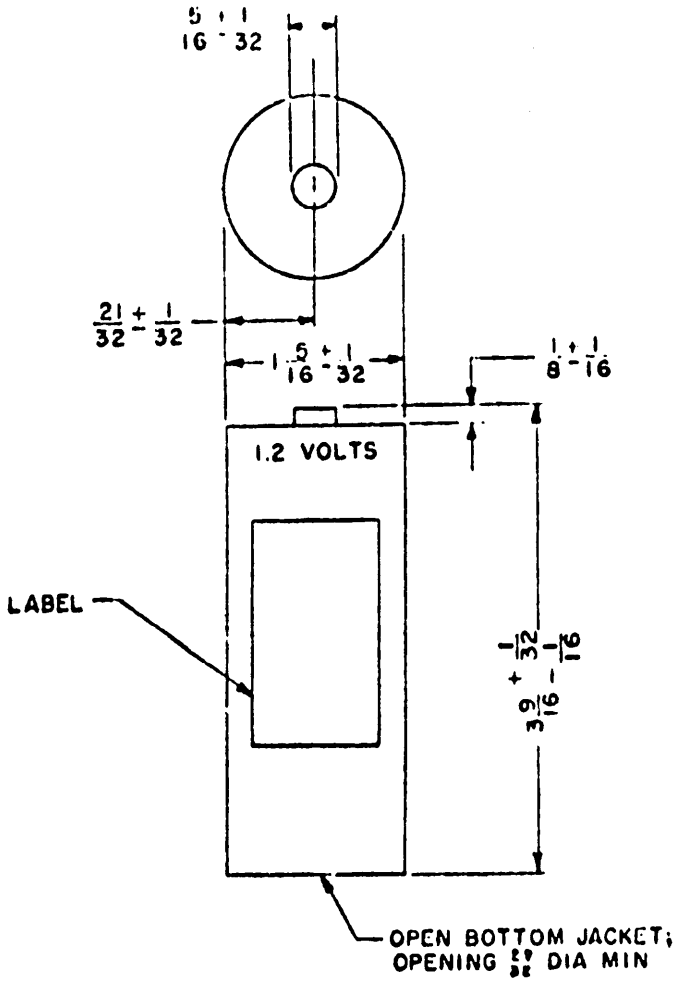

NOTES:

1. ALL DIMENSIONS IN INCHES
2. For design feature purposes, this Standard takes precedence over procurement documents referenced herein.
3. Referenced documents shall be of the issue in effect on date of invitations for bids.

P.A. Sig C Other Cust	TITLE BATTERY, STORAGE BB-411( )/U	MILITARY STANDARD MS 75030 (SigC)
Procurement Specification Mil-B-55130(SigC)	SUPERSEDES	SHEET 1 OF 2

DD FORM 672 (Limited coordination) PREVIOUS EDITION

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T20:27Z
Check the source to verify that this is the current version before use.