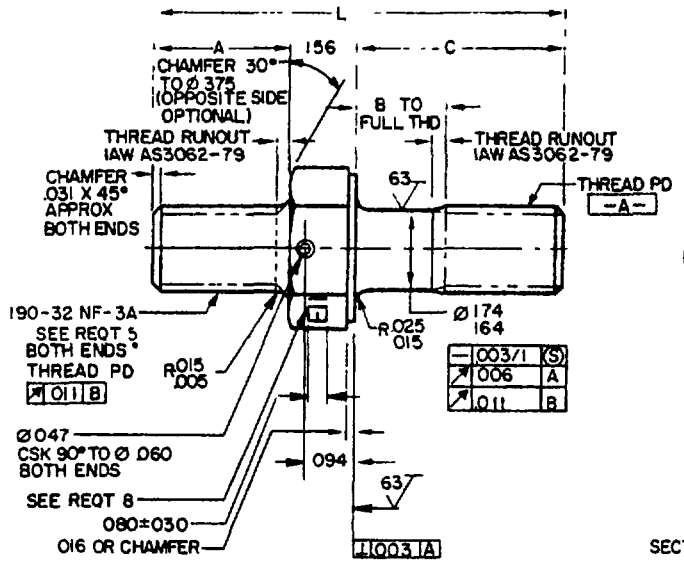


TABLE I. DASH NUMBERS AND DIMENSIONS

DASH NUMBER	A	B +.000 -.060	C	L REF	APPROX WEIGHT LBS/100
-001	.375	1/	.375	.906	.99
-002	.375	1/	.438	.968	1.04
-003	.375	1/	.500	1.031	1.07
-004	.375	1/	.562	1.094	1.13
-005	.375	1/	.625	1.156	1.16
-006	.375	1/	.688	1.219	1.18
-007	.375	.125	.750	1.281	1.27
-008	.375	.188	.812	1.344	1.27
-009	.375	.250	.875	1.406	1.33
-010	.375	.312	.938	1.469	1.38
-011	.375	.375	1.000	1.531	1.41
-012	.375	.438	1.062	1.594	1.44
-013	.375	.500	1.125	1.656	1.47
-014	.375	.562	1.188	1.719	1.52
-015	.375	.625	1.250	1.781	1.55
-016	.375	.688	1.312	1.844	1.61
-017	.375	.750	1.375	1.906	1.64
-018	.375	.812	1.438	1.969	1.69
-019	.375	.875	1.500	2.031	1.72
-020	.375	.938	1.562	2.093	1.78
-021	.375	1.000	1.625	2.156	1.81
-022	.375	1.062	1.688	2.219	1.83
-023	.375	1.125	1.750	2.281	1.89

DASH NUMBER	A	B +.000 -.060	C	L REF	APPROX WEIGHT LBS/100
-050	.438	1/	.375	.968	1.04
-051	.438	1/	.438	1.031	1.07
-052	.438	1/	.500	1.094	1.13
-053	.438	1/	.562	1.156	1.16
-054	.438	1/	.625	1.219	1.18
-055	.438	1/	.688	1.281	1.27
-056	.438	.125	.750	1.344	1.27
-057	.438	.188	.812	1.406	1.33
-058	.438	.250	.875	1.469	1.38
-059	.438	.312	.938	1.531	1.41
-060	.438	.375	1.000	1.594	1.44
-061	.438	.438	1.062	1.656	1.47
-062	.438	.500	1.125	1.719	1.52
-063	.438	.562	1.188	1.781	1.55
-064	.438	.625	1.250	1.844	1.61
-065	.438	.688	1.312	1.906	1.64
-066	.438	.750	1.375	1.969	1.69
-067	.438	.812	1.438	2.031	1.72
-068	.438	.875	1.500	2.093	1.78
-069	.438	.938	1.562	2.156	1.81
-070	.438	1.000	1.625	2.219	1.83
-071	.438	1.062	1.688	2.281	1.89
-072	.438	1.125	1.750	2.344	1.92

(B) ENTIRE STANDARD REVISED

APPROVED 24 FEB 60 REVISED (B) 22 MAY 86

USER ACTIVITIES:
REVIEWER ACTIVITIES:
AIR FORCE-82
DLA-IS
DISTRIBUTION STATEMENT A Approved for public release, distribution is unlimited
This military standard is approved for use by all Departments and Agencies of the Department of Defense
Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

P A NAVY-AS Other Cust ARMY-AR AIR FORCE-99	INTERNATIONAL INTEREST	TITLE STUD, SHOULDERED, HEXAGON WRENCHING, DRILLED, STEEL, .190-32 NF-3A X .190-32 NF-3A	MILITARY STANDARD MS9308
PROCUREMENT SPECIFICATION AMS 7452-73	SUPERSEDES:		PAGE 1 OF 2

Source: https://assist.dla.mil -- Downloaded: 202610-23T13:14Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS - CONTINUED

DASH NUMBER	A	B +.000 -.060	C	L REF	APPROX WEIGHT LBS/100
-100	500	1/	.375	1 031	1.07
-101	.500	1/	438	1.094	1.13
-102	.500	1/	500	1.156	1.16
-103	.500	1/	.562	1.219	1.18
-104	.500	1/	.625	1.281	1.27
-105	.500	1/	.688	1.344	1.27
-106	.500	125	.750	1.406	1 33
-107	.500	188	.812	1.469	1.38
-108	.500	.250	.875	1.531	1.41
-109	.500	.312	.938	1.594	1.44
-110	.500	.375	1.000	1.656	1.47
-111	.500	.438	1.062	1.719	1.52
-112	.500	.500	1.125	1.781	1.55
-113	.500	.562	1.188	1 844	1.61
-114	.500	625	1.250	1.906	1.64
-115	500	688	1.312	1.969	1.69
-116	.500	.750	1.375	2.031	1.72
-117	500	.812	1 438	2.094	1.78
-118	.500	.875	1.500	2.156	1.81
-119	.500	938	1.562	2.218	1.83
-120	.500	1.000	1.625	2.281	1.89
-121	500	1.062	1.688	2.344	1.92
-122	.500	1 125	1 750	2.406	1.98


DASH NUMBER	A	B + 000 -.060	C	L REF	APPROX WEIGHT LBS/100
-150	.562	1/	375	1.094	1.13
-151	562	1/	.438	1.156	1 16
-152	.562	1/	.500	1.219	1 18
-153	.562	1/	.562	1.281	1 27
-154	562	1/	.625	1.344	1.27
-155	.562	1/	.688	1.406	1.33
-156	562	.125	.750	1 469	1.38
-157	562	.188	.812	1.531	1 41
-158	.562	.250	.875	1.594	1.44
-159	.562	.312	938	1.656	1.47
-160	.562	.375	1.000	1.719	1.52
-161	562	.438	1 062	1 781	1.55
-162	.562	.500	1.125	1 844	1.61
-163	.562	.562	1 188	1.906	1.64
-164	.562	.625	1 250	1.969	1.69
-165	.562	.688	1.312	2.031	1 72
-166	562	.750	1 375	2.094	1 78
-167	562	.812	1.438	2.156	1 81
-168	.562	.875	1.500	2.218	1.83
-169	562	.938	1.562	2.281	1.89
-170	562	1.000	1.625	2.344	1 92
-171	562	1 062	1.688	2 406	1 98
-172	.562	1.125	1 750	2 469	2.00

1/ THREAD TO HEAD. MAXIMUM TWO INCOMPLETE THREADS

REQUIREMENTS:

1. MATERIAL: STEEL IN ACCORDANCE WITH AMS 6322-80
2. FINISH: CADMIUM PLATE IN ACCORDANCE WITH AMS 2400-80
3. HARDNESS 26-32HRC.
4. DIMENSIONING AND TOLERANCING: DIMENSIONING AND TOLERANCING SHALL BE IN ACCORDANCE WITH ANSI Y14.5M
5. THREADS: THREADS SHALL BE IN ACCORDANCE WITH FED-STD-H28/2 ACCEPTABILITY OF SCREW THREADS SHALL BE IN ACCORDANCE WITH FED-STD-H28/20, SYSTEM 22.
6. SURFACE TEXTURE: SURFACE TEXTURE SHALL BE IN ACCORDANCE WITH AS291-64.
7. MAGNETIC PARTICLE INSPECTION: MAGNETIC PARTICLE INSPECTION SHALL BE IN ACCORDANCE WITH AMS 2640-83
8. MARKING: MATERIAL IDENTIFICATION AND MARKING IN ACCORDANCE WITH AMS 2800-76. DEPRESSED .010 MAX
9. TOLERANCE: UNLESS OTHERWISE SPECIFIED, TOLERANCES SHALL BE LINEAR DIMENSIONS ± .010, ANGULAR DIMENSIONS ±5°.
10. EDGES BREAK SHARP EDGES .003 - .015, UNLESS OTHERWISE SPECIFIED.
11. PART NUMBER: THE PART NUMBER SHALL CONSIST OF THE BASIC MS NUMBER FOLLOWED BY A DASH NUMBER FROM TABLE I

EXAMPLE: MS9308-001



MS9308-001 INDICATES: STUD, SHOULDERED, HEXAGON WRENCHING, DRILLED, STEEL; .190-32 NF-3A X .190-32 NF-3A, LENGTH .906.

NOTES:

1. ALL DIMENSIONS ARE IN INCHES.
2. DO NOT USE UNASSIGNED PART NUMBERS
3. IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS STANDARD AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS STANDARD SHALL TAKE PRECEDENCE
4. REFERENCED GOVERNMENT (OR NONGOVERNMENT) DOCUMENTS OF THE ISSUE LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION FORM A PART OF THIS STANDARD TO THE EXTENT SPECIFIED HEREIN
5. THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE SAE AEROSPACE PROPULSION DIVISION
6. AS AND AMS ARE SAE PUBLICATIONS.

APPROVED 24 FEB 60 REVISED (B) FOR CHANGES SEE PAGES 1 AND 2

USER ACTIVITIES.

REVIEWER ACTIVITIES
AIR FORCE-82
DLA-IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable

P A NAVY-AS Other Cust ARMY-AR AIR FORCE-99	INTERNATIONAL INTEREST	TITLE STUD, SHOULDERED, HEXAGON WRENCHING, DRILLED, STEEL, .190-32 NF-3A X .190-32 NF-3A	MILITARY STANDARD MS9308
PROCUREMENT SPECIFICATION AMS-7452-73	SUPERSEDES:		PAGE 2 OF 2

Source: https://assist.dla.mil -- Downloaded: 202640-23T13:14Z
Check the source to verify that this is the current version before use.