
FED. SUP CLASS 5306

MS9535

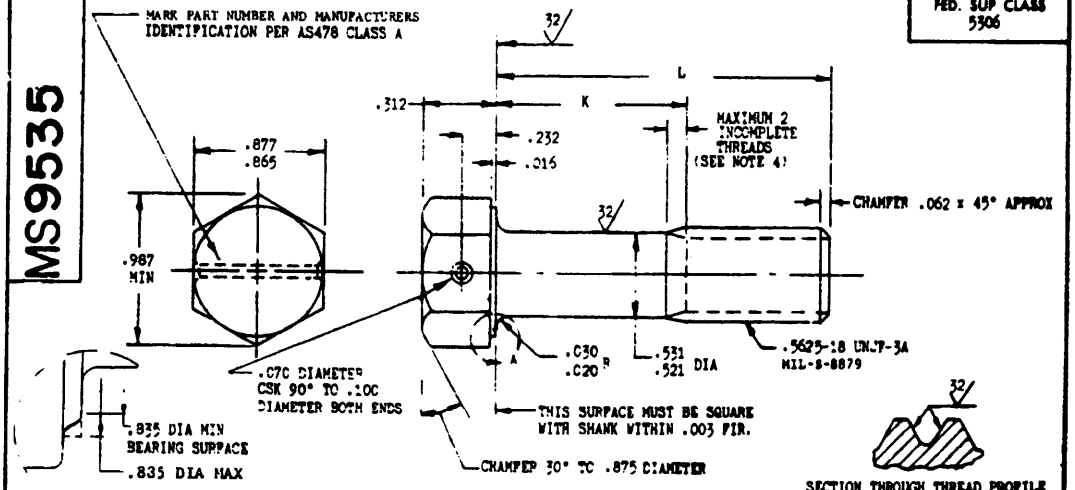

PART NUMBER	L	K	APPROX WEIGHT LB/100
MS9535-04	.875	.113-.133	11.18
MS9535-05	.938	.213-.133	11.56
MS9535-06	1.000	.113-.133	11.94
MS9535-07	1.062	.113-.133	12.32
MS9535-08	1.125	.113-.133	12.70
MS9535-09	1.188	.113-.133	13.08
MS9535-10	1.250	.113-.133	13.47
MS9535-11	1.312	.113-.133	13.85
MS9535-12	1.375	.113-.133	14.23
MS9535-13	1.438	.113-.133	14.62
MS9535-14	1.500	.113-.133	15.00
MS9535-15	1.562	.128-.168	15.38
MS9535-16	1.625	.190-.250	15.77
MS9535-17	1.688	.253-.313	16.15
MS9535-18	1.750	.315-.375	16.55
MS9535-19	1.812	.377-.437	16.91
MS9535-20	1.875	.440-.500	17.30
MS9535-21	2.000	.565-.625	18.06
MS9535-22	2.125	.690-.750	18.83
MS9535-23	2.250	.815-.875	19.60
MS9535-24	2.375	.940-1.000	20.36
MS9535-25	2.500	1.065-1.125	21.13
MS9535-26	2.625	1.190-1.250	21.90
MS9535-27	2.750	1.315-1.375	22.66
MS9535-28	2.875	1.440-1.500	23.43
MS9535-29	3.000	1.565-1.625	24.19
MS9535-30	3.125	1.690-1.750	24.96

PART NUMBER	L	K	APPROX WEIGHT LB/100
MS9535-31	3.250	1.815-1.875	25.73
MS9535-32	3.375	1.940-2.000	26.49
MS9535-33	3.500	2.065-2.125	27.26
MS9535-34	3.625	2.190-2.250	28.02
MS9535-35	3.750	2.315-2.375	28.79
MS9535-36	3.875	2.440-2.500	29.56
MS9535-37	4.000	2.565-2.625	30.32
MS9535-38	4.125	2.690-2.750	31.09
MS9535-39	4.250	2.815-2.875	31.86
MS9535-40	4.375	2.940-3.000	32.62
MS9535-41	4.500	3.065-3.125	33.39
MS9535-42	4.625	3.190-3.250	34.15
MS9535-43	4.750	3.315-3.375	34.92
MS9535-44	4.875	3.440-3.500	35.69
MS9535-45	5.000	3.565-3.625	36.45
MS9535-46	5.125	3.690-3.750	37.22
MS9535-47	5.250	3.815-3.875	37.99
MS9535-48	5.375	3.940-4.000	38.75
MS9535-49	5.500	4.065-4.125	39.52
MS9535-50	5.625	4.190-4.250	40.28
MS9535-51	5.750	4.315-4.375	41.05
MS9535-52	5.875	4.440-4.500	41.82
MS9535-53	6.000	4.565-4.625	42.58

1. SHANK SHALL BE STRAIGHT WITHIN .002 PER INCH OF BOLT LENGTH.
2. THE CONCENTRICITY OF THREAD PD IN RELATION TO THE SHANK SHALL BE WITHIN .006 FIR.
3. THE CONCENTRICITY OF THE SHANK IN RELATION TO THE WASHER FACE DIAMETER AND HEXAGON SHALL BE WITHIN .026 FIR.
4. INCOMPLETE THREADS NOT TO ENTER FILLET.
5. MATERIAL: STEEL AMS 6322.
6. HARDNESS: ROCKWELL C26-32.
7. FINISH: CADMIUM PLATE PER AMS 2400. DIMENSIONS SPECIFIED ARE AFTER PLATING.
8. MAGNETIC PARTICLE INSPECTION PER AMS 2640.
9. MANUFACTURING SPECIFICATION: AMS 7452 EXCEPT HEAD MUST BE UPSET.
10. SURFACE TEXTURE: USAS B46.1-1962. UNLESS OTHERWISE SPECIFIED SURFACES TO BE 125 MICROINCHES, EXCEPT HEXAGON.
11. BREAK SHARP EDGES .003 - .015 UNLESS OTHERWISE SPECIFIED.
12. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: LINEAR DIMENSIONS ± .010, ANGULAR DIMENSIONS ± 5°.
13. DO NOT USE UNASSIGNED PART NUMBERS.

CERTAIN PROVISIONS OF THIS STANDARD ARE THE SUBJECT OF INTERNATIONAL AGREEMENTS. WHEN REVISION OR CANCELLATION OF THIS STANDARD IS PROPOSED, NATIONAL ACTIVITIES WILL INFORM THEIR REPRESENTATIVE DEPARTMENTAL STANDARDIZATION OFFICE SO THAT APPROPRIATE ACTION MAY BE TAKEN RELATIVE TO THE INTERNATIONAL AGREEMENT CONCERNED.

AS & AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC. PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE S.A.E. AEROSPACE PROPULSION DIVISION.

APPROVED 2 Feb 1968 REVISED

P.V.	INTERNATIONAL INTEREST	TITLE	MILITARY STANDARD
Other Cust		BOLT, MACHINE-STEEL AMS 6322, CADMIUM PLATE, DRILLED, 1 HOLE, HEXAGON HEAD, .5625-18 UNJF-3A	MS9535
PROCUREMENT SPECIFICATION		SUPERSEDES:	SHEET 1 OF 1

DD FORM 672-1 (Reproduced)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

☆ U.S. GOVERNMENT PRINTING OFFICE: 1968-301-516 4202

This military standard has been approved by the Department of Defense and is mandatory for use by all departments and agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Reviewer activities:

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:19Z
Check the source to verify that this is the current version before use.