
MS9957

FED. SUP CLASS
5306

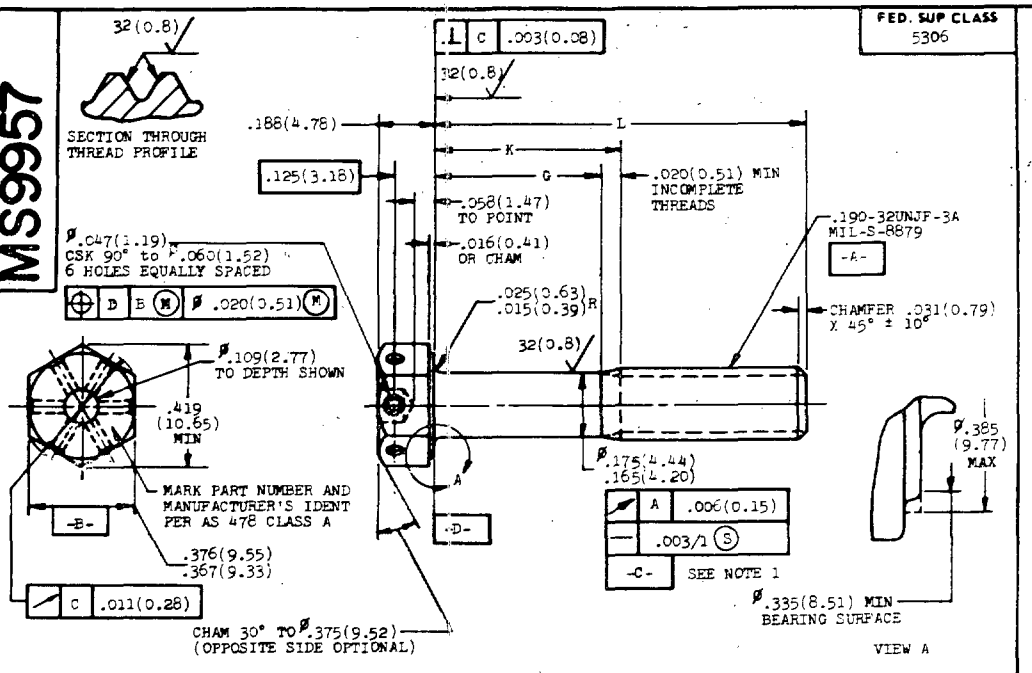

1. FOR PART NUMBERS MS9957-03 THRU MS9957-14 THE THREAD PD SHALL REPLACE DATUM C.
2. INCOMPLETE THREADS NOT TO ENTER FILLET.
3. MATERIAL: STEEL AMS 6322.
4. HARDNESS: ROCKWELL C 26-32.
5. FINISH: CADMIUM PLATE AMS 2400. DIMENSIONS SPECIFIED ARE AFTER PLATING.
6. MANUFACTURING SPECIFICATION: AMS 7452 EXCEPT HEAD SHALL BE UPSET.
7. HEAD TO SHANK FILLET SHALL BE COLD WORKED.
8. MAGNETIC PARTICLE INSPECTION PER AMS 2640 AFTER PLATING.
9. SURFACE TEXTURE: ANSI B46.1-1962. UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES (3.2 MICROMETERS) EXCEPT UPSET HEAD.
10. BREAK SHARP EDGES .003-.015 (0.08-0.38) UNLESS OTHERWISE SPECIFIED.
11. DIMENSIONS IN INCHES. METRIC CONVERSIONS ARE IN PARENTHESES. UNLESS OTHERWISE SPECIFIED: TOLERANCES; LINEAR DIMENSIONS ±.010 (0.25), ANGULAR DIMENSIONS ± 5°. INTERNATIONAL SYSTEM UNITS (SI) SHOWN ARE FOR REFERENCE ONLY.
12. DIMENSIONING AND TOLERANCING: ANSI Y14.5-1966, Ø = DIAMETER
13. DO NOT USE UNASSIGNED PART NUMBERS.

APPROVED 27 Jun 74 REVISED

AS AND AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC., PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PART STANDARDS DIVISION.

P.A. Air Force – 11 Other Cust Army – AV Navy – AS	TITLE BOLT, MACHINE, HEXAGON HEAD, DRILLED, 6 HOLE, PD SHANK, STEEL AMS 6322, CADMIUM PLATED, .190-32 UNJF-3A	MILITARY STANDARD MS9957
PROCUREMENT SPECIFICATION	SUPERSEDES:	SHEET 1 OF 2

DD FORM 672-1 PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE. 5306-0492

User activities: Army, Navy, Air Force, DSA

Review activities: Army, Navy, Air Force, DSA

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:28Z
Check the source to verify that this is the current version before use.

MS9957

FED. SUP CLASS 5306

PART NUMBER	L		G MIN		K MAX		APPROX MASS	
	IN.	(mm)	IN.	(mm)	IN.	(mm)	LB/100	kg/100
MS9957-03	.312	7.92	.025	0.64	.092	2.33	.77	.349
MS9957-04	.375	9.52	.025	0.64	.092	2.33	.81	.367
MS9957-05	.438	11.12	.025	0.64	.092	2.33	.85	.386
MS9957-06	.500	12.70	.025	0.64	.092	2.33	.89	.404
MS9957-07	.562	14.27	.025	0.64	.092	2.33	.93	.423
MS9957-08	.625	15.88	.025	0.64	.092	2.33	.97	.440
MS9957-09	.688	17.48	.025	0.64	.092	2.33	1.01	.458
MS9957-10	.750	19.05	.025	0.64	.120	3.04	1.05	.476
MS9957-11	.812	20.62	.060	1.53	.182	4.62	1.09	.494
MS9957-12	.875	22.22	.123	3.13	.245	6.22	1.13	.512
MS9957-13	.938	23.82	.186	4.73	.308	7.82	1.17	.531
MS9957-14	1.000	25.40	.248	6.30	.370	9.39	1.21	.549
MS9957-15	1.062	26.97	.310	7.88	.432	10.97	1.25	.567
MS9957-16	1.125	28.58	.373	9.48	.495	12.57	1.29	.585
MS9957-17	1.188	30.18	.436	11.08	.558	14.17	1.33	.603
MS9957-18	1.250	31.75	.498	12.65	.620	15.74	1.37	.621
MS9957-19	1.312	33.32	.560	14.23	.682	17.32	1.41	.640
MS9957-20	1.375	34.92	.623	15.83	.745	18.92	1.45	.658
MS9957-21	1.438	36.52	.686	17.43	.808	20.52	1.49	.676
MS9957-22	1.500	38.10	.748	19.00	.870	22.09	1.53	.694
MS9957-23	1.562	39.67	.810	20.58	.932	23.67	1.57	.712
MS9957-24	1.625	41.28	.873	22.18	.995	25.27	1.61	.730
MS9957-25	1.688	42.88	.936	23.78	1.058	26.87	1.65	.748

PART NUMBER	L		G MIN		K MAX		APPROX MASS	
	IN.	(mm)	IN.	(mm)	IN.	(mm)	LB/100	kg/100
MS9957-26	1.750	44.45	.998	25.35	1.120	28.44	1.69	.767
MS9957-27	1.812	46.02	1.060	26.93	1.182	30.02	1.73	.785
MS9957-28	1.875	47.62	1.123	28.53	1.245	31.62	1.77	.803
MS9957-29	1.938	49.22	1.186	30.13	1.308	33.22	1.80	.816
MS9957-30	2.000	50.80	1.248	31.70	1.370	34.79	1.85	.839
MS9957-31	2.125	53.98	1.373	34.88	1.495	37.97	1.93	.875
MS9957-32	2.250	57.15	1.498	38.05	1.620	41.14	2.02	.916
MS9957-33	2.375	60.32	1.623	41.23	1.745	44.32	2.10	.952
MS9957-34	2.500	63.50	1.748	44.40	1.870	47.49	2.18	.989
MS9957-35	2.625	66.68	1.873	47.58	1.995	50.67	2.26	1.025
MS9957-36	2.750	69.85	1.998	50.75	2.120	53.84	2.34	1.061
MS9957-37	2.875	73.02	2.123	53.93	2.245	57.02	2.42	1.098
MS9957-38	3.000	76.20	2.248	57.10	2.370	60.19	2.50	1.134
MS9957-39	3.125	79.38	2.373	60.28	2.495	63.37	2.58	1.170
MS9957-40	3.250	82.55	2.498	63.45	2.620	66.54	2.66	1.207
MS9957-41	3.375	85.72	2.623	66.63	2.745	69.72	2.74	1.247
MS9957-42	3.500	88.90	2.748	69.80	2.870	72.89	2.82	1.279
MS9957-43	3.625	92.08	2.873	72.98	2.995	76.07	2.90	1.315
MS9957-44	3.750	95.25	2.998	76.15	3.120	79.24	2.98	1.352
MS9957-45	3.875	98.42	3.123	79.33	3.245	82.42	3.06	1.388

Review activities: Army, Navy, Air Force, DSA

User activities: Army, Navy, Air Force, DSA

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 27 Jun 74 REVISED

AS AND AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC., PUBLICATIONS. THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PART STANDARDS DIVISION

P.A. Air Force - 11

Other Cust: Army - AV, Navy - AS

PROCUREMENT SPECIFICATION

TITLE: BOLT, MACHINE, HEXAGON HEAD, DRILLED, 6 HOLE, PD SHANK, STEEL AMS 6322, CADMIUM PLATED, .190-32UNJF-3A

SUPERSEDES:

MILITARY STANDARD

MS9957

SHEET 2 OF 2

DD FORM 1 SEP 67 672-1

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

5306-0492

☆U.S. GOVERNMENT PRINTING OFFICE: 1974—603-109/1175

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:28Z
Check the source to verify that this is the current version before use.