
FED SUP CLASS
5306

MS9958

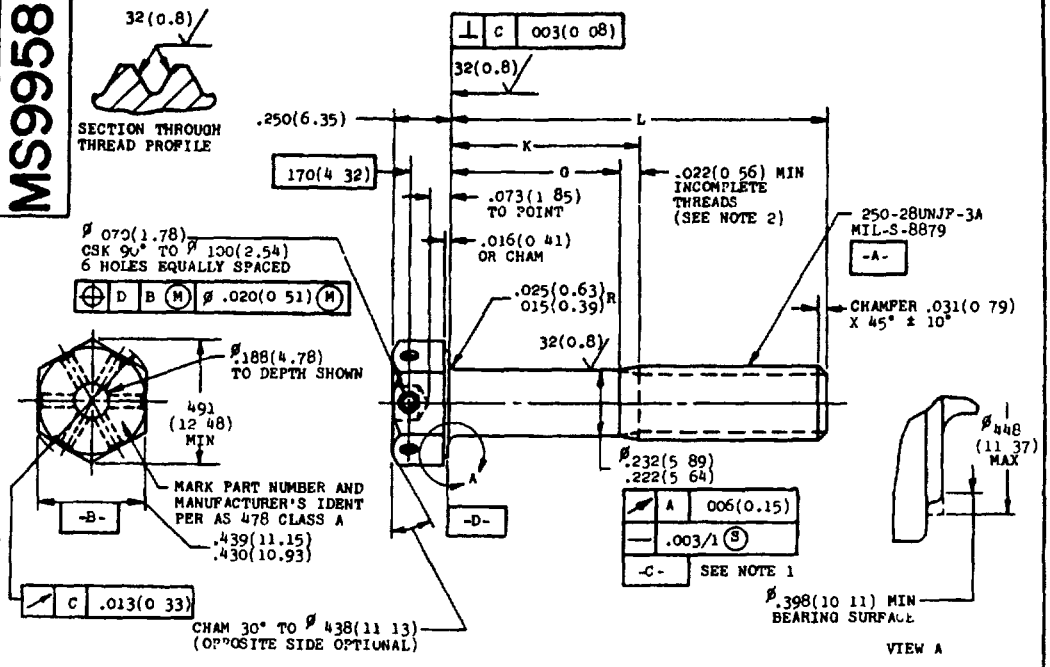

1 FOR PART NUMBERS MS9958-04 THRU MS9958-18 THE THREAD PD SHALL REPLACE DATUM C.
2 INCOMPLETE THREADS NOT TO ENTER FILLET
3 MATERIAL STEEL AMS 6322
4 HARDNESS ROCKWELL C26-32
5 FINISH CADMIUM PLATE AMS 2400 DIMENSIONS SPECIFIED ARE AFTER PLATING
6 MANUFACTURING SPECIFICATION AMS 7452 EXCEPT HEAD SHALL BE UPSET
7 HEAD TO SHANK FILLET SHALL BE COLD WORKED
8 MAGNETIC PARTICLE INSPECTION PER AMS 2640 AFTER PLATING
9 SURFACE TEXTURE ANSI B46 1-1962 UNLESS OTHERWISE SPECIFIED, SURFACES TO BE 125 MICROINCHES (3 2 MICROMETERS) EXCEPT UPSET HEAD
10 BREAK SHARP EDGES 003- 015 (0.08-0 38) UNLESS OTHERWISE SPECIFIED
11 DIMENSIONS IN INCHES METRIC CONVERSIONS ARE IN PARENTHESES UNLESS OTHERWISE SPECIFIED TOLERANCES, LINEAR DIMENSIONS ± 010 (0 25), ANGULAR DIMENSIONS ±5° INTERNATIONAL SYSTEM UNITS (SI) SHOWN ARE FOR REFERENCE ONLY.
12. DIMENSIONING AND TOLERANCING ANSI Y14 5-1966, Ø = DIAMETER
13 DO NOT USE UNASSIGNED PART NUMBERS.

AS AND AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC , PUBLICATIONS
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PART STANDARDS DIVISION.

APPROVED 27 Jun 74 REVISED

User activities: Army, Navy, Air Force, DSA
Review activities: Army, Navy, Air Force, DSA

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

P A. Air Force – 11 Other Cust Army–AV Navy –AS	TITLE BOLT, MACHINE, HEXAGON HEAD, DRILLED, 6 HOLE, PD SHANK, STEEL AMS 6322, CADMIUM PLATED, 250-28UNJF-3A	MILITARY STANDARD MS9958
PROCUREMENT SPECIFICATION	SUPERSEDES	SHEET 1 OF 2

DD FORM 672-1
ASO use only

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5306-0493

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:28Z
Check the source to verify that this is the current version before use.

MS9958

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

Review activities: Army, Navy, Air Force, DSA

User activities: Army, Navy, Air Force, DSA

PART NUMBER	L IN.	L (mm)	G MIN IN	G MIN (mm)	K MAX IN.	K MAX (mm)	APPROX MASS LB/100	APPROX MASS kg/100	PART NUMBER	L IN.	L (mm)	G MIN IN.	G MIN (mm)	K MAX IN.	K MAX (mm)	APPROX MASS LB/100	APPROX MASS kg/100
MS9958-04	.375	9.52	.025	0.64	.099	2.51	1.37	.621	MS9958-36	2.750	69.85	1.869	47.48	2.000	50.80	4.09	1.855
MS9958-05	.438	11.12	.025	0.64	.099	2.51	1.44	.653	MS9958-37	2.875	73.02	1.994	50.65	2.125	53.97	4.23	1.919
MS9958-06	.500	12.70	.025	0.64	.099	2.51	1.51	.685	MS9958-38	3.000	76.20	2.119	53.83	2.250	57.15	4.38	1.987
MS9958-07	.562	14.27	.025	0.64	.099	2.51	1.58	.717	MS9958-39	3.125	79.38	2.244	57.00	2.375	60.32	4.52	2.050
MS9958-08	.625	15.88	.025	0.64	.099	2.51	1.65	.748	MS9958-40	3.250	82.55	2.369	60.18	2.500	63.50	4.66	2.114
MS9958-09	.688	17.48	.025	0.64	.099	2.51	1.72	.780	MS9958-41	3.375	85.72	2.494	63.35	2.625	66.67	4.81	2.182
MS9958-10	.750	19.05	.025	0.64	.099	2.51	1.80	.816	MS9958-42	3.500	88.90	2.619	66.53	2.750	69.85	4.95	2.245
MS9958-11	.812	20.62	.025	0.64	.099	2.51	1.87	.848	MS9958-43	3.625	92.08	2.744	69.70	2.875	73.02	5.09	2.309
MS9958-12	.875	22.22	.025	0.64	.125	3.17	1.94	.880	MS9958-44	3.750	95.25	2.869	72.88	3.000	76.20	5.24	2.377
MS9958-13	.938	23.82	.057	1.45	.188	4.77	2.01	.912	MS9958-45	3.875	98.42	2.994	76.05	3.125	79.37	5.38	2.440
MS9958-14	1.000	25.40	.119	3.03	.250	6.35	2.08	.943	MS9958-46	4.000	101.60	3.119	79.23	3.250	82.55	5.52	2.504
MS9958-15	1.062	26.97	.161	4.60	.312	7.92	2.15	.975	MS9958-47	4.125	104.78	3.244	82.40	3.375	85.72	5.67	2.572
MS9958-16	1.125	28.58	.244	6.20	.375	9.52	2.23	1.012	MS9958-48	4.250	107.95	3.369	85.58	3.500	88.90	5.81	2.635
MS9958-17	1.188	30.18	.307	7.80	.438	11.12	2.30	1.043	MS9958-49	4.375	111.12	3.494	88.75	3.625	92.07	5.95	2.699
MS9958-18	1.250	31.75	.369	9.38	.500	12.70	2.37	1.075	MS9958-50	4.500	114.30	3.619	91.93	3.750	95.25	6.10	2.767
MS9958-19	1.312	33.32	.431	10.95	.562	14.27	2.44	1.107	MS9958-51	4.625	117.48	3.744	95.10	3.875	98.42	6.24	2.830
MS9958-20	1.375	34.92	.494	12.55	.625	15.87	2.51	1.138	MS9958-52	4.750	120.65	3.869	98.28	4.000	101.60	6.38	2.894
MS9958-21	1.438	36.52	.557	14.15	.688	17.47	2.58	1.170	MS9958-53	4.875	123.82	3.994	101.45	4.125	104.77	6.53	2.962
MS9958-22	1.500	38.10	.619	15.73	.750	19.05	2.66	1.206	MS9958-54	5.000	127.00	4.119	104.63	4.250	107.95	6.67	3.025
MS9958-23	1.562	39.67	.681	17.30	.812	20.62	2.73	1.238	MS9958-55	5.125	130.18	4.244	107.80	4.375	111.12	6.82	3.094
MS9958-24	1.625	41.28	.744	18.90	.875	22.22	2.80	1.270	MS9958-56	5.250	133.35	4.369	110.98	4.500	114.30	6.96	3.157
MS9958-25	1.688	42.88	.807	20.50	.938	23.82	2.87	1.302	MS9958-57	5.375	136.52	4.494	114.15	4.625	117.47	7.10	3.220
MS9958-26	1.750	44.45	.869	22.08	1.000	25.40	2.94	1.333	MS9958-58	5.500	139.70	4.619	117.33	4.750	120.65	7.25	3.288
MS9958-27	1.812	46.02	.931	23.65	1.062	26.97	3.01	1.365	MS9958-59	5.625	142.88	4.744	120.50	4.875	123.82	7.39	3.352
MS9958-28	1.875	47.62	.994	25.25	1.125	28.57	3.09	1.402	MS9958-60	5.750	146.05	4.869	123.68	5.000	127.00	7.53	3.416
MS9958-29	1.938	49.22	1.057	26.85	1.188	30.17	3.16	1.433	MS9958-61	5.875	149.22	4.994	126.85	5.125	130.17	7.68	3.484
MS9958-30	2.000	50.80	1.119	28.43	1.250	31.75	3.23	1.465	MS9958-62	6.000	152.40	5.119	130.03	5.250	133.35	7.82	3.547
MS9958-31	2.125	53.98	1.244	31.60	1.375	34.92	3.37	1.527									
MS9958-32	2.250	57.15	1.369	34.78	1.500	38.10	3.52	1.597									
MS9958-33	2.375	60.32	1.494	37.95	1.625	41.27	3.66	1.660									
MS9958-34	2.500	63.50	1.619	41.13	1.750	44.45	3.80	1.724									
MS9958-35	2.625	66.68	1.744	44.30	1.875	47.62	3.95	1.792									

FED SUP CLASS 5306

AS AND AMS ARE SOCIETY OF AUTOMOTIVE ENGINEERS, INC., PUBLICATIONS.
THIS STANDARD WAS DEVELOPED COOPERATIVELY WITH THE MILITARY SERVICES BY THE SAE AEROSPACE PART STANDARDS DIVISION

APPROVED 27 Jun 74 REVISED

P.A. Air Force - 11

Other Cust
Army-AV
Navy-AS

TITLE
BOLT, MACHINE, HEXAGON HEAD, DRILLED, 6 HOLE, PD SHANK, STEEL AMS 6322, CADMIUM PLATED, .250-28UNJF-3A

MILITARY STANDARD
MS9958

PROCUREMENT SPECIFICATION

SUPERSEDES

SHEET 2 OF 2

DD FORM 1 SEP 67 672-1
ASD use only

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

5306-0493

☆U.S. GOVERNMENT PRINTING OFFICE 1974-603-109/1176

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:28Z
Check the source to verify that this is the current version before use.