MIL-I-22782E(NU)
13 November 1985
SUPERSEDING
MIL-I-22782D(NU)
22 Jan 1982

MILITARY SPECIFICATION

INSIGNIA, SHOULDER SLEEVE AND BREAST

This specification is approved for use by the Navy Clothing and Textile Research Facility, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers Schiffli embroidered identification shoulder sleeve and breast insignia used by the Navy and Coast Guard.

* 1.2 Classification. The embroidered insignia shall be of the following types and styles as specified (see 6.2):

Type I - Navy

Style 1 - Badge Identification - JROTC
Style 2 - Mark, Unit Identification

Type II - Coast Guard (CEREMONIAL GUARDS AND BAND)

Style 2 - Badge Identification - Service
Style 3 - Badge Identification - National Flag
Style 4 - Tab - Ceremonial
Style 5 - Tab - Band
Style 6 - Badge, Identification - Ceremonial Shield

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Officer in Charge, Navy Clothing and Textile Research Facility, 21 Strathmore Road, Natick, MA 01760-2490 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this Document or by letter.

FSC 8455

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:58Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Government documents

* 2.1.1 Specifications, Standards and Handbooks. Unless otherwise specified, the following specifications, standards and handbooks of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDiss) specified in the solicitation form a part of this specification to the extent specified herein.

SPECIFICATIONS

FEDERAL

V-T-276	- Thread, Cotton
PPP-B-636	- Boxes, Shipping, Fiberboard
PPP-B-676	- Boxes, Setup

MILITARY

MIL-E-17568	- Embroidery Materials, Metallic and Synthetic Metallic

STANDARDS

FEDERAL

FED-STD-191	- Textile Test Methods
FED-STD-751	- Stitches, Seams and Stitchings

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	- Marking for Shipment and Storage

(Copies of specifications, standards and stitch enlargements required by the contractor in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

* 2.1.2 Other Government Documents, Drawings and Publications. The following other government publication forms a part of this specification to the extent specified herein.

LAWS AND REGULATIONS

U. S. Postal Service Manual

(Copies of the manual may be obtained from the Superintendent of Documents, U. S. Government Printing Office, Washington, D. C. 20402.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:58Z
Check the source to verify that this is the current version before use.

2.2 Other publications. The following documents form a part of this specification to the extent specified herein.

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT
National Motor Freight Classification

(Applications for copies should be addressed to American Trucking Association, Att: Traffic Department, 1616 P Street, N.W., Washington, DC 20036.)

UNIFORM CLASSIFICATION COMMITTEE, AGENT
Uniform Freight Classification

(Applications for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606.)

DEPARTMENT OF DEFENSE STANDARD COLOR CARD
OF OFFICIAL STANDARDIZED SHADES FOR HERALDIC YARNS
For Embroidery and Ribbons

(Applications for copies of the color card should be addressed to the Color Association of the United States, Inc., 24 East 38th Street, New York, N.Y. 10016.)

* 2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document shall take precedence.

3. REQUIREMENTS

3.1 Guide sample. Samples, when furnished are solely for guidance and information to the contractor (see 6.3). Variation from the specification may appear in the sample, in which case the specification shall govern.

3.2 First article. When specified, the contractor shall furnish sample unit(s) for first article inspection and approval (see 4.3 and 6.2).

3.3 Materials.

3.3.1 Base cloth. The base cloth shall be cotton or a polyester/cotton blend, twill weave, single or plied yarns, 6.0 to 8.0 ounces per square yard, with a breaking strength of 150 pounds per inch (min.) in the warp and 70 pounds per inch (min.) in the filling. The color shall be as specified on the applicable figure or stitch enlargement.

3.3.2 Embroidery yarn and thread.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:58Z
Check the source to verify that this is the current version before use.

* 3.3.2.1 Rayon yarn (needle). The rayon yarn shall be a bright, continuous filament, regenerated cellulose type rayon. Yarn size and color shall be as specified in the applicable figure or stitch enlargement. The use of sulphur dyes is prohibited. The dyed yarn shall show good colorfastness to wet-dry cleaning, bleaching, wet heat (hot pressing), light, and laundering when the end item is tested in 4.4.1.

3.3.2.1.1 Color matching. The color shall match the approved standard shade sample under artificial daylight having a color temperature of 7500 (±500) Kelvin and shall be a good approximation to the standard shade sample under incandescent lamplight at 2850 (±100) Kelvin.

3.3.2.2 Thread (bobbin). The bobbin thread shall be cotton, natural color, two ply or a continuous multifilament, undyed (white) nylon yarn. Yarn size shall be sufficient to assure proper stitch execution.

* 3.3.2.3 Thread, overedge (cover). Unless otherwise specified in the figure or stitch enlargement, the overedge (cover) thread shall be a bright, continuous multifilament, single ply, 600 denier rayon, with two ends feeding as one or one single ply of 1200 denier rayon, one end feed.

* 3.3.2.4 Thread, overedge (needle and looper). The needle and looper thread shall be cotton conforming to type IC2, ticket number 00, three ply of V-T-276. In addition, the colored cotton overedge threads shall show good colorfastness to dry and wet heat (hot pressing) when tested as specified in 4.4.1. Unless otherwise specified, the color of the thread shall match the color of the background cloth.

* 3.3.2.5 Metallic yarns. The synthetic metallic yarns shall consist of a metallic ribbon wound around a core yarn conforming to type III, classes 8 and 11 of MIL-E-17568. The synthetic metallic ribbon shall not show any evidence of discoloration or become tacky when tested as specified in 4.4.4.

3.3.3 Buckram. The buckram (when required) for the insignia shall be plain weave, natural or white in color, 2.5 ounces (min) per square yard, a minimum thread count of 25 ends per inch in the warp and 20 picks per inch in the filling, and a minimum breaking strength of 25 pounds per inch in the warp and 20 pounds per inch in the filling. The contractor shall furnish a Certificate of Compliance for the above requirements (see 4.1.1).

* 3.4 Construction. The insignia shall be embroidered on a Schiffli automatic type embroidery machine in accordance with this specification, guide sample and the applicable stitch enlargement. Stitch enlargements shall be furnished by the Government to the contractor for use in preparing the necessary punchings. The stitch enlargements shall not be altered in any way.

NOTE: Stitch enlargements of the unit identification marks are furnished with the background size and individual letter size only. Stitch enlargements for individual ship names are not provided.

3.4.1 Embroidery stitches. The embroidery stitches shall be of the type, length, number and density as specified on the applicable stitch enlargement.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:58Z
Check the source to verify that this is the current version before use.

3.4.2 Ground/overlay stitches. The ground and overlay stitches shall be in accordance with the applicable stitch enlargement and shall completely cover the applicable background design area in a close, dense and tightly drawn manner to produce a clear, sharp execution of the design. The base cloth and underlay stitches shall not be visible.

3.4.3 Underlay stitches. Where underlay stitches are required, the number of stitches shall not be less than indicated on the applicable stitch enlargement or guide sample. Where underlay stitches are required, the stitches shall be inserted in the direction and manner most suitable for proper design execution.

3.4.4 Border stitches. The embroidered insignia shall be bordered by a Schrage stitch or a combination of Blatt and Schrage stitches provided it is equal in density to the specified Schrage stitch. The border stitch shall be as indicated on the applicable stitch enlargement or guide sample (not applicable to type I, style 2).

3.4.5 Cutting. The completely embroidered insignia shall be cut from the base cloth and properly trimmed before the overedging operation. Border stitching along the edge of the insignia shall not be cut.

3.4.6 Overedge stitching. Unless otherwise specified, the insignia shall have overedge stitching superimposed on the border stitching using yarn specified in 3.3.2.3 and 3.3.2.4. The overedge stitching shall comform to stitch type 504 or 505 of FED-STD-751, using 26 (±4) stitches per inch with a stitch length of 1/8 (± 1/32) inch. The needle and looper thread shall be cotton and the looper and cover thread shall be two ends of 600 denier rayon or one single end of 1200 denier rayon. The overedge stitching shall start and finish on the edge of the design in accordance with industry practice. There shall be approximately a half inch overlap of the stitching. Stitching shall completely cover the edge of the base cloth. The free end of the overedge stitching chain shall extend a minimum of 1/2 inch, turned and secured to the backside of the insignia with a pressure sensitive tape or masking tape and shall not be visible on the face of the insignia. The masking tape shall be no closer than 1/8 inch from the overedging.

3.4.7 Stiffener. Insignia may be treated on the reverse side with a suitable stiffener, if required, to facilitate subsequent processing. The finish shall not affect the colors on the face of the insignia and shall not be adversely affected by storage or the requirements for end item testing.

* 3.4.8 Construction requirements. Construction requirements and dimensions for the Schiffli embroidered insignia shall be as specified in Table I.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:58Z
Check the source to verify that this is the current version before use.

Table I - Construction requirements

Type and style	Minimum No. of stitches	Design and dimensions (inches)	Finished size (inches)	Stitch enlargement number
Type I, style 1	12,202	see figure 1	3(diameter)	16-1-449
Type I, style 2	1/	see figure 2,3	1/	1/
Type II, style 2	10,311	see figure 4	2-3/8 x 4	16-1-474
Type II, style 3	8,707	see figure 5	2-5/8 x 3-3/4	16-1-475
Type II, style 4	4,505	see figure 6	1-1/16 x 3-3/4	16-1-473
Type II, style 5	3,478	see figure 7	11/16 x 4-5/8	16-1-497
Type II, style 6	4,288	see figure 8	2-1/8 x 2-5/8	16-1-586

1/ See Table II.

* 3.4.8.1 Additional requirements for type I, style 2 insignia. The embroidery yarns used in type I, style 2 sleeve insignia shall be as follows:

Yarn	Color	Cable No.	Size
Background (Rayon)	Dark blue	67126	75 denier, 3 ply
Characters and symbols (Rayon)	White	67101	75 denier, 3 ply
Overedging:			
Cover (Rayon)	Dark blue	67126	see 3.3.2.3
Needle and looper (Cotton)	Dark blue	67126	see 3.3.2.4

The overall length of the sleeve insignia and the style of the embroidered characters (A or B) shall be determined by the total number of characters (exclusive of symbols) in the unit name (see Table II). The background shall be in the form of an arc.

Table II - Additional requirements for type I, style 2 insignia

Background size (inches)1/	Radius of arc (inches)	Style of characters	No. of characters in unit name 2/	No. of background stitches (min)	Stitch enlargement No.
5 x 1/2	8-3/4	A	1 to 14	1,387	16-1-593 16-1-594 16-1-595
5 x 1/2	8-3/4	B	15 to 20	1,387	16-1-596
5-3/4 x 1/2	8-3/4	B	21 to 32	1,568	16-1-597

1/ Tolerance for length of finished insignia shall be + 1/8 and -0.

2/ See 3.4.8.1.1 for exceptions

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:58Z
Check the source to verify that this is the current version before use.

* 3.4.8.1.1 Exceptions for number of characters in unit name. The number of characters in a unit name employing a single evenly spaced group of characters shall be as follows:

Background Size	Style of Character	Number of Character
5 x 1/2	A	15 to 19
5 x 1/2	B	21 to 26
5-3/4 x 1/2	B	33 to 36

* 3.4.8.2 Characters and symbols for unit name. Embroidered characters and symbols shall completely cover the background embroidery and underlay stitching and shall contain the minimum number of stitches indicated in table III. Characters shall be 1/4 (+ 1/16 - 1/32) inch high. All numerals shall be embroidered with style "A" characters. Unless otherwise specified, all characters and symbols in a specific unit identification mark shall be of the same style. Definitions and requirements for lettering, numerals, and symbols are as follows and as illustrated in figures 2 and 3.

Characters - Alphabet letters and Arabic numerals

Style A characters - expanded or extended Gothic

Style B characters - compressed or condensed Gothic

Symbols - period (.), comma (,), and apostrophe (')

Group - Arrangement of characters or characters and symbols forming one word or subdivision, i.e., U.S.S, 126, MC, COM, O'HARA, COMSERVRON, etc.

Group spacing shall be as follows:

Unit names with Style A characters - expanded or extended Gothic, the spacings between groups shall be 1/4 (+0, -1/16) inch.

Unit names with Style B characters - compressed or condensed Gothic, the spacings between groups shall be 3/16 (+0, -1/16) inch.

3.4.8.2.1 Spacing. The unit name shall be centered on the background with equally balanced spacing of the characters and blank spaces on both sides of the centerline of the unit mark (see Figures 2 and 3). In addition, the characters and symbols of a unit name shall be at normal spacing. Normal spacing shall be considered as approximately equal spacing between characters in a group offering good legibility and eye appeal.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:58Z
Check the source to verify that this is the current version before use.

Table III - Stitch requirements for characters and symbols

Character or symbol	Minimum No. Stitches 1/		Character or Symbol	Minimum No. Stitches 1/	
	Style			Style	
	A	B		A	B
			T	38	32
A	52	45	U	51	48
B	70	67	V	43	39
C	52	55	W	78	69
D	58	55	X	47	38
E	56	48	Y	37	31
F	45	38	Z	57	42
G	67	60	Period (.)	6	7
H	52	47	Comma/Hyphen(,-)	10	10
I	22	21	Apostrophe (')	10	9
J	39	36	1	30	-
K	50	46	2	57	-
L	34	30	3	67	-
M	78	66	4	56	-
N	60	54	5	64	-
O	59	52	6	69	-
P	58	45	7	38	-
Q	70	61	8	82	-
R	66	55	9	67	-
S	68	48	0	59	-

1/ Exclusive of connecting stitches and stitches removed in subsequent thread cutting operations.

3.4.8.3 Connecting, traveling and position stitches. Connecting stitches between individual characters or symbols will be permitted provided they do not adversely affect the appearance of the end item. Connecting stitches between group separations shall not be permitted. Traveling and position stitches shall not be visible on the finished insignia.

3.5 Tolerances. Unless otherwise specified, the overall measurement of the finished insignia shall have a tolerance of + 1/8 inch. Measurements 1/2 inch or less shall be ± 1/32 inch and more than 1/2 inch, ± 1/16 inch.

3.6 Finishing. The finished insignia shall be clean. Embroidery thread ends or stumps shall be removed.

3.7 Workmanship. The finished insignia shall conform to the quality of product established by this specification. The occurrance of defects shall not exceed the applicable point values.

4. QUALITY ASSURANCE PROVISIONS

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:58Z
Check the source to verify that this is the current version before use.

4.1 Responsibility for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

4.3 First article inspection. The first article submitted in accordance with 3.2 shall be inspected as specified in 4.4.2 for compliance with design, construction, workmanship and dimensional requirements.

4.4 Quality conformance inspection. Inspection shall be in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated herein.

* 4.4.1 Component and material testing. In accordance with 4.1, components and materials shall be tested in accordance with all the requirements of referenced specifications, drawings and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document. Components listed in table IV shall be tested using methods specified in FED-STD-191 wherever applicable. The lot shall be unacceptable if one or more sample units fail to meet the requirements specified. The sample size for each component shall be as follows:

Lot size (unit)	Sample size
800 or less	2
801 thru 22,000	3
22,001 and over	5

The lot size and sample unit shall be expressed as follows:

Component	Unit of Product	Sample unit
Base cloth	1 linear yard	1 linear yard
Embroidery yarn	1 pound	Cone, spool or sufficient yarn to total 360 yards.
Bobbin yarn	1 pound	Cone, spool, bobbin or sufficient yarn to total 360 yards.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:58Z
Check the source to verify that this is the current version before use.

Table IV - Component testing

Component	Characteristic	Requirement Paragraph	Test Method
Base Cloth	Material ident.	3.3.1	1200 1/
	Weave	3.3.1	Visual
	Yarn ply	3.3.1	Visual
	Wgt/oz/sq yd.	3.3.1	5041
	Breaking strength	3.3.1	5100
	Color	Applicable figure	Visual
Embroidery Yarn (Rayon)	Material ident.	3.3.2.1	1500 or 1521 1/
	Denier	3.3.2.1	4021
	Ply	3.3.2.1	Visual
	Sulphur	3.3.2.1	2020 1/
	Color	Applicable figure	Visual
Bobbin Yarn	Material ident.	3.3.2.2	1/
Thread (Overedge)	Material ident.	3.3.2.3	1/
	Ply	3.3.2.3	1/
	Denier	3.3.2.3	1/
	Color	Applicable figure	Visual
Thread (needle and looper)	Colorfastness to hot pressing		
	Dry heat	3.3.2.4	5640
	Wet heat	3.3.2.4	5640

1/ Unless otherwise specified, a certificate of compliance shall be submitted and will be acceptable for the stated requirement.

4.4.2 Examination of the end item. The defects found during the examination of the end item shall be classified in accordance with 4.4.2.1 and 4.4.2.2. The sample unit shall be one finished insignia. The lot size shall be expressed in units of one insignia. The inspection levels and acceptable quality levels shall be as specified in 4.4.2.3.

* 4.4.2.1 Visual examination. The finished insignia shall be examined for defects in design, material, construction and workmanship and classified in accordance with the defects listed in Table V.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:58Z
Check the source to verify that this is the current version before use.

Table V - Classification of defects

Examine	Defects (One Class)
1. Base Cloth	a. Other than specified. b. Color or shade other than specified. c. Hole, tear slub, knot, broken yarn, spot or stain.
II Design	a. Design incomplete, not in accordance with stitch enlargement, or guide sample b. Wrong color arrangement c. Any color missing d. Design poorly defined e. Distorted or misshapen overall form or outline f. Shift g. Device or lettering flat: -underlay missing (where required) h. Design density thin or uneven: (1)-base cloth, underlay showing through (2)-thinness of detail i. Design features not clearly outlined
III Construction	a. Tight tension: (1)-distortion of surface (face side) (2)-unrelated colors or yarn showing through surface b. Loose tension; loopy surface c. Traveling (walking or jumping) stitches on face of insignia d. Broken stitches or stitching incomplete (missing) e. Bobbin thread showing on face of insignia f. Border stitching not specified type g. Schrage stitching omitted
IV Overedge Stitching	a. Omitted completely b. Wrong stitch type c. Obscuring design or characters d. Runs into background or design e. Broken or skipped stitches: (1)-1/8 inch to 1/4 inch missing (2)-more than 1/4 inch missing f. Ravelled, ends not secured g. Run-off; not caught in base cloth h. Edges of base cloth showing through i. Less than 22 or more than 30 stitches per inch j. Stitch density not uniform k. Stitch length not uniform l. Tight or loose stitch tension m. Stitch length more or less than specified n. Start, finish or overlap not as specified

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:58Z
Check the source to verify that this is the current version before use.

Table V - Classification of defect(cont'd)

Examine	Defects (One Class)
	o. Free end not secured on back as specified p. Adhesive tape (back) less than 1/8 inch from finished edge q. Final free end less than 1/2 inch r. Border not covered by overedge stitching s. Wavy edges
V Workmanship	a. Kinked, bunched, tangled yarn on face b. Broken, scuffed or cut yarns on face c. Spot, stain, stiffener or foreign matter on face d. Spot, stain, foreign matter on back e. Two or more thread ends untrimmed f. Two or more stumps g. Creased or folded, will not flatten by manual pressure h. Cut Schrage stitching not adequately covered by overedge stitching

4.4.2.2 Dimensional examination. The finished insignia shall be examined for defects in dimension. Any measurement deviating from specified dimensions or tolerances specified on applicable figure and in Tables I and II shall be scored as a dimensional defect.

4.4.2.3 Inspection levels and acceptable quality levels. The inspection levels and acceptable quality levels (AQL's), expressed in defects per 100 units (DHU), shall be as follows:

	Inspection level	AQL
For visual examination in 4.4.2.1	II	4.0
For dimensional examination in 4.4.2.2	S-3	6.5

4.4.3 Examination of packaging. An examination shall be made to determine that packaging, packing and marking comply with the Section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully packed, selected just prior to the closing operation. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of containers in the inspection lot. The sample size shall be in accordance with level S-2 of MIL-STD-105. The acceptable quality level (AQL) for this examination shall be 2.5 defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:58Z
Check the source to verify that this is the current version before use.

Examine	Defect
Marking (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, sequence or method of application.
Materials	Any component missing, or not as specified. Any component damaged, affecting serviceability.
Workmanship	Inadequate application of components, such as: incomplete closure of container flaps, loose strapping, inadequate stapling. Bulging or distortion of containers
Content	Number of items per container or bundle is more or less than specified. Number of set-up boxes per shipping container more or less than specified.

* 4.4.4 Testing of the end item. The end item shall be tested as specified in Table VI. The lot size shall be expressed in units of one insignia. The unit of product for tests shall be six insignia. The lot shall be unacceptable if one or more sample units fail to meet the requirements referenced in Table VI. The sample size shall be as follows:

Lot size (each)	Sample size
800 or less	2
801 thru 22,000	3
22,001 and over	5

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:58Z
Check the source to verify that this is the current version before use.

Table VI - End item tests

Characteristics	Specification Reference: Requirement Paragraph	Specification Reference: Test Method
Colorfastness to:		
Light (40 Hours)	3.3.2.1	5660
Wet-dry Cleaning	3.3.2.1	5622
Laundering	3.3.2.1	5614
Crocking	3.3.2.1	5651
Bleaching	3.3.2.1	5600
Wet heat (hot pressing)	3.3.2.1	5640
Durability of color	3.3.2.5	1/
Tackiness	3.3.2.5	2/

1/ A cloth saturated with methyl ethyl ketone solvent shall be lightly rubbed once back and forth over the synthetic metallic ribbon. Any evidence of discoloration in the synthetic metallic ribbon shall be cause for failure

2/ A cloth saturated with Stoddard solvent shall be lightly rubbed once back and forth over the synthetic metallic ribbon. Any evidence of tackiness in the synthetic metallic ribbon shall be cause for failure.

5. PACKAGING

* 5.1 Packaging - Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A. Insignia shall be put up in bundles of 10 each and securely tied or cross-tied with cotton twine or thread. Insignia shall be packaged as follows:

	AMOUNT/BOX	BOX REQUIREMENTS
Type I, Style 1	70 (7 bdles - 10 each)	5.1.1.1.1
Type I, Style 2 (5 and 5 3/4 inch sizes)	100 (10 bdles - 10 each)	5.1.1.1.2
Type II, Styles 2, 3 & 6	70 (7 bdles - 10 each)	5.1.1.1.2
Type II, Style 4	140 (14 bdles - 10 each)	5.1.1.1.2
Type II, Style 5	140 (14 bdles - 10 each)	5.1.1.1.2

5.1.1.1 Boxes, Set Up.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:58Z
Check the source to verify that this is the current version before use.

5.1.1.1.1 Type I, Style 1. The insignia shall be placed on edge along the length of the box. The box shall be a two-piece, full telescope style, set-up paperboard box that conforms to Type I, variety 1, class A, style 4 of PPP-B-676. The outside dimensions of the box shall be approximately 7 1/4 inches in length, 3 1/4 inches in width and 3 1/4 inches in depth.

5.1.1.1.2 Type I, Style 2, and Type II, Styles 2, 3, 4, 5 and 6. The type II insignia shall be placed on edge along the length of the box. Type I, Style 2 insignia shall be stacked 2 bundles (20) deep in the box. The insignia shall be placed lengthwise along the length of the box, 5 stacks in a row. The box shall conform to the requirements specified in 5.1.1.1.1, except that the approximate dimensions shall be 7 1/4 inches in length, 4 1/4 inches in width and 2 3/4 inches in depth.

5.1.2 Level C (Commercial packaging). The insignia shall be packaged to afford adequate protection against physical damage during shipment from the contractor to the first receiving activity. The package and quantity per package shall be the same as that normally use by the contractor for retail distribution.

* 5.2 Packing. Packing shall be level A, B or C (see 6.2).

5.2.1 Level A.

5.2.1.1 Type I, Style 1. Twenty (20) boxes packaged as specified in 5.1.1 and 5.1.1.1 shall be packed in a fiberboard shipping container conforming to type CF, class weather-resistant, variety DW, grade V15c, style RSC of PPP-B-636. Inside dimensions of the container shall approximate 17 inches in length, 7 1/2 inches in depth and 13 1/4 inches in width. Dimensions are furnished as a guide only. Packages shall be packed on end, five in length and four in width within the shipping container. Each container shall be closed, waterproofed and reinforced in accordance with the appendix of the box specification.

5.2.1.2 Type I, Style 2 and Type II, Styles 2, 3, 4, 5 and 6. Eighteen (18) boxes packaged as specified in 5.1.1 and 5.1.1.1.2 shall be packed in a fiberboard shipping container conforming to type CF, class weather-resistant, grade V15c, variety DW, style RSC of PPP-B-636. Inside dimensions of the container shall approximate 17 inches in length, 7 1/2 inches in depth and 13 1/4 inches in width. Dimensions are furnished as a guide only. Packages shall be packed on end, six in length and three in width within the shipping container. Each container shall be closed, waterproofed and reinforced in accordance with the appendix of the box specification.

5.2.2 Level B

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:58Z
Check the source to verify that this is the current version before use.

5.2.2.1 Type I, Style 1. Twenty (20) boxes, packaged as specified in 5.1.1 and 5.1.1.1 shall be packed in a fiberboard shipping container conforming to type CF, class domestic, variety DW, grade 200 style RSC of PPP-B-636. Each container shall be closed in accordance with method II as specified in the appendix of the box specification. Inside dimensions of the container shall approximate 17 inches in length, 7 1/2 inches in depth and 13 1/4 inches in width. dimensions are furnished as a guide only. Packages shall be placed on end, five in length and four in width within the shipping container.

5.2.2.2 Type I, Style 2 and Type II, Styles 2, 3, 4, 5 and 6. Eighteen (18) boxes packaged as specified in 5.1.1 and 5.1.1.1.2, shall be packed in a fiberboard shipping container conforming to type cf, class domestic, variety DW, grade 200 style RSC, of PPP-B-636. Inside dimensions of the container shall approximate 17 inches in length, 7 1/2 inches in depth and 13 1/4 inches in width. Dimensions are furnished as a guide only. Packages shall be placed on end, six in length and three in width within the shipping container. Each container shall be closed in accordance with method II of the appendix of the box specification.

5.2.3 Level C (Commercial Packing). Insignia, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the contractor for retail distribution. Containers shall comply with the US Postal Service Manual, Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.3 Marking. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The embroidered insignia covered by this specification are intended for use as identification badges by Navy and Coast Guard personnel.

* 6.2 Ordering data. Procurement documents should specify the following:

a. Title, number and date of this specification.
b. Levels of packaging and packing required (see 5.1 and 5.2).
c. Type and styles required (see 1.2).
d. Unit name for Type I, Style 2 insignia.
e. When first article inspection is required, the item will be tested and should be a first article sample. The contracting officer should include specific instructions in acquisition documents regarding arrangement for examinations, quantity and testing and approval.

6.3 Guide samples. For access to samples, address the procuring activity issuing the invitation for bids.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:58Z
Check the source to verify that this is the current version before use.

* 6.4 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodian:
Navy - NU


Preparing Activity:
Navy - NU

Review Activity:
DLA - CT

Project No. 8455-N096

User Activity:
Navy - CG

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:58Z
Check the source to verify that this is the current version before use.

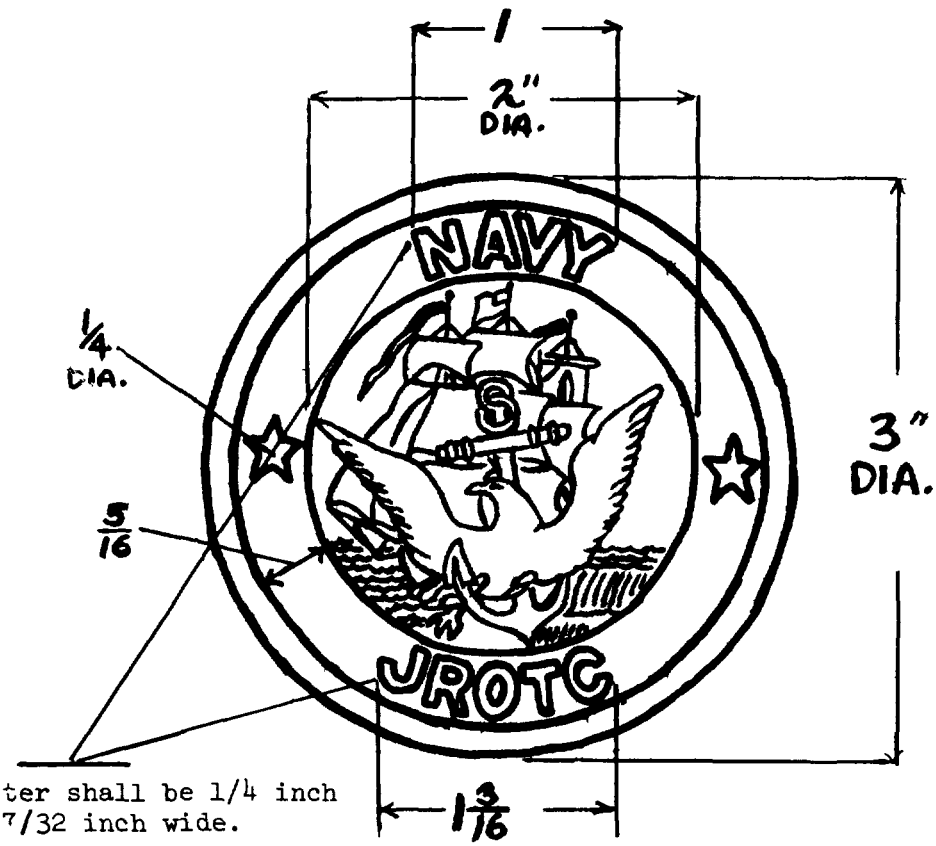

Each letter shall be 1/4 inch high by 7/32 inch wide.

NAVY JUNIOR RESERVE OFFICER TRAINING CORPS

1. Stitches for Schiffli execution - 12,202 min. (Stitch enlargement 16-1-449.)

2. Schiffli yarn designation: The applicable stitch enlargement (16-1-449) shall govern the location of colors, yarn sizes and color numbers.

3. Overedge thread for merrow-type sewing.
   Cover thread - - - - - - - - - - - - Air Force Yellow, Cable No. 67103
   Needle and looper thread - - - - - - - Air Force Yellow, Cable No. 67103


4. Base cloth - YELLOW OR TAN

NOTE: Dimensions specified are in inches

NOTE:
The above illustration is for reference only. The basic document and stitch enlargement shall govern design, construction and dimensions.

FIG. 1 - INSIGNIA, SLEEVE, TYPE I, STYLE I

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:58Z
Check the source to verify that this is the current version before use.

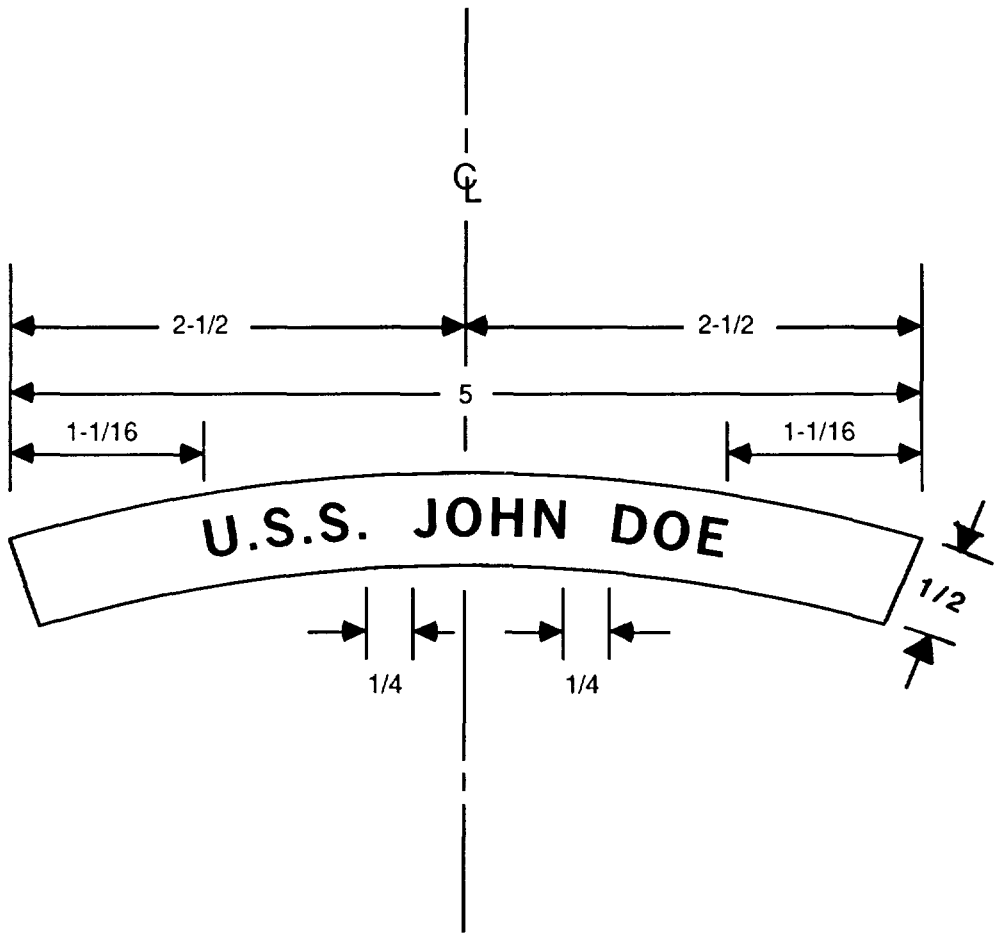

NAVY SHOULDER SLEEVE UNIT IDENTIFICATION MARK

1. Stitches for Schiffli execution: See Tables I and II

2. Schiffli yarn designation:

Design	Color	Cable No.	Yarn No.
Background	Dark Blue	67126	75/3
Lettering	White	67101	75/3

3. Overedge threads for Merrow type sewing:
   Cover thread - Dark Blue 67126
   Needle and looper - Dark Blue 67126


4. Background fabric - Blue 3346 approximating shade of overedging

The above illustration is for reference only. The basic document and stitch enlargement shall govern design, construction and dimensions, which are in inches.

Type I, Style 2 - Characters and Symbols - Style A

Figure 2 - Insignia, Shoulder, Sleeve and Breast

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:58Z
Check the source to verify that this is the current version before use.

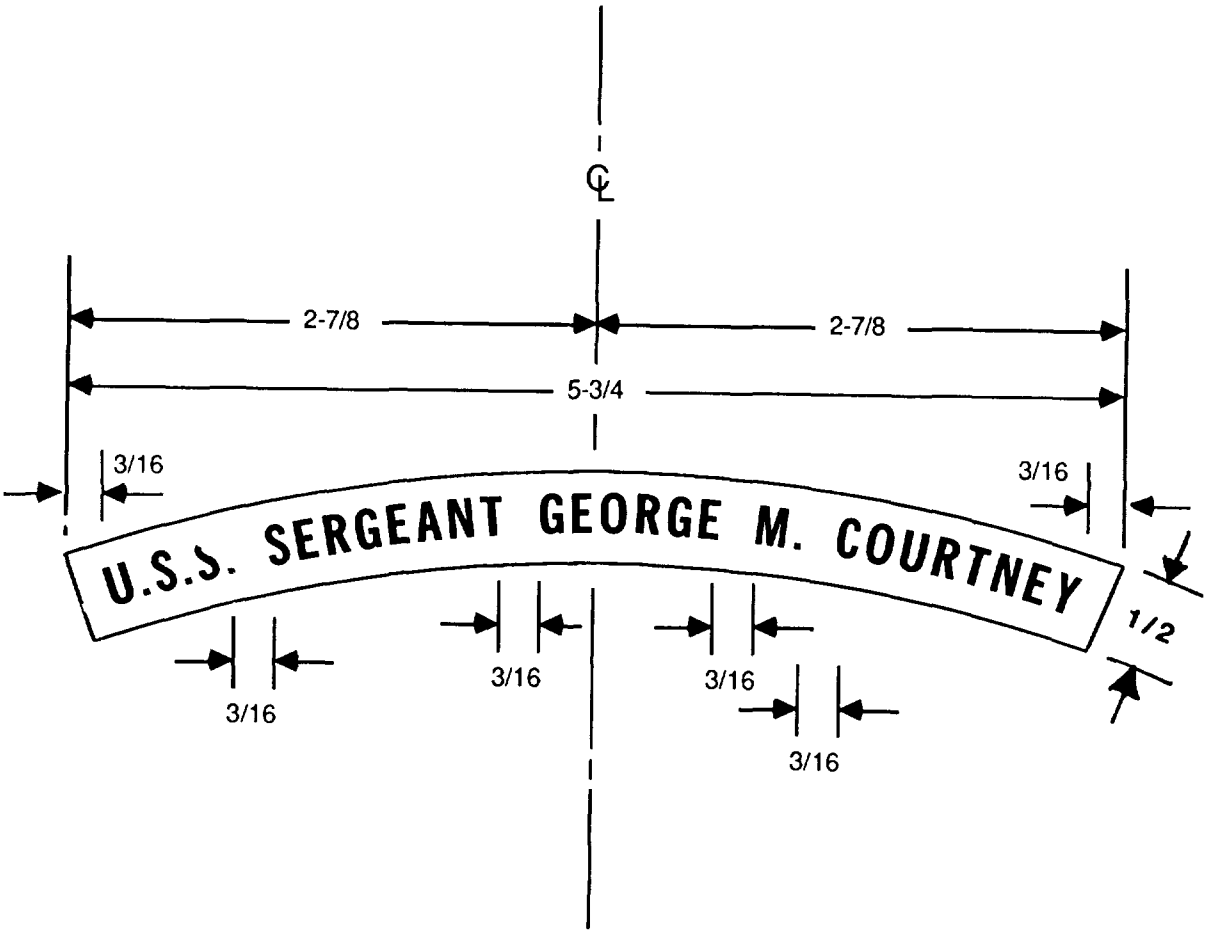

NAVY SHOULDER SLEEVE UNIT IDENTIFICATION MARK

1. Stitches for Schiffli execution: See Tables I and II

2. Schiffli yarn designation:

Design	Color	Cable No.	Yarn No.
Background	Dark Blue	67126	75/3
Lettering	White	67101	75/3

3. Overedge threads for Merrow type sewing:
   Cover thread - Dark Blue 67126
   Needle and looper - Dark Blue 67126


4. Background fabric - Blue 3346 approximating shade of overedging

The above illustration is for reference only. The basic document and stitch enlargement shall govern design, construction and dimensions, which are in inches.

Type I, Style 2 - Characters and Symbols - Style B

Figure 3 - Insignia, Shoulder, Sleeve and Breast

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:58Z
Check the source to verify that this is the current version before use.

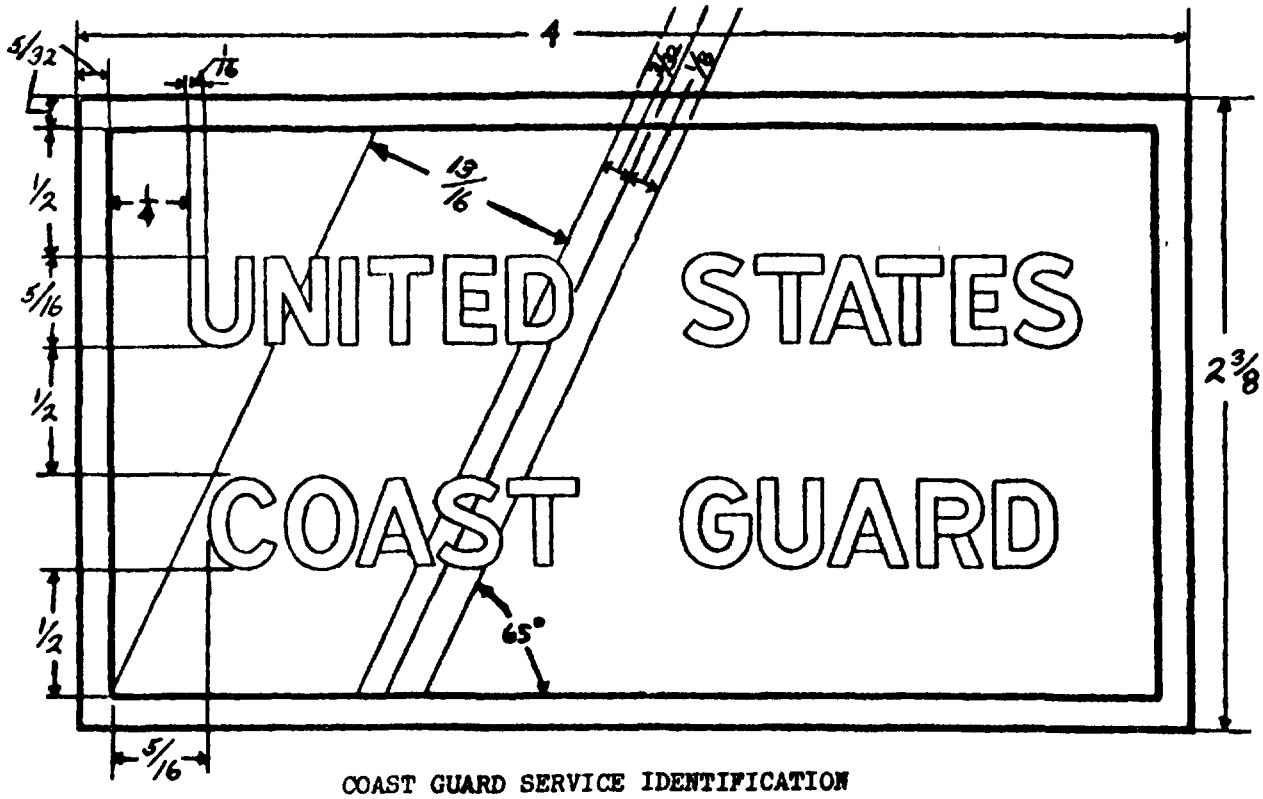

COAST GUARD SERVICE IDENTIFICATION

1. Stitches for Schiffli execution - 10,311 MIN (Stitch enlargement 16-1-474)
2. Schiffli yarn designation:

Design	Color	Cable No.	Yarn No.
Lettering	Black	67138	100 denier, 2 ply
Racing stripe(widest)	Paprica	67151	150 denier, 2 ply
Racing stripe(1/8 inch wide)	Oriental Blue	67172	150 denier, 2 ply
Background	White	67101	150 denier, 2 ply

3. Overedge thread for Merrow type sewing:
   Cover thread - - Imperial Blue HBZ, Cable No. 67175
   Needle and looper thread - Imperial Blue HBZ, Cable No. 67175

4. Base cloth - Blue, approximating shade of overedge threads.


NOTE:
The above illustration is for reference only. The basic document and stitch enlargement shall govern design, construction and dimensions.

NOTE: Dimensions specified are in inches

Type II Style 2

Figure 4 - INSIGNIA, BREAST

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:58Z
Check the source to verify that this is the current version before use.

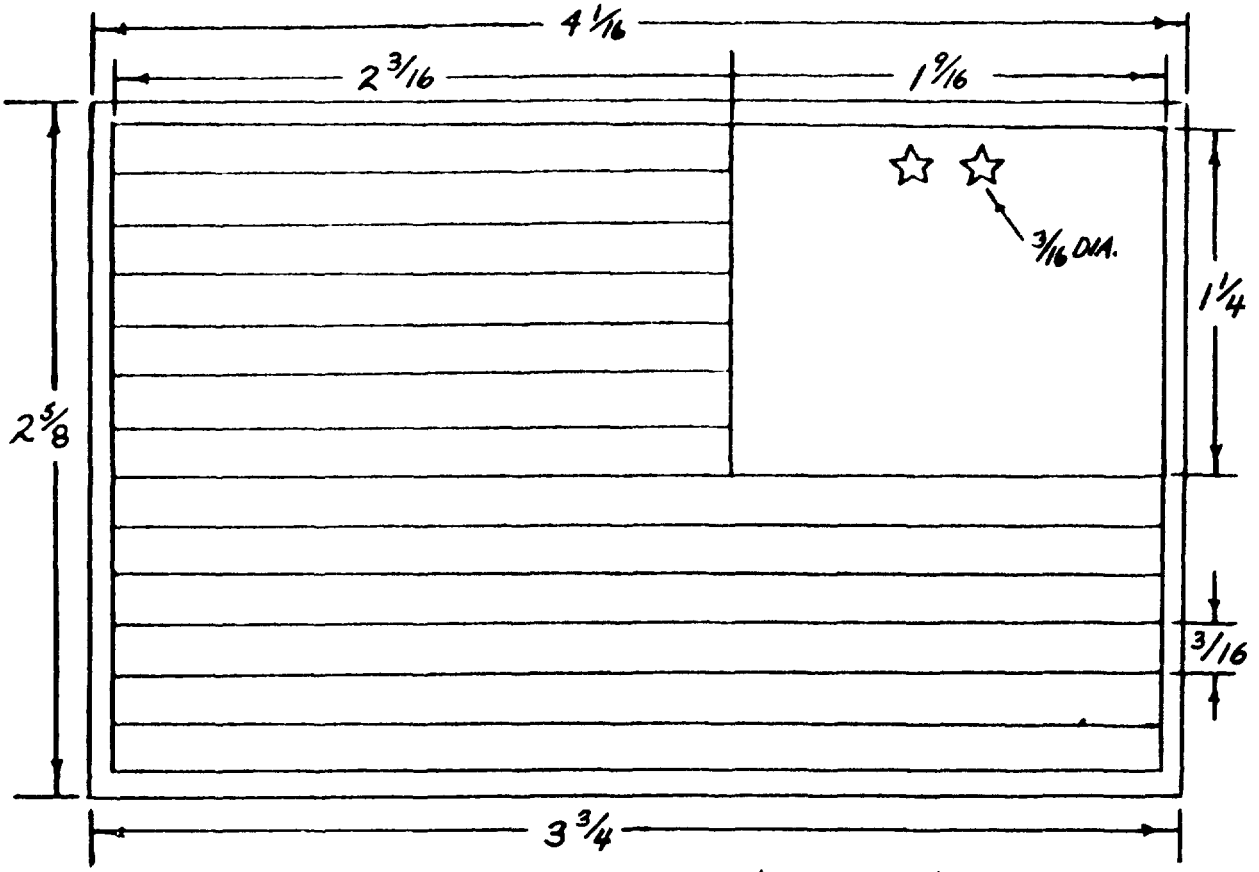

NATIONAL FLAG, U.S.A. (Coast Guard)

1. Stitches for Schiffli execution - 8707 MIN. (Stitch enlargement 16-1-475)
2. Schiffli yarn designation:

Design	Color	Cable No.	Yarn No.
Seven stripes	Old Glory Red	67156	150 denier, 2 ply
Six stripes	White	67101	150 denier, 2 ply
Stars & border	White	67101	100 denier, 2 ply
Field	Old Glory Blue	67178	150 denier, 2 ply

3. Overedge thread for Merrow type sewing:
   Cover thread - - White, Cable No. 67101
   Needle and looper thread - White, Cable No. 67101
4. Base cloth - White


NOTE:
The above illustration is for reference only. The basic document and stitch enlargement shall govern design, construction and dimensions.

NOTE: Dimensions specified are in inches

Type II Style 3

Figure 5 - Insignia, Shoulder Sleeve and Breast

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:58Z
Check the source to verify that this is the current version before use.

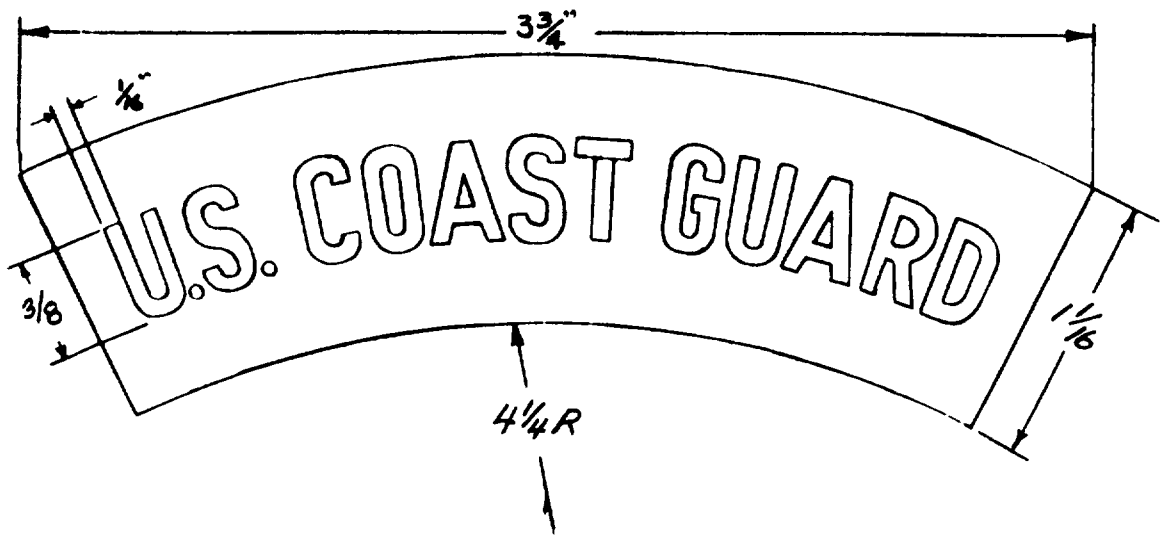

US COAST GUARD CEREMONIAL SHOULDER SLEEVE TAB

1. Stitches for Schiffli execution - 4505 MIN. (Stitch enlargment 16-1-473)
2. Schiffli yarn designation:

Design	Color	Cable No.	Yarn No.
Background	Flag Blue HY	67124	150 denier, 2 ply
Lettering	White	67101	100 denier, 2 ply

3. Overedge threads for Merrow type sewing:
   Cover thread - Flag Blue HY, Cable No. 67124
   Needle and looper thread - Flag Blue HY, Cable No. 67124

4. Base cloth - Blue, approximating shade of overedge threads.


NOTE: Dimensions specified are in inches

NOTE:
The above illustration is for reference only. The basic document and stitch enlargement shall govern design, construction and dimensions.

Type II Style 4

Figure 6 - Insignia, Shoulder Sleeve

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:58Z
Check the source to verify that this is the current version before use.

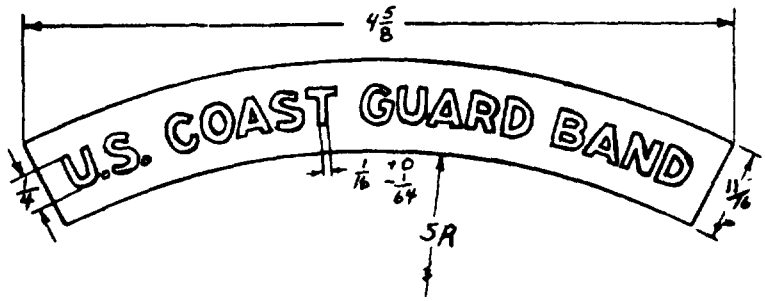

U. S. COAST GUARD BAND SHOULDER SLEEVE TAB

1. Stitches for Schiffli execution: 3478 (Min.) Stitch Enlargement 16-1-497.

2. Schiffli yarn information:

Design	Color	Cable No.	Yarn No.
Background	Flag Blue HY	67124	150 denier, 2 ply
Lettering	Gold	Reference sample*	225 (-5, +15) denier

* Reference sample is for color of gold lettering only.

3. Overedge threads for Merrow type sewing:
   Cover thread - Flag Blue HY, Cable No. 67124
   Needle and looper thread - Flag Blue HY, Cable No. 67124

4. Base cloth - Blue, approximating shade of overedge threads.


NOTE: Dimensions specified are in inches

NOTE:
The above illustration is for reference only. The basic document and stitch enlargement shall govern design, construction and dimensions.

Type II Style 5

Figure 7 - Insignia, Shoulder Sleeve and Breast

Source: https://assist.dla.mil Downloaded: 2026-10-19T13:58Z
Check the source to verify that this is the current version before use.

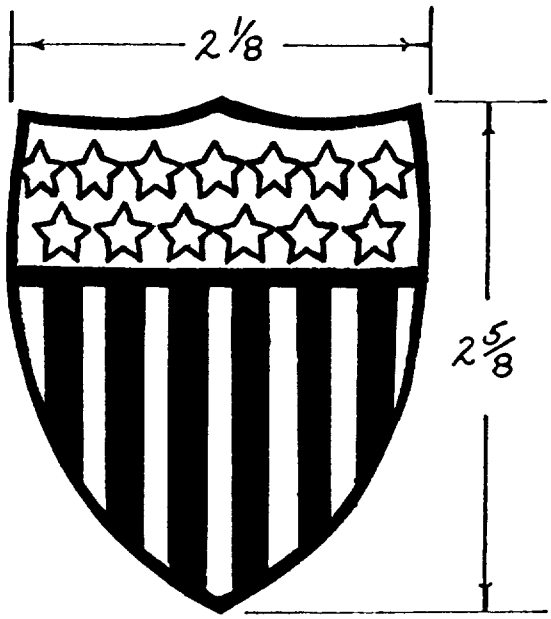

CEREMONIAL SHIELD (COAST GUARD)

1. Stitches for Schiffli execution - 4,288 minimum (Stitch enlargement 16-1-586).

2. Schiffli yarn designation:

Design	Color	Cable No.	Yarn No.
Stars and field	Ultramarine Blue HE	67118	150 denier, 2 ply
Six stripes	Scarlet HL	67111	150 denier, 2 ply
Seven stripes	White HA	67101	150 denier, 2 ply
Dividing line between star field and stripes	Old Gold HE	67105	150 denier, 2 ply

3. Overedge thread for Merrow type sewing:

Cover thread - Old Gold HE, Cable No. 67105
Needle and looper thread - Old Gold HE, Cable No. 67105
Yarn sizes shall be suitable for the purpose intended.

4 Base cloth - TAN OR YELLOW

The above illustration is for reference only. The basic document and stitch enlargement shall govern design, construction, and dimensions.

NOTE: Dimensions specified are in inches

Type II, Style 6

Figure 8 - Insignia, Shoulder Sleeve and Breast

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:58Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered

NOTE This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12503 WASHINGTON D C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Officer in Charge
Navy Clothing & Textile Research Facility
Code 50
21 Strathmore Road
Natick, MA 01760-2490

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:58Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2 DOCUMENT TITLE
MIL-I-22782E(NU)	INSIGNIA, SHOULDER, SLEEVE AND BREAST

3a. NAME OF SUBMITTING ORGANIZATION	4 TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)* _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5 PROBLEM AREAS

a. Paragraph Number and Wording

b. Recommended Wording

c Reason/Rationale for Recommendation

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T13:58Z
Check the source to verify that this is the current version before use.