MILITARY SPECIFICATION SHEET

CONNECTORS, PLUG, ELECTRICAL, COAXIAL, RADIO FREQUENCY, (SERIES C, (CABLED), MALE, RIGHT ANGLE, CLASS 2)

This amendment forms a part of MIL-C-39012/10D, dated 3 October 1986, and is approved for use by all Departments and Agencies of the Department of Defense.

PAGE 1

FIGURE 1, delete and substitute new figure 1 as follows:

"

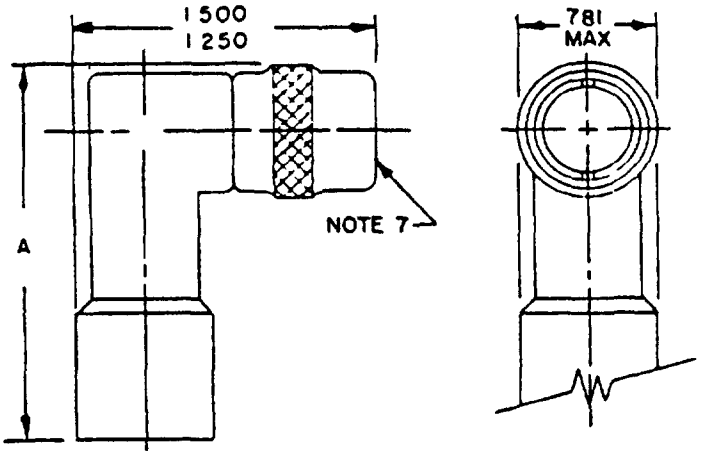

Inches	mm
.062	1.57
.781	19.84
1.250	31.75
1.500	38.10

NOTES
1. Dimensions are in inches.
2. Metric equivalents are given for general information only.
3. For dimension A see table I.
4. Dimension A defines the maximum length of the connector when assembled to the appropriate cable.
5. Wrench flats to accommodate standard wrench in accordance with FED-STD-H28, appendix 10.
6 All undimensioned pictorial configurations are for reference purposes only.
7. Series C, pin contact interface in accordance with MIL-STD-348.

FIGURE 1. General configuration. "

CONCLUDING MATERIAL

Custodians:
Army - CR
Navy - EC
Air Force - 85

Review activities:
Army - CR, EA, MI
Air Force - 11, 17, 99
DLA - ES

User activities:
Army - AT, AV
Navy - AS, MC, OS, SH
Air Force - 19

Preparing activity:
Army - CR

Agent:
DLA - ES

(Project 5935-3736)

DISTRIBUTION STATEMENT A. Approved for public release, distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:42Z
Check the source to verify that this is the current version before use.