INCH-POUND


MIL-PRF-39012/11D
w/AMENDMENT 1
8 June 2016
SUPERSEDING
MIL-PRF-39012/11D
14 December 1987

PERFORMANCE SPECIFICATION SHEET

CONNECTORS, RECEPTACLE, ELECTRICAL, COAXIAL, RADIO FREQUENCY, (SERIES C (CABLED), FEMALE, JAM NUT REAR MOUNTED PRESSURIZED, CLASS 2)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet and MIL-PRF-39012.

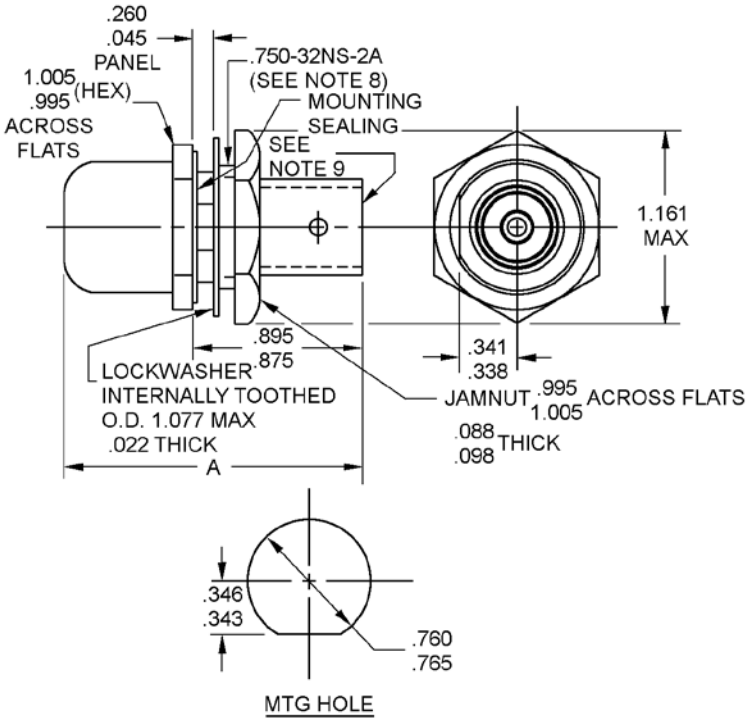

Inches	mm
.022	0.56
.088	2.24
.098	2.49
.260	6.60
.338	8.59
.341	8.66
.343	8.71
.346	8.79
.760	19.30
.765	19.43
.875	22.23
.895	22.73
.995	25.27
1.005	25.53
1.077	27.36

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.
3. For dimensions A, see tables I and III.
4. Dimension 1.161 (29.49mm) maximum is the largest overall diameter of the connector.
5. Wrench flats to accommodate standard wrench in accordance with FED-STD-H28.
6. Dimension A defines the maximum length of the connector when assembled to the appropriate cable.
7. All undimensioned pictorial configurations are for reference purposes only.
8. Series C, socket contact interface, in accordance with MIL-STD-348.
9. Orientation of body hex flats, mounting flats and bayonet studs shall be within 3° of that shown. Full threads to within .063 (1.60mm) of shoulder; 1½ maximum uneven threads to shoulder.

AMSC N/A

FSC 5935

FIGURE 1. General Configuration.


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:42Z
Check the source to verify that this is the current version before use.

TABLE I. Dash numbers, cross-reference, and dimensions.

Dash Number 1/	Applicable cable M17/ 2/	Typical mating connector M39012/ (optional hardware) 3/	Dimensions	Inches 13/ (millimeters)	
				minimum	maximum
CATEGORY A – FIELD SERVICEABLE (NO SPECIAL TOOLS REQUIRED)					
0001 4/	73-RG212 5/ 112-RG304	6-0001	A	1.416 (35.97)	1.666 (42.32)
0002 4/	65-RG165 74-RG213 75-RG214 5/ 86-00001 7/	6-0002 10-0001			
0018 6/	73-RG212 5/ 112-RG304	6-0014			
0019 6/	65-RG165 74-RG213 75-RG214 5/ 86-00001 7/	6-0015			
0020 6/	74-RG215 8/	6-0019	A	1.416 (35.97)	2.093 (53.16)
0021 6/	92-RG115 7/	6-0020 10-0009	A	1.416 (35.97)	1.666 (42.32)
CATEGORY C – FIELD REPLACEABLE (MIL-DTL-22520 CRIMP TOOL) SEE NOTE NEXT TO APPLICABLE CABLE FOR CRIMP DIE 6/ 9/ 14/					
0012	73-RG212 5/ 10/ 112-RG304 10/	6-0027	A	1.510 (38.35)	1.885 (47.88)
0013	65-RG165 7/ 11/ 74-RG213 5/ 11/	6-0028 10-0006			
0014	75-RG214 5/ 11/	6-0029 10-0007			
0015	86-00001 5/ 7/ 11/	6-0030 10-0008			
0016	6-RG11 5/ 11/ 12/	6-0031			
0017	92-RG115 11/	6-0032 10-0011			

1/ For cross reference of dash number to superseded Part or Identifying Number (PIN) or type designation, see table IV.
2/ The latest version of each cable shall be applicable.
3/ Optional hardware M39012/25-0003.
4/ Inactive for new design..
5/ Cable to be used when performing tests requiring cable except as in 7/ and 12/.
6/ These connectors have captivated center contacts.
7/ Cable to be used for the +200°C temperature cycling tests.
8/ Armored cable.
9/ Category C connectors are assembled using the applicable crimp tool in accordance with MIL-DTL-22520, to the specified cable stripped as shown on figure 2.
10/ M22520/5-35 closure A or M22520/5-55 closure A.
11/ M22520/5-61.
12/ These are not 50 ohm cables; therefore, when attached to the specified connectors, VSWR, RF leakage and insertion loss are not applicable.
13/ Dimensions are in inches. Metric equivalents are given for information only.
14/ Complete connector assembly shall consist of a body, center contact, ferrule, and assembly instructions.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:42Z
Check the source to verify that this is the current version before use.

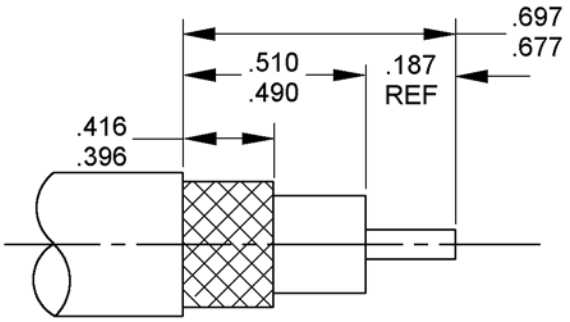

Inches	mm
.187	4.75
.396	10.06
.416	10.57
.490	12.45
.510	12.95
.677	17.20
.697	17.70

NOTES:
1. Dimensions are in inches.
2. Metric equivalents are given for information only.

FIGURE 2. Recommended cable stripping dimensions for category C connectors.

ENGINEERING INFORMATION:

Nominal impedance: 50 ohms.
Frequency range: 0 to 11 GHz.
Voltage rating: 1,000 volts rms maximum working voltage at sea level.
250 volts rms maximum at 70,000 feet (4.437 kPa).
Temperature rating: -65°C to +165°C.

REQUIREMENTS:

Dimensions and configuration: See figure 1 and MIL-STD-348.
Force to engage and disengage:
Longitudinal force: 4 1/2 pounds, maximum.
Torque: 4 inch-pounds, maximum (.45 Nm).
Coupling proof torque: Not applicable.
Inspection conditions: Coupling torque not applicable.

Mating characteristics: See MIL-STD-348.
Center contact (female):
Oversize test pin: .098 inch (2.49 mm) diameter, minimum (non-closed entry contacts only).
Insertion depth: .125 inch (3.17 mm), minimum.
Number of insertions: 1
Insertion force test:
Steel test pin diameter: .092 inch (2.34 mm), minimum.
Test pin finish: 16 microinches (0.406 µm).
Insertion force: 2 pounds (8.90 N), maximum.
Withdrawal force test:
Steel test pin diameter: .090 inch (2.29 mm), maximum.
Withdrawal force: 2 ounce (.56 N), minimum.
Test pin finish: 16 microinches (0.406 µm).
Hermetic seal: Not applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:42Z
Check the source to verify that this is the current version before use.

Leakage (pressurized connectors): Connectors shall be mounted in mounting hole shown in figure 1 with mating end capped. Test applicable to mounting seal only.

Air pressure – 30 psi.

Duration – 30 seconds minimum, 2 minutes maximum.

Insulation resistance: In accordance with MIL-STD-202-302, condition B, 5,000 mega ohms, minimum.

Center contact retention: 6 pounds (26.69 N), minimum axial force.

Corrosion (salt spray): In accordance with MIL-STD-202-101, condition B.

Voltage standing wave ratio (VSWR): From 500 MHz to 11 GHz, or approximately 80 percent of the upper cutoff frequency of the cable, whichever is lower; 1.35, maximum.

Swept frequency VSWR setup:

Item 6: VSWR shall be less than 1.015 +.005F (F in GHz).

Item 16: VSWR shall be less than 1.015 +.005F (F in GHz).

Second step of VSWR checkout procedure: VSWR shall be less than 1.045 +.015F (F in GHz).

Group B inspection: VSWR shall be less than 1.10 +.01F (F in GHz).

Qualification and group C inspection: VSWR shall not exceed 1.15.

Connector durability: 500 cycles minimum at 12 cycles per minute, maximum. The connector shall meet mating characteristics and force to engage and disengage requirements.

Contact resistance: In milliohms, maximum:

	Initial	After environment
Center contact:	1.0	1.5
Outer contact:	.35	Not applicable
Braid to body:	.05	Not applicable

Dielectric withstanding voltage at sea level: In accordance with MIL-STD-202-301, 3,000 volts rms minimum at sea level.

Vibration, high frequency: In accordance with MIL-STD-202-204, test condition B.

Shock: In accordance with MIL-STD-202-213, test condition I.

Thermal shock: In accordance with MIL-STD-202-107, test condition B, except test high temperature shall be +85°C. Test high temperature shall be +200°C for connectors using +200°C cables (see tables I and III).

Moisture resistance: In accordance with MIL-STD-202-106. No measurements at high humidity. Insulation resistance shall be at least 200 megohms within 5 minutes after removal from humidity.

Corona level:

Voltage: 750 volts rms, minimum.

Altitude: 70,000 feet.

RF high potential withstanding voltage:

Voltage and frequency: 2,500 volts rms tested at a frequency from 5 to 7.5 MHz.

Leakage current: Not applicable.

Cable retention force:

Non-crimp assemblies: 75 pounds (333.62 N), minimum.

Crimp assemblies:

50 lbs. (222.41 N) minimum for cables .155 -.189 inch (3.94 – 4.80 mm) OD.

60 lbs. (266.90 N) minimum for cables .190 - .229 inch (4.83 – 5.82 mm) OD.

75 lbs. (333.62 N) minimum for cables .230 - .249 inch (5.84 – 6.32 mm) OD.

90 lbs. (400.34 N) minimum for cables .250 inch (6.35 mm) OD and larger.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:42Z
Check the source to verify that this is the current version before use.

Coupling mechanism retention force: Not applicable.
RF leakage: -55 dB minimum, tested at frequency between 2 and 3 GHz.
RF insertion loss:
.15 dB maximum at 9 GHz.
.05 $\sqrt{F\ (GHz)}$ dB maximum tested at 3 and 6 GHz.

Part or Identifying Number (PIN): M39012/11- (dash number from table I or B number from table III).

Group qualification: See table II.

TABLE II. Group qualification. 1/

Group	Submission and qualification of any of the following connectors.	Qualifies the following Connectors
I	M39012/11 -0002	M39012/11 -0001 -0002
II	-0019	-0018 -0019 -0020 -0021
III	B0023	B0022 B0023 B0024 B0025 B0026 B0027
IV	-0012	-0012 -0013 -0014 -0015 -0016 -0017

1/ If a connector manufacturer produces a connector which meets all the requirements for two or more connector PIN's (within the same series), the manufacturer may receive qualification approval for two or more connector PIN's by qualifying the one connector. It is not necessary that such connectors be in the same group. Each connector, however, must be marked with its own appropriate PIN. For group qualification, the connectors must be of similar design and be of the same materials and plating.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:42Z
Check the source to verify that this is the current version before use.

TABLE III. Category B – non-field replaceable (special tools may be required).

Not for Air Force, Army, or Navy use. For OEM use only.

PIN 2/ 3/ M39012/11	Applicable Cable M17/ 4/	Typical mating connector M39012/ (optional hardware) 1/	Dimensions	Inches 8/ (millimeters)	
				minimum	maximum
B0022	73-RG212 5/ 112-RG304	6-0021	A	1.510 (38.35)	1.885 (47.88)
B0023	65-RG165 74-RG213	6-0022			
B0024	75-RG214 5/	6-0023			
B0025	86-00001 5/ 6/	6-0024			
B0026	6-RG11 5/ 7/				
B0027	92-RG115 5/ 6/	6-0026 10-0010			

1/ Optional hardware part numbers are in parentheses.
2/ For cross-reference of PIN to superseded PIN or type designation, see table IV.
3/ These connectors have captivated center contacts.
4/ The latest version of each cable shall, be applicable.
5/ Cable to be used when performing tests requiring cable except as in 6/ and 7/.
6/ Cable to be used for the +200°C temperature cycling tests.
7/ These are not 50 ohm cables; therefore, when attached to the specified connectors, VSWR, RF leakage, and insertion loss are not applicable.
8/ Dimensions are in inches. Metric equivalents are given for information only.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:42Z
Check the source to verify that this is the current version before use.

Supersession data: See table II.

TABLE IV. Supersession data. 1/ 2/

Preferred PIN M39012/11	Superseded PINs or superseded type designation
-0001	UG-630/U, UG-1773/U
-0002	UG-570/U, UG-1774/U, M23329/1-11, UG-1775/U, M23329/1-12, UG-1776/U, M23329/1-14
-0011	
-0012	
-0013	
-0014	
-0015	M39012/11-0008, UG-1777/U, M23329/1-15
-0016	
-0017	
-0018	M39012/11-0001, UG-603/U
-0019	M39012/11-0002, UG-570/U
-0020	M39012/11-0010
-0021	
B0022	M39012/11-0022
B0023	M39012/11-0023
B0024	M39012/11-0024
B0025	M39012/11-0025
B0026	M39012/11-0026
B0027	M39012/11-0027

1/ The superseded PIN or the type designation is for reference only. Where a superseded PIN or type designation is not given, none was assigned or will be assigned. The PIN M39012/11-XXXX shall be used in all cases for marking and identifying the connector.

2/ The basic type designation includes all letter versions of the specified number, e.g. UG-18/U includes UG-18 A/U, UG-18B/U, etc.

TABLE V. Maintenance replacements for category B.

Category B number 1/	Category C dash number	Category A dash number
B0022	0012	0001
B0023	0013	-------
B0024	0014	-------
B0025	0015	-------
B0026	0016	-------
B0027	0017	0021

1/ Category B connectors are for original installation only. They will not be stocked or procured by the government.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:42Z
Check the source to verify that this is the current version before use.

Amendment notations. The margins of this specification are marked with vertical lines to indicate modifications generated by this amendment. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations.

Referenced documents. In addition to MIL-PRF-39012, this document references the following:

FED-STD-H28	MIL-STD-202-204	MIL-STD-202-302
MIL-STD-202-101	MIL-STD-202-213	MIL-STD-348
MIL-STD-202-106	MIL-STD-202-301	MIL-DTL-22520
MIL-STD-202-107		

CONCLUDING MATERIAL

Custodians:
Army – CR
Navy – EC
Air Force – 85
DLA - CC

Preparing activity:
DLA - CC

(Project 5935-2016-063)

Review activities:
Army – AT, CR4, MI
Navy – AS, MC, OS, SH
Air Force – 19, 99

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil .

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T16:42Z
Check the source to verify that this is the current version before use.