MILITARY SPECIFICATION

CAP, GARRISON, MAN'S: WOOL, GREEN

This specification is approved for use by U. S. Marine Corps, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers requirements for the green wool garrison caps.

1.2 Classification. The cap shall be of one type in the following classes and sizes as specified (see 6.2)

Class 1 - Cloth, Serge, Wool, 15 ounce Green Shade 2234
Class 2 - Cloth, Gabardine, Wool, 14.5 ounce Green Shade 2210
Class 3 - Cloth, Elastique, Wool, 18 ounce Green Shade 2222

Schedule of sizes

6-3/8	7	7-1/2
6-1/2	7-1/8	7-5/8
6-5/8	7-1/4	7-3/4
6-3/4	7-3/8	
6-7/8		

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards and handbooks. Unless otherwise specified, the following specifications, standards and handbooks of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DODISS) specified in the solicitation form a part of this specification to the extent specified herein.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to the Commandant of the Marine Corps, Headquarters, U. S. Marine Corps (LMA-1), Washington, DC 20380, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426), appearing at the end of this document, or by letter.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:03Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

V-T-276	- Thread, Cotton.
V-T-301	- Thread, Silk.
CCC-C-461	- Cloth, Uniform Twill, Cotton.
DDD-L-20	- Label; For Clothing, Equipage, And Tentage (General Use).

MILITARY

MIL-C-823	- Cloth, Serge, Wool; Wool and Nylon, Polyester and Wool.
MIL-C-3577	- Sweatband, Headgear (Leather).
MIL-C-3738	- Cloth, Elastique, Wool.
MIL-C-10176	- Cloth, Gabardine: Wool, Polyester and Wool.
MIL-B-17757	- Box, Shipping, Fiberboard (Modular Sizes).

STANDARDS

FEDERAL

FED-STD-191	- Textile Test Methods.
FED-STD-751	- Stitches, Seams, And Stitchings.

MILITARY

MIL-STD-129	- Marking for Shipment and Storage.
MIL-STD-147	- Palletized Unit Loads.
MIL-STD-901	- Provisions for Evaluating Quality of Caps, Garrison, Men's.

(Copies of specification, standards, handbooks, drawings, and publications required by manufacturers in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.1.2 Other Government documents, drawings, and publications. The following Government documents, drawings, and publications form a part of this specification to the extent specified herein.

LAWS AND REGULATIONS

U. S. POSTAL SERVICE MANUAL

(Application for copies of the manual may be obtained from the Superintendent of Documents, U. S. Government Printing Office, Washington, D. C. 20402.)

2.2 Other publications. The following document(s) form a part of this specification to the extent specified herein. The issues of the documents which are indicated as DoD adopted shall be the issue listed in the current DoDISS and the supplement thereto, if applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:03Z
Check the source to verify that this is the current version before use.

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification Rules

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606.)

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Association, Inc., Tariff Order Section, 1616 P Street, N. W., Washington, DC 20026.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence.

3. REQUIREMENTS

3.1 Samples.

3.1.1 Guide sample. A guide sample is furnished solely for guidance and information to the contractor (see 6.3). Variation from the specification may appear in the sample, in which case the specification shall govern.

3.1.2 Standard sample. The finished cap shall match the standard sample for shade and shall be equal to or better than the standard sample with respect to all characteristics for which the standard sample is referenced (see 6.3).

3.2 First article approval. Unless otherwise specified (see 6.2), before production is commenced, a first article consisting of the number of finished caps specified by the procuring activity (see 6.2) shall be submitted or made available to the contracting officer or his authorized representative for approval. The approval of the first article authorizes the commencement of production, but does not relieve the supplier of responsibility for compliance with the provisions of this specification. The first article shall be manufactured by the supplier in the same facilities to be used for the manufacture of the production items.

3.3 Materials.

3.3.1 Basic material. The basic material for each class of cap shall be as follows:

(a) Class 1. Cloth, 15-ounce, wool serge, green shade 2234 conforming to type I, class 5 of MIL-C-823 except the requirement for colorfastness to crocking shall not apply.

(b) Class 2. Cloth, 14.5-ounce, wool gabardine, green shade 2210 conforming to type I, class 5 of MIL-C-10176.

(c) Class 3. Cloth, 18-ounce, wool elastique, green shade 2222 conforming to type II, class 1 of MIL-C-3738.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:03Z
Check the source to verify that this is the current version before use.

3.3.2 Sweatband. The material for the sweatband shall be cloth, cotton, uniform twill, green shade 2224 (see 6.3), 8 ounce, conforming to type III of CCC-C-461, except the requirements for colorfastness to bleaching and light shall not apply or cloth, sateen, cotton, olive green shade 107 conforming to class 1 of MIL-C-10296. As an alternate to the cotton cloth sweatband for classes 2 and 3 caps only, a leather sweatband, dyed brown, not less than 7/8 inch in width and conforming to MIL-S-3577 may be used. The leather sweatband shall be embossed with an imitation turned line 1/8 inch from the top edge.

3.3.3 Sweatband reinforcement. If the alternate leather sweatband is used, the material for the sweatband reinforcement shall be a 5/8-inch-wide strip of either print cloth or sheeting that is lightly coated on both sides with proxylin or vinyl.

3.3.4 Threads.

3.3.4.1 Cotton thread. The cotton thread used for inside seaming shall be type IC2, 3 ply, ticket No. A and for overedging type IA3, 2 ply, ticket No. 70 conforming to V-T-276.

3.3.4.2 Silk thread. The silk thread used for topstitching the top crown and hemming the curtain shall be type I, 3 ply, size A conforming to V-T-301.

3.3.4.3 Color and colorfastness. The cotton and silk thread shall be dyed olive drab shade T-1, cable No. 66023. The colored threads, when tested in accordance with the applicable thread specification, shall show good fastness to wet-dry cleaning, and in addition, the silk thread shall show good fastness to light.

3.3.5 Eyelets. The eyelets shall be brass, rolled flange type, with the barrel scored with 6 to 8 scores. The flange of the eyelets shall be enameled a shade of green to closely match the shade of the basic materials (see 3.3.1) or the entire eyelet may be enameled. Eyelets with a washer may be used. The eyelet shall conform to the following dimensions:

Outside diameter of barrel, inch:	0.185 $\pm$ 0.004
Outside diameter of flange, inch:	0.312 $\pm$ 0.005
Length of barrel under flange, inch:	0.145 $\pm$ 0.004
Metal thickness, inch:	0.008 $\pm$ 0.001

3.3.6 Labels. Each cap shall have a combination identification and size label conforming to type VI, class 4 of DDD-L-20, except the content shall include the name of contractor and the Wool Products Act information. The label shall measure not less than 1-3/4 by 1-1/4 inches, with a minimum 1/4-inch margin at the top edge for sewing. The cap is intended to be dry cleaned.

Nomenclature
Contract Number
Name of Contractor

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:03Z
Check the source to verify that this is the current version before use.

Size
National Stock Number
Wool Product Act
DRY CLEAN ONLY

NOTE: Size of characters for "Name of Contractor" shall be minimum 6 point (approximately 1/16 inch).

3.4 Design. The cap shall be the U. S. Marine Corps design shown on Figure 1 (See 6.4).

3.5 Patterns. Standard patterns will be furnished to the contractor by the Government. The standard patterns shall not be altered in any way and shall be used only as a guide for cutting the contractor's working patterns. The standard patterns provide 1/4-inch seam allowance, except as otherwise specified in Table I, show size and are marked or notched for the proper cutting, placement, and assembly of the component parts.

3.5.1 List of pattern parts. Caps shall be cut from materials specified herein in accordance with the basic material pattern parts indicated below:

Item	Pattern Parts	No. of cut parts
1.	Side crown	2
2.	Curtain	2
3.	Top crown	1

3.6 Construction. The caps shall be manufactured in accordance with the operations and the stitch, seam, and stitching types specified in Table I. The supplier is not required to follow the exact sequence of operations as listed in Table I, but all operations specified shall be used to manufacture the caps.

3.6.1 Stitches, seams, and stitchings. The stitch, seam, and stitching types specified in Table I shall conform to FED-STD-751. Whenever two or more stitch or seam types are specified for the same operation, any one of them may be used. Where stitching type 401 is used, the looper (under thread) shall be on the inside of the cap. The number of stitches per inch, as specified in Table I, indicates the minimum and maximum number permitted.

3.6.1.1 Serge stitching. Serge stitching shall be done on serging machines having a knife attachment properly set to trim the raveled edge without cutting the material.

3.6.1.2 Tacking and backstitching. Ends of seams and stitching produced with 301 type stitch, when not caught in other seams or stitching, shall be backstitched not less than 1/4 inch. Thread breaks (all stitch types) shall be secured by stitching back of break not less than 1/2 inch. When stitch type 401 is used, ends of seams and stitching shall be caught in other seams or stitching, and skipped stitches and thread breaks may be repaired using stitch type 301 backstitched not less than 1/2 inch on each side of the skip or break.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:03Z
Check the source to verify that this is the current version before use.

3.6.2 Shade marking. The wool parts shall be marked to insure a uniform shade and size throughout the cap. Any method of shade marking may be used except:

(a) Corrosive metal devices.
(b) Adhesive-type tickets which show discoloration and the adhesive mass which adheres to the material upon removal of the tickets.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
1.	Cutting. a. Cut the cap in strict accordance with the patterns furnished by the Government. b. Cut the material in the direction indicated by directional lines on the patterns. c. Cut the wool parts of the cap from one piece of the basic material. d. Cut the sweatband on the straight (warp or filling direction) of the cotton uniform twill material. The sweatband shall be cut 1-5/8 inches wide and sufficiently long in order to lap the ends 3/4 inch with the top end turned under not less than 3/4 inch.					
2.	Replacement of damaged parts. a. Replace, at time of cutting, all parts containing damages such as holes or serious weakening defects such as smashes, multiple floats and slubs likely to develop into a hole.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:03Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
2.	Replacement of damaged parts.(Con't)					
	b. Replace any parts damaged during the manufacturing process by needle chews which may be expected to develop into a hole, scissors or knife cuts, tears, holes, mends, burns and large exposed drill holes.					
3.	Shade marking.					
	a. Mark or ticket (see 3.6.2) all wool parts in order to insure a uniform shade, size, and proper assembly throughout the cap.					
4.	Serge stitch curtain, top and side crowns.					
	Finished appearance. The curtain, top and side crowns shall be properly serge stitched.					
	a. Serge stitch raw top edge of curtain, all raw edges of top crown, and side crown except bottom raw edge of side crown. When serging raw edges, care shall be exercised in setting the gage so that the raveled edge only of the material is trimmed off.	503 or 505	EFd-1 EFd-1	6-8 6-8	70/2 70/2	70/2 70/2
5.	Hem curtain.					
	Finished appearance. The hem shall be uniformly stitched without pleats, puckers or twists, and shall be uniform in width.					
	a. Hem the serged edge of the curtain 1/4 to 3/8 inch with the stitching 1/16 inch from the folded edge.	301 or 401	EFa-1 EFa-1	12-16 12-16	A (silk) A (silk)	A A

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:03Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
6.	Join ends of curtain. Finished appearance. The ends of the curtain shall be joined without twists, fullness, or puckers.					
	a. Lap the left end of the curtain over the outside of the right end, with the bottom edges even and the notches matching, and seam together along the bottom 1/8 to 3/16 inch from the edge.	301	SSa-1	8-12	A	A
7.	Join top crown. Finished appearance. The top crown shall be joined together without twists, puckers, pleats or distortion.					
	a. Fold top crown in half lengthwise with serged edges even and notches matching. Stitch along folded edge from end; the line of stitching shall taper from zero at each end to 1/8 to 3/16 inch from folded edge at center.	301	OSf-1	8-12	A	A
	b. Stitch top crown 5/8 inch from serged edge.	301	SSa-1	8-12	A	A
8.	Join top and side crowns. Finished appearance. The top and side crowns shall be joined together without twists, puckers, pleats, or distortion.					
	a. Position the left and right side crown on the outside of the respective top crown with top edges even and the point at each end of the top crown matching the notches in the side crowns.					
	b. Join the left and right side crowns, respectively, to the top crown with a 1/4-inch seam, beginning and ending on the top crown 1/4 inch from each end.	301	LSq-2 (a)	8-12	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:03Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
9.	Join ends of side crown.					
	Finished appearance. The ends of side crown shall be joined together without twists, puckers, pleats, or distortion. The center of the top crown shall be in line with the front and back seams of cap. The stitching shall not extend to the top edge of the side crown.					
	a. Join the left and right side crowns at front and back ends of cap with a 3/8-inch seam from the lower serged edge up to the notch.	301	SSz-3 (a)	8-12	A	A
10.	Topstitch side crown.					
	Finished appearance. The side crowns shall be uniformly top-stitched.					
	a. Turn the cap right side out, working out the upper front and back corners. Spread open the seam at each end of cap and topstitch each side crown 1/16 inch from the seam. Turn the side-top crown outlet towards the side and continue to topstitch each side crown 1/16 inch from the raised edge, catching the outlet in the stitching.	301	SSz-3 (b) (ends) LSq-2 (b) (raised edge)	12-16	A (silk)	A
	b. On the finished cap, the width of the top crown shall be 1/2 to 3/4 inch, measured from raised edge to raised edge of the side crowns with the spread fully extended.					
11.	Join curtain to crown.					
	Finished appearance. The curtain shall fit close to sides of the cap without pleats or puckers. The ends of the curtain shall cross each other at the front seam of cap.					
	a. Position the curtain on the outside of side crown with bottom edge even and notches of curtain matching front and back seam of cap. Join	301	SSa-1	10-14	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:03Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
11.	Join curtain to crown. (con't) the curtain to the cap with a 3/8-inch seam. b. On the finished cap, the left end of the curtain shall overlap the right end for a distance of 4-1/2 ± 1/4 inches when measured at the bottom edge of the cap as shown on figure 1.					
12.	Join sweatband and label to cap. Finished appearance. The sweatband shall be uniformly stitched to the cap and shall finish smooth and flat without pleats, puckers, twists or other distortions. The sweatband shall be positioned so that the lower edge is not exposed beyond the bottom finished edge of cap after the final pressing. The ends of the sweatband shall finish to the right or left of, but not on, the back seam of the cap. The twill side of the sweatband shall face out. The combination identification-size label shall be placed to the right or left of the back seam in accordance with ends of the sweatband. a. The sweatband shall finish 1±1/8 inch wide.					
	b. Turn down the curtain and position the sweatband on the inside of cap, with both side edges of sweatband turned under in line with the stitching joining the curtain and side crown. Stitch the sweatband through curtain and side crown 1/8 inch from each folded edge, catching the turned-under portion in the stitching and leaving one end free for attaching the label.	301	LSd-1 (each edge)	8-12	A	A
	c. Turn under and lap the free end of the sweatband on the opposite end. Place the top end of the label	301	LSd-1	8-12	A	A

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:03Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
12	Join sweatband and label to cap. (con't)					
	under the upper free edge of sweatband. Secure the free end of the sweatband to the cap with a row of stitches 1/8 inch from the folded upper and lower edges and folded end, catching the turned-under portions and the label in the stitching.					
	d. Turn up the curtain.					
	e. The leather sweatband shall be cut to the required length. The ends of the sweatband shall be abutted and joined with a row of zigzag stitching reinforced on the underside with a strip of the coated cloth.	304	FSe-1	8-12	A	A
	f. The sweatband shall be zigzag stitched to the cap on the inside through the curtain seam allowance and side pieces, with the stitching on the bottom edge of the sweatband. The combination identificaction size label shall be caught behind the sweatband during this joining operation. The curtain shall be turned up.	304	LSa-1	8-12	A	A
	Note: The caps must be completely set and pressed before sewing in the leather sweatband (see oper. 14).					
	g. When the leather sweatband is used in lieu of the cotton sweatband, the curtain and side crown shall be over edge stitched together at the bottom edges. (see 12e)	502 or 503	SSa-1	10-14	A	A
			SSa-1	10-14	A	A
	h. Turn down the curtain and stitch the curtain to the side crown 1/16 inch from raised edge.	301	SSa-1	8-12	A	A
13	Clean cap.					
	a. Trim all ends of stitching and remove all loose ends of thread from					

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:03Z
Check the source to verify that this is the current version before use.

TABLE I MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	NDL	BOB/ LPR
13.	Clean cap. (con't) the cap. Remove all spots and stains, and remove all shade tickets and markings without injury to the material.					
14.	Press caps. Finished appearance. The top crown shall not extend beyond the topstitched upper edge of side crowns. The front and back of cap curtain shall not be creased. a. Insert a side shaper between the cap curtain and each side crown, and spread the curtain smoothly and evenly on the shaper. b. Press the cap smooth and flat with a heated pressing machine, carefully folding and creasing the bottom edge. The pressing shall be done in such a manner that the seams joining side crowns to top crown will finish at the top edge of cap and the sweatband will not be exposed beyond the bottom edge of cap. c. Remove all pressing marks.					
15.	Attach eyelet to curtain. Finished appearance. The eyelet shall be properly positioned and securely attached through the outside of the left side of the curtain and securely clinched on the inside without distorting and cutting material or splitting the flange of the eyelet. a. Mark the top end of the curtain 1-1/4 ± 1/8 inches from the top edge and 2 ± 1/8 inches from the front edge, as indicated on Figure 1, for the location of one metal eyelet. b. Attach the metal eyelet to the left side of curtain at the mark.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:03Z
Check the source to verify that this is the current version before use.

3.7 Finished measurements. The finished caps shall conform to the measurements shown in Table II.

Table II. Finished measurements

Size	Head Measurement 1/	Height of cap at center 2/	Height of curtain 3/ front	back
	inches	inches	inches	inches
6-3/8	20-1/8	4-7/8	2-3/8	2-7/8
6-1/2	20-1/2	4-7/8	2-3/8	2-7/8
6-5/8	20-7/8	4-7/8	2-3/8	2-7/8
6-3/4	21-1/4	4-7/8	2-3/8	2-7/8
6-7/8	21-5/8	4-7/8	2-3/8	2-7/8
7	22	4-7/8	2-3/8	2-7/8
7-1/8	22-3/8	4-7/8	2-3/8	2-7/8
7-1/4	22-3/4	4-7/8	2-3/8	2-7/8
7-3/8	23-1/8	4-7/8	2-3/8	2-7/8
7-1/2	23-1/2	4-7/8	2-3/8	2-7/8
7-5/8	23-7/8	4-7/8	2-3/8	2-7/8
7-3/4	24-1/4	4-7/8	2-3/8	2-7/8
Tolerence	+1/4 -1/8	+ 1/4 - 1/8	+ 1/4 - 1/8	+ 1/4 - 1/8

1/Head measurements shall be taken with a gage.
2/Height of cap measurement shall be taken at the center of the cap from the folded edge at the bottom of the curtain to the raised edge of the side crown.
3/Height of curtain measurements shall be taken at the location for the front and back seams from the folded bottom edge to the folded top edge of the curtain.

3.8 Workmanship. The finished caps shall conform to the quality of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality level (AQL).

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Certificate of compliance. When certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:03Z
Check the source to verify that this is the current version before use.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.4).
2. Quality conformance inspection (see 4.5).

4.3 Inspection conditions. Sampling for inspection shall be performed in accordance with provisions of MIL-STD-901, except when otherwise indicated herein.

4.4 First article inspection. When first article is required, inspection shall be made of a completely fabricated cap for all provisions of this specification.

4.5 Quality conformance inspection.

4.5.1 Component inspection. In accordance with 4.1 above, components shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase documents. Wherever applicable, tests shall be conducted in accordance with methods perscribed in FED-STD-191.

4.5.2 Sampling for testing. Testing shall be in accordance with sampling provisions tables cited in MIL-STD-901.

4.5.3 Examination of the end item. The end item examination for the finished caps shall be as specified in MIL-STD-901.

4.5.4 Dimensional examination. Any measurement deviating from the nominal dimension and tolerance specified in Table II shall be classified as a measurement defect.

4.5.5 Examination of packaging requirements. The examination for compliance with the packaging requirements shall be as specified in MIL-STD-901.

5. PACKAGING

5.1 Packaging. Packaging shall be level A or commercial, as specified (see 6.2).

5.1.1 Level A. Each cap shall be placed in an individual polyethylene bag measuring approximately 6 inches wide by 15 inches long with a 1-inch lip at the open end along the 6-inch dimension. The polyethylene flexible film shall be 0.0015 inch thick. Prior to or during final heat sealing operations, excess air within the bag shall be expelled. Each bag shall contain a label (see 5.3).

5.1.2 Commercial. The caps shall be packaged in accordance with the industry's practice.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:03Z
Check the source to verify that this is the current version before use.

5.2 Packing. Packing shall be level A, B, or commercial as specified (see 6.2).

5.2.1 Level A.

5.2.1.1 Method 1. One hundred-fifty (150) caps of one size only, packaged as specified in 5.1.1, shall be packed in a fiberboard shipping container with liner conforming to class-weather resistant, size No. 2A of MIL-B-17757, assembled, closed, and reinforced as specified in the appendix thereto. Towards the end of the contract, or when there is less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container (see 5.3.1).

5.2.1.2 Method 2. When specified (see 6.2), six level B shipping containers (900 caps of one size only) shall be packed in a fiberboard shipping container conforming to class-weather resistant, size No. 4 of MIL-B-17757, assembled, closed, and reinforced as specified in the appendix thereto. Towards the end of the contract, or when there is less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container (see 5.3.1)

5.2.2 Level B. One hundred-fifty (150) caps of one size only, packaged as specified in 5.1.1, shall be packed in a fiberboard shipping container conforming to class-domestic, size No. 2A of MIL-B-17757, assembled and closed as specified in the appendix thereto. Fiberboard used to fabricate boxes shall be grade 275. Towards the end of the contract, or when there is less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container (see 5.3.1).

5.2.3 Commercial. Caps, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination. Containers shall be in accordance with Uniform Classification Rules, National Motor Freight Classification Rule and U. S. Postal Service Manual, as applicable.

5.3 Marking. In addition to any special marking required by the contract or order, the shipping containers shall be marked in accordance with the requirements of MIL-STD-129. A white paper label with the following information legibly printed or stamped thereon in black shall be inserted within each polyethylene bag in order to permit ready information:

Nomenclature
Size_____ Stock number_____ Class_____
Contract number
Name of contractor

5.3.1 Labels. Each shipping container packed with mixed sizes shall have securely attached to the end and side directly under the printing or stenciling a white paper label with the words "MIXED SIZES" plainly stamped or printed thereon, and under these words shall be legibly printed the correct quantity and sizes contained therein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:03Z
Check the source to verify that this is the current version before use.

5.4 Palletization. When specified (see 6.2), caps packed as specified in 5.2 shall be palletized in accordance with load type I of MIL-STD-147. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L. Pallet patterns shall be in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course. If the container is of a size which does not conform to any of the pallet patterns specified in MIL-STD-147, the pallet pattern used shall first be approved by the contracting officer.

6. NOTES

6.1 Intended use. The caps are intended for wear by enlisted male personnel of the Marine Corps.

6.2 Ordering data.

6.2.1 Acquisition requirements. Acquisition documents should specify the following:

(a) Title, number, and date of this specification.
(b) Class and size required (1.2).
(c) Whether first article is required (see 3.2).
(d) Number of finished caps required for first article (see 3.2).
(e) Selection of applicable levels of packaging and packing (5.1 and 5.2).
(f) When level A, method 2, packing is required (see 5.2.1.2).
(g) When palletization is required (see 5.4).

6.2.2 Data requirements. When this specification is used in an acquisition which incorporates a DD Form 1423, Contract Data Requirements List (CDRL), the data requirements identified below shall be developed as specified by an approved Data Item Description (DD Form 1664) and delivered in accordance with the approved CDRL incorporated into the contract. When the provisions of DAR 7-104.9 (n) (2) are invoked and the DD Form 1423 is not used, the data specified below shall be delivered by the contractor in accordance with the contract or purchase order requirements. Deliverable data required by this specification is cited in the following paragraphs.

Paragraph no.	Data requirements	Applicable DID no.	Options
(a) 4.2	Inspection System Program Plan	DI-R-4803	--
(b) 4.4	First Article Inspection Procedures	DI-T-4901	--
(c) 4.4	First Article Inspection Report	DI-T-4902	--

(Data item descriptions related to this specification, and identified in section 6 will be approved and listed as such in DoD 5000.19L., Vol. II, AMSDL. Copies of data item descriptions required by the contractors in connection with specific acquisition functions should be obtained from the Naval Publications and Forms Center or as directed by the contracting officer.)"

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:03Z
Check the source to verify that this is the current version before use.

6.3 Guide sample and standard sample. For information regarding the availability of a guide sample of the cap and of the standard sample specified, address inquiry to the procuring activity issuing the invitation for bids.

6.4 Figures. The figure is furnished for information purposes only. To the extent of any inconsistencies between the written specification and the figures, the written specification shall govern.

6.5 First article. Examinations, tests and approval shall be as specified by the contracting officer (see 3.2).

6.6 Changes from previous issues. Asterisks are not used in this revision to identify changes with respect to the previous issue, due to the extensiveness of the changes.

Preparing activity:
Navy-MC
Project No. 8405-N948

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:03Z
Check the source to verify that this is the current version before use.

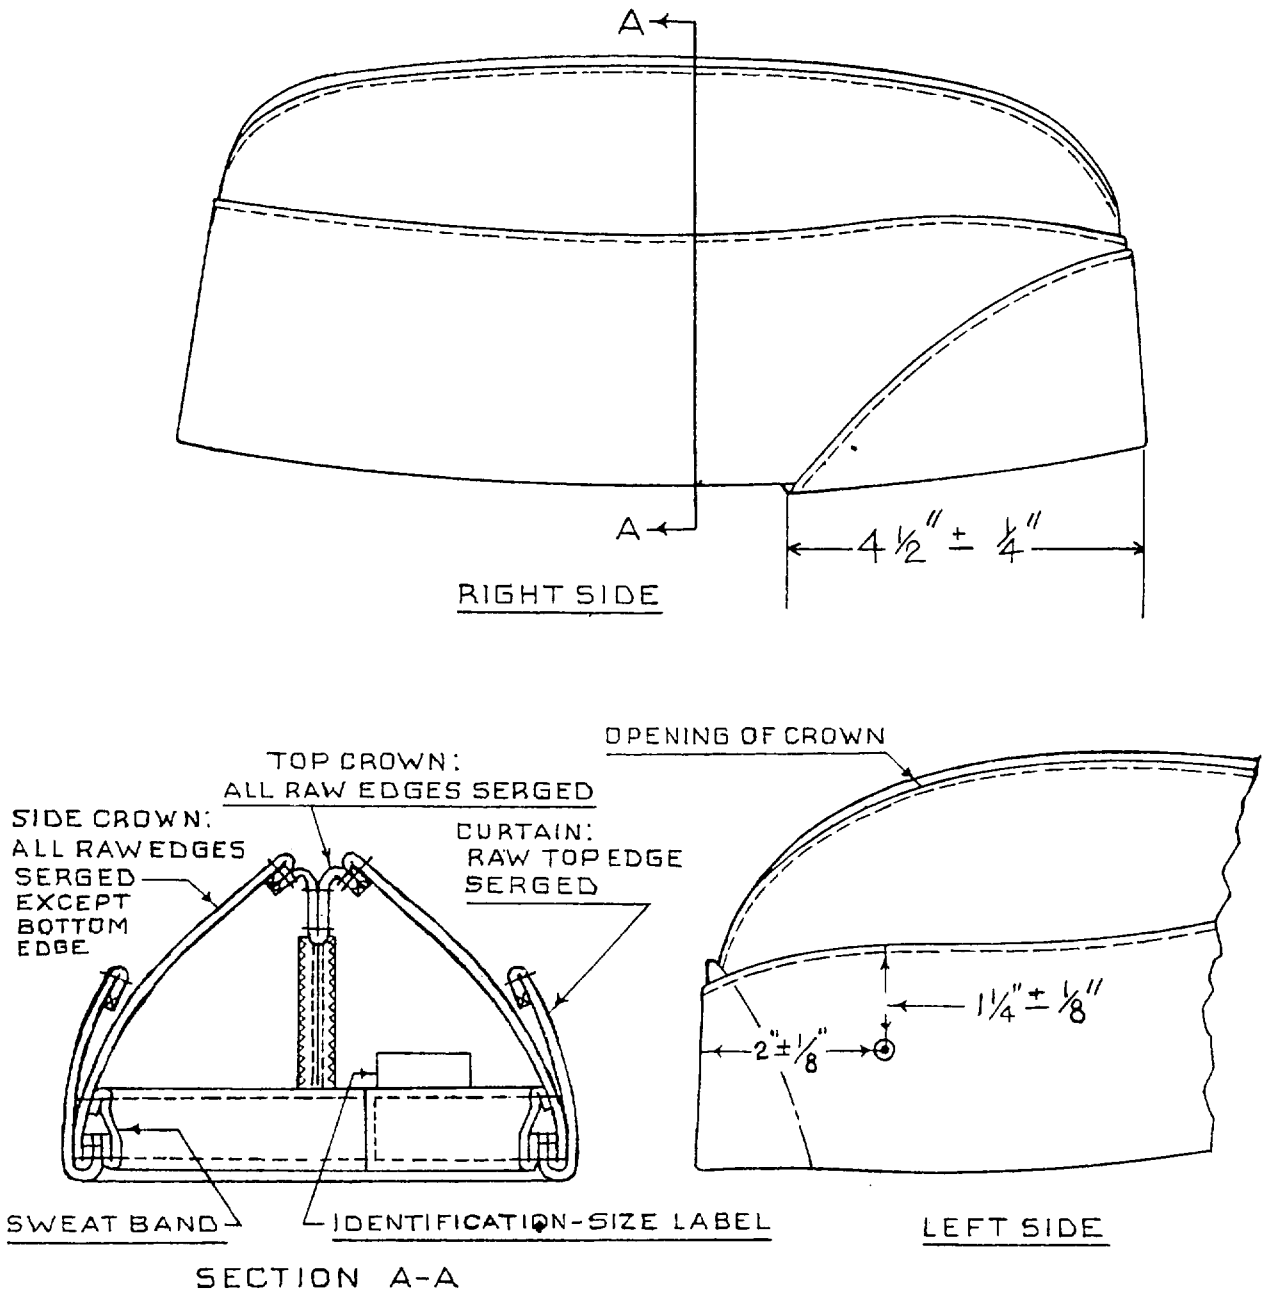


FIGURE 1. CAP, GARRISON, MEN'S: WOOL, GREEN

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:03Z
Check the source to verify that this is the current version before use.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-C-21181D(MC)	CAP, GARRISON, MAN'S: WOOL, GREEN

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:03Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE NAVY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12503 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE NAVY

Commandant of the Marine Corps
Headquarters, U.S. Marine Corps
(Code LMA-1)
Washington, D.C. 20380

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:03Z
Check the source to verify that this is the current version before use.