MIL-C-21275C
13 March 1979
SUPERSEDING
MIL-C-21275B
30 September 1964

MILITARY SPECIFICATION

CORE MATERIAL, METALLIC, HEAT-RESISTING, FOR STRUCTURAL SANDWICH CONSTRUCTION

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers heat-resisting welded metallic core materials for structural sandwich constructions that can be used at elevated temperatures.

* 1.2 Classification. The core materials shall be of the following classes, as specified. (See 6.2)

Class	Max. Temperature, °C(°F)
2	426.7 (800)
3	648.9 (1200)
4	871.1 (1600)

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: Engineering Specifications and Standards Department (Code 93), Naval Air Engineering Center, Lakehurst, New Jersey 08733, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or letter.

FSC 5680

Source: https://assist.dla.mil -- Downloaded: 202640-19T09:12Z
Check the source to verify that this is the currentversion before use.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

* STANDARDS

FEDERAL

PPP-B-636 - Box, Shipping, Fiberboard

MILITARY

MIL-STD-831 - Test Reports, Preparation of

SPECIFICATIONS

* MILITARY

MIL-S-6721 - Steel, Corrosion- and Heat-Resistant (Chemically Stabilized) Plate, Sheet, and Strip

MIL-N-7786 - Nickel - Chromium Alloy, Sheet and and Strip, Age-Hardenable Annealed

MIL-S-8840 - Steel Sheet and Strip, Corrosion-Resistant, Precipitation Hardening (AM 350 and AM 355) Premium Quality

MIL-T-9046 - Titanium and Titanium Alloy, Sheet, Strip and Plate

MIL-S-25043 - Steel Plate, Sheet, and Strip, 17-7PH, Corrosion Resistant, Precipitation Hardening

MIL-A-25463 - Adhesive, Metallic Structural Sandwich Construction

STANDARDS

* MILITARY

- STANDARDS

MIL-STD-794 - Part and Equipment, Procedures for Packaging and Packing of

Source: https://assist.dla.mil -- Downloaded: 202640-19T09:12Z
Check the source to verify that this is the current version before use.

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issues in effect on date of invitation for bids or request for proposal shall apply.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

ASTM C 273	- Shear Test in Flatwise Plane of Flat Sandwich Constructions or Sandwich Cores, Standard Method of
ASTM C 365	- Flatwise Compressive Strength of Sandwich Cores, Standard Test Methods for

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, Pennsylvania 19103).

AEROSPACE MATERIAL SPECIFICATIONS

AMS 5520	- Sheet, Strip and Plate - 15 Cr. 7.1 Ni 2.5 Mo 1.1 Al

(Application for copies should be addressed to the Society of Automotive Engineers, Inc., 400 Commonwealth Drive, Warrendale, PA 15096)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

* 3.1 First article. The core materials furnished under this specification shall be products which have been inspected and passed the first article inspection specified herein (see 4.3 and 6.2.1)

3.1.1 Materials and design changes. Core material shall be approved only for the materials, configurations, joining and splicing methods and within the range of core densities for which first article inspections are made. Any changes shall be cause for designating the core material as a new core material which shall not be considered as approved. The changed core material shall be given a new code number and resubmitted for approval under this specification.

Source: https://assist.dla.mil -- Downloaded: 202610-19T09:12Z
Check the source to verify that this is the current version before use.

3.2 Materials. The materials comprising the core shall conform to applicable specifications and shall be as specified herein. Materials which are not covered by applicable specifications, or which are not specifically described herein, shall be subject to the approval of the procuring activity.

3.2.1 Metals. The heat-resisting metallic foil from which the core is constructed, except for the strength and thickness requirements, shall conform to Specification MIL-S-6721, MIL-N-7786, MIL-S-8840 , MIL-T-9046, MIL-S-25043, or AMS 5520. The alloy to be used shall be as specified by the procuring activity in the designated code number (see 5.2 and 6.2).

* 3.2.2 Identification of product. Each piece of core material shall be tagged with the manufacturer's trade name or number, specification number and code number to identify the core (5.2 and 6.2). The code number shall consist of the following;

(a) Designated density
(b) Cell size in sixteenths of an inch.
(c) Nominal foil thickness in ten thousandths of an inch.
(d) "P" for perforated or "N" for non-perforated core.
(e) Alloy and heat treatment (standard designation).
(f) Temperature class number

Example: Welded core material of a density of 7.8 pounds per cubic foot (pcf), fabricated for a 1/4 inch cell size, 0.0015 inch foil thickness, perforated, and using 17-7PH Corrosion-resisting steel alloy heat treated to condition TH 1050, suitable for use at 426.7°C (800°F), shall be coded as follows: Trade name - 7.8-4-15P (17-7PH/TH 1050) Class 2

3.3 Fabrication

3.3.1 Configuration. The core material shall consist of metal foil ribbons or strips joined together to form cells approximately of uniform geometric shapes.

3.3.2 Perforated core material. If the core material is of perforated foil, the perforations shall be not larger than 0.030 inch in diameter and shall be located in a pattern so that all cells are vented. One hole shall be required for each 1/4 inch of thickness to a maximum of three holes for each cell wall per inch of thickness.

3.3.3 Sizes. The core material shall be furnished to dimensions and dimensional tolerances as specified by the procuring activity. Thickness tolerances of pieces finished for brazing shall be ±0.003 inch unless otherwise specified by the procuring activity.

Source: https://assist.dla.mil -- Downloaded: 202640-19T09:12Z
Check the source to verify that this is the current version before use.

* 3.4 Physical Properties. Physical properties and tolerances of the cores shall be in accordance with paragraphs 3.4.1 through 3.4.4.

* 3.4.1 Core shear modulus. Values of core shear modulus at 21.1° to 32.2°C (70° to 90°F) shall be not less than the requirements given by the graph of Figure 1 when tested in accordance with 4.5.1. If the core shear properties are not the same in different directions, the requirements shall be minimum for the strong direction and the core shear modulus at 90° to the strong direction shall be not less than 40 precent of the requirements for the strong direction.

3.4.2 Core shear strength. Values of core shear strength at 21.1° to 32.2°C (70° to 90°F.) for cores of annealed corrosion-resisting steel alloy, titanium alloy, or nickel-chromium alloy shall be not less than the requirements given by the graph of Figure 1 when tested in accordance with 4.5.1. Values of core shear strength at 21.1° to 32.2°C (70° to 90°F) for cores of transformed or heat-treated corrosion-resisting steel alloy shall be not less than the requirements given by Figure 1 increased by 90 percent. If the core shear properties are not the same in different directions, the requirements shall be minimum for the strong direction and the core shear strength at 90° to the strong direction shall be not less than 40 percent of the requirements for the strong direction.

3.4.3 Core compressive strength. Values of bare core flatwise compressive strength at 21.1° to 32.2°C (70° to 90°F) for cores of annealed corrosion-resisting steel alloy, titanium alloy, or nickel-chromium alloy shall be not less than the requirements given by Figure 1. when tested in accordance with 4.6.2. Values of core flatwise compressive strength at 21.1° to 32.2° C (70° to 90° F) for cores of transformed or heat-treated corrosion-resisting steel alloy shall be not less than the requirements given by Figure 1 increased by 90 percent.

3.4.3.1 Class 2 cores. Flatwise compressive strength of Class 2 cores of corrosion-resisting steel alloy and nickel-chromium alloy at 426.7°±2.8°C (800° ±5°F.) shall be not less than 65 percent of the requirements for the same core at 21.1° to 32.2°C (70° to 90°F.) Flatwise compressive strength of Class 2 cores of titanium alloy at 426.7° ±2.8°C (800° ±5°F.) shall be not less than 30 percent of the requirements for the same core at 21.1° to 32.2°C (70° to 90°F.)

3.4.3.2 Class 3 cores. Flatwise compressive strength of Class 3 cores of corrosion-resisting steel alloy and nickel-chromium alloy at 648.9° ±5.6°C. (1200° ±10°F.) shall be not less than 65 percent of the requirements for the same core at 21.1° to 32.2°C (70° to 90°F.)

3.4.3.3 Class 4 cores. Flatwise compressive strength of Class 4 cores at 871° ±9.5°C (1600 ±15°F) shall not be less than 65 percent of the flatwise compressive strength at 21.1° to 32.2°C. (70° to 90°F.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:12Z
Check the source to verify that this is the current version before use.

3.4.4 Node strength. Core nodes shall withstand a load of 30 pounds without separation when tested in accordance with 4.5.3.

3.5 Welded core. Where spot welding is used to join adjacent metal foil ribbons or strips, not less than 16 uniformly spaced spot welds per inch shall be used. (see 4.5.4)

* 3.6 Core density. The density of any particular core block, or slice shall not vary more than ±12 percent from the designated nominal value when tested in accordance with 4.5.5.

* 3.7 Workmanship. When visually examined, the core materials shall be free from defects such as foil tears or weld burn-throughs or contaminants, such as oxides, grease, or carbon, that would affect adversely the properties of the end item and shall be fabricated in accordance with the best commercial practices. Tolerances for edge smoothness, burrs, and chips may be specified by the procuring activity.

3.7.1 Defects. No more than two separated node-to-node joints shall be permitted per square foot of core material regardless of core thickness.

3.7.2 Splices. Splices are not permitted unless specified by the procuring activity. When permitted, splices shall comply with all requirements for density, dimensional accuracy, and strength of unspliced sections.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

* 4.2 Classification of inspection. The examination and testing of the core shall be classified as follows:

(a) First article inspection (see 4.3).
(b) Quality conformance inspection (see 4.4).

* 4.3 First article inspection. First article inspection shall consist of a review for approval of the manufacturer's test report (4.3.1.1) and process specification (4.3.1.1.1) and subjecting the first article inspection samples (4.3.1) to examination and testing for all the requirements of this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:12Z
Check the source to verify that this is the current version before use.

* 4.3.1 First article inspection samples. The first article inspection samples shall consist of at least four square feet of each density of a core material cut to a thickness of 0.500 ±.003 inches submitted with a test report and process specification. The samples shall be properly labeled as follows:

Sample for First Article Inspection
Core Material, Metallic, Heat-Resisting for Structural
Sandwich Construction
MIL-C-21275C
Manufacturer's Core Material Tradename
Manufacturer's name
Product Identification Code Number
Date of Manufacture

* 4.3.1.1 Test report. A report, certified by affidavit, shall be furnished, including the results of tests to determine all properties required by this specification and performed as specified herein. The report shall also include the manufacturer's trade name, specification code number, a description of the fabrication of the core material, a description of the fabrication and materials of the shear specimens, and an identification of the testing laboratory. A copy of this report shall be provided to the inspector when acceptance tests are being made. A description of the cell, including, size, shape, alinement, uniformity, and tolerances on these factors, shall be included in the first article test report. The first article test report format shall be in accordance with MIL-STD-831. (See 6.3.)

* 4.3.1.1.1 Process specification. A specification shall be prepared by each fabricator of core material. This specification shall include the materials and quality control data information pertinent to the joining and splicing of the core material during its manufacture. If more than one joining and splicing method is used, the alternate methods shall also be specified in the process specification.

* 4.3.1.2 Prior approval. If a contractor has previously delivered material in accordance with the requirements of this specification and his product has been found to be satisfactory, the requirements for First Article inspection for that product, in connection with any subsequent contract or order for that product, may be waived at the discretion of the procuring activity. Whether or not a first article sample is required, the contractor shall supply a certified statement of composition and prior tests which shows the material furnished complies with the requirements of this specification. The statement shall also include the manufacturer's trade name and code number for the material.

* 4.3.1.3 Further production. Any production of core by the contractor prior to approval of the procuring activity shall be at the contractor's risk.

Source: https://assist.dla.mil -- Downloaded: 202640-19T09:12Z
Check the source to verify that this is the currentversion before use.

* 4.4 Quality conformance inspection. Quality conformance inspection shall consist of the following, as specified by the procuring activity:

a. Inspection plan A
b. Inspection plan B

* 4.4.1 Inspection plan A. Quality conformance inspection samples (4.4.3.1) shall be inspected for workmanship, conformity of configuration, perforation, identification, core density, and packaging, packing and marking (Section 5).

* 4.4.2 Inspection plan B. Quality conformance inspection samples (4.4.3.2) shall be subjected to three compressive strength tests at 21.1°-32.2°C (70-90°F) in accordance with 4.5.

* 4.4.3 Samples for quality conformance inspection. Samples for quality conformance inspections shall consist of the following, as specified by the procuring activity:

a. Sampling plan A
b. Sampling plan B

* 4.4.3.1 Sampling plan A. Each block or two percent of the slices of core material submitted for acceptance at any one time on any contract or order shall be selected for quality conformance testing.

* 4.4.3.2 Sampling plan B. One sample of core material sufficient to conduct three compressive strength tests at 21.1 to 32.2°C (70-90°F) shall be selected at random from each lot of 100 cubic feet or less of each core code number on order.

4.4.3.3 Lot. Unless otherwise specified in the contract or order (see 6.2), a lot shall consist of not more than 100 cubic feet of material of the same identification code number (see 3.2.2), manufactured under essentially the same condtions and submitted for acceptance at the same time.

* 4.5 Inspection methods

4.5.1 Core shear modulus and core shear strength. The test equipment used to determine core shear modulus and core shear strength shall be in accordance with ASTM C 273. The specimen shall be 2 inches wide, ½-inch thick, and 6 inches long. The thickness shall be measured to the nearest 0.001 inch and length and width to the nearest 0.01 inch. Core shearing shall be accomplished by applying tensile loading to ½-inch thick steel plates bonded to the specimen with a fairly rigid adhesive, such as epoxy or phenol-vinyl adhesive conforming to requirements of Specification MIL-A-25463. Shear deformations shall be measured to the nearest 0.0001 inch by means of apparatus attached to measure motion of

Source: https://assist.dla.mil -- Downloaded: 202640-19T09:12Z
Check the source to verify that this is the currentversion before use.

loading plates relative to each other. The load shall be applied with a continuous movement of the movable testing machine head at 0.030 inch per minute ±25 percent. The core shear modulus shall be computed from the formula:

$$G = \frac{Wt}{ab}$$

Where $W = \frac{p}{r}$ = slope of initial straight line portion of load deformation curve (below proportional limit)

G is core shear modulus
a is specimen length
b is specimen width
t is specimen core thickness
r is motion of one load plate with respect to the other
p is applied load

The core shear strength shall be computed from the formula

$$S = \frac{P}{ab}$$

Where
S is core shear strength
P is maximum load
a is specimen length
b is specimen width

Three core shear specimens in each direction shall be tested to determine shear strength and shear modulus at 21.1° to 32.2°C (70-90°F). Minimum individual values are given by the requirements of 3.4.

4.5.2 Core flatwise compressive strength. The flatwise compressive strength test equipment used shall be in accordance with ASTM C 365. The test specimen shall be three inches square and 1/2 inch in thickness. The cross-sectional dimensions shall be measured to the nearest 0.01 inch. The testing machine loading faces shall be applied to the specimen through a spherical loading block, preferably of the suspended, self-aligning type. The load shall be applied with a continuous movement of the movable testing machine head at 0.002 inch per minute, with a permissable vibration of ±25 percent. The flatwise compressive strength shall be computed by dividing the maximum load by the cross-section area of the core specimen. For first article inspection at least six specimens shall be tested at 21.1 to 32.2°C (70 to 90°F) and an additional 6 shall be tested at the maximum temperature of these respective classes (Class 2 426.7°C (800°F)); Class 3 648.9°C (1200°F); and Class 4 871.1°C (1600°F) after heating at these temperatures for ten minutes and the minimum individual requirements shall be not less than values given by 3.4 for the class of core. For quality conformance inspection specimens shall be tested at 21.1 to 32.2°C (70 to 90°F), and the minimum individual requirements shall be not less than values given by 3.4.

Source: https://assist.dla.mil -- Downloaded: 202610-19T09:12Z
Check the source to verify that this is the current version before use.

4.5.3 Node strength. A ½-inch thick core slice, 10 cells by 10 cells, shall be tested in a suitable core tension fixture such as shown in Figure 2. The core slice shall be mounted at opposite ends of the fixture pins so that the pins at each end engage all the cells of a continuous longitudinal row with an even extension of cell rows at each end and so that opposite pins in opposite plates engage cells in the same transverse row. The pins shall be round and of such diameter as to fit the core cells closely. The fixture shall be slotted to permit horizontal movement of the pins. The load shall be applied with a continuous head travel at 0.25 inch per minute, with a permissable variation of ±25 percent. At least three tests shall be made on each core material at 21.1 to 32.2°C (70 to 90°F).

* 4.5.4 Welded core. Welds shall be visually examined for conformance to 3.5.

4.5.5 Core density. The core density in pounds per cubic foot shall be determined by the weight and dimensions of pieces not smaller than ½ inch by 6 inches by 6 inches by calculating the volume from the dimensions and dividing the weight of the block or slice by the volume in cubic feet. Weight shall be determined to an accuracy of at least one percent. Dimensions shall be measured to the nearest 0.01 inch, except the thickness of slices shall be measured to the nearest 0.001 inch.

4.5.6 Rejections. When the sample, consisting of three specimens of core material selected for the compressive strength acceptance test at 21.1 to 32.2°C (70 to 90°F) as being representative of a certain lot, fails to meet the requirements, two additional samples from the same lot shall be tested. If either sample fails to meet the requirements, the core material shall be rejected. Core material failing to meet other requirements specified herein shall be rejected.

5. PREPARATION FOR DELIVERY

* 5.1 Packaging, packing and marking. Packaging, packing and marking shall be in accordance with MIL-STD-794. In addition, Level A packaging of more than one core piece per container shall include interleaving of the layers of core material with 200-pound test double-faced corrugated fiberboard conforming to PPP-B-636.

* 5.2 Special marking. The manufacturer shall designate each core material combination by a trade name and code (3.2.2) which shall be used to identify the core.

6. NOTES

6.1 Use. The core material covered by this specification is intended for use in fabricating sandwich construction for airframe structural uses.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:12Z
Check the source to verify that this is the current version before use.

6.1.1 Classification. The classes established in 1.2 are based on exposure of 10 minutes at the elevated temperature. For service applications at times and temperatures different from these, the heat-resisting characteristics of the specific material selected should be considered.

* 6.2 Ordering data. Procurement documents should specify the following:

a. Title, number and date of this specification.
b. Core code number (see 3.2.2 and 5.2)
c. The dimensions of the core material and tolerances (see 3.3.3)
d. Special requirements
e. Applicable sampling plan (see 4.)
f. The quantity of core material desired
g. The applicable levels of preservation, packaging and packing (see 5.)
h. Items of data required (see 6.3)

* 6.2.1 Contracts or orders shall specify the following provisions for first article inspection.

* 6.2.1.1 First article. When a first article is required for inspection and approval (see 3.1, 4.3, 6.2 and 6.3), the contract shall specify the following provisions for first article inspection. When a contractor is in continuous production of core material from contract to contract, consideration should be given to waive the first article inspections. If inspection is required, indicate:

a. If first article inspections are conducted at the contractor's plant or a government approved laboratory, an inspection report shall be forwarded to the procuring activity for verification.

b. That the approval of first article samples or the waiving of the first article inspection shall not relieve the contractor of his obligation to fulfill all other requirements of the specification and contract.

* 6.3 Contract data requirements. When this specification is used in a procurement which incorporates a DD Form 1423 and invokes the provisions of 7-104.9(n) of the Armed Services Procurement Regulations, the data requirements identified below will be developed as specified by an approved Data Item Description (DD Form 1664) and delivered in accordance with the approved Contract Data Requirements List (DD Form 1423) incorporated into the contract. When the provisions of ASPR-7-104.9(n) are not invoked, the data specified below will be delivered by the contractor in accordance with the contract requirements. Deliverable

Source: https://assist.dla.mil -- Downloaded: 202610-19T09:12Z
Check the source to verify that this is the current version before use.

data required by this specification is cited in the following paragraphs:

Paragraph	Data Requirement	Applicable DID
4.3	First Article Inspection Reports	DI-T-5329 - Inspection Test Reports
4.4	Quality Conformance Inspection Reports	DI-T-5329 - Inspection Test Reports

(Copies of data item descriptions required by the contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

6.4 Changes from previous issue. The outside margins of this document have been marked to indicate where changes (deletions, additions, etc.) from the previous issue have been made. This has been done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content as written irrespective of the marginal notations and relationship to the last previous issue.

Custodians:
Navy - AS
Air Force - 99

Preparing activity:
Navy - AS
(DoD Project No. 5680-0074)

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:12Z
Check the source to verify that this is the current version before use.

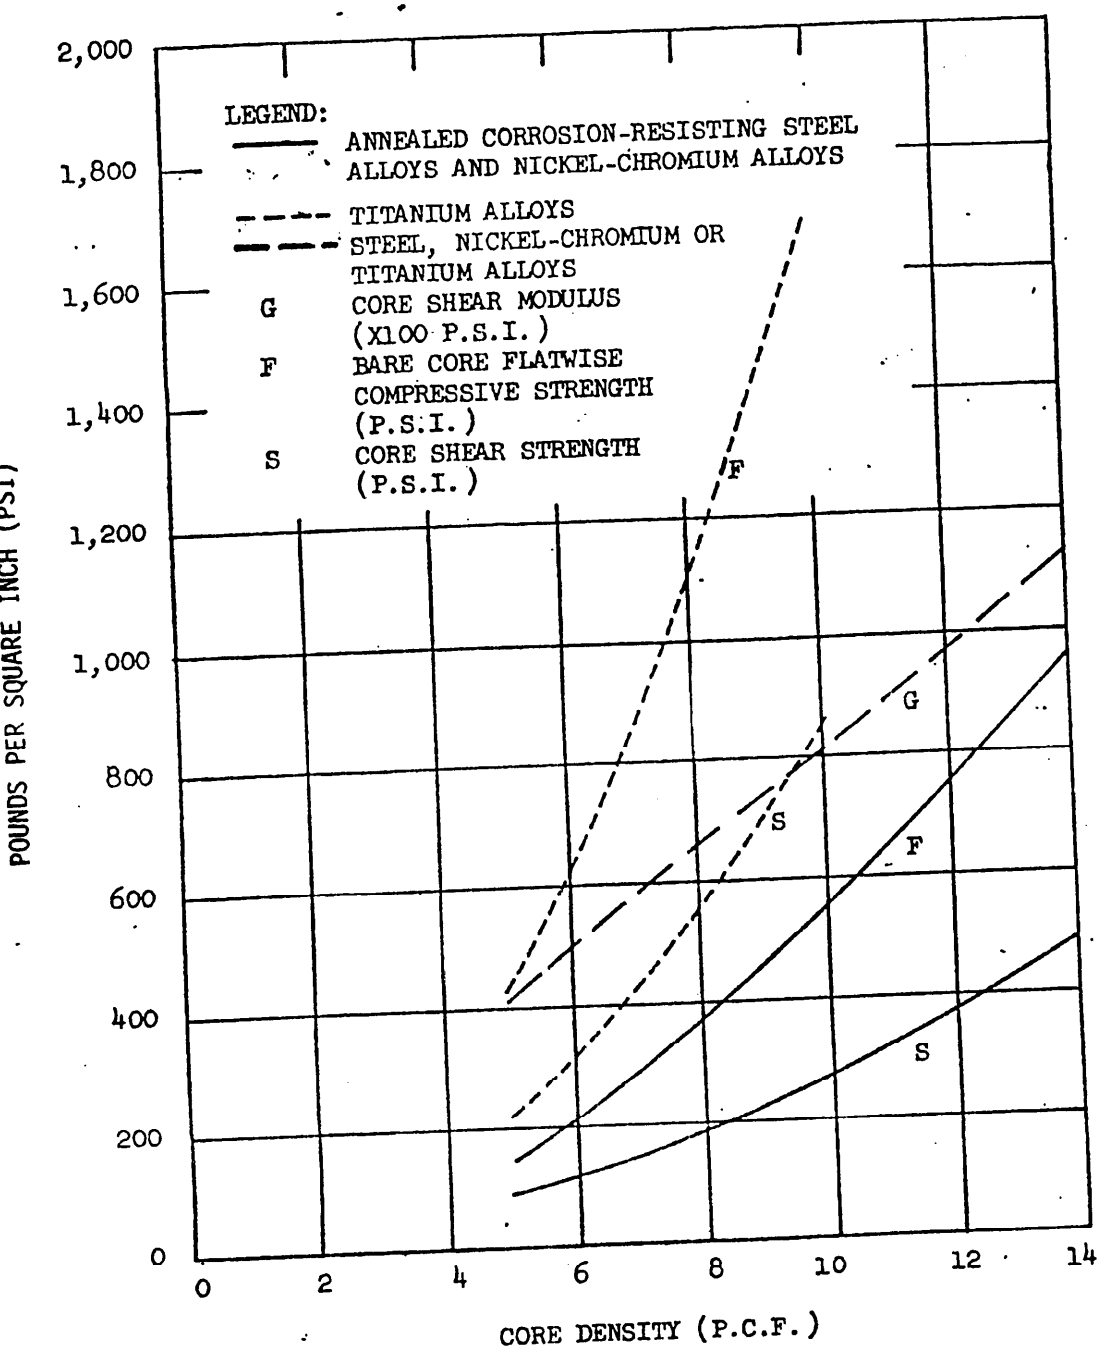


FIGURE 1. REQUIREMENTS AT 70° to 90°F. FOR HEAT-RESISTING METALLIC CORE MATERIALS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:12Z
Check the source to verify that this is the current version before use.

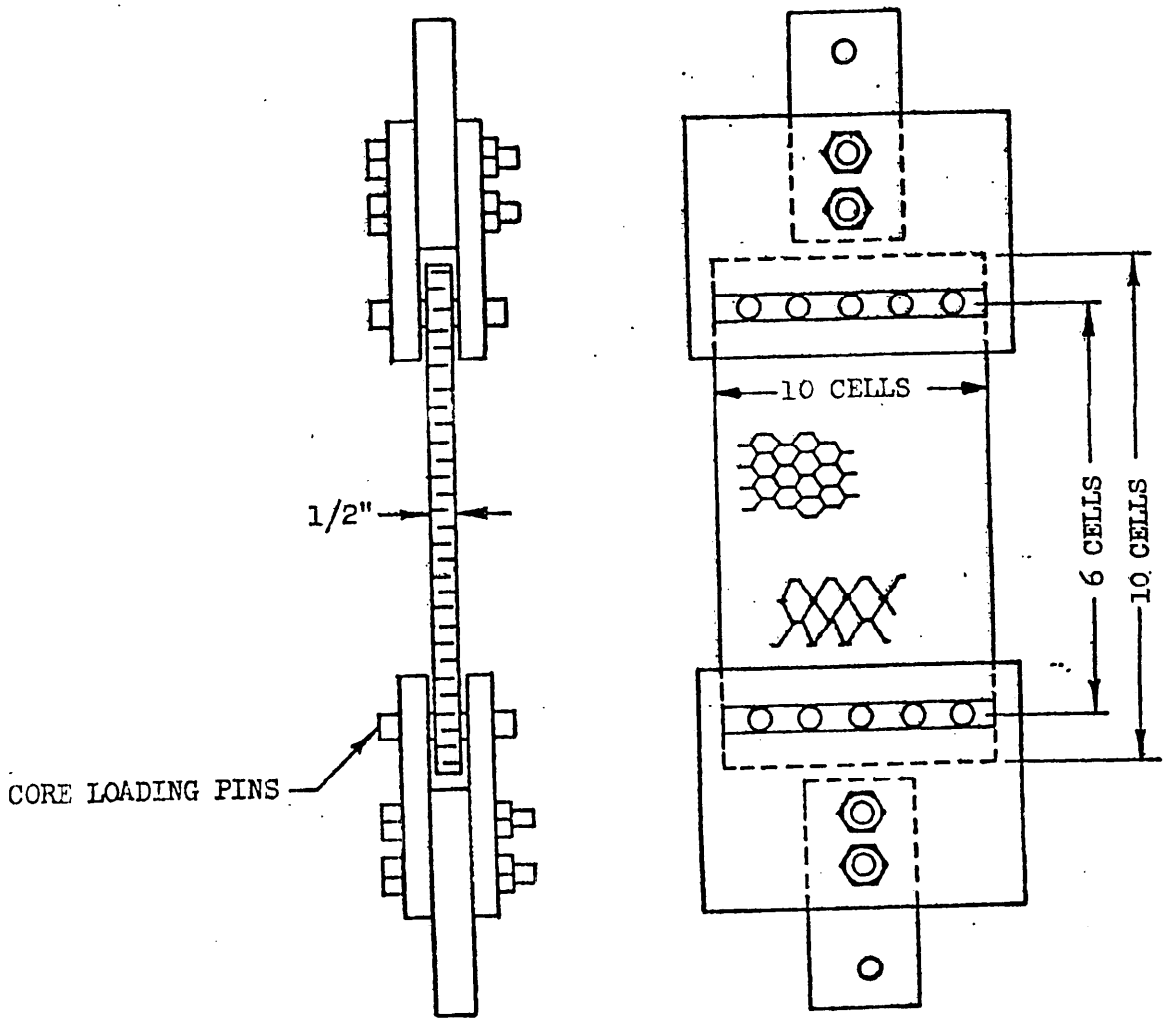


FIGURE 2. APPARATUS FOR NODE STRENGTH TESTS.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:12Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.

NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE

MIL-C-21275C, CORE MATERIAL, METALLIC, HEAT-RESISTING, FOR STRUCTURAL SANDWICH CONSTRUCTION

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*	TELEPHONE NO.
	DATE

DD FORM 1426 1 OCT 76 EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:12Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY
Naval Air Engineering Center
Lakehurst, NJ 08733

POSTAGE AND FEES PAID
Navy Department
DOD-316

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Engineering Specifications and Standards Department (Code 93)
Naval Air Engineering Center
Lakehurst, NJ 08733

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:12Z
Check the source to verify that this is the current version before use.