INCH-POUND

MIL-F-21173C(MC)
6 FEBRUARY 1991
SUPERSEDING
MIL-F-21173B(MC)
13 December 1971

MILITARY SPECIFICATION

FLAG, INDIVIDUAL: RAYON, COMMANDANT, USMC

This specification is approved for use by the U.S. Marine Corps, Department of the Navy, and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers requirements for one type and size embroidered rayon flag with fringe.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. Unless otherwise specified, the following specifications, standards, and handbooks of the issue listed in that issue of the Department of Defense Index of Specifications and Standards (DoDISS) specified in the solicitation form a part of this specification to the extent specified herein.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to the Commanding General (PSE-C), Marine Corps Research, Development, and Acquisition Command, Washington, DC 20380, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC-NA FSC 8345

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:02Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

V-T-276	- Thread, Cotton.
KK-L-168	- Leather, Deerskin, Chrome-Tanned.
UU-P-268	- Paper, Kraft, Wrapping.
UU-P-553	- Paper, Wrapping, Tissue.
CCC-C-430	- Cloth, Sheeting, Cotton, Polyester and Cotton.
CCC-C-458	- Cloth, Flannel, Cotton.
DDD-L-20	- Label, For Clothing, Equipage and Tentage (General Use).
PPP-B-636	- Box, Shipping Fiberboard.

MILITARY

MIL-C-606	- Cloth, Banner, Rayon.
MIL-F-2310	- Fringe, Ornamental, Rayon.
MIL-L-40051	- Leather, Cattlehide, For Glove Leather.

STANDARDS

FEDERAL

FED-STD-191	- Textile Test Methods
FED-STD-751	- Stitches, Seams, and Stitchings.

MILITARY

MIL-STD-105	- Sampling Procedures and Tables For Inspection By Attributes.
MIL-STD-129	- Marking For Shipment and Storage.

(Unless otherwise indicated, copies of federal and military specifications and standards are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094)

2.1.2 Other Government documents and publications. The following other Government documents and publications form a part of this specifcation to the extent specified herein. Unless otherwise specified, the issues are those cited in the solicitation.

LAWS AND REGULATIONS
U.S. Postal Service Manual

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:02Z
Check the source to verify that this is the current version before use.

(Application for copies of the manual should be addressed to the Superintendent of Documents, U. S. Government Printing Office, Washington, D. C. 20402.)

2.2 Non-government publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted are those listed in the issue of the DoDISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DoDISS are the issues of the documents cited in the solicitation (see 6.2).

UNIFORM CLASSIFICATION COMMITTEE, AGENT
Uniform Freight Classification Rules

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606.)

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC., AGENT
National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Association, Inc., Tariff Order Section, 1616 P. Street, N.W., Washington, D. C. 20026.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These douments also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Standard samples. Standard samples, when furnished are solely for guidance and information to the contractor (see 6.3). Variation from this specification may appear in the standard sample, in which case, the specification shall govern.

3.2 First article. When specified (see 6.2), a sample shall be subjected to first article inspection (see 6.4) in accordance with 4.4.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:02Z
Check the source to verify that this is the current version before use.

3.3 Material.

3.3.1 Basic material. The basic material for the flag shall be cloth, banner, rayon, conforming to MIL-C-606, except regenerated cellulose (viscose or cuprammonium type) may be used. The background cloth shall be scarlet, cable No. 65006; the cloth for the globe of the emblem shall be silver gray, cable No. 70151; and the cloth for the motto ribbon and stars shall be white, cable No. 70001. The colors shall match the approved standard shades (see 6.3). The scarlet background cloth shall be 52 inches wide and the selvages shall form the top and bottom edges of the finished flag.

3.3.2 Thread.

3.3.2.1 Cotton thread. The thread for sewing the heading, the hem at the fly end, and attaching the fringe shall be cotton, mercerized, conforming to type IC2, ticket No. B, of V-T-276. As an alternate to the cotton thread, a polyester, cotton-covered thread conforming to MIL-T-43548, ticket No. 50, 3 ply or ticket No. 70, 2 ply may be used.

3.3.2.2 Embroidery thread. Machine embroidery thread shall be continuous filament rayon, 600 denier, 460 yards minimum average length per ounce, 2.3 pounds minimum breaking strength. The embroidery thread when tested as specified in Section 4, Table I shall comply with the requirements specified herein.

3.3.2.3 Colors. All embroidery threads shall be vat dyed, and the colors, of which there are 15, shall match the approved standard shades (see 6.3). All cotton thread and the polyester/cotton thread shall be vat dyed and the colors shall match the shade of the material being sewn, except the cotton thread used in the horizontal lines on the globe shall match the approved standard shade which is identified as No.16 Putty HCW 67197 (see Figure 1 for the location of colors).

3.3.3 Lining for heading. The lining for the heading shall be cloth, flannel, cotton, conforming to type III, class 2, of CCC-C-458 bleached white; or cloth, sheeting, cotton, conforming to type I, class I, style A of CCC-430.

3.3.4 Leather. The leather tabs shall be natural colored, 5/64 to 6/64 inch thick leather conforming to type II, class 2, of MIL-L-40051.

3.3.5 Fringe. The fringe shall be 2-1/2 inch length conforming to class 2 of MIL-F-2310. The color shall be golden yellow matching cable No. 65001.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:02Z
Check the source to verify that this is the current version before use.

3.4 Design. The general design of the flag shall be the Marine Corps emblem with motto ribbon at the center of the flag and four 10-inch diameter stars of white banner cloth arranged one at each side of and one above and below the emblem. The white stars shall be appliqued with white machine embroidery thread. The motto ribbon shall be bonnaz stitched with the words "SEMPER FIDELIS". The emblem with motto ribbon shall be accomplished using bonnaz embroidery and applique machine embroidery as shown on the standard sample. The flag shall have a tube or tunnel heading lined with cotton flannel or sheeting and fitted with a slotted leather tab at each end of the heading. The flag shall be 52 inches in the hoist, and 66 inches in the fly, with a continuous length of 2-1/2-inch-wide gold colored rayon fringe as shown on Figure 2.

3.4.1 Design application. The design and position of the appliqued stars and bonnaz and appliqued emblem, with motto ribbon, shall be identical on both sides of the flag, except only the position of the anchor in relation to the globe will be reversed. The position of the emblem and top and bottom stars shall be such that a vertical line through the center of the globe and stars coincides with the vertical center of the finished flag, exclusive of the heading and fringe; and a horizontal line which equally divides the distance between the upper point of the star at the top of the flag and an opposite point on a circle circumscribing the star at the bottom of the flag coincides with the horizontal center of the finished flag, exclusive of fringe. The embroidered banner cloth for the globe and motto ribbon, and the banner cloth for the stars, for both sides of the flag, shall be appliqued back to back, with the words "SEMPER FIDELIS" to read from left to right on both sides of the flag and centered on the motto ribbon from top to bottom; the land areas on the globe shall be in their positions on both sides of the flag. On both sides of the flag the eagle shall face the hoist end. In relation to the globe, the anchor shall point downward from the northeast quarter to the southwest quarter on the front of the flag, and from the northwest quarter to the southeast quarter on the back of the flag, the ring and stock in the north and the crown and flukes in the south. The front of the flag shall be that side which when viewed will have the hoist end on the left and the fly end on the right.

3.5 Construction.

3.5.1 Cutting. The scarlet background cloth shall be cut sufficiently long to provide the required hems at the hoist and fly ends, and to provide a sufficient allowance for take-up of the cloth due to the embroidery and applique work, permitting the

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:02Z
Check the source to verify that this is the current version before use.

flag to finish to the required length. No seams shall be allowed in the background cloth other than those specified for the hem at the fly end and the heading; the hoist of the flag shall be the full width of the cloth, the selvages forming the top and bottom edges. The cloth for the globe, motto ribbon and stars for both sides of the flag shall each be cut in one piece, no seams permitted.

3.5.2 Stitches, seams and stitching. All stitch, seam and stitching types specified herein, except embroidery stitching, shall conform to FED-STD-751. Applique stitching of stars shall be stitch type 304, with 58 stitches per inch, throw of stitch 1/16 inch. All stitching with cotton thread shall be done with stitch type 301, not less than 12 stitches per inch. All ends of stitching when not secured by a hem or by other stitching shall be securely backstitched for a minimum of 1/2 inch, and all thread breaks shall be securely backstitched for a minimum of 1 inch.

3.5.2.1 Embroidery stitching. All embroidery stitching, except the outline stitching of the stars, motto ribbon, globe, and horizontal lines on the globe, shall be a chain and texture type of bonnaz stitching. The outline stitching of the stars, motto ribbon, globe and the horizontal lines on the globe shall be an imitation hand embroidery type of stitching. The stitch type, texture, density and colors for the various parts of the embroidery work shall conform to the standard sample. The chain type of bonnaz stitching shall be that type shown in the standard sample at the edging of the land areas on the globe, edging of the anchor, or in the wing feathers of the eagle; the textured type on bonnaz stitching shall be that type shown in the standard sample in the large gold color areas of the continents and anchor. The imitation hand embroidery type of stitching outlining the globe and stars, and the lines on the globe shall be made with 1/8 -to 5/32 -inch-long stitches, and the stitching outlining the motto ribbon shall be made with 3/32-to 1/8-inch-long stitches. Each horizontal line on the globe shall have a single row of No. 16 - Putty HCW cotton thread stitched along the center of the line. Embroidery work shall not be stiff, but shall be soft and flexible in finish, and shall be done in a manner to keep puckering of the cloth at a minimum.

3.5.2.2 Letter stitching. The letters on the motto ribbon shall be embroidered with No. 10 - Scarlet embroidery thread. The style of the letters, and the stitch type, texture and density of the embroidery work shall conform to the standard sample. Letters shall be 5/16 to 3/8 inch in height.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:02Z
Check the source to verify that this is the current version before use.

3.5.3 Heading. The heading shall be the tube or tunnel type for the insertion of a flagstaff, and shall be made by taking a piece of cotton flannel or cotton sheeting, 6 inches wide and 52-1/2 inches long, and folding it under not less than 1/4 inch at each end. This strip shall be placed on the back of the flag at the hoist end with the folded ends of the strip flush with the selvage edges of the flag at top and bottom and attached thereto by a single row of stitching across each folded end of the strip. The tube or tunnel shall then be formed by hemming the hoist end of the flag with the lining strip inside, with 1/4 inch turned under and stitched with a double row of stitching, 1/8-inch gage, which shall pass through both the turned edges of the lining strip. The flat width of the finished heading shall be 2-3/4 ±1/8 inches wide. The finished heading shall be straight and of even width from top to bottom. Alternatively, the heading may be made as shown in Figure 2.

3.5.4 Leather tabs. The heading shall be fitted with a leather tab at each end. Each tab shall be 2-1/2 inches long and 7/8 inch wide minimum, with outer end rounded. A 1/2-inch-long slit shall be made in each tab at the vertical center and 5/8 inch from rounded end. A 1/8-inch diameter hole shall be punched in the tabs at the end of the slit nearest the rounded end of the tabs. The combined slit and hole shall measure 5/8 inch long. The tab shall be placed within the heading and centered opposite the stitching of the hem, the rounded ends of the tabs flush with ends of the heading. The tabs shall be stitched to the flag across their full width at the square end by box stitching, cross stitching, triangular stitching or by any combination of the three types of stitching which will securely join the tabs to the flag.

3.5.5 Hem. The fly end of the flag shall be hemmed 3/16 inch using seam type EFb-1. The hem shall finish straight and parallel with the heading.

3.5.6 Fringe. A continuous length of fringe specified in 3.3.5 shall be stitched to the front side of the flag at the top, fly and bottom edge, and completely around each end of the heading. The fringe shall be neatly turned at the corners of the flag and the raw ends of the fringe shall be turned under and caught in the heading stitching. The fringe shall be stitched to the flag with gold and scarlet cotton thread, gold on the front of the flag to match the fringe and scarlet on the back of the flag. The heading of the fringe at the fly end shall cover the hem. The fringe shall be evenly attached around the flag with a single row of stitching through the center of the fringe heading. The top and bottom edges of the flag shall be hemmed with a seam comforming to type EFa-1 of FED-STD-751. The stitching used to

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:02Z
Check the source to verify that this is the current version before use.

attach the fringe to the flag may be incorporated in formation of the hem. The width of the hem shall be not less than 3/32 inch and not more than 3/16 inch. The hems under the fringe shall be on the face side of the flag.

3.6 Finished dimensions. Finished dimensions shall be as shown in Figure 2, except that dimensional examination for the design and scroll shall be checked by comparing the balance and symmetrical alignment of the design with the approved sample. A tolerance of ± 3 percent will be allowed on all dimensions over 2 feet. A tolerance of ± 5 percent will be allowed for dimensions 2 feet and less. All dimensions shown are exclusive of heading and fringe.

3.7 Label. Each flag shall have an identification label conforming to type VI, class 5 of DDD-L-20. The label shall be stitched on four sides to the top end of the heading on the back of the flag.

3.8 Workmanship. The finished flag shall conform to the quality of product established by this specification.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the government. The government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:02Z
Check the source to verify that this is the current version before use.

4.1.2 Certificate of compliance. Where certificates of compliance are permitted, the Government reserves the right to check test such items to determine the validity of the certification.

4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.4)

b. Quality conformance inspection (see 4.5)

4.3 Inspection conditions. Unless otherwise specified all inspections shall be performed in accordance with the test condition specified in the applicable test method document or applicable paragraphs in the specification. Inspection shall be in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated herein.

4.4 First article inspection. When first article is required(see 6.2), it shall be examined for the defects specified in 4.5.2.1 and 4.5.2.2. The presence of any defect or failure to pass any test shall be cause for rejection of the first article. The number of units to be inspected shall be specified by the contracting officer (see 6.2).

4.5 Quality conformance.

4.5.1 Testing of componenets. Testing of components shall be in accordance with applicable subsidiary specifications and standards to the extent applicable, except that this specification shall govern in the event of conflict. The method of testing specified in MIL-STD-105 and FED-STD-191,wherever applicable, and as listed in Table I shall be followed. All requirements are applicable to sample units. When the data as to number of determinations per sample unit and the results reported are not as specified in Table I, they shall be as required by the reference test method.

4.5.1.1 Sampling for testing. Unless otherwise specified in subsidiary specifications, sampling shall be in accordance with the following. The lot shall be unacceptable if one or more sample units fail to meet any test requirement specified herein.

Lot size (lot unit)	Sample size (sample unit)
800 or less	2
801 through 22,000	3
22,001 and over	5

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:02Z
Check the source to verify that this is the current version before use.

The unit for expressing lot size and sample unit for testing each component shall be in accordance with the applicable subsidiary specification and as follows:

Component	Lot size expressed as	Sample unit for testing
Embroidery (thread)	1 spool, cone or tube	1 lb.

4.5.1.2 In-process inspection. Inspection shall be performed during the manufacturing of the end item to ascertain that the operations are performed as specified herein. The Government reserves the right to determine the acceptability of construction methods not performed in accordance with specified requirements for operations or subassemblies.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:02Z
Check the source to verify that this is the current version before use.

Table I - Test methods

Component	Characteristic	Rqmt. para.	Test method	No. Determinations per sample unit	Results reported as
Embroidery thread	Denier	3.3.2.2	Std comm'l	5	Nearest Denier
	Breaking strength	3.3.2.2	4102	10	Nearest 0.5 lb.
	Dye identification	3.3.2.3	Std comm'l	1	Pass or fail

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:02Z
Check the source to verify that this is the current version before use.

4.5.2 Examination of end item. The end item shall be examined for defects listed in 4.5.2.1 and 4.5.2.2. The sample unit shall be one flag. The inspection level shall be II (see 6.5).

4.5.2.1 General defects. General defects shall be classified as follows

Examine	Defect	Classification Major	Minor
Component Material	Any component not fabricated of specified material.	101	
Color	Basic colors other than specified.	102	
	Off shade, seriously affecting appearance.	103	
	Off shade, affecting appearance but not seriously.		201
Material defects	Hole, cut, tear, smash or weak place.	104	
	Spots, stains, streaks or shade bars, affecting appearance seriously.	105	
	Spots, stains, streaks or shade bars, affecting appearance but not seriously.		202
	Two or more continuous broken picks.	106	
	Double pick, coarse pick or mispick, clearly noticeable.		203
	Slub, slough-off, float or skips, seriously affecting appearance or serviceability.	107	
	Slub, slough-off, float or skips affecting appearance or serviceability but not seriously.		204

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:02Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor
Leather	Holes, brands, open cut or scratches, damage grain or other flesh imperfections, impairing serviceability.	108	
	Leather tabs not positioned and attached as shown on Figure 2.		205
	Not of specified thickness.		206
Seams, stitches, and stitching	Wrong type of seam, stitching or stitches.	109	
	Wrong color thread.	110	
	Row of stitches partially or completely missing.	111	
	Wrong stitching gage or margin.		207
	Seams improperly formed, material caught in unrelated stitching operations.		208
	Ends of stitching not backstitched at least 1 inch (when not caught in other seams or stitching).		209
	Needle chews.	112	
	Any raw edge exceeding 1/2 inch in length.	113	
	Background cloth pieced in fly or hoist direction.	114	
	Loose stitch tension.		210
	Tight stitch tension (stitches break when normal pull is exerted in lengthwise direction of seam or stitching.	115	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:02Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor
	Stitches per inch for seams, hems: Four or more stitches less than specified.	116	
	one to three stitches less than specified.		211
	Stitches per inch for headings: Two or more stitches less than specified.	117	
	One stitch less than specified.		212
	Stitches per inch for appliqueing: Five or more stitches less than specified.	118	
	One to four stitches less than specified.		213

NOTE: Variation in the number of stitches per inch caused by the operator speeding up the machine or pulling fabrics such as sewing over heavy places or in turning corners, shall be classified as follows: major to minor, minor to no defect.

	Seam twisted, pleated or puckered seriously affecting appearance.	119	
	Seam twisted, pleated or puckered, affecting appearance but not seriously.		214
	More than two continuous skipped stitches.	120	
	Broken stitches in heading seam, causing an unstitched length of 1 inch or more.	121	
	Broken stitches in heading seam, causing an unstitched length of less than 1 inch.		215
	Broken stitches in any other seam, causing an unstitched length of 1/2 inch or more.	122	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:02Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor
	Broken stitches in any other seam, causing an unstitched length of less than 1/2 inch.		216
Embroidery	Broken stitches.	123	
	Loose or tight tension.	124	
	Puckering of cloth due to embroidering.		217
	Stars not applied by applique.		218
	Stars inverted.	125	
	Stars not oriented on each side as specified.	126	
	Stars misplaced or in wrong location	127	
	Stars not neatly trimmed.	128	
Heading	Not extending full length of the hoist of the flag.	129	
	Each end not folded at least 1/4 inch.		219
	Folded ends of heading strip not flush with the selvage edge of the flag at top and bottom.		220
	Less or more than double row of stitching.		221
	Heading seam not formed on back of flag.		222
	Turned edge of flag not caught in double row of stitching.	130	
	Flat width of finished heading less than 2-5/8 inches or more than 2-7/8 inches.		223
Leather tabs	One or both missing.	131	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:02Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor
	Less than 2-1/2 inches long.		224
	Less than 7/8 inch wide.		225
	Tab not slit 1/2 inch at the vertical center and 5/8 inch from the rounded end.	132	
	1/8-inch diameter hole missing at the end of slit nearest the rounded end of tab.	133	
	Tabs not centered within heading opposite the stitching of the hem.		226
	Tabs not securely stitched to the heading.	134	
Fringe	Not specified type and color.	135	
	Not securely stitched to flag.	136	
	Missing.	137	
	Not a continuous length.		227
	Not stitched to flag with gold and scarlet thread (gold on one side to match fringe; scarlet on other side to match base cloth .		228
	Fringe not neatly turned at corner.		229
	Raw edge of fringe showing.		230
	Raw edge of fringe not caught in heading stitching.	138	
	Heading of the fringe at fly end does not cover hem.		231
	Fringe not evenly attached to flag.		232

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:02Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor
Design	Emblem not clearly distinguishable.	139	
	The design and position of the appliqued and embroidered emblem, motto ribbon and stars not identical on both sides of the flag (except that only the position of the anchor in relation to the globe will be reversed).	140	
	Lettering not legible from left to right.	141	
	Eagle does not face hoist end on both faces of flag.	142	
	Execution of applique not same as that on standard sample.		233
	Lettering not same as that on standard sample.		234
	Design not equal to that of standard sample.	143	
	Colors not equal to that of standard sample.	144	
Label	Missing.		235
	Not legible.		236
	Not specified legend.		237

4.5.2.2 Finished measurements. Overall length and width of flag and the placement of design and decorations deviating more than 3 percent from dimensions shown in Figure 2 shall be classified as a measurement defect. The inspection level shall be S-3 (see 6.5).

4.5.3 Examination of packaging. An examination shall be made to determine compliance with packaging, packing and marking requirements of Section 5 of this specification. Defects shall be scored in accordance with the list below. The sample unit shall

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:02Z
Check the source to verify that this is the current version before use.

be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 (see 6.5).

Examine	Defect
Marking (exterior and interior)	Omitted, incorrect, illegible, of improper size, location, sequence or method of application.
Materials	Any component missing or damaged.
Workmanship	Inadequate application of components, such as incomplete closure of case liners, container flaps, loose strapping, inadequate stapling. Bulging or distortion of containers.
Weight or content (exterior and interior)	Number of intermediate packages is more or less than required. Gross/net weight exceeds requirements.

5. PACKAGING

5.1 Packaging. Packaging shall be level A or commercial specified (see 6.2).

5.1.1 Level A. Each flag shall be laid out flat on two thickness of tissue paper conforming to type I, grade A, class 1 of UU-P-553. The tissue paper shall overlap all edges of the flag a minimum of 2 inches. Each flag and tissue paper shall be rolled open width on a chipboard tube. The tissue paper overlapping the tube ends shall be tucked inside the tube ends. The rolled flag shall then be inserted into a polyethylene bag or tube having a minimum thickness of 0.002 inch. Alternately each flag shall be tightly wrapped with 50-pound minimum basis weight kraft paper conforming to grade B of UU-P-268. Each flag packaged as specified herein shall be placed in a snug-fitting fiberboard container conforming to class domestic, type CF or SF, grade 200 of PPP-B-636.

5.1.2 Commercial. Flags shall be packaged in accordance with manufacturer's commercial practice.

5.2 Packing. Packing shall be level A, B or Commercial as specified (see 6.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:02Z
Check the source to verify that this is the current version before use.

5.2.1 Level A Flags packaged as specified in 5.1, shall be packed within a snug-fitting shipping container conforming to class weather resistant, type CF or SF grade V3c or V3s of PPP-B-636 and assembled, closed and reinforced as specified in the appendix thereto. Net weight of the contents of each shipping container shall not exceed 65 pounds.

5.2.2 Level B. Flags, packaged as specified in 5.1, shall be packed within a snug-fitting shipping container conforming to class domestic, type CF or SF grade 200 of PPP-B-636. Net weight of the contents of each shipping container shall not exceed 65 pounds.

5.2.3 Level C. Flags, shall be packed in a manner to insure carrier acceptance and safe delivery at destination. Containers shall be in accordance with Uniform Freight Classification Rules or regulations of other carriers applicable to the mode of transportation.

5.3 Marking. In addition to any special marking required by the contract or purchase order, unit packages and shipping containers shall be marked in accordance with the requirements of MIL-STD-129. A white paper label with the following information legibly printed or stamped thereon in black shall be inserted within each polyethylene bag in order to permit ready identification:

Nomenclature
Stock number
Contract number
Name of contractor

6. NOTES
(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The flag is intended for use by the Commandant of the Marine Corps.

6.2 Acquisition requirements. Acquisition documents must specify the following:

(a) Title, number, and date of this specification.
(b) Whether first article is required (see 3.2).
(c) Number of flags in first article (see 4.4.6.4).
(d) Level of packaging and packing required (see 5.1 and 5.2).
(e) Acceptance criteria (see 6.5).

6.3 Samples and shade samples. For information regarding the

Source: https://assist.dla.mil -- Downloaded: 202610-19T09:02Z
Check the source to verify that this is the current version before use.

availability of sample flags, and of standard shades specified, address inquiry to the acquistioning activity issuing the invitation for bids.

6.4 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of FAR 52.209. The first article should be a preproduction sample. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should also include specific instructions in acquisition documents regarding arrangements for selection, inspection, and approval of the first article.

6.5 Acceptance criteria. The acceptance criteria below are recommended for use. The acceptance criteria as specified in the contract or purchase order shall be binding. Unless otherwise specified, the following acceptance criteria are in accordance with MIL-STD-105.

6.5.1 For end item visual examination. An acceptance quality level (AQL), expressed in terms of defects per hundred units, of 2.5 for major defects and 6.5 for (major and minor combined) defects is recommended.

6.5.2 For end item dimensional examination. An AQL, expressed in terms of defects per hundred units, of 4.0 is recommended.

6.5.3 For packaging examination. An AQL, expressed in terms of defects per hundred units, of 4.0 is recommended.

6.6 Figures. Figures 1 and 2 provide the design, dimensions and yarn shade requirements for the flags. To the extent of any inconsistencies between the written specification and the figures, the written specification shall control.

6.7 Key word listing.
Bonnaz embroidery
Marine Corps

6.8 Changes from previous issue. Asterisks are not used in this revision to identify changes with respect to the previous issue, due to extensive changes.

Preparing activity:
Navy - MC
Project No. 8345-N185

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:02Z
Check the source to verify that this is the current version before use.

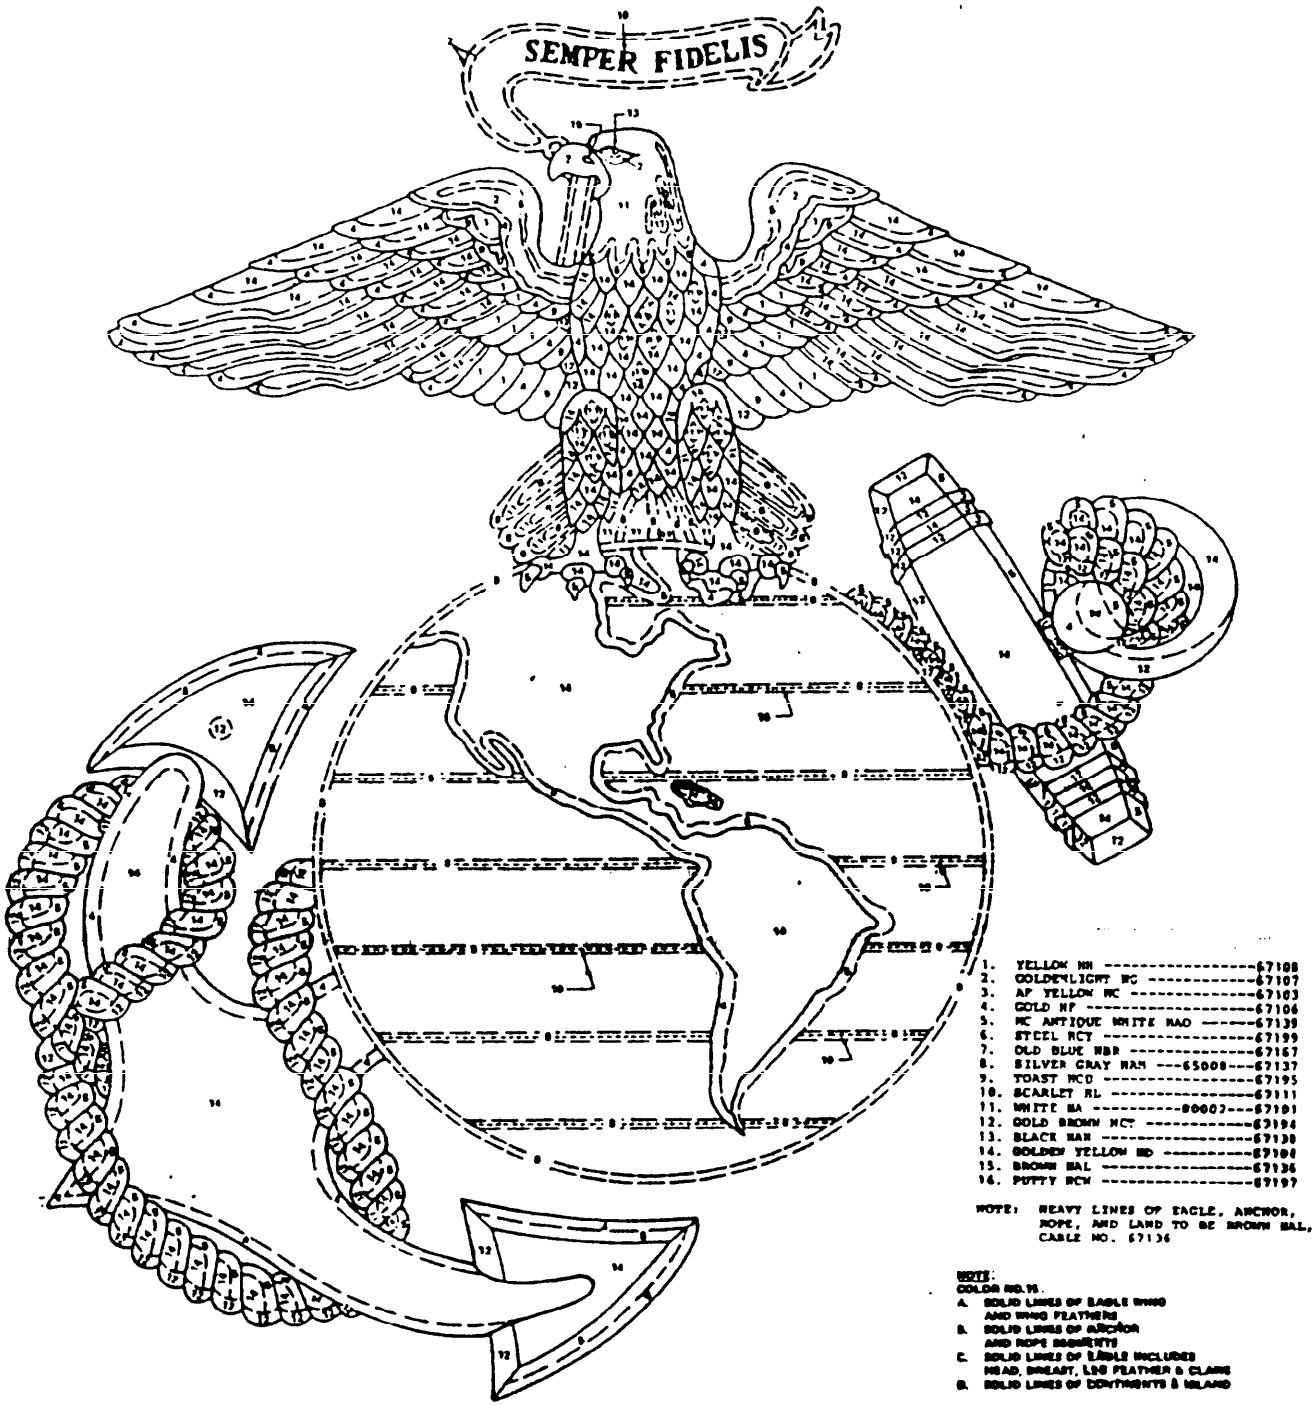


Figure 1. Flag, Individual; Rayon: Commandant, U. S. M. C.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:02Z
Check the source to verify that this is the current version before use.

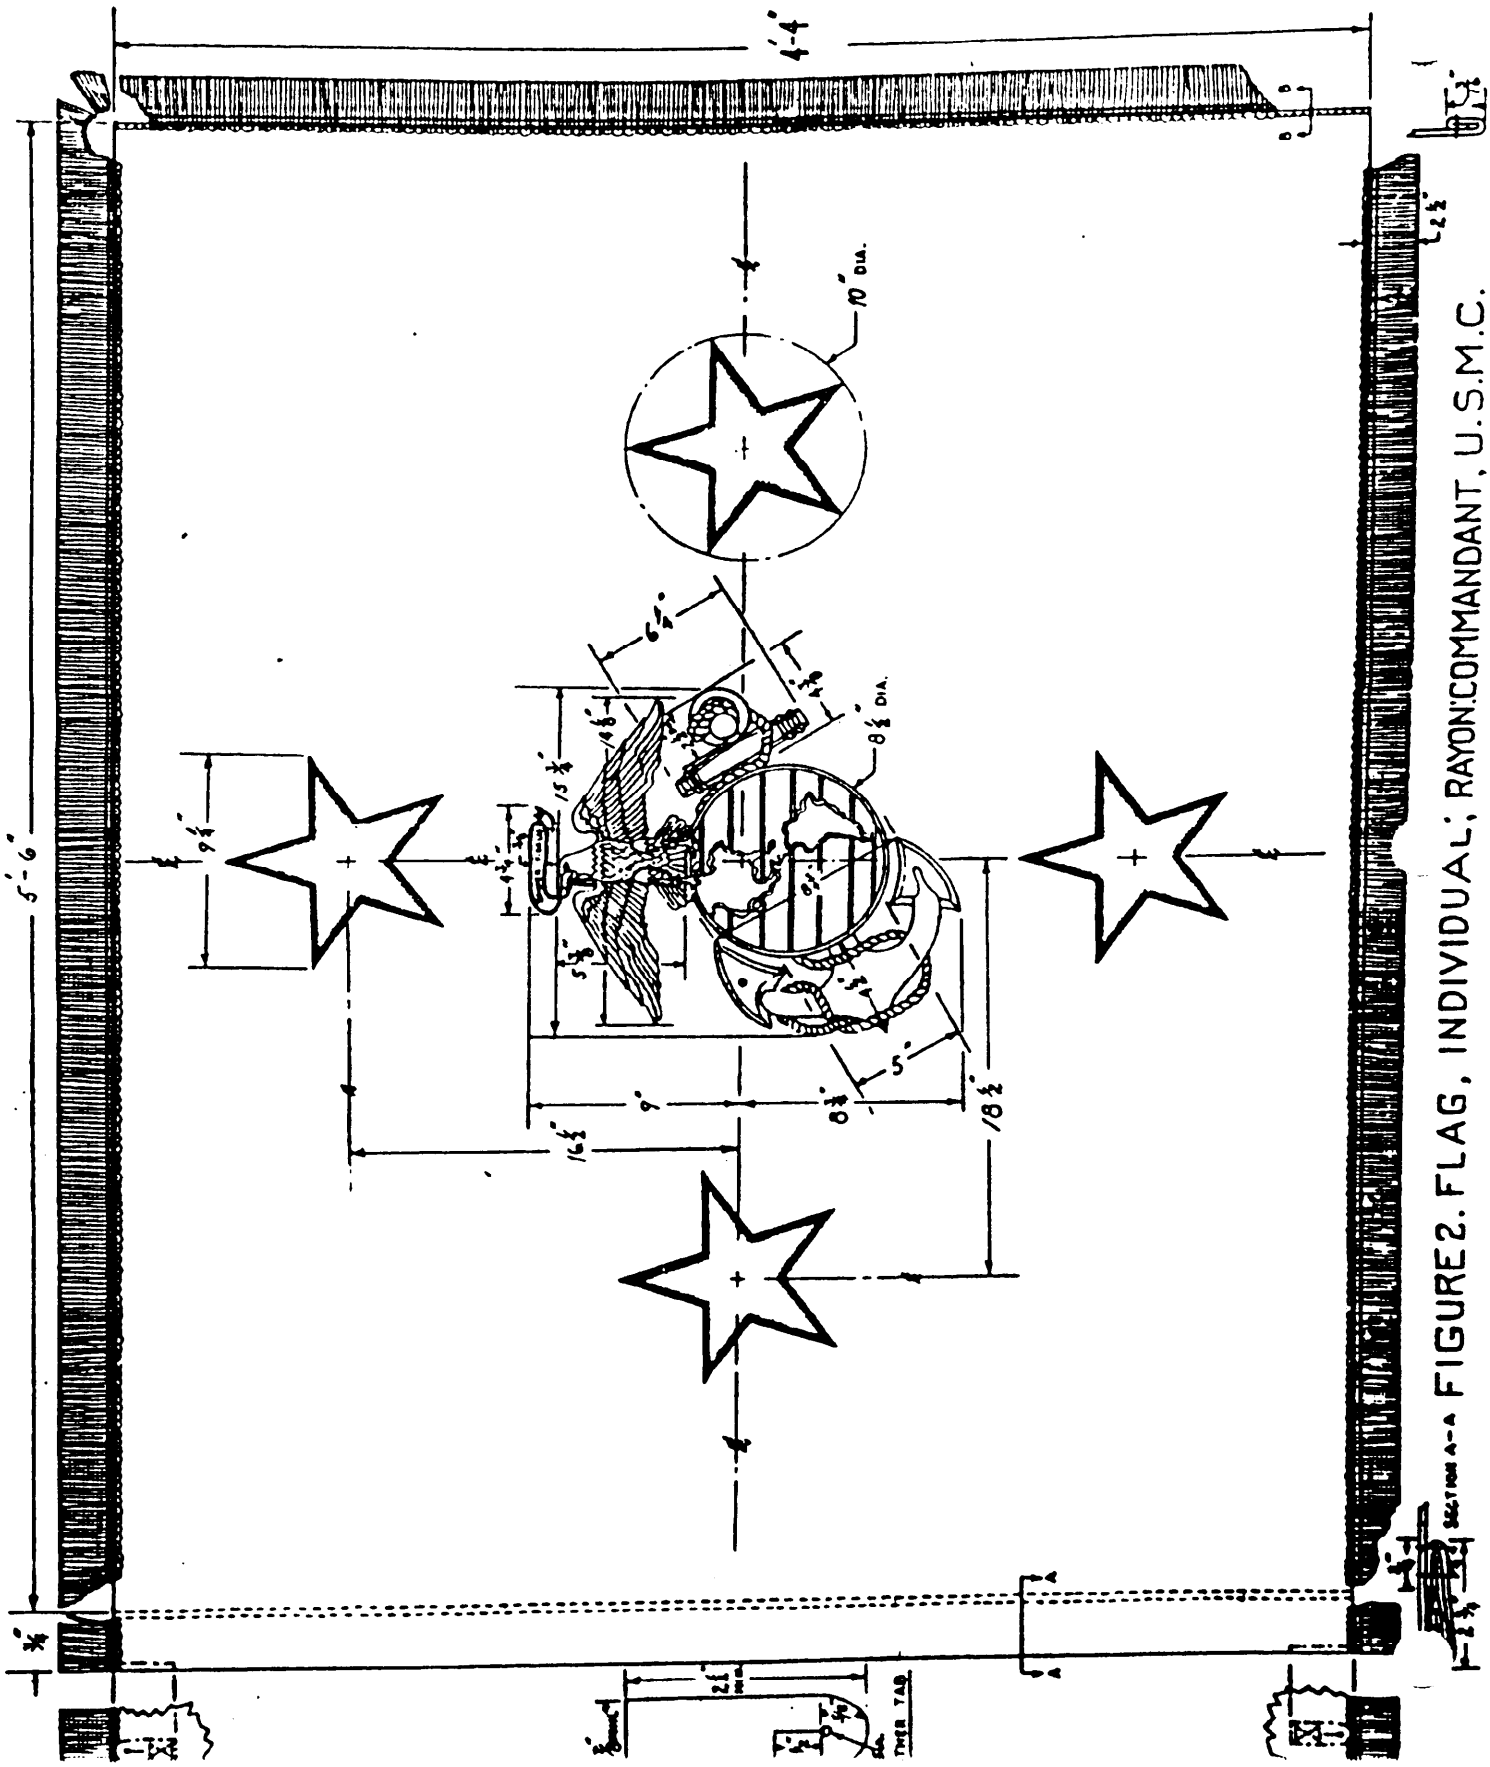


FIGURE 2. FLAG, INDIVIDUAL; RAYON: COMMANDANT, U.S.M.C.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:02Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS

1. The preparing activity must complete blocks 1, 2, 3, and 8. In block 1, both the document number and revision letter should be given.
2. The submitter of this form must complete blocks 4, 5, 6, and 7.
3. The preparing activity must provide a reply within 30 days from receipt of the form.

NOTE: This form may not be used to request copies of documents, nor to request waivers, or clarification of requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

I RECOMMEND A CHANGE:	1. DOCUMENT NUMBER MIL-F-21173C(MC)	2. DOCUMENT DATE (YYMMDD) 6 FEBRUARY 1991

3. DOCUMENT TITLE

FLAG, INDIVIDUAL: RAYON, COMMANDANT, USMC

4. NATURE OF CHANGE (Identify paragraph number and include proposed rewrite, if possible. Attach extra sheets as needed.)

5. REASON FOR RECOMMENDATION

6. SUBMITTER		
a. NAME (Last, First, Middle Initial)	b. ORGANIZATION	
c. ADDRESS (Include Zip Code)	d. TELEPHONE (Include Area Code) (1) Commercial (2) AUTOVON (If applicable)	7. DATE SUBMITTED (YYMMDD)

8. PREPARING ACTIVITY

a. NAME Commanding General, Marine Corps Research, Development, and Acquisition Command (PSE-C)	b. TELEPHONE (Include Area Code) (1) Commercial (202) 696-1186/87/88	(2) AUTOVON 226-1186/87/88
c. ADDRESS (Include Zip Code) Washington, DC 20380-0001	IF YOU DO NOT RECEIVE A REPLY WITHIN 45 DAYS, CONTACT: Defense Quality and Standardization Office 5203 Leesburg Pike, Suite 1403, Falls Church, VA 22041-3466	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:02Z
Check the source to verify that this is the current version before use.