MIL-S-21257C(MC)
7 September 1978
SUPERSEDING
MIL-S-21257B(MC)
14 July 1971

MILITARY SPECIFICATION

SHOE, BASKETBALL: FOR RECONNAISSANCE

This specification is approved for use by U. S. Marine Corps, Department of the Navy and is available for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers requirements for a basketball type shoe.

1.2 Classification. The shoes shall be of one type in the following sizes as specified (see 6.2).

Schedule of sizes

5	8-1/2	12
5-1/2	9	12-1/2
6	9-1/2	13
6-1/2	10	13-1/2
7	10-1/2	14
7-1/2	11	14-1/2
8	11-1/2	15

2. APPLICABLE DOCUMENTS

*2.1 Issue of documents. The following documents of the issue in effect on date of invitation for bids, or request for proposal, form a part of the specification to the extent specified herein:

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to the Commandant of the Marine Corps (LMA-1), Headquarters U. S. Marine Corps, Washington, D. C. 20380, by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8430

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:11Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

V-L-61	- Laces, Nylon.
V-T-285	- Thread, Polyester.
CCC-C-419	- Cloth, Duck, Cotton, Unbleached, Plied-Yarns, Army and Numbered.
DDD-L-20	- Label, For Clothing, Equipage, and Tentage, (General Use).

MILITARY

MIL-B-17757	- Box, Shipping Fiberboard (Modular Sizes).

STANDARDS

FEDERAL

FED-STD-191	- Textile Test Methods.
FED-STD-601	- Rubber, Sampling and Testing.
FED-STD-751	- Stitch, Seam and Stitching.

MILITARY

MIL-STD-105	- Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129	- Marking for Shipment and Storage.

(Copies of specification and standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

*2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids or request for proposal shall apply.

LAWS AND REGULATIONS

U. S. Postal Service Manual

(Copies of the manual may be obtained from the Superintendent of Documents, U. S. Government Printing Office, Washington, D. C. 20402.)

AMERICAN SOCIETY FOR TESTING MATERIALS

Method of Test D-1630-61	- Abrasion Resistance of Sole and Heel Rubber Compounds

(Application for copies should be addressed to the American Society for Testing Materials, 1916 Race Street, Philadelphia, Pa. 19103.)

Source: https://assist.dla.mil -- Downloaded: 202610-19T09:11Z
Check the source to verify that this is the current version before use.

NATIONAL MOTOR FREIGHT TRAFFIC ASSOCIATION, INC. AGENT

National Motor Freight Classification

(Application for copies should be addressed to American Trucking Associations, Attn: Tariff Order Section, 1616 P Street, N.W., Washington, D. C. 20036).

UNIFORM CLASSIFICATION COMMITTEE, AGENT

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, Illinois 60606).

Department of Defense (DOD) Standard Color Card of Official Standardized Shades for Sewing Threads, 1968

(Copies may be obtained from the Color Association of the United States, Inc., 200 Madison Avenue, New York, New York 10016.)

3. REQUIREMENTS

*3.1 Standard sample. Standard samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variation from the specification may appear in the sample, in which case the specification shall govern.

*3.2 First article. Unless otherwise specified, (see 6.2) before production is commenced, a pair of finished shoes shall be submitted, or made available, to the contracting officer or his authorized representative for approval. The approval of the first article authorizes the commencement of production, but does not relieve the contractor of responsibility for compliance with all provisions of this specification. The first article shall be manufactured by the contractor at the same facilities to be used for the manufacture of the production item.

3.3 Materials.

*3.3.1 Rubber compounds. The rubber components for the shoe shall meet the physical and chemical requirements indicated below:

3.3.1.1 Chemical requirements. Rubber compounds shall be natural or synthetic rubber, or a mixture of the two, and shall show an amount of rubber by volume as specified below when tested as specified in Section 4, Table II. The remaining compound shall be a filler material consisting of cork, reprocessed rubber or any filler material used in making commercial type basketball shoes. When this filler material is added to the compounds, the total shall be 100 percent.

Source: https://assist.dla.mil -- Downloaded: 202610-19T09:11Z
Check the source to verify that this is the current version before use.

Compounds	Total rubber (min.) Percent	New rubber (min.) Percent
Outsole	60	45
Upper	65	65
Lining	48	40
Friction	63	42

3.3.1.2 Physical requirements. Physical requirements shall be as follows when tested as specified in Section 4, Table II.

3.3.1.2.1 Tensile strength. The tensile strength of the upper compound shall be not less than 1,200 pounds per square inch.

3.3.1.2.1.1 Tensile strength after accelerated aging. After being subjected to a temperature of 158 ± 2° F in air for 7 days, the tensile strength of the upper compound shall be not less than 75 percent of its original value.

3.3.1.2.2 Ultimate elongation. The ultimate elongation of the upper compound shall be not less than 400 percent.

3.3.1.2.3 Resistance to abrasion. The abrasive index of the outsole compound shall be not less than 75.

*3.3.2 Cotton duck. Cotton duck for quarters, quarter lining, tongue, tongue lining, back reinforcement stay and outside back reinforcement shall be that type commercially known as Army Duck, conforming to type III of CCC-C-419. The duck shall have a minimum weight of 8.25 ounces per square yard for quarters, tongues, and outside back reinforcement and 9.85 ounces per square yard for quarter lining, tongue lining, and back reinforcement stay. The color of the duck shall be an olive drab (OD) No. 7 except back reinforcement stay may be natural.

*3.3.3 Inside eyelet stay. The inside eyelet stay shall be composed of a cotton duck fabric weighing not less than 7.6 ounces per square yard combined to a cotton drill weighing not less than 5.0 ounces per square yard. The two fabrics shall be combined by a vulcanizable adhesive.

3.3.4 Counters. Small and large counters shall be made of a natural cotton fabric weighing not less than 7.0 ounces per square yard and coated on one side with a good grade of stiffening compound to an overall thickness of not less than 0.060 inch thick.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:11Z
Check the source to verify that this is the current version before use.

*3.3.5 Tongue, counter and backseam binding. Tongue, counter and backseam binding shall be made of a cotton fabric weighing not less than 2.8 ounces per square yard. The binding shall be bias cut and folded to a minimum finished width of 1/2 inch for the tongue and backseam and 1/4 inch for the counter. The color of the tongue binding shall be OD No. 7, but the counter and backseam binding may be OD No. 7 or natural.

3.3.6 Insole. The insole shall be made of natural cotton fabric weighing not less than 7.0 ounces per square yard and coated on one side with a sponge compound to a total thickness of not less than 0.125 inch.

3.3.7 Bottom insole. The bottom insole shall be made of a cotton fabric weighing not less than 2.2 ounces per square yard, frictioned on both sides and coated on one side with a good grade of stiffening compound to an overall thickness of not less than 0.040 inch.

3.3.8 Filler sole. The filler sole shall be made of a good grade of stiffening compound and shall be not less than 0.050 inch thick.

3.3.9 Heel and arch cushion. Shoes shall be provided with a combination heel and arch cushion made of a sponge rubber compound. The heel section shall be not less than 0.200 inch thick and the arch section shall rise above the heel section and shall be not less than 0.290 inch thick at the center of the arch.

3.3.10 Friction top cap. The friction top cap shall be made of a cotton fabric weighing not less than 5.4 ounces per square yard, frictioned on both sides and coated with upper compound on one side to a total thickness of not less than 0.025 inch.

3.3.11 Gum toe cap. The gum top cap shall be made of a dark brown rubber compound equal to the upper compound and shall be not less than 0.035 inch thick. The cap shall be the manufacturer's standard design used in making commercial basketball type shoes.

3.3.12 First foxing. The first foxing shall be made of dark brown upper compound and shall be not less than 0.035 inch thick by 1 inch wide.

3.3.13 Second foxing. The second foxing shall be made of a cotton fabric weighing not less than 5.4 ounces per square yard, frictioned on both sides with the friction compound and coated on both sides with dark brown upper compound to a total thickness of not less than 0.045 inch. The foxing shall be not less than 1 inch wide, shall be placed over the top edge of the insole, and shall extend to the bottom edge of the outsole.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:11Z
Check the source to verify that this is the current version before use.

3.3.14 Bumper. The bumper shall be made of dark brown upper compound not less than 0.075 inch thick, and shall extend around the forepart of the shoe to the bottom edge of the outsole. The bumper may be plain or engraved.

3.3.15 Gum binder sole. The gum binder sole shall be made of a compound equivalent to the lining compound and shall be not less than 0.025 inch thick.

3.3.16 Outsole. The outsole shall be molded of dark brown or black outsole compound not less than 0.275 inch thick with the exception of the arch which shall have a minimum thickness of 0.100 inch. The shore "A" hardness shall range from 45 to 65 when tested as specified in 4.5.1. The mold shall be the manufacturer's standard design used in making commercial basketball type shoes.

3.3.17 Eyelets.

3.3.17.1 Lace eyelets. Eyelets for laces shall be the type commercially known as No 404 aluminum telescopic eyelet with No 202 aluminum washer. There shall be 36 eyelets per pair of shoes. Eyelets shall be enameled a dark brown color.

*3.3.17.2 Ventilating eyelets. Shoes shall be provided with ventilating eyelets in the shank of the inside and outside quarter, two eyelets on each side. Eyelets shall be the manufacturer's standard type used in making commercial basketball type shoes. The eyelets shall be made of brass or other rust-resistant metal and shall be enameled a dark brown color.

3.3.18 Laces. The laces shall be spun nylon 52 inches long conforming to type I, class 1 of V-L-61. The color of the laces shall be OD No. 7.

3.3.19 Thread polyester. The thread shall be polyester conforming to type I, class 1, letter size E, final ply 3 of V-T-285. The thread shall be dyed olive drab shade S-1, cable No 66022 and shall show fastness to laundering, weathering and light. (See DOD Standard Color Card of Official Standardized Shades for Sewing Threads, 1968.)

3.3.20 Adhesive. The adhesive used in the various cementing operations shall consist of a suitable compound of natural rubber, synthetic rubber, or thermoplastic type rubber or any suitable combination thereof. The adhesive shall provide a permanent and even bond throughout the cemented areas of the combined parts and shall prepare and activate the components for vulcanization.

3.3.21 Label. Each shoe shall be provided with a combination identification size label. The label shall conform to type IV, class 5 of DDD-L-20, except the contents shall include the name of the contractor. The label shall show fastness to laundering. The size of characters for the name of the contractor shall be minimum 18 point, approximately 1/4 inch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:11Z
Check the source to verify that this is the current version before use.

3.4 Design. The shoe shall be the U. S. Marine Corps design shown on Figures 1, 2 and 3. The shoes shall be lace-to-toe, loose lined, cotton duck, rubber sole basketball shoe design, made in olive drab and brown colors, provided with a heel and arch cushion, ventilating eyelets, and molded rubber outsole.

3.5 Patterns. Patterns shall be furnished by the contractor.

3.5.1 Lasts. Lasts shall be the manufacturer's standard lasts used in making commercial basketball type shoes.

*3.6 Construction. The shoes shall be manufactured in accordance with the operations and the stitch, seam, and stitching types specified in Table I. This specification requires the thermal lasted or cemented bottom construction method. The slip lasted construction is authorized as an alternate method of fabrication. The contractor is not required to follow the exact sequence of operations as listed in Table I, but all operations specified shall be used to manufacture the shoes.

*3.6.1 Stitches, seams and stitching. The stitch, seam and stitching types specified in Table I shall conform to FED-STD-751. Where stitch type 401 is used, the looper (under thread) shall be on the inside of the shoe. The number of stitches per inch as specified in Table I indicates the minimum and maximum number permitted.

*3.6.1.1 Tacking and backstitching. Ends of seams and stitching produced with 301 type stitch, when not caught in other seams or stitchings, or not ending at the bottom lasting edge, shall be securely backtacked not less than 1/4 inch. Thread breaks (all stitch types) shall be secured by stitching back of break not less than 1/2 inch. When stitch type 401 is used, ends of seams and rows of stitching shall be caught in other seams or rows of stitching, and skipped stitches and thread breaks may be repaired, using stitch type 301 backstitched not less than 1/2 inch on each side of skip or break.

*3.6.2 Shade marking. The components of the shoe shall be shade marked to insure a uniform shade and size throughout the shoe. Any method of shade marking may be used except:

(a) Corrosive metal fastening devices.
(b) Sew-on shade tickets.
(c) Adhesive type tickets whose adhesive discolors or adheres to the material upon removal of the tickets.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:11Z
Check the source to verify that this is the current version before use.

TABLE 1 MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	THREAD NDL	THREAD BOB/ LPR
1.	Cutting.					
	a. Cut the shoes in accordance with contractor's patterns.					
	b. Cut the cotton duck and the rubber component parts from one piece of cotton duck and rubber compound.					
2.	Replacement of damaged parts.					
	a. Replace at time of cutting any part containing damages such as holes or seriously weakening defects such as smashes, multiple floats and slubs likely to develop into holes.					
	b. Replace any part damaged during the manufacturing process by needle chews which may be expected to develop into holes, scissor or knife cuts, tears, holes, mends, burns and large exposed drill holes.					
3.	Bind tongue.					
	a. Back the tongue facing and the tongue lining together with spreader coated cement. Bind the top and side edges of tongue and tongue lining together with 1/2-inch-wide bias binding. The stitching shall be 1/8 inch from folded edge.	301	BSa-1	8-12	E	E
*4.	Assemble quarter linings.					
	a. Stitch the heel of the quarter linings together, face to face, 3/16 inch from raw edge.	301 or 401	SSa-1	8-12	E	E
	b. The left quarter lining shall be turned back sharply over the first row of stitching and seamed through all plies with two rows of stitches 1/8 inch apart.	301 or 401	LSq-3	8-12	E	E

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:11Z
Check the source to verify that this is the current version before use.

TABLE 1 MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	THREAD NDL	THREAD BOB/ LPR
4.	Assemble quarter linings. (cont'd)					
	c. Cut fronts approximately 1 inch horizontal to bottom edge of linings for attaching the tongue. In the finished shoes, the cut shall be just above the lower end of eyelet stay.					
	d. Join coated side of small (inside) counter to the under (pocket) side of the lining by double stitching a 1/2-inch-wide bias binding tape, with the edges turned under so that the finish width is approximately 5/16 inch, centered over the raw edges of counter. The rows of stitching shall be 1/8 inch apart and centered on the binding. The counter shall be set to a margin of 3/8 inch from the lining edge.	301 or 401	LSbj-1 and SSat-2	8-12	E	E
				8-12	E	E
	e. Join coated side of large counter to the inside of the lining (against the foot) by double stitching a 1/2 inch wide bias binding, with the edges turned under so that the finished width is approximately 5/16 inch, centered over the raw edge of counter. The rows of stitching shall be 1/8 inch apart and centered on the binding. The counter shall be set to a margin of 3/8 inch in from the lining edge.	301 or 401	LSbj-1 and SSat-2	8-12	E	E
				8-12	E	E
*5.	Assemble quarters.					
	a. Join heels of quarters by abutting the raw edges together (to facilitate this operation a 1/2 inch wide back-seam tape shall be centered over the seam, on the underside of quarter) and seam with a row of stitches extending across and covering the edges of the quarter material.	304 or 404	FSe-1	12-14	E	E
			FSe-1	12-14	E	E

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:11Z
Check the source to verify that this is the current version before use.

TABLE 1 MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	THREAD NDL	THREAD BOB/ LPR
5.	Assemble quarters. (cont'd)					
	b. Turn under top and bottom edge of outside back reinforcement and center inside back reinforcement stay. Stitch outside back reinforcement and inside back reinforcement stay over the back seam with four rows of stitches (see Figure 3). The outside stitch rows shall be 1/16 inch from the edge. The inside stitch rows may be spaced equally within the back reinforcement width.	301 or 401	SSas-4 and LSp-4	6-10 6-10	E E	E E
	c. Properly position eyelet stay on the upper inside fronts of quarters to properly reinforce lace eyelets. Seam eyelet stay to quarters with a double row of stitches 1/16 inch gage with the lower row of stitches approximately 1/8 inch from the lower edge of stay. In the finished shoe, the upper edge of the stays shall not be caught in the finished upper quarter seams.	301	SSaa-2	6-10	E	E
*6.	Join quarters to lining.					
	a. Seam lining and quarters together along the upper edges with a 3/16 inch seam, running from just below the location for the top of the first foxing, along the lacing eyelet areas and the ankle, catching the back reinforcement, back reinforcement stay and lining stay in the stitching.	301	SSe-2(a)	10-12	E	E
	b. Turn and topstitch with double row of stitches 1/16 inch gage, 3/16 inch from turned seam.	301	SSe-3(b) (finished seam)	10-12	E	E

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:11Z
Check the source to verify that this is the current version before use.

TABLE 1 MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	THREAD NDL	THREAD BOB/ LPR
7.	Join tongue to quarters.					
	a. Position tongue on front of upper quarter with lower edge even with bottom of quarters and lower sides positioned between lining and quarters below the 1 inch cut.					
	b. Seam tongue to quarter fronts with a double row of stitches, 1/8 inch gage, along the front and top of cut, then down to the bottom edge.	301	SSa-2	10-12	E	E
8.	Seam lower edge of uppers.					
	a. Seam lining and quarters and tongue and tongue lining together along the bottom edge, catching the large counter, back support and back support stay in the stitching.	301	SSa-1	4-8	E	E
9.	Attach eyelets.					
	a. Attach lace eyelets through each side of quarters and eyelet stays, equally spaced between the top and bottom, about 5/8 inch below upper edge and through the eyelet stay. Nine pairs of eyelets are required.					
	b. Attach ventilating eyelets on each side of the quarters at the instep. In the finished shoe, the eyelets shall finish just above the foxings.					
10.	Assemble shoe.					
	a. Insert the combined heel and arch cushion support between the innersole and bottom sole and cement all together.					
	b. Cement the filler sole to the bottom sole.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:11Z
Check the source to verify that this is the current version before use.

TABLE 1 MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	THREAD	
					NDL	BOB/ LPR
10.	Assemble shoe. (cont'd) c. Lay the combined insole, filler sole and bottom insole on the last. An upper of the correct size shall be fitted over the last and shall be drawn and secured to the bottom insole. d. Properly position the friction top cap, with the coated side cemented to the toe and with the lower part to come under the top edge of the combined outsole and bottom insole. e. Properly position the gum toe cap over the toe and the friction toe cap and cement. f. Cement the first foxing around the uppers with the lower edge of the foxing finishing under the top edge of the outsole. g. Cement the bindersole to the inside of the outsole. h. Cement the outsole-bindersole assembly to the shoe bottom. i. Cement the second foxing around the first foxing with the top edge approximately 1/4 inch below the top edge of the first foxing. The lower edge of the second foxing shall be even with or slightly over the bottom edge of the outer edge of the outside. The ends of the second foxing shall overlap approximately 3/8 inch at the inside shank.					

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:11Z
Check the source to verify that this is the current version before use.

TABLE 1 MANUFACTURING REQUIREMENTS

NO	OPERATION	STCH TYPE	SEAM/ STCH TYPE	STCH/ IN	THREAD NDL	THREAD BOB/ LPR
10.	Assemble shoe. (cont'd)					
	j. Center the bumper on the front of the shoe with its bottom edge slightly over or even with the bottom edge of the outer edge of the outsole.					
	-or-					
	k. The slip lasted construction is authorized as an alternate method of fabrication.					
11.	Clean shoe.					
	a. Trim all ends of stitching and remove all loose threads from the shoes.					
	b. Remove all spots, shade tickets, markers and stains from the shoes without injury to the material.					
12.	Marking.					
	a. The identification-size label shall be placed inside of the shoe on the outside quarter lining at the ankle. Markings shall not penetrate the shoe to the outside.					
13.	Vulcanization.					
	a. The shoes shall be vulcanized under pressure to insure a compact unit.					
14.	Laces.					
	a. A lace shall be inserted through the bottom eyelet of the outside quarter of each shoe.					

Source: https://assist.dla.mil -- Downloaded: 202610-19T09:11Z
Check the source to verify that this is the currentversion before use.

3.7 Finished measurements. The height of the finished shoe, measured at the inside back, shall be not less than 5 inches for size 8 shoes. Height for other sizes shall be graded therefrom, the grading to be in accordance with the manufacturer's commercial practice used in making commercial basketball type shoes.

3.8 Workmanship. The finished shoe shall conform to the quality and grade of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels (AQL's).

4. QUALITY ASSURANCE PROVISIONS

*4.1 Responsiblity for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

*4.1.1 Certificate of compliance. Where certificates of compliance are submitted, the Government reserves the right to check test such items to determine the validity of the certification.

*4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.4).
2. Quality conformance inspection (see 4.5).

*4.3 Inspection conditions. Unless otherwise specified, all inspections shall be performed in accordance with the test conditions specified in MIL-STD-105.

*4.4 First article inspections. When first article is required, inspection shall be made of a completely fabricated pair of shoes for conformance to all provisions of this specification.

*4.5 Quality conformance inspection.

*4.5.1 Testing of components. In accordance with 4.1 above, components and materials shall be tested as required by referenced specifications, drawings and standards unless otherwise excluded, amended, modified, or qualified in this specification or applicable purchase document. In addition, testing shall be performed on components and materials listed in Table II. When the data in the "No. of determinations per sample unit" and "Results reported as" columns are not specified in Table II, they shall be as required by the referenced test method. The sample unit

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:11Z
Check the source to verify that this is the current version before use.

for testing of fabrics shall be 1/4 yard full width. The sample unit for testing of rubber compounds shall be a milled composite piece of rubber measuring 6 by 9 by 0.25 inches. The composite sample unit shall consist of rubber compound from each batch in the inspection lot and remilled into a single composite unit. Specimens for testing shall be prepared from this composite sample unit and vulcanized in the same manner as the shoe. Requirements for rubber are applicable to the lot average.

*4.5.1.1 Sampling for testing. Unless otherwise specified in the subsidiary specifications, testing shall be in accordance with the following. The lot shall be unacceptable if one or more sample units fail to meet any test requirements specified herein.

Lot size (lot unit)	Sample size
800 or less	2
801 to 22,000	3
22,001 and over	5

*4.5.2 In-process inspection. Inspection shall be performed during the manufacturing of the end item to ascertain that the operations are performed as specified herein. The Government reserves the right to determine the acceptability of construction methods not performed in accordance with specified requirements for operations or subassemblies.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:11Z
Check the source to verify that this is the current version before use.

Table II. - Test Methods

Component	Characteristics	Rqmt. para.	Test Method FED-STD-191 or FED-STD-601	No. Determinations per Sample unit	Results Reported as:
Rubber	Chemical composition	3.3.1.1	Std. comm'l	2	Pass or fail
	Tensile strength:				
	- initial	3.3.1.2.1	4111 2/		
	- after aging	3.3.1.2.1.1	4111 2/		
	- ultimate elongation	3.3.1.2.2	4111 2/		
	Abrasion	3.3.1.2.3	ASTM D-1630-61		
	Accelerated aging	3.3.1.2.1.1	7001 2/		
	Hardness	3.3.16	3021 2/	4	Nearest whole no.
Cotton duck	Identification 1/	3.3.2	1200 3/		Pass or fail
	Weight	3.3.2	5041 3/		Nearest 0.1 oz. per square yd.
Stay fabric	Identification 1/	3.3.3	1200 3/	1	Pass or fail
	Weight	3.3.3	5041 3/	5	Nearest 0.1 oz. per square yd.
Counter fabric	Identification 1/	3.3.4	1200 3/	1	Pass or fail
	Weight	3.3.4	5041 3/	5	Nearest 0.1 oz. per square yd.
Binding fabric	Identification 1/	3.3.5	1200 3/	1	Pass or fail
	Weight	3.3.5	5041 3/	5	Nearest 0.1 oz. per square yd.
Insole fabric	Identification 1/	3.3.6	1200 3/	1	Pass or fail
	Weight	3.3.6	5041 3/	5	Nearest 0.1 oz. per square yd.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:11Z
Check the source to verify that this is the current version before use.

Table II. - Test Methods (cont'd)

Component	Characteristics	Rqmt. para.	Test Method FED-STD-191 or FED-STD-601	No. Determination per sample unit	Results Reported as:
Bottom insole fabric	Identification 1/	3.3.7	1200 3/	1	Pass or fail
	Weight	3.3.7	5041 3/	5	Nearest 0.1 oz. per square yd.
Friction toe cap fabric	Identification 1/	3.3.10	1200 3/	1	Pass or fail
	Weight	3.3.10	5041 3/	5	Nearest 0.1 oz. per square yd.
Second foxing fabric	Identification 1/	3.3.13	1200 3/	1	Pass or fail
	Weight	3.3.13	5041 3/	5	Nearest 0.1 oz. per square yd.
Adhesive	Material identification 1/	3.3.20	Std, comm'l	1	Pass or fail

1/ The contractor shall submit a certificate of compliance for this characteristic.

2/ Refers to FED-STD-601.

3/ Refers to FED-STD-191.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:11Z
Check the source to verify that this is the current version before use.

*4.5.3 Examination of the end item. The end item shall be visually examined for defects in 4.5.2.1. The sample unit for the examination shall be one pair of shoes. The lot size shall be expressed in terms of one shoe. The inspection level for this visual examination shall be II of MIL-STD-105. The AQL for this examination shall be 2.5 defects per 100 units (DHU) for major defects and 6.5 DHU for total defects.

*4.5.3.1 Defects. Defects shall be classified as follows:

Examine	Defect	Classification		
		Major	Minor	
			A	B
Pairing	a. Not properly mated, i.e., not right and left of same size.	X		
	b. Variation between shoes, seriously affecting appearance.	X		
	c. Variation between shoes, not seriously affecting appearance.		X	
Cleanness	Any spot or stain clearly noticeable.		X	
Color	a. Not specified color.		X	
	b. Color not uniform.			X
Design	Design not as specified.	X		
Construction and workmanship (applicable to all components)	a. Any component missing.	X		
	b. Any cut, tear, hole, rip, mend or weak place.	X		
	c. Any component misplaced seriously affecting serviceability, e.g., tongue misplaced to an extent where it will cause discomfort to user.	X		
	d. Any component misplaced, not seriously affecting serviceability, e.g., gum toe cap slightly out of alignment.		X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:11Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification		
		Major	Minor	
			A	B
Construction and workmanship (applicable to all components)	e. Any operation omitted (unless otherwise classified herein).	X		
Seam and stitching	a. Not specified seam or stitch type.	X		
	b. Any row of stitching missing.	X		
	c. Raw edge showing which should be concealed.		X	
	d. Irregular or uneven stitching, affecting appearance.		X	
	e. One or two less than required number of stitches per inch.		X	
	f. More than two stitches less than required number of stitches per inch.	X		
	g. Loose stitch tension, resulting in a loosely secured seam.	X		
	h. Tight stitch tension resulting in puckering of fabric or assembly.	X		
	i. Any open seam.	X		
	Note: A seam shall be classified as open when one or more stitches joining a seam are broken, or when two or more continuous skipped stitches or runoffs occur. On double stitched seams, a seam is considered open when either one side or both sides of seam are open.			
Rubber components	a. Not securely bonded or vulcanized where required.	X		

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:11Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification		
		Major	Minor	
			A	B
Rubber components	b. Porous, or imbedded foreign matter.	X		
Eyelets	a. One or two eyelets not securely clinched.		X	
	b. More than two eyelets not securely clinched.	X		
	c. Eyelets not in proper alignment, interfering with proper lacing.	X		
Marking	Missing, incomplete, incorrect, not applied in the specified manner, misplaced, illegible, or size not as specified.		X	

*4.5.3.2 Examination of finished measurements. The end item shall be examined for conformance to the finished measurements specified herein (see 3.7). The inspection level for this examination of the finished measurements shall be S-3 of MIL-STD-105. The AQL for this examination shall be 4.0 DHU for defects. Any finished measurement deviating from the finished measurements specified herein shall be classified as a finished measurement defect.

*4.5.4 Examination of preparation for delivery. An examination shall be made to determine compliance with packaging, packing and marking requirements of Section 5 of this specification. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery with the exception that it need not be sealed. Defects of closure listed below shall be examined on shipping containers fully prepared for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be level S-2 and the AQL shall be 2.5 DHU.

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence or method of application.
Materials	Any component missing.
	Any component damaged, affecting serviceability.

Source: https://assist.dla.mil -- Downloaded: 2026-01-19T09:11Z
Check the source to verify that this is the current version before use.

Examine	Defect
Workmanship	Inadequate application of components, such as incomplete closure of container flaps, loose strapping, inadequate stapling. Bulging or distortion of containers.
Content	Number per container is more or less than required.

5. PACKAGING

*5.1 Preservation and packaging. Preservation and packaging shall be level A or commercial as specified (see 6.2).

5.1.1 Level A. Each pair of shoes shall be inserted in a snug-fitting, clear, polyethylene film bag of 0.0015 inch thickness (± 20 percent tolerance). The polyethylene bag shall be formed with heat sealed seams that are straight, continuous and parallel to each other and the formed edges of the bag. Closure of the polyethylene bag shall be accomplished by means of a mechanical tie (paper or plastic covered soft steel wire, aluminum band, etc.). Prior to or during the closure operations, excess air within the bag shall be expelled.

*5.1.2 Commercial. Commercial packaging shall afford adequate protection against deterioration and physical damage during shipment from the supply source to the first receiving activity. The contractor may use his standard practice provided it meets the requirements specified for commercial packing.

*5.2 Packing. Packing shall be level A, B, or commercial as specified (see 6.2).

5.2.1 Level A.

5.2.1.1 Method 1. Fourteen (14) pairs of shoes of one size only, packaged as specified in 5.1, shall be packaged in a fiberboard shipping container conforming to class weather resistant, size 2A of MIL-B-17757. Packages shall be packed with a bottom layer of eight on their sides, and a top layer of six flat, both layers having the length of the packages parallel to the end panels of the container. Shipping containers shall be assembled, closed and reinforced as specified in the appendix to the box specification. Towards the end of the contract, or when there is less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:11Z
Check the source to verify that this is the current version before use.

5.2.1.2 Method 2. When specified (see 6.2), six level B shipping containers (84 shoes of one size only) shall be overpacked in a fiberboard shipping container conforming to weather-resistant class, size 4 of MIL-B-17757, and assembled, closed and reinforced as specified in the appendix to the box specification. Towards the end of the contract, or when there is less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

5.2.2 Level B. Fourteen (14) pairs of shoes of one size only, packaged as specified in 5.1, shall be packed in a fiberboard shipping container conforming to class domestic, size 2A of MIL-B-17757, except that the fiberboard for the shipping container shall be grade 275. Packages shall be packed with a bottom layer of eight on their sides and a top layer of six flat, both layers having the length of the packages parallel to the end panels of the container. Shipping containers shall be assembled and closed as specified in the appendix to the box specification. Towards the end of the contract, or when there is less than the required amount per container of the same size, mixed sizes may be packed within the same shipping container.

*5.2.3. Commercial. Shoes shall be packed in a manner to insure carrier acceptance and safe delivery at destination. Containers shall be in accordance with Uniform Freight Classification Rules, National Motor Freight Classification Rule and U. S. Postal Service Manual or regulations of other carriers applicable to the mode of transportation.

5.3 Marking. In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with the requirements of MIL-STD-129. Polyethylene bagged packages shall have the following information legibly printed or stamped in block letters directly on the bag across the center face or on a white paper label inserted within the bag in order to permit ready identification:

Stock Number
Item Description
Quantity
Size

5.3.1 Mixed sizes. Each shipping container packed with mixed sizes shall have a white paper label 5 X 4 inches in size, securely attached to the end and side. The words "mixed sizes" shall be plainly printed on the labels. Under these words, the sizes and quantities of each size of shoes contained therein shall be legibly printed.

6. NOTES

6.1 Intended use. The shoes covered by this specification are used for reconnaissance purposes by Marine Corps personnel.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:11Z
Check the source to verify that this is the current version before use.

*6.2 Ordering data. Procurement documents should specify the following:

6.2.1 Procurment requirements.

(a) Title, number and date of this specification.
(b) Size(s) required (see 1.2).
(c) Whether first article is required (see 3.2).
(d) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(e) When level A, method 2, packing is required (see 5.2.1.2).

6.2.2 Contract data requirements. Data conforming to Data Item Descriptions DI-R-4803, DI-R-4805, DI-T-4901, DI-T-4902, DI-T-4903 and DI-T-4904 will usually be required for delivery in connection with this specification. When so required, such data will be specified for delivery on a DD-1423 included in the contract.

6.3 Standard samples and shade samples. For information regarding availability of standard samples and standard shades specified, address inquiry to the procuring activity issuing the invitation for bids.

6.4 First article. First article examination, test and approval shall be as specified by the contracting officer (see 3.2).

*6.5 Figures. Figures 1, 2 and 3 show general design of the shoes and are furnished for information only. In the event of conflict between these figures and the text of this specification, the text of this specification shall govern.

*6.6 Marginal notations. The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this documents based on the entire content irrespective of the marginal notations and relationship of the last previous issue.

Preparing activity:
Navy - MC
Proj No. 8430-N263

Source: https://assist.dla.mil -- Downloaded: 202610-19T09:11Z
Check the source to verify that this is the current version before use.


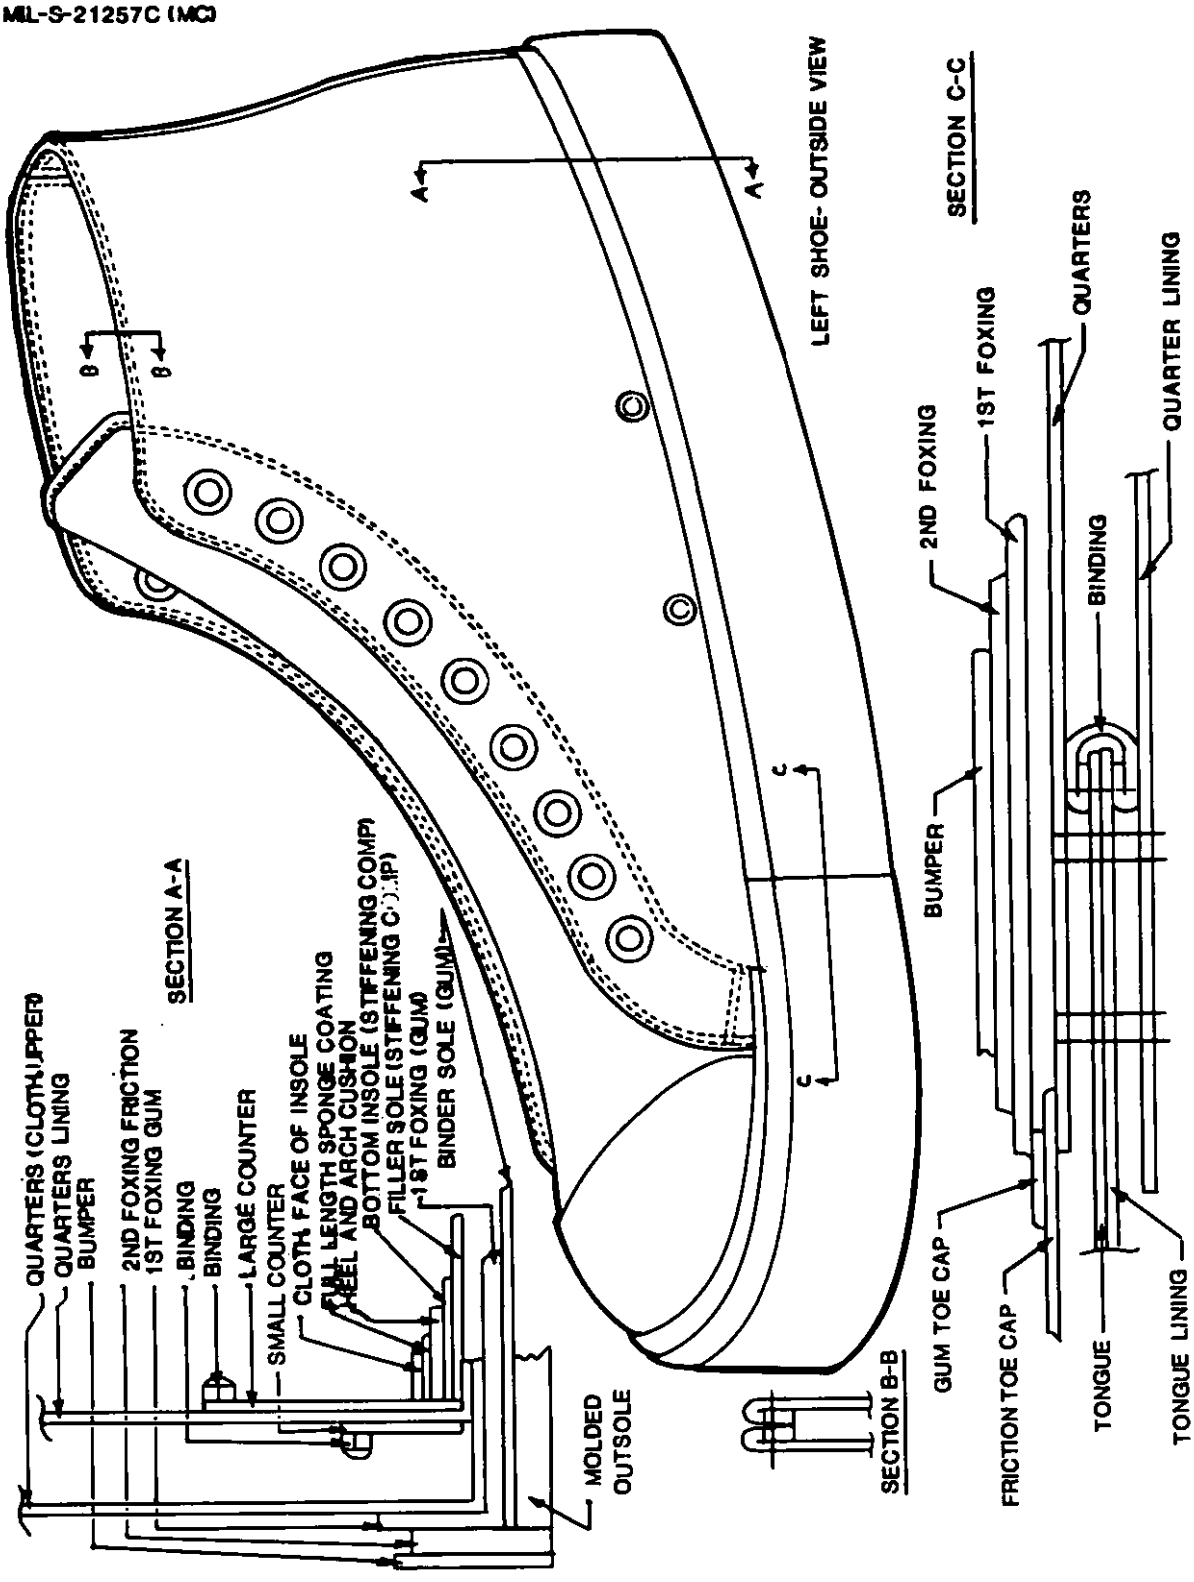


FIGURE 1 SHOE BASKETBALL: FOR RECONNAISSANCE

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:11Z
Check the source to verify that this is the current version before use.

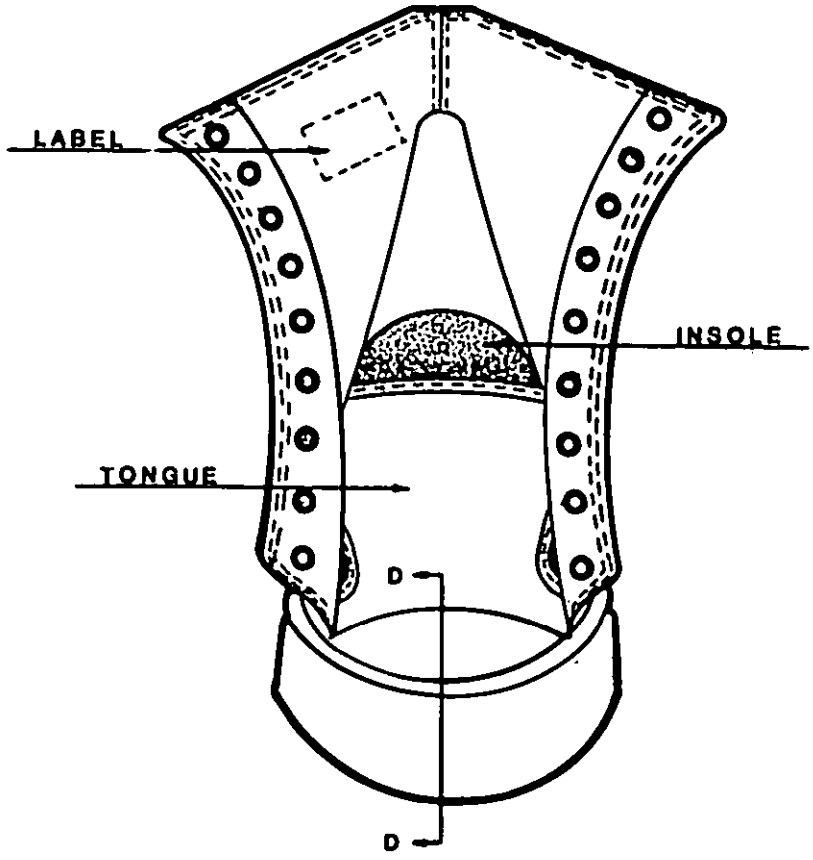

FRONT VIEW OPEN

(BACK INSIDE DETAIL)

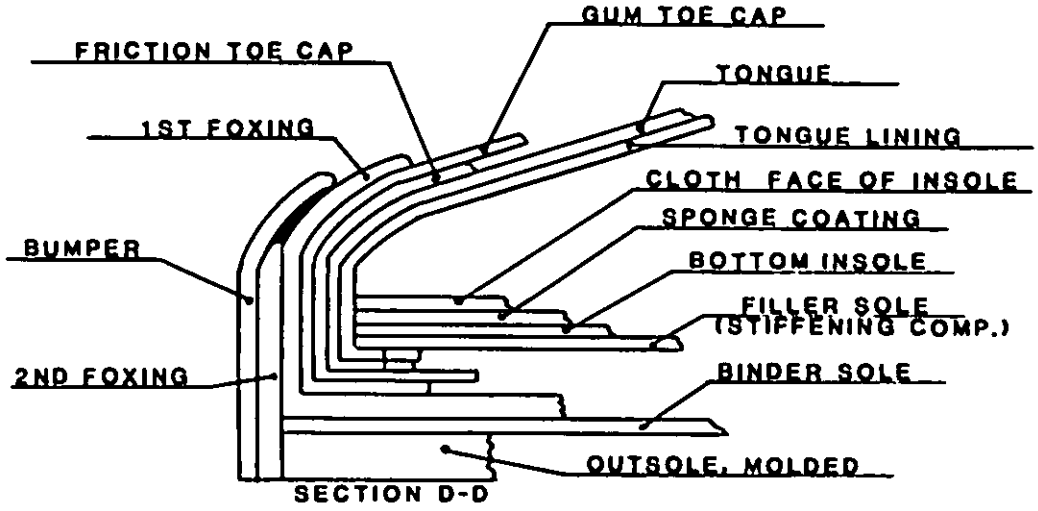


FIGURE 2. SHOE, BASKETBALL: FOR RECONNAISSANCE

Source: https://assist.dla.mil -- Downloaded: 2026-01-19T09:11Z
Check the source to verify that this is the current version before use.

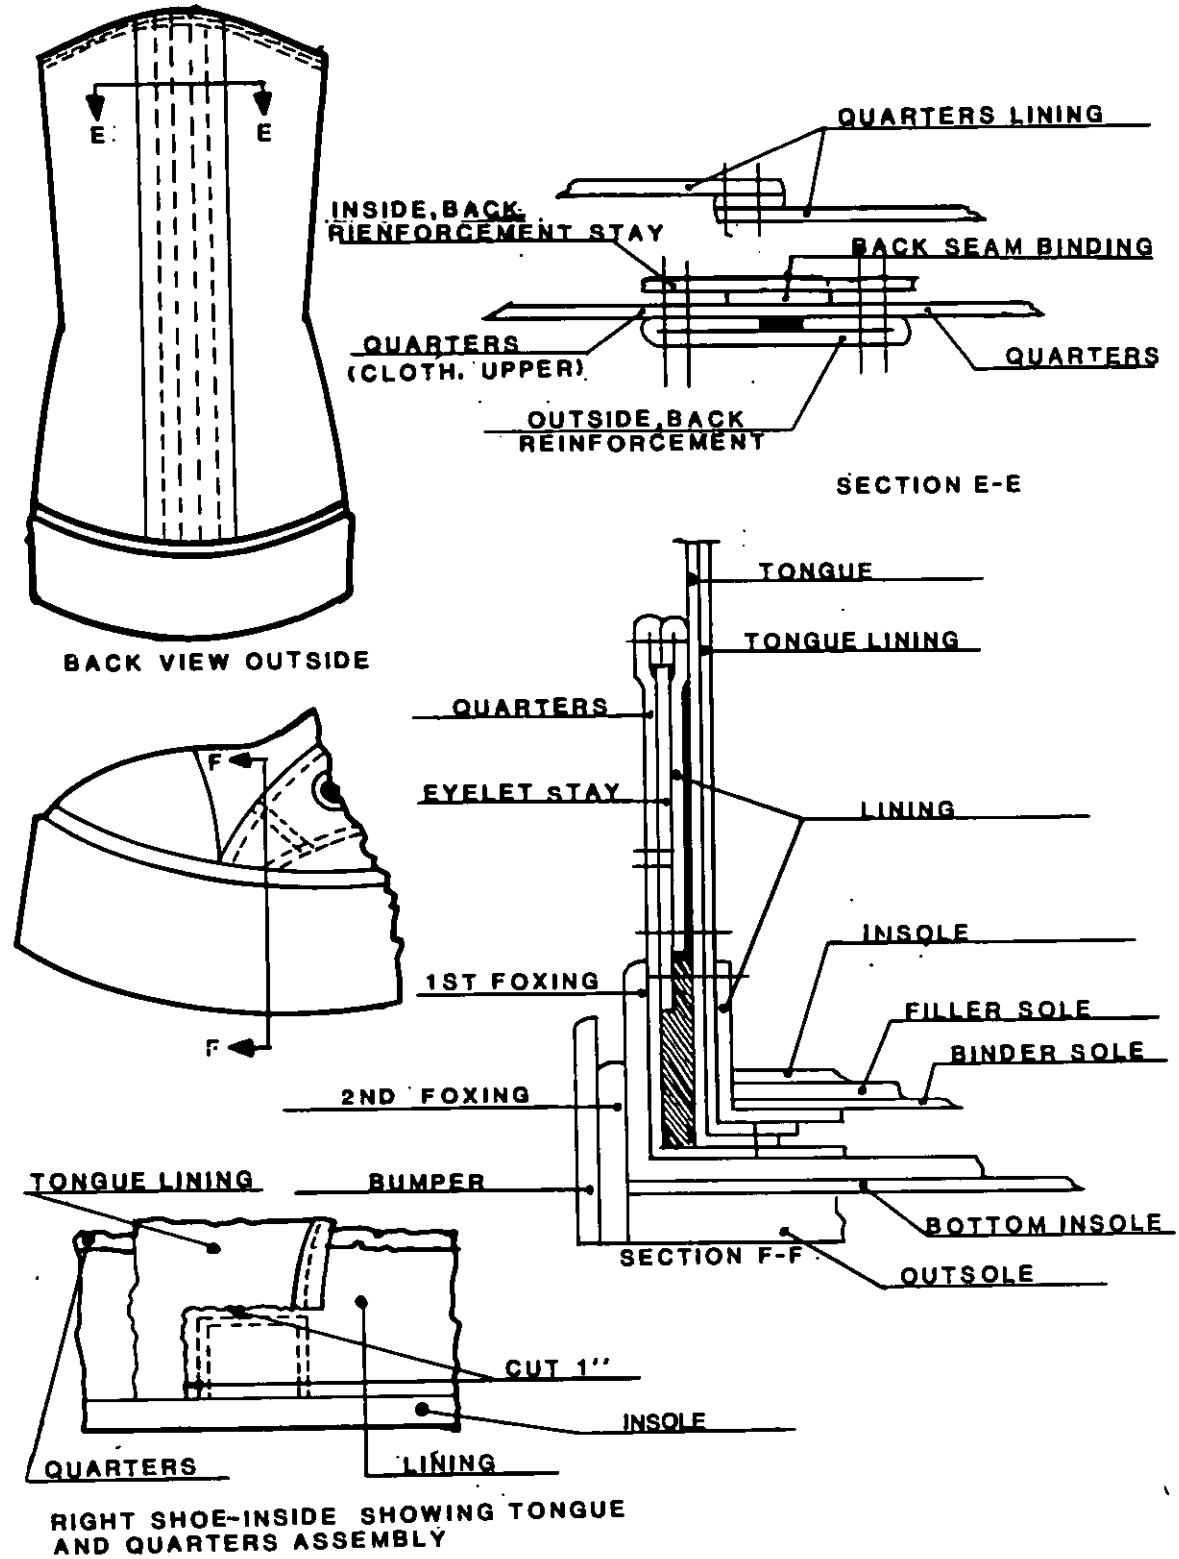


FIGURE 3. SHOE, BASKETBALL: FOR RECONNAISSANCE

Source: https://assist.dla.mil -- Downloaded: 20261O-19T09:11Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID



OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commandant of the Marine Corps
Headquarters U. S. Marine Corps
Code LMA-1
Washington, D. C. 20380

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:11Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/ vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED S/N 0102-LF-014-1802

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T09:11Z
Check the source to verify that this is the current version before use.