MILITARY SPECIFICATION

BREADBOX, DELIVERY, ALUMINUM

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers an aluminum delivery box for bread.

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

QQ-A-250/8 - Aluminum Alloy, 5052, Plate and Sheet
PPP-B-636 - Boxes, Shipping, Fiberboard

STANDARDS

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage

DRAWING

ARMY NATICK DEVELOPMENT CENTER

5-11-941 - Breadbox, Delivery, Aluminum

FSC 8115
7330

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:12Z
Check the source to verify that this is the current version before use.

(Miniature copy of Drawing No. 5-11-941, identified as figure 1, is attached for information purposes only.)

(Copies of specifications, standards, and drawings required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

* 2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply:

National Motor Freight Traffic Association, Inc., Agent

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Inc., Tariff Order Section, 1616 P Street, N.W., Washington, DC 20036.)

Uniform Classification Committee, Agent

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), the supplier shall furnish samples of the breadbox to be procured under this specification for first article inspection and approval (see 4.3 and 6.3).

3.2 Materials. Materials shall conform to the applicable requirements of referenced specifications, standards and drawings and the requirements specified herein. Unless otherwise specified herein, commercial tolerances shall apply to material thicknesses and diameters.

3.2.1 Aluminum sheet. Aluminum sheet shall conform to the requirements for alloy 5052, temper H26 of QQ-A-250/8.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:12Z
Check the source to verify that this is the current version before use.

3.3 Design and construction. The breadbox shall consist of a body, two handles, four stacking clips, four handle clips, and not less than three runners and shall be fabricated and assembled as shown on Drawing No. 5-11-941 and as specified herein. With the handles in the open position the empty breadboxes shall nest within each other and rest on the stacking clips. The handles, when in the closed position, shall rest on the handle clips and provide cross supports for stacking full breadboxes. There shall be no evidence of binding, and the increase in height shall be not greater than 3 inches for each breadbox when tested as specified in 4.5.1. There shall be no visible evidence of permanent distortion, separation of parts, loosening of rivets, or crushing when the breadboxes are load tested as specified in 4.5.2 and crush tested as specified in 4.5.3.

3.3.1 Body. The body shall be formed of one piece of the aluminum sheet specified in 3.3.1 and shall have a thickness of not less than 0.040 inch. The reinforcing rod rolled into the top edge of the body shall be 5/16-inch-nominal-diameter steel or 1/2-inch-nominal-diameter aluminum. The body shall be seamless or folded. If folded, the corner laps shall be riveted to the sides.

3.3.2 Handles. The handles shall be of 5/16-inch nominal diameter steel rod or 1/2-inch nominal diameter aluminum rod. The handles shall pivot in the stacking clips and rotate around the ends of the body and rest on the handle clips so as to provide cross supports inside the breadbox body for stacking full breadboxes.

3.3.3 Stacking clips and handle clips. Stacking clips and handle clips shall be fabricated of the aluminum specified in 3.3.1 with a thickness of not less than 0.061 inch, or of corrosion-resisting steel with a thickness of not less than 0.030 inch. Stacking clips and handle clips shall be joined to the body by riveting.

3.3.4 Runners. Runners shall be fabricated of aluminum, and shall be attached to the bottom of the breadbox by rivets or threaded fasteners in accordance with the manufacturer's standard practice.

3.4 Finish. All aluminum and corrosion-resisting steel parts shall be finished in accordance with the manufacturer's standard practice. Steel rod, when used, shall be zinc plated in accordance with the manufacturer's standard practice.

3.5 Marking. The manufacturer shall emboss or indent his name, trade-name, or trademark of such known character easily identifiable with such manufacturer on each breadbox.

3.6 Workmanship. The finished breadbox shall be clean and free of scratches, dents, wrinkles, fabrication marks, breaks, cracks, punctures, sharp edges and corners, deformities, burrs and slivers.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:12Z
Check the source to verify that this is the current version before use.

3.6.1 Rivets. Rivets shall be tight. The rivet heads and peened ends shall be round and concentric and shall be in full contact with the surfaces of the joined components.

3.6.2 Threaded fasteners. Threaded fasteners, when used, shall be drawn tight and shall be free of crossed or stripped threads.

3.6.3 Zinc plate. Zinc plate, when used, shall be free of areas of no coverage, flakes, blisters, peeling, chipping, scratches, smudges and imbedded foreign matter.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

* 4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

1. First article inspection (see 4.3).
2. Quality conformance inspection (see 4.4).

* 4.3 First article inspection. When a first article is required, the breadboxes shall be examined for the defects listed in table I, dimensions specified, and tested as specified in 4.5.1, 4.5.2 and 4.5.3. The presence of any defect, any dimension not in conformance with specified requirements, or failure of any test shall be cause for rejection of the first article.

* 4.4 Quality conformance inspection. Except as otherwise specified herein, sampling for inspection shall be performed in accordance with provisions set forth in MIL-STD-105.

4.4.1 Components and material inspection. In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:12Z
Check the source to verify that this is the current version before use.

4.4.2 End item inspection. The lot shall consist of all breadboxes offered for inspection at one time. The sample unit shall be one completely fabricated breadbox.

4.4.2.1 Visual inspection. Inspection shall be made of the breadbox for the defects listed in table I. The inspection level shall be level II with an acceptable quality level (AQL) of 2.5 for major defects and 6.5 for total defects, expressed in terms of defects per hundred units.

TABLE I. Classification of defects

Examine	Defect	Classification Major	Classification Minor
Finish	Dirty		X
Zinc plate	Steel rod (when used for reinforcing and handles), not zinc plated	X	
	Areas of no coverage, blisters, flakes, chipping, peeling, scratches, smudges, embedded foreign matter		X
Design and construction	Body not one piece	X	
	Top edge of body not rolled around rod	X	
	Handles missing, do not rotate around body	X	
	Runners missing	X	
	Runners not attached by rivets, or threaded fasteners		X
Workmanship	Wrinkles, punctures, deformities, breaks	X	
	Scratches, dents, fabrication marks, sharp edges, sharp corners, burrs, slivers		X
Rivets	Missing, loose, not peened	X	
	Not in full contact with riveted surfaces		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:12Z
Check the source to verify that this is the current version before use.

TABLE I. Classification of defects (cont'd)

Examine	Defect	Classification Major	Minor
Workmanship (cont'd)			
Threaded fasteners (when applicable)	Missing	X	
	Loose, threads crossed or stripped		X
Runners	Less than three runners	X	
Stacking clips and handle clips	Not fabricated in one piece, missing	X	
Marking	Missing, illegible, not indented or embossed		X

4.4.2.2 Dimensional inspection. Inspection shall be made for dimensions specified. Any deviation from specified requirements shall be considered a defect. The inspection level shall be S-2 with an AQL of 4.0, expressed in terms of defects per hundred units.

* 4.4.2.3 End item testing. The tests as specified in 4.5.1, 4.5.2 and 4.5.3 shall be performed on two production units (see 6.4). Failure of any test shall be cause for rejection of the inspection lot.

* 4.4.3 Examination of preparation for delivery. An examination shall be made to determine whether the packing and marking complies with the section 5 requirements. Defects will be scored as listed in table II. The lot shall be the number of shipping containers offered for inspection at one time. The sample unit shall be one shipping container fully prepared for delivery except it need not be closed. The inspection level shall be S-2 with an AQL of 4.0, expressed in terms of defects per hundred units.

TABLE II. Examination of preparation for delivery

Examine	Defect
Marking (exterior)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Materials	Any component missing, damaged or not as specified.
Content	Contents per container is more or less than specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:12Z
Check the source to verify that this is the current version before use.

4.4.3.1 Examination of shipping containers. When shipping containers are required to be in accordance with PPP-B-636, examination for defects in closure, waterproofing, and reinforcing shall be in accordance with PPP-B-636.

4.5 Tests.

4.5.1 Nesting. Place a breadbox on a flat surface with the handles in the open position. Measure the overall height. Nest a second breadbox inside the first and set the handles in the open position. Measure the overall height of both breadboxes to determine compliance with the increase in height requirement of 3.3. Raise and lower the top breadbox into the lower breadbox to determine compliance with the nonbinding requirements of 3.4.

4.5.2 Load test. Place a breadbox on a flat surface and distribute weight of not less than 44 pounds evenly over the bottom. Raise the weighted breadbox by the handles to a height of not less than 3 feet and return to the flat surface. Repeat the raising and lowering not less than 50 times, releasing the handles after each lowering. Remove the weight and examine the breadbox to determine compliance with the distortion, parts separation, and rivet tightness requirements of 3.3.

4.5.3 Crush test. Place a breadbox on a flat surface with the handles in the stacking position. Place a second breadbox, loaded with weight of not less than 300 pounds, on top of the first breadbox in the stacking position for not less than 1 hour. Remove the weighted breadbox and examine the bottom breadbox to determine compliance with the noncrushing requirement of 3.3.

5. PREPARATION FOR DELIVERY

5.1 Packing. Packing shall be level A, B, or C as specified (see 6.2).

* 5.1.1 Level A. Six breadboxes shall be nested in the most compact manner and packed in a snug-fitting fiberboard shipping container conforming to style RSC, grade V2s of PPP-B-636. Fiberboard blocking and bracing, made of the same material as the shipping container, shall be provided to prevent shifting of the breadboxes within the container. Each shipping container shall be closed in accordance with method III, waterproofed in accordance with method V and reinforced as specified in the appendix of PPP-B-636.

* 5.1.2 Level B. Six breadboxes shall be nested in the most compact manner and packed in a snug-fitting fiberboard shipping container conforming to style RSC, type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. Fiberboard blocking and bracing, made of the same material as the shipping container, shall be provided to prevent shifting of the breadboxes within the container. Each fiberboard container shall be closed in accordance with method II as specified in the appendix of PPP-B-636.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:12Z
Check the source to verify that this is the current version before use.

* 5.1.2.1 When specified (see 6.2), the fiberboard shipping container shall be a grade V3c, V3s or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III as specified in the appendix of the container specification.

* 5.1.3 Level C (commercial packing). Breadboxes shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. The quantity per shipping container shall be the same as that normally used by the supplier for retail distribution. Containers shall comply with Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.2 Marking. In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The breadbox covered by this specification is intended for use for the delivery of packaged bread from a bakery to mess halls.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) First article. When a first article is required (see 3.1, 4.3 and 6.3).
(c) Selection of the applicable level of packing (see 5.1).
(d) When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.1.2.1).

* 6.3 First article. When a first article is required, it shall be inspected and approved under appropriate provisions of ASPR 7-104.55. The contracting officer should specify the appropriate type of first article and the number of units to be furnished (minimum of two (2) breadboxes). The contracting officer should include specific instructions in all procurement instruments regarding arrangements for inspection and approval of the first article.

6.4 End item tests. Performance of tests as specified in 4.5.1, 4.5.2 and 4.5.3 should be limited to two (2) successful demonstrations of compliance to the requirements of this specification for each contract.

6.5 The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:12Z
Check the source to verify that this is the current version before use.

in these notations. Bidders and suppliers are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:

Army - GL
Navy - SA
Air Force - 69

Review activities:


Army - MD
Navy - MC
Air Force - 84, 82

Preparing activity:

Army - GL

Project No. 8115-0231

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:12Z
Check the source to verify that this is the current version before use.

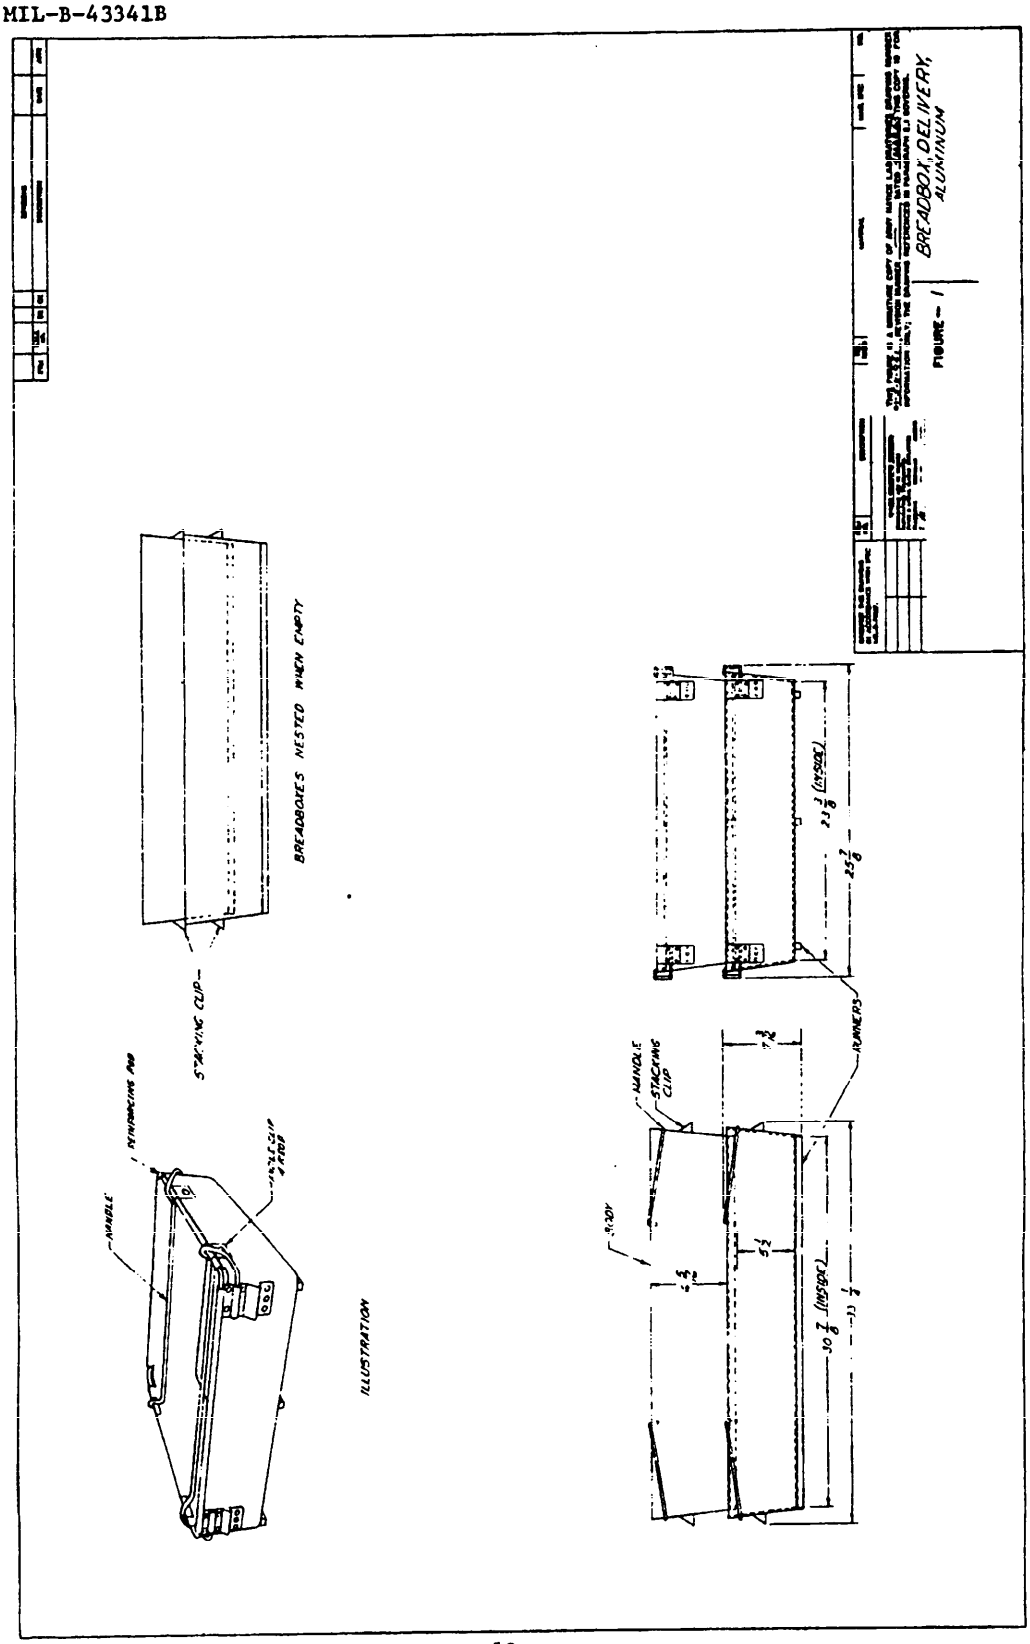

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:12Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE
MIL-B-43341B - BREADBOX, DELIVERY, ALUMINUM

NAME OF ORGANIZATION AND ADDRESS

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*

TELEPHONE NO.

DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:12Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
US ARMY NATICK DEVELOPMENT CENTER
NATICK, MA 01760

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

AMXNM-TDG

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314

U.S. MAIL

Commander
US Army Natick Development Center
ATTN: AMXNM-TDG
Natick, MA 01760

NATICK OP 1 MAY 75

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:12Z
Check the source to verify that this is the current version before use.