MIL-C-43339D
7 November 1988
SUPERSEDING
MIL-C-43339C
3 August 1983

MILITARY SPECIFICATION

COVERALLS, INDUSTRIAL: LINT-FREE

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

* 1.1 Scope. This document covers the requirements for the manufacturing of industrial coveralls for a lint-free environment.

1.2 Classification. The coveralls shall be of one type in the following sizes (see 6.2):

Schedule of Sizes

X-Small
Small
Medium
Large
X-Large

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: U.S. Army Natick Research, Development, and Engineering Center, Natick, MA 01760-5014 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8415

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:12Z
Check the source to verify that this is the current version before use.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

* 2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

FEDERAL

A-A-203	- Paper, Kraft, Untreated
V-B-871	- Button, Sewing Hole, and Button, Staple, (Plastic)
V-T-280	- Thread, Gimp, Cotton, Buttonhole
V-T-285	- Thread, Polyester
DDD-L-20	- Label: For Clothing, Equipage, and Tentage, (General Use)
PPP-B-636	- Boxes, Shipping, Fiberboard

MILITARY

MIL-L-35078	- Loads, Unit: Preparation of Semiperishable Subsistence Items; Clothing, Personal Equipment and Equipage: General Specification For
MIL-C-43487	- Cloth, Taffeta, Polyester

STANDARDS

FEDERAL

FED-STD-751	- Stitches, Seams and Stitchings

MILITARY

MIL-STD-129	- Marking for Shipment and Storage
MIL-STD-147	- Palletized Unit Loads
MIL-STD-731	- Quality of Wood Members for Containers and Pallets
MIL-STD-1668	- Provisions for Evaluating Quality of Cloth Coveralls

(Copies of specifications, standards, and handbooks required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting activity.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:12Z
Check the source to verify that this is the current version before use.

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted shall be those listed in the issue of the DODISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS shall be the issues of the nongovernment documents which are current on the date of the solicitation.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D 3951 - Standard Practice for Commercial Packaging

(Copies should be obtained from the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103-1187.)

AMERICAN ASSOCIATION OF TEXTILE CHEMISTS AND COLORISTS (AATCC)

Chromatic Transference Scale

(Copies should be obtained from the American Association of Textile Chemists and Colorists, P.O. Box 12215, Research Triangle Park, NC 27709-2215.)

(Nongovernment standards and other publications are normally available from the organizations which prepare or which distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this specification and the references cited herein, the text of this specification shall take precedence. Nothing in this specification, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 Guide samples. Guide samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variation from this document may appear in the sample, in which case this document shall govern.

* 3.2 First article. When specified in the contract or purchase order, a sample shall be subjected to first article inspection (see 4.3, 6.2, and 6.4).

3.3 Materials (see 6.5).

* 3.3.1 Basic material. The basic material shall be polyester taffeta cloth, conforming to MIL-C-43487.

* 3.3.2 Thread. The polyester thread for seaming, stitching, attaching buttons, and making buttonholes shall be type I or II, class 1, subclass A, size A and B, 3 ply, dyed Khaki P-1, C.A. 66019 conforming to V-T-285.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:12Z
Check the source to verify that this is the current version before use.

3.3.2.1 Colorfastness. The dyed thread shall show fastness to light, laundering, and perspiration equal to or better than the standard sample. When no standard sample is available, the dyed thread shall show "good" fastness to laundering, light, and perspiration.

3.3.3 Gimp. The gimp for reinforcing buttonholes (when applicable) shall be Khaki P-1, C.A. 66019 conforming to type I or II, size 8 of V-T-280.

3.3.3.1 Colorfastness. The gimp shall show fastness to laundering (after 3 cycles), equal to or better than the standard sample (see 6.3). When no standard sample is available, the dyed gimp shall show "good" fastness to laundering (after 3 cycles).

3.3.4 Labels. Each coverall shall have a combination identification-size label and an instruction label or combination size, identification, and instruction label conforming to type VI of DDD-L-20. Labels shall show fastness to laundering.

3.3.4.1 Combination identification-size label. The combination identification-size label shall be a combination of class 1 and class 2 labels.

3.3.4.2 Instruction label. The instruction label shall conform to class 3 and contain the following information:

COVERALL, INDUSTRIAL: LINT-FREE

1. Wear over personal clothing; will provide a lint-free surface.
2. Do not expose to intense heat; material will melt.
3. Launder by hand or machine with a detergent solution.

DO NOT REMOVE THIS LABEL

3.3.4.3 Combination size, identification, and instruction label. The combination label shall conform to class 14 of DDD-L-20. The coating requirement shall conform to class 3 label.

3.3.5 Buttons. The buttons shall be type II, class D, style 26, 30-line of V-B-871, and be Khaki AL with a dull finish.

3.4 Design. The coveralls have a button and buttonhole front closure, shirt style collar, long sleeves, a right hip pocket, and a left chest pocket with pencil opening (see figure 1).

3.5 Patterns. Standard patterns which provide an allowance of 1/2 inch for double-lapped and double-stitched seams and pockets and 3/8 inch for all other seams will be furnished by the Government. The standard patterns shall not be altered in any way and are to be used only as a guide for cutting the contractor's working patterns. The working patterns shall be identical to the standard patterns.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:12Z
Check the source to verify that this is the current version before use.

3.5.1 List of pattern parts. The coverall shall be cut from the material specified in accordance with the number of parts indicated in table I.

TABLE I. List of pattern parts

Material	Nomenclature	Cut parts
Polyester cloth	Jacket parts	
	Back	1
	Front	2
	Collar 1/	1
	Sleeve	2
	Chest pocket	1
	Trouser parts	
	Back	2
	Front	2
	Hip pocket	1

1/ Collar may be cut of two pieces adding seam allowances.

3.6 Construction. The construction shall conform in all respects to the requirements specified in table II and herein. Figure 1 is furnished solely for guidance and information. Should variation from the document appear in figure 1, the document shall govern.

3.6.1 Stitches, seams and stitching. Stitches, seams, and stitching types specified in table II shall conform to FED-STD-751. When two or more methods of seaming or of stitch type are given for the same operation, the method and type is optional. Where stitch type 401 is used, the looper (underthread) shall be on the inside of the coveralls. The gage of stitching for double-lapped, double-stitched seams shall be 3/16 to 5/16 inch. All seams shall start and finish evenly.

NOTE: The polyester cloth shall be so handled in the seaming and stitching operations to minimize as much as possible seam puckering resulting from excessively high sewing thread tension, course feeds, unnecessary high pressure, and undue stretching of the material in holding back by the operators.

3.6.1.1 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:12Z
Check the source to verify that this is the current version before use.

3.6.1.2 Seam type. Seam type shall be as specified in table II with seam allowance maintained and seams properly sewn so that no raw edges, run-offs, twists, pleats, puckers, or open seams result.

3.6.1.3 Type 301 stitching. Ends of all stitching shall be backstitched or overstitched 1/4 inch minimum except when caught in other stitching or turned under in a hem. Thread tension shall be maintained so that there will be no loose stitching resulting in loose bobbin or top thread, or excessively tight stitching resulting in puckering of the materials sewn. The lock shall be embedded in the materials sewn.

3.6.1.3.1 Repairs of type 301 stitching. Repairs of type 301 stitching shall be as follows:

a. When thread breaks or bobbin run-outs occur during sewing, the stitching shall be repaired by restarting the stitching a minimum of 1/2 inch back of the end of the stitching. 1/

b. Thread breaks, two or more consecutive skipped or run-off stitches noted during inspection of the item (in-process or end item) shall be repaired by overstitching. The stitching shall start a minimum of 1/2 inch in back of the defective area, continue over the defective area, and continue a minimum of 1/2 inch beyond the defective area on to the existing stitching. Loose or excessively tight stitching shall be repaired by removing the defective stitching, without damaging the materials, and restitching in the required manner. 1/

1/ When making the above repairs, the ends of the stitching are not required to be backstitched.

3.6.1.4 Type 401 stitching. Thread tension shall be maintained so that there will be no loose stitching. All repairs shall be in accordance with 3.6.1.3.1a and 3.6.1.3.1b. Thread tension shall be maintained so that there will be no loose or excessively tight stitching resulting in puckering of the materials sewn.

3.6.1.5 Bartacking. Bartacking shall be 1/2 $\pm$ 1/16 inch long, 1/8 $\pm$ 1/32 inch wide and shall contain 28 stitches. Bartacks shall be free from thread breaks and loose stitching.

3.6.1.6 Automatic stitching. Automatic machines may be used to perform any of the stitch patterns provided the requirements for the stitch pattern, stitches per inch, and size and type of thread are met. At least three tying, overlapping, or backstitches shall be used to secure the ends of the stitching.

3.6.1.7 Thread ends. All thread ends shall be trimmed to 1/4 inch maximum length.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:12Z
Check the source to verify that this is the current version before use.

3.6.2 Buttonholes. The buttonholes shall be the straight-cut type with ends tacked or eyelet and taper-bar type worked over gimp (see 3.3.3) with not less than four tacking stitches at bar end (not counting cross over stitch). The purling shall be on the outside of the coverall. The finished cut lengths shall be 9/16 to 3/4 inch. The buttonholes shall be clean cut with the stitching securely caught in the fabric. Additive treatments or materials used to secure the ends of the stitching or to stiffen the fabric, prior to stitching the buttonholes, are prohibited.

3.7 Manufacturing operation requirements. The coveralls shall be manufactured in accordance with operations specified in table II. The contractor is not required to follow the exact sequence of operations. Any additional basting or holding stitching may be used providing the stitching is removed or not visible on the finished coveralls.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:12Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cut overalls. a. Cut the coveralls in strict accordance with patterns furnished which show size, directional lines, shape, and placement of pockets, and notches for proper assembly. b. Lay the fronts and backs of trousers so that the directional line is in the warp direction. The directional line may vary from the warp direction by not more than 2-1/2 inches on both fronts and backs. Measurement shall be taken from the top and bottom of the directional line on pattern to the selvage edge of the fabric, and the difference between two measurements shall not exceed the tolerance specified. c. Cut all component parts of the garment from one piece of material, except buttonhole reinforcement and undercollar (when applicable) which may be cut from ends. Parts cut from ends shall approximate the shade of the garment. Reinforcement for buttonholes shall be 1-1/4 to 1-1/2 inches wide and of sufficient length to reinforce top buttonhole and extend 1 inch below the bottom buttonhole.						
2.	Replacement of damaged parts. Care shall be exercised during the spreading, cutting, and manufacturing operations to assure that material defects and damages, as classified in MIL-STD-1668, are excluded and replaced with non-defective and properly matched material.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:12Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
3.	Marking. a. Mark, ticket, or bundle all component parts of the coverall except those parts cut from ends to ensure correct size, proper assembly, and a uniform shade throughout the coverall. b. Any method of marking may be used except: (1) Metal fastening devices. (2) Sewn-on tickets. (3) Adhesive type tickets which leave traces of adhesive on the material after removal of the tickets. c. The use of ink pad numbering machine, rubber stamp, or pencil will be acceptable provided the numbers do not show through the outside of the coverall and the numbers are covered by the seam allowance.						
4.	Labels. a. Stitch labels on all four sides not more than 3/16 inch from edges to inside center of back (1 inch off center tolerance) as follows: (1) Combination identification-size label - The top edge caught in the stitching of top collar to neck. (2) Instruction label - The top edge may abut or be caught in the bottom line of stitching of the combination identification-size label.	301	LSbj-1	6-8	B	B	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:12Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)
MANUFACTURING OPERATIONS REQUIREMENTS

NO.		STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
4.	Labels. (cont'd)						
	(3) Combination size, identification, and instruction label (when used) - Positioned as in 4.a.1 above.						
	(4) The ends of label stitching shall be overlapped not less than three stitches.						
	- or -						
	b. Stitch labels with automatic machine. If an Automatic Box Stitch machine is used, the ends of the stitching shall be overlapped at least three stitches.	301	EFb-Box	6-8	B	B	
5.	Make collar.						
	a. Fold collar in half and join side edges; turn, force out points and edges, and stitch 3/16 to 1/4 inch from edges with the stitching continued along top folded edge.	301 or 401 and 301	SSe-2(a) SSe-2(a) SSe-2(b) and OSf-1	6-8 6-8 6-8	B B B	B A B	
	- or -						
	b. When collar is cut of two pieces, join top and undercollar plies along top and side edges; turn, force out points and edges, and stitch 3/16 to 1/4 inch from edge.	301 or 401 and 301	SSe-2(a) SSe-2(b)	6-8 6-8	B B B	B A B	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:12Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
6.	Hem pockets.						
	Turn in top edges 1/2 to 3/4 inch with the raw edges turned in and single stitch 1/16 to 3/32 inch from edges.	301	EFb-1	6-8	B	B	
7.	Set pockets.						
	a. Turn in side and bottom edges of pockets with the raw edges turned in to the folded edges. Position hip pocket to right back and chest pocket to left front, as indicated on pattern, and single stitch 1/16 to 3/32 inch from side and bottom edges.	301	LSd-1	6-8	B	B	
	NOTE: The side and bottom raw edges may be turned in 1/4 inch and stitched 1/16 to 1/8 inch from folded edges prior to setting pockets.						
	b. Place a second row of stitching 1/4 to 5/16 inch from the first row of stitching at sides and bottoms of pockets enclosing the folded edges of seam allowances between the double stitching.	301	LSd-1	6-8	B	B	
	c. Place a vertical row of stitching through chest pocket and front positioned 1-1/2 inches + 1/8 inch from front edge of pocket forming a pencil pocket. The stitching shall extend the full length of the pocket.	301	SSv-1	6-8	B	B	
8.	Join shoulders.						
	Join shoulders with double-lapped and double-stitched seams with the back lapping the fronts.	301 or 401	LSc-2	6-8	B B	B A	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:11ZZ
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
9.	Set sleeves.						
	Set sleeves to armholes with double-lapped and double-stitched seams with the back and fronts lapping the sleeves.	301 or 401	LSc-2	6-8	B B	B A	
10.	Join side and underarm seams.						
	Join side and underarm seams in one continuous operation with double-lapped and double-stitched seams. The back shall lap the fronts, and the seams at base of armhole may be staggered not more than 3/8 inch (center to center).	301 or 401	LSc-2	6-8	B B	B A	
11.	Hem sleeves.						
	Turn in bottom of sleeves with raw edges turned in and single stitch 1/16 to 3/32 inch from edge. The hems shall finish 1 $\pm$ 1/8 inch in width.	301	EFb-1	6-8	B	B	
12.	Join crotch seam.						
	a. Turn crotch seam of the right front to the outside and single stitch 1/16 to 1/8 inch from edge.	301	EFa-1	6-8	B	B	
	b. Turn edge of left front crotch seam to the inside and double-stitch, catching the right front crotch seam with both rows of stitching.	301	LSb-2	6-8	B	B	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:12Z
Check the source to verify that this is the current version before use.

NO.	TABLE II. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
13.	Join seat seam.						
	Join the seat seam with a double-lapped and double-stitched seam. The right back shall lap the left back.	301 or 401	LSc-2	6-8	B B	B A	
14.	Join outseams.						
	Join outseams with a double-lapped and double-stitched seam. The fronts shall lap the backs.	301 or 401	LSc-2	6-8	B B	B A	
15.	Join inseams.						
	Join inseams in one continuous operation with a double-lapped and double-stitched seam. The fronts shall lap the backs. The seams of crotch and seat may be staggered not more than 3/8 inch (center to center).	301 or 401	LSc-2	6-8	B B	B A	
16.	Join trousers to jacket.						
	Join trousers to jacket with a double-lapped and double-stitched seam with the jacket lapping the trousers. Seams of side and outseam may be staggered not more than 3/8 inch (center to center).	301 or 401	LSc-2	6-8	B B	B A	
17.	Make facings and make buttonholes on left facing.						
	a. Position buttonhole reinforcement piece on inside of left facing.						

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:12Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
17.	Make facings and make buttonholes on left facing. (cont'd)						
	b. Make 4 horizontal buttonholes through facing and reinforcement only, positioned as indicated by marks on pattern with the nearest inside edge of buttonhole 5/8 ± 1/8 inch from front edge when facing is in finished position.	Buttonhole 304	---	44-46 per buttonhole including tack	B	B	
	c. Turn up bottom edge of left facing 3/8 to 1/2 inch and single stitch 1/16 to 3/32 inch from edge.	301	EFa-1	6-8	B	B	
	d. Turn facings to outside, as indicated on patterns, and single stitch across lapel steps and bottom edge of right facing. Turn facings to inside and force out points.	301 or 401	SSe-2(a)	6-8	B	B	
	e. Turn in back raw edges of left and right facings and single stitch 1/16 to 3/32 inch from edge through front.	301	LSd-1	6-8	B	B	
	f. Make horizontal buttonhole at neck through front and facing with the nearest inside edge of buttonhole 5/8 ± 1/8 inch from finished front edge, and 1-1/4 to 1-3/8 inches down front lapel step.	Buttonhole 304	---	44-46 per buttonhole including tack	B	B	
	g. Single stitch along lapel steps, fronts, and bottom edge of right facing 1/16 to 3/32 inch from edge.	301	SSe-2(b)	6-8	B	B	
18.	Finish front opening.						
	Box stitch base of front opening with the bottom line of stitching superimposed on the stitching at bottom ends of facings. The box stitching shall measure 2-1/2 to 2/3-4 inches in length and 3/8 to 1/2 inch in width.	301		6-8	B	B	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:12Z
Check the source to verify that this is the current version before use.

TABLE II. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
19.	Attach collar.						
	Stitch undercollar along neck edge; turn collar at seam line, and with raw edge of top collar turned in, single stitch 1/16 to 1/8 inch from edge the full length, catching the size label in the stitching of top collar.	301 and 301	SSa-1 LSb-1	6-8 6-8	B B	B B	
20.	Hem bottoms.						
	Turn in leg bottoms with raw edges turned in and single stitch 1/16 to 3/32 inch from edge. The hem shall finish 1 ± 1/8 inch.	301	EFb-1	6-8	B	B	
21.	Buttons.						
	Sew 5 buttons to right front to correspond with the 5 buttonholes. The top button shall be positioned so that the ends of collar at neck edge are not less than 1/4 inch or more than 3/8 inch apart when buttoned.	301 or 101		14-16 per button 20-24 per button	B B	B	
22.	Bartacks.						
	a. Place a vertical bartack at ends of each pocket opening superimposed on the inside row of stitching.	Bartack		28 per bartack	B	B	
	b. Bartack the base of front opening with 2 horizontal bartacks (one each end) in line with top row of box stitching.	Bartack		28 per bartack	B	B	
23.	Clean coveralls.						
	a. Trim all thread ends and remove loose threads.						
	b. Remove all spots, stains, shade, and size markings.						

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:12Z
Check the source to verify that this is the current version before use.

* 3.8 Measurements. The finished coveralls shall conform to measurements as shown in table III.

TABLE III. Table of measurements (inches)

Size	X-Small	Small	Medium	Large	X-Large	Tolerance
1/2 Chest 1/	20-1/2	22-1/2	24-1/2	26-1/2	28-1/2	± 1
1/2 Waist 2/	17	19	21	23	25	± 1
Sleeve inseam 3/	23	23	23	23	23	± 1
Leg inseam 4/	32	32	32	32	32	± 1
Overall length 5/	64-1/2	65-1/2	66-1/2	67-1/2	68-1/2	± 1

1/ With coverall buttoned, measure across front at base of armholes.

2/ With coverall buttoned, measure across waist seam from folded edge to folded edge.

3/ Measure from base of armhole along sleeve seam to bottom of sleeve.

4/ Measure from crotch seam along inseam to bottom of leg.

5/ Measure from base of neck along center back to bottom of leg.

3.9 Workmanship. The finished coveralls shall conform to the quality of product established by this document and the occurrence of defects shall not exceed the applicable point value or defect limit.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this document where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:12Z
Check the source to verify that this is the current version before use.

* 4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this document shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirement in the document shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

* 4.1.2 Responsibility for dimensional requirements. Unless otherwise specified in the contract or purchase order, the contractor is responsible for assuring that all specified dimensions have been met. When dimensions cannot be examined on the end item, inspection shall be made at any point or at all points in the manufacturing process necessary to assure compliance with all dimensional requirements.

* 4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).

* 4.3 First article inspection. When a first article is required (see 6.2), it shall be examined for the defects specified in 4.4.2. The presence of any defect shall be cause for rejection of the first article.

4.4 Quality conformance inspection.

4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified, or qualified in this document or applicable purchase documents.

4.4.2 Point count inspection. Sampling and inspection provisions for end item examination, dimensional examination, and packaging inspection shall be performed in accordance with MIL-STD-1668.

* 4.4.3 Palletization examination. The fully packaged and palletized end items shall be examined for the defects listed below. The lot size shall be expressed in units of palletized unit loads. The sample unit shall be one palletized unit load, fully packaged. The inspection level shall be S-1 and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 6.5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:12Z
Check the source to verify that this is the current version before use.

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirement
Palletization	Pallet pattern not as specified Interlocking of loads not as specified Load not bonded as specified
Weight	Exceeds maximum load limits
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application

* 4.5 Method of inspection.

* 4.5.1 Photographic standards. Photographic standards for evaluating single and double needle stitching prepared by AATCC are available for use as a guide for scoring the defect "poor seam appearance (puckered)." Seam appearance better than Standard 3, for both single and double needle stitching, is considered acceptable. One or more seams on the coverall not meeting the rating shall be considered one defect.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or Commercial as specified (see 6.2).

5.1.1 Level A. Each pair of buttoned coveralls shall be folded to approximately 13 by 13 inches in such a manner that the size label is clearly visible to permit ready identification. Ten folded coveralls of one size only shall be neatly stacked in a bundle and cross-tied with cotton tape or twine.

5.1.2 Commercial. The coveralls shall be preserved in accordance with ASTM D 3951.

5.2 Packing. Packing shall be level A, B, or Commercial as specified (see 6.2).

* 5.2.1 Level A packing. Forty coveralls of one size only, preserved as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC-L, grade V2s of PPP-B-636. The inside of each container shall be fitted with a box liner conforming to type CF, class weather-resistant, variety DW, grade V15c of PPP-B-636. Level A unit packs shall be packed flat, two in length, one in width, and two in depth within a shipping container. Inside dimensions of each shipping container shall be approximately 27 inches in length, 14 inches in width, and 10 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:12Z
Check the source to verify that this is the current version before use.

have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to A-A-203. Each container shall be closed in accordance with method III, waterproofed in accordance with method V, and reinforced as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.2. Shipping containers shall be arranged in unit loads in accordance with MIL-L-35078 for the type and class of load specified (see 6.2). When unit loads are strapped, strapping shall be limited to nonmetallic strapping, except for type II, class F loads.

* 5.2.2 Level B packing. Forty coveralls of one size only, preserved as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC-L, type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. The inside of each container shall be fitted with a box liner conforming to type CF, class domestic, variety DW, grade 275 of PPP-B-636. Level A unit packs shall be packed flat, two in length, one in width, and two in depth within a shipping container. Inside dimensions of each shipping container shall be approximately 27 inches in length, 14 inches in width, and 10 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to A-A-203. Each container shall be closed in accordance with method II as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.2.

5.2.2.1 Weather-resistant fiberboard container. When specified (see 6.2), the shipping container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III as specified in the appendix of the container specification except that the inspection shall be in accordance with 4.4.2.

5.2.3 Commercial packing. Coveralls, preserved as specified in 5.1, shall be packed in accordance with ASTM D 3951, as applicable.

* 5.3 Palletization. When specified (see 6.2), coveralls, packed as specified in 5.2.2 and 5.2.3, shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Pallet type shall be type I (4-way entry), type IV, or type V in accordance with MIL-STD-147. Pallets shall be fabricated from wood groups I, II, III, or IV of MIL-STD-731. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L or film bonding means O or P. Pallet pattern shall be in accordance with load pattern number six in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course.

5.4 Marking. In addition to any special marking required by the contract or purchase order, shipping containers, unit packs, and palletized unit loads shall be marked in accordance with MIL-STD-129 or ASTM D 3951, as applicable.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:12Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. The coveralls are intended for wear by male personnel of the Department of Defense.

6.2 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this document.
b. Size(s) required (see 1.2).
c. When first article is required (see 3.2, 4.3, and 6.4).
d. Selection of applicable levels of preservation and packing (see 5.1 and 5.2).
e. Type and class of load specified (see 5.2.1).
f. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).
g. When palletization is required (see 5.3).

6.3 Standard sample. For access to samples, address the contracting activity issuing the invitation for bids.

* 6.4 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of FAR 52.209. The first article should be a preproduction sample. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should include specific instructions in all acquisition instruments regarding arrangements for selection, inspection, and approval of the first article.

6.5 Recycled material. It is encouraged that recycled material be used when practical as long as it meets the requirements of this document (see 3.3).

* 6.6 Subject term (key word) listing.

Coveralls, industrial
Coveralls, polyester
Military coveralls

6.7 Changes from previous issue. The margins of this document are marked with an asterisk (*) to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only, and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content, as written, irrespective of the marginal notations and relationship to the last previous issue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:12Z
Check the source to verify that this is the current version before use.

Custodians:

Army - GL
Navy - NU
Air Force - 99

Review activities:

Army - MD
Air Force - 82
DLA - CT

User activity:

Air Force - 45

Preparing activity:

Army - GL

Project No. 8415-0642

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:12Z
Check the source to verify that this is the current version before use.

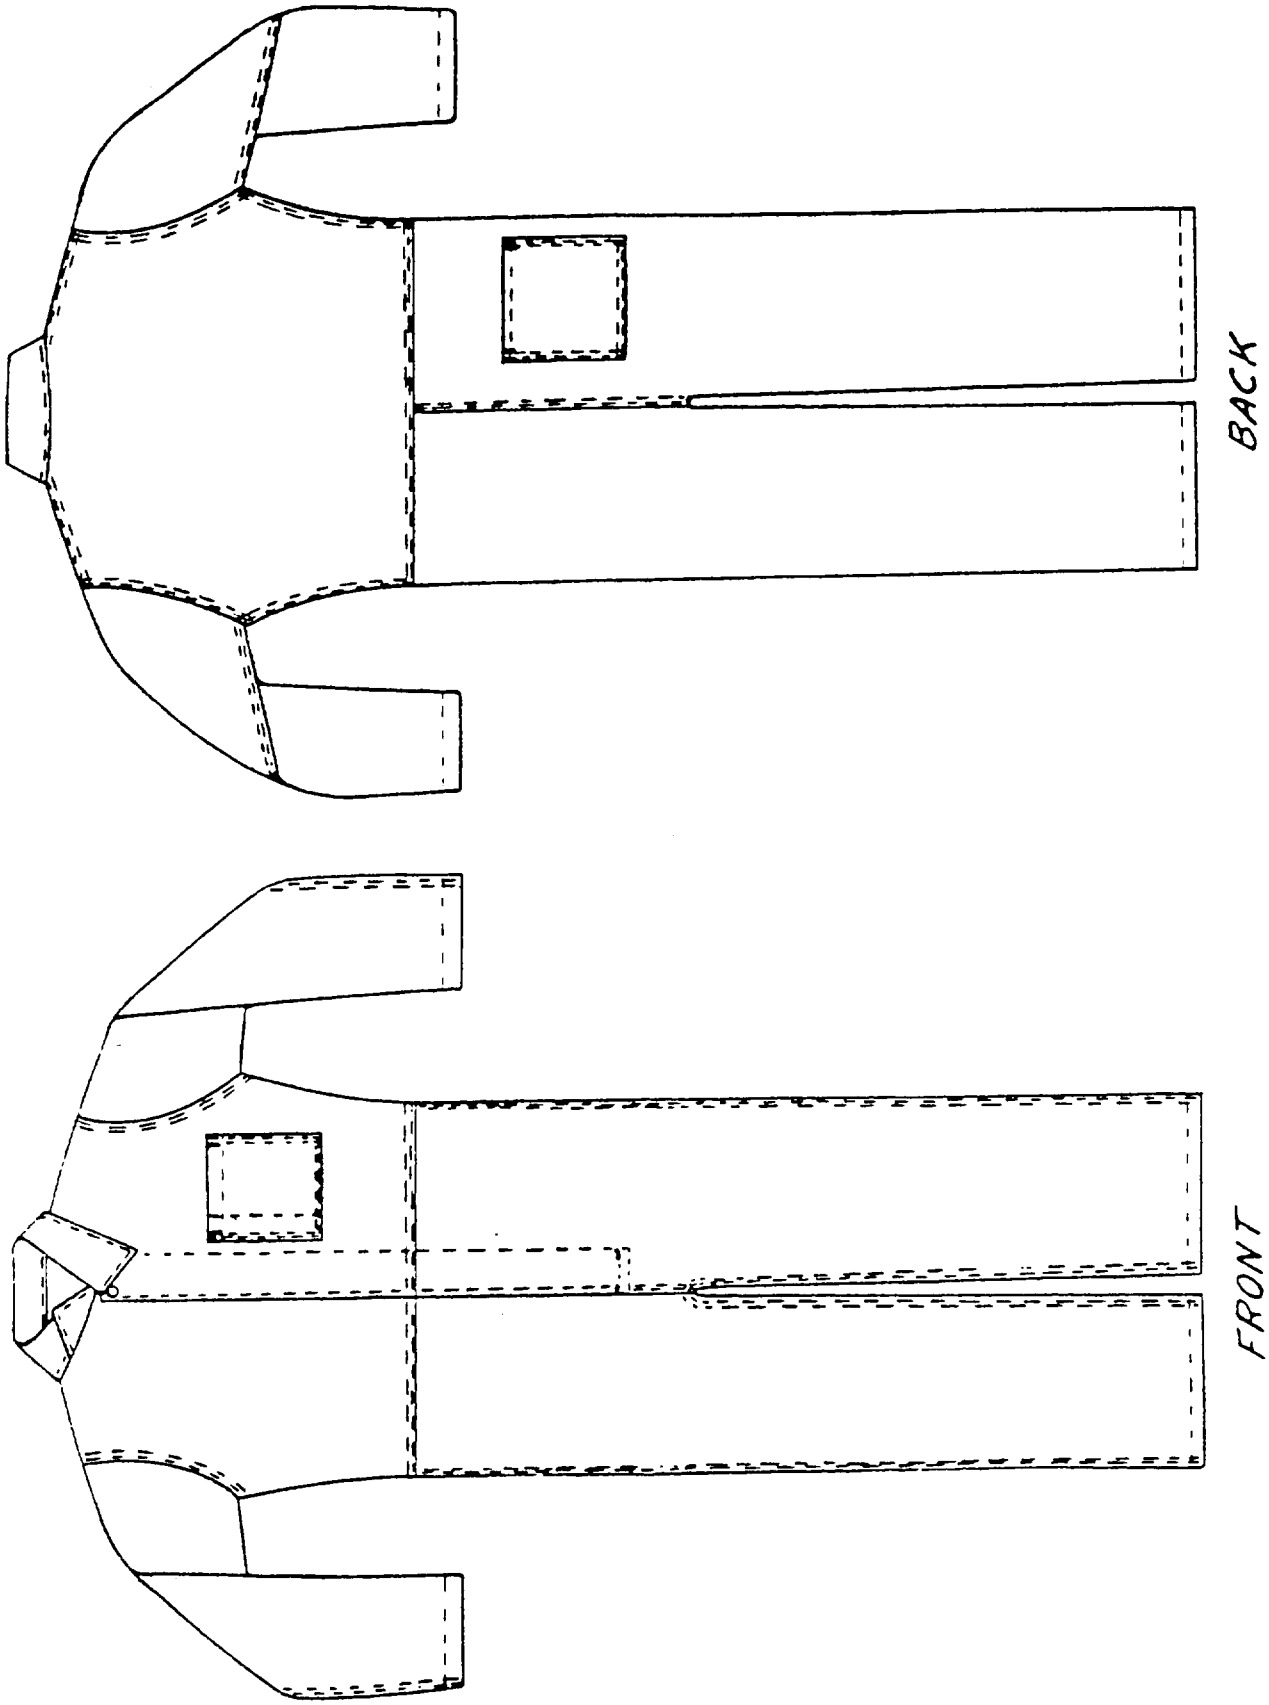


Figure 1. Coveralls, Industrial: Lint-Free

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:12Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-C-43339D	Coveralls, Industrial: Lint-Free

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
	☐ USER
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ MANUFACTURER
	☐ OTHER *(Specify)*: _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

Source: https://assist.dla.mil – Downloaded: 2026-10-21T21:12Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

US Army Natick Research, Development, and
Engineering Center
Natick, MA 01760-5014

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300
STRNC-ES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Natick Research, Development,
and Engineering Center
ATTN: STRNC-ES
Box 14A
Natick, MA 01760-5014

Source: https://assist.dla.mil - Downloaded: 2026-10-21T21:12Z
Check the source to verify that this is the current version before use.