MIL-L-43335E
20 August 1986
SUPERSEDING
MIL-L-43335D
30 November 1982

MILITARY SPECIFICATION

LINER, WET WEATHER PONCHO

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This document covers one type and size of poncho liner.

* 2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Documents. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents shall be those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation.

SPECIFICATIONS

FEDERAL

A-A-203 - Paper, Kraft, Untreated
V-L-61 - Laces, Nylon

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: U.S. Army Natick Research, Development and Engineering Center, Natick, MA 01760-5014 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8405

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:11Z
Check the source to verify that this is the current version before use.

V-T-285 - Thread, Polyester
V-T-295 - Thread, Nylon
DDD-L-20 - Label: for Clothing, Equipment, and Tentage, (General Use)
PPP-B-636 - Boxes, Shipping, Fiberboard

MILITARY

MIL-C-508 - Cloth, Oxford, Nylon, 3 Ounce
MIL-L-35078 - Loads, Unit: Preparation of Semiperishable Subsistence Items; Clothing, Personal Equipment and Equipage; General Specification For
MIL-B-41826 - Batting, Synthetic Fibers: Polyester, (Unquilted and Quilted)

STANDARDS

FEDERAL

FED-STD-751 - Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage
MIL-STD-147 - Palletized Unit Loads
MIL-STD-731 - Quality of Wood Members for Containers and Pallets

(Copies of documents required by contractors in connection with specific acquisition functions should be obtained from the contracting activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted shall be those listed in the issues of the DODISS specified in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS shall be the issues of the nongovernment documents which are current on the date of the solicitation.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D 3951 - Standard Practice for Commercial Packaging

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:11Z
Check the source to verify that this is the current version before use.

(Technical society and technical association documents are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein (except for associated detail specifications, specification sheets, or MS standards), the text of this document shall take precedence. Nothing in this document, however, shall supersede applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

* 3.1 Guide samples. Samples, when furnished, are solely for guidance and information to the contractor (see 6.3). Variation from this document may appear in the sample, in which case this document shall govern.

3.2 Materials (see 6.5).

3.2.1 Batting. The quilted polyester batting shall conform to type VIII, cover C, style a, class 6 of MIL-B-41826 except that the outer covering for batting intended for liners made according to figure 1 may be full width, or may be joined with a single seam (before quilting) as specified in 3.2.1.1 to achieve the full width or length required for liners. The bonded batting intended for liners made according to figure 1 shall be full width and length and butting or lapping is not permitted in either direction.

* 3.2.1.1 Seaming of cover material (for liners made according to figure 1). The nylon rip-stop material shall be joined before quilting, using seam type SSa-1 and stitch type 301 conforming to FED-STD-751. The seam allowance shall be not less than 1/2 inch and the number of stitches shall be 10 to 12 per inch. The thread for seaming of cover material shall be nylon, type I, class A or B, size B of V-T-295. The thread shall be dyed Olive Drab S-1, Cable No. 66022 and shall show fastness to laundering as specified for nylon thread in MIL-B-41826.

3.2.2 Binding. The cloth used for binding all sides of the liner shall be 3 ounce nylon oxford cloth dyed Olive Green 106, conforming to type I, class 2 of MIL-C-508, except that the test for wet-drycleaning shall not apply.

* 3.2.3 Tie laces. The tie laces shall be spun nylon laces 18 $\pm$ 1/2 inches in length, conforming to type I, class 1 of V-L-61, except that the ends shall be fused or impregnated with cellulose acetate or cellulose acetate butyrate. The color of the laces shall be Olive Green 106.

3.2.4 Thread, polyester. The thread for seaming, stitching, and bartacking shall conform to type I or II, class 1, sub-class A, size B of V-T-285. The thread shall be dyed Olive Drab S-1, C.A. 66022, and shall show fastness to weathering equal to or better than the standard sample (see 6.3). When no standard sample is available, the dyed thread shall show "good" fastness to weathering.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:11Z
Check the source to verify that this is the current version before use.

* 3.2.5 Labels. Each liner shall have a combination identification-instruction label conforming to type VI, class 15 of DDD-L-20, except that the color of the label shall be medium green (see 6.4) and the identification label shall also include the National Stock Number. The label shall show fastness to laundering transference and accelerated laundering. The information required for the identification shall be printed below the information specified for the instructions. The content, description, and format of the instruction label shall be as specified below:

LINER, WET WEATHER PONCHO

1. Spread the poncho flat on the ground, making sure that the hood opening is tightly closed and is on the groundside.

2. Place liner on poncho, matching the tie laces on liner with the grommets on the poncho and tie together.

3. If the poncho and liner combination is to be used as a sleeping bag, snap the sides of the poncho together along their entire length and tuck the foot end under to keep the feet from sticking out.

   CAUTION: Do not fasten the snap fasteners together when used as a sleeping bag in combat areas; it cannot be opened quickly.

4. Poncho and liner combination can be used as a wrap-around sleeping bag or as a blanket.

5. The liner, without the poncho, can be used as a blanket when sleeping under cover or in a jungle hammock.

6. Keep liner away from open fire and sparks. DO NOT SMOKE in bed when using liner as a blanket or sleeping bag.

7. When necessary, liner can be hand laundered. Use a mild soap and lukewarm water. Do not boil.

8. Do not dry clean.

3.3 Design. The liners conforming to figure 1 shall consist of non-lapped and non-butted batting with an outer covering that is either full width (non-seamed) or with an outer covering that is seamed before quilting (see 3.2.1). The liners conforming to the alternate constructions of figures 2 and 3 shall consist of two panels of quilted batting seamed through the center on either the lengthwise or widthwise direction. One panel may contain two pieces with the seam constructed the same as the center seam and running perpendicular or parallel to the center seam. The maximum number of liners that may be pieced shall not exceed 5 percent (see 4.2.3). All liners shall be bound on all edges and shall be equipped with eight tie laces for attaching to a poncho. Except for liners made according to figure 1 (see 3.2.1) neither ply of the camouflage material shall be pieced individually.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:11Z
Check the source to verify that this is the current version before use.

3.4 Construction.

3.4.1 Stitches, seams, and stitching. Stitches, seams, and stitching types specified in table I shall conform to FED-STD-751. Whenever two or more methods for seams or stitch types are given for the same part of the operation, any one of them may be used.

3.4.2 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in table I.

3.4.3 Type 301 stitching. Unless otherwise specified, ends of all 301 stitching shall be backstitched or overstitched 1/2 inch minimum except where ends are turned under in a hem or held down by other stitching. Thread tension shall be maintained so that there will be no loose stitching resulting in loose bobbin or top thread, or excessively tight stitching resulting in puckering of the materials sewn. The lock shall be embedded in the materials sewn.

3.4.3.1 Repairs of type 301 stitching. Repairs of type 301 stitching shall be as follows:

a. When thread breaks or bobbin run-outs occur during sewing, the stitching shall be repaired by restarting the stitching a minimum of 1/2 inch back of the end of the stitching. 1/

b. Thread breaks or two or more consecutive skipped or run-offs stitches noted during inspection of the item (in-process or end item) shall be repaired by overstitching. The stitching shall start a minimum of 1/2 inch in back of the defective area, continue over the defective area, and continue a minimum of 1/2 inch beyond the defective area onto the existing stitching. Loose or excessively tight stitching shall be repaired by removing the defective stitching, without damaging the materials, and restitching in the required manner.

1/ When making the above repairs the ends of the stitching are not required to be backstitched.

3.4.3.2 Bartacking. Bartacks shall be 1/2 ± 1/16 inch long and 1/8 ± 1/32 inch wide and shall contain 28 stitches. Bartacks shall be free from thread breaks or loose stitching.

3.4.3.3 Thread ends. All thread ends shall be trimmed to 1/4 inch maximum length.

3.4.4 Manufacturing operations requirements. The poncho liner shall be made in accordance with all operations listed in table I. The contractor is not required to follow the exact sequence of operations.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:11Z
Check the source to verify that this is the current version before use.

TABLE I

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cutting: a. Spread the batting material in uniform widths with one side of the lay even. The plies shall not be stretched or pulled. b. Cut single panel of the quilted batting in accordance with figure 1, or two panels in accordance with figure 2 or 3. c. Cut the nylon oxford for binding edges on the bias 3 ± 1/8 inches wide. The binding may be cut, pre-creased, and placed on rolls for machine attachment.						
2.	Replacement of damaged parts. Care shall be exercised during the spreading, cutting and manufacturing operations to assure that material defects and damages, as classified in 4.2.3, are excluded and replaced with non-defective and properly matched material.						
3.	Join panels (applicable only to figures 2 and 3). The two panels shall be seamed at the center in one direction, with a lapped, double stitched seam, 1 ± 1/16 inch gauge, with the stitching 1/8 to 3/16 inch from the turned edge.	301	LSr-2	10-12	B	B	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:11Z
Check the source to verify that this is the current version before use.

NO.	TABLE I (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
3.	Join panels (applicable only to figures 2 and 3). (cont'd)						
	-or-						
	As an alternate, a modified seam with butted ends may be used. Before the seam is formed, the ends shall be over-edged. The butted ends shall not be more than 1/8 inch away from each other.	301 or 401	LSc-2	8-10	B	B	
		502 or 503	EFd-1	8-10	B	B	
*4.	Bind edges.						
	Bind all edges of liner with bias cut nylon oxford with raw edges of binding turned in and stitch binding 1/8 to 3/16 inch from edges. The binding shall finish 1 ± 1/8 inches wide and the end of binding shall be turned under in the stitching.	301	BSc-1	10-12	B	B	
	Not more than two splices of the binding shall be permitted per liner. Splicing shall be accomplished by stitching across the entire width of the binding 1/8 to 3/16 inch in from the edge. The stitching shall be through both superimposed plies of binding.	301	SSa-1	10-12	B	B	
5.	[illegible] laces.						
	a. Eight tie laces shall be positioned on the binding with one located in each corner and one on each side equidistant from the corners (as shown on figures 1, 2 or 3). The bartacking shall be through the binding.						

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:11Z
Check the source to verify that this is the current version before use.

TABLE I (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
5.	Tie laces. (cont'd)						
	b. Fold tie laces in half and bartack across folded end to liner; spread laces so that inside edges are abutted and bartack across the width of both laces as indicated in figures 1, 2, and 3.	Bartack		28 per bartack	B	B	
6.	Label.						
	The combination identification-instruction label shall be positioned on the top side of the liner in the corner indicated on figure 1, 2, or 3 and stitched on all four sides not more than 3/16 inch from edges of label.	301		8-12	B	B	
*7.	Clean liners.						
	a. Trim end of threads to 1/4 inch maximum length.						
	b. Remove all spots and stains.						
	c. Fold and prepare for packing.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:11Z
Check the source to verify that this is the current version before use.

3.5 Finished measurements. The measurements of the finished liner shall be as specified on figure 1, 2, or 3.

3.6 Workmanship. The finished liner shall conform to the quality of product established by this document. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this document where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

* 4.1.1 Responsibility for compliance. All items must meet all requirements of sections 3 and 5. The inspection set forth in this document shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the document shall not relieve the contractor of the responsibility of assuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling in quality conformance does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to acceptance of defective material.

* 4.1.2 Responsibility for dimensional requirements. Unless otherwise specified in the contract or purchase order, the contractor is responsible for assuring that all specified dimensions have been met. When dimensions cannot be examined on the end item, inspection shall be made at any point, or at all points in the manufacturing process necessary to assure compliance with all dimensional requirements.

4.2 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.

4.2.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified or qualified in this document or applicable purchase document.

4.2.2 In-process inspection. Inspection of sub-assemblies shall be made to ascertain that construction details which cannot be examined in the finished product are in accordance with specified requirements. The Government reserves the right to exclude from consideration for acceptance any material or service for which in-process inspection has indicated nonconformance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:11Z
Check the source to verify that this is the current version before use.

* 4.2.3 End item visual examination. The end item shall be examined for the defects listed in table II. The lot size shall be expressed in units of one liner. The sample unit shall be one liner. The inspection level shall be II and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 1.5 for major defects and 10.0 for total (major and minor combined) defects. During the performance of end item examination, a tally of liners that contain a two-piece panel shall be maintained. At the completion of the examination if the tally exceeds 5 percent of the total liners in the sample, the lot shall be rejected (see 3.3).

NOTE: If 5 percent of the sample should result in a fractional acceptance number such as 6.25 or 15.75, the next highest whole number shall be used as the acceptance number (i.e. 7 or 16).

TABLE II. End item visual defects

Examine	Defect	Classification Major	Minor
Batting (applies to batting as a whole and each ply of camouflage material individually)	Any hole, cut, tear, or smash	X	
	Spot, stain, or streak more than 1 inch in combined dimensions		X
	Abrasion mark, open place, broken or missing yarn, or multiple floats		X
	Style (pattern) not as specified	X	
	Stitching pattern not within established tolerances		X
	Average stitches per inch on 6-inch repeat less than 5 or more than 8		X
	Any area evidencing complete bobbin change		X
	Color not as specified	X	
	Cloth pleated in quilting operation for a distance of more than 1 inch or any pleat more than 1/4-inch deep		X
	Any row of stitching omitted in the quilting	X	
Binding	Any hole, cut, or tear	X	
	Any edge not turned in and caught in stitching	X	
	Color not as specified		X
	Puckered, twisted, or pleated		X
	More than two splices		X
	Splice incorrectly accomplished		X
Tie laces	Ends not properly fused or impregnated		X
	Color not as specified		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:11Z
Check the source to verify that this is the current version before use.

TABLE II. End item visual defects (cont'd)

Examine	Defect	Classification Major	Minor
Components and assembly	Any component omitted or misplaced (unless otherwise classified herein)	X	
	Any operation omitted, added, or not properly performed (unless otherwise classified herein)	X	
	Any mend or patch	X	
	Any burn	X	
	Needle chew	X	
Open seam	On joining seam and binding:		
	- More than 1/8 inch but not more than 1/2 inch		X
	- More than 1/2 inch	X	
	On batting and label:		
	- More than 1/4 inch but not more than 1 inch		X
	- More than 1 inch	X	
NOTE:	A seam shall be classified as open when one or more stitches joining a seam are broken or when two or more continuous skipped or run-off stitches occur. On double stitched seams, a seam shall be considered open when either one or both sides of the seam are open.		
Raw edge	More than 1/2 inch but not more than than 1 inch		X
	More than 1 inch	X	
Gauge of stitching	Irregular, i.e., unevenly gauged or corresponding stitching not uniformly gauged		X
	Not within range or gauge specified		X
Seam and stitch type	Wrong seam or stitch type	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:11Z
Check the source to verify that this is the current version before use.

TABLE II. End item visual defects (cont'd)

Examine	Defect	Classification Major	Classification Minor
Stitch tension	Loose tension resulting in a loosely secured seam or stitching		X
	Tight tension (stitches break when normal strain is applied to seam or stitching)		X
	NOTE: Puckering is evidence of tight tension. When puckering is evident, seam shall be tested by exerting normal pull in lengthwise direction of seam.		
Stitches per inch	One or more stitches less than minimum specified		X
	One stitch more than maximum specified		X
	Two or more stitches more than maximum specified	X	
Stitching ends	Backstitched or overstitched less than 1/2 inch (except when caught in other seams or stitching)		X
Thread breaks, skipped stitches, or run-offs	Overstitched less than 1/2 inch		X
	NOTE: Thread breaks, skipped stitches, or run-offs not overstitched shall be classified as open seams.		
Bartack	Omitted	X	
	Not as specified or not in specified location		X
Workmanship	Thread ends not trimmed throughout		X
Label (marking)	Omitted, incorrect, illegible, misplaced, or size of characters not as specified		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:11Z
Check the source to verify that this is the current version before use.

4.2.4 End item dimensional examination. The finished liner shall be examined for the defects listed below. The lot size shall be expressed in units of one liner. The sample unit shall be one liner. The inspection level shall be S-3 and the AQL, expressed in terms of defects per hundred units, shall be 4.0.

Examine	Defect
Liner	Length less than 91 or more than 92 inches. Width less than 64-1/2 or more than 66-1/2 inches.
Binding	Less than 7/8 or more than 1-1/8 inches wide.
Tie laces	Length less than 17-1/2 or more than 18-1/2 inches.

* 4.2.5 Packaging examination. The fully packaged end item shall be examined for the defects listed below. The lot size shall be expressed in units of shipping containers. The sample unit shall be one shipping container fully packaged. The inspection level shall be S-2 and the AQL, expressed in terms of defects per hundred units, shall be 2.5.

Examine	Defect
Markings (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Materials	Any component missing, damaged, or not as specified.
Workmanship	Inadequate application of components, such as: incomplete sealing or closure of container flap, improper taping, loose strapping, or inadequate stapling. Bulged or distorted container.
Content	Number of bundles per shipping container is more or less than required. Number of liners per bundle is more or less than required.

* 4.2.6 Palletization examination. The fully packaged and palletized end items shall be examined for the defects listed below. The lot size shall be expressed in units of palletized unit loads. The sample unit shall be one palletized unit load, fully packaged. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:11Z
Check the source to verify that this is the current version before use.

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirement.
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded with required straps as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or Commercial as specified (see 6.2).

5.1.1 Level A. Each liner shall be laid out flat and folded in half the length and in half the width. The liner shall again be folded in half the length and in half the width, with the label visible and facing up. Ten liners reversed end for end shall be neatly stacked in a bundle and securely tied with cotton tape or twine approximately 4 inches in from each end.

* 5.1.2 Commercial. Each liner shall be preserved in accordance with ASTM D 3951.

5.2 Packing. Packing shall be level A, B, or Commercial as specified (see 6.2).

* 5.2.1 Level A packing. Ten liners, preserved as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC-L, grade V2s of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class weather-resistant, variety DW, grade V15c of PPP-B-636. Level A unit packs shall be packed flat, with the label facing up, within a shipping container. Inside dimensions of each container shall approximate 23-1/2 inches in length, 15 inches in width, and 18 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to A-A-203. Each shipping container shall be closed in accordance with method III, waterproofed in accordance with method V, and reinforced as specified in the appendix of PPP-B-636, except that the examination shall be in accordance with 4.2.5. Shipping containers shall be arranged in unit loads in accordance with MIL-L-35078 for the type and class of load specified (see 6.2). Strapping shall be limited to nonmetallic strapping, except for type II, class F loads.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:11Z
Check the source to verify that this is the current version before use.

* 5.2.2 Level B packing. Ten liners, preserved as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC-L, type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class domestic, variety DW, grade 275 of PPP-B-636. Level A unit packs shall be packed flat, with the label facing up, within a shipping container. Inside dimensions of each container shall approximate 23-1/2 inches in length, 15 inches in width, and 18 inches in depth. Approximate dimensions are furnished as a guide only. Each shipping container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to A-A-203. Each shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636, except that the examination shall be in accordance with 4.2.5.

* 5.2.2.1 Weather-resistant fiberboard containers. When specified (see 6.2), the shipping container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III as specified in the appendix of PPP-B-636 except that the examination shall be in accordance with 4.2.5.

* 5.2.3 Commercial packing. Liners, preserved as specified in 5.1, shall be packed in accordance with ASTM D 3951.

* 5.3 Palletization. When specified (see 6.2), liners packed as specified in 5.2.2 or 5.2.3 shall be palletized on a 4-way pallet in accordance with load type Ia of MIL-STD-147. Pallet type shall be type I (4-way entry), type IV, or type V in accordance with MIL-STD-147. Pallets shall be fabricated from wood groups I, II, III, or IV of MIL-STD-731. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L or film bonding means O or P. Pallet pattern shall be pattern number 3 of the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course.

* 5.4 Marking. In addition to any special marking required by the contract or purchase order, unit packs, shipping containers, and palletized unit loads shall be marked in accordance with MIL-STD-129 or ASTM D 3951, as applicable. Each unit pack shall have attached a manila colored paper shipping tag for the identification information.

6. NOTES

6.1 Intended use. The liner is intended for use as a sleeping bag when used with a poncho, or as a blanket.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:11Z
Check the source to verify that this is the current version before use.

* 6.2 Ordering data. Acquisition documents should specify the following:

a. Title, number, and date of this document.
b. Selection of applicable levels of preservation and packing (see 5.1 and 5.2).
c. Type and class of load required (see 5.2.1).
d. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).
e. When palletization is required (see 5.3).

6.3 Samples. For access to samples address the contracting office issuing the invitation for bids.

6.4 Medium green shade (see 3.2.5). The following cable numbers of the Standard Color Card of America are furnished for information and guidance as to the intensity of the shade medium green desired:

Cable No. 70034
Cable No. 70130
Cable No. 70131

6.5 Recycled material. It is encouraged that recycled material be used when practical as long as it meets the requirements of the document (see 3.2).

6.6 Subject term (key word) listing.

Liner
Poncho
Clothing, wet weather

6.7 Changes from previous issue. The margins of this document have been marked with an asterisk (*) to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content as written, irrespective of the marginal notations and relationship to the last previous issue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:11Z
Check the source to verify that this is the current version before use.

Custodians:

Army - GL
Navy - NU
Air Force - 99

Review activities:

Army - MD
Navy - YD
Air Force - 82
DLA - CT

User activity:

Navy - MC

Preparing activity:

Army - GL

Project No. 8405-0997

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:11Z
Check the source to verify that this is the current version before use.

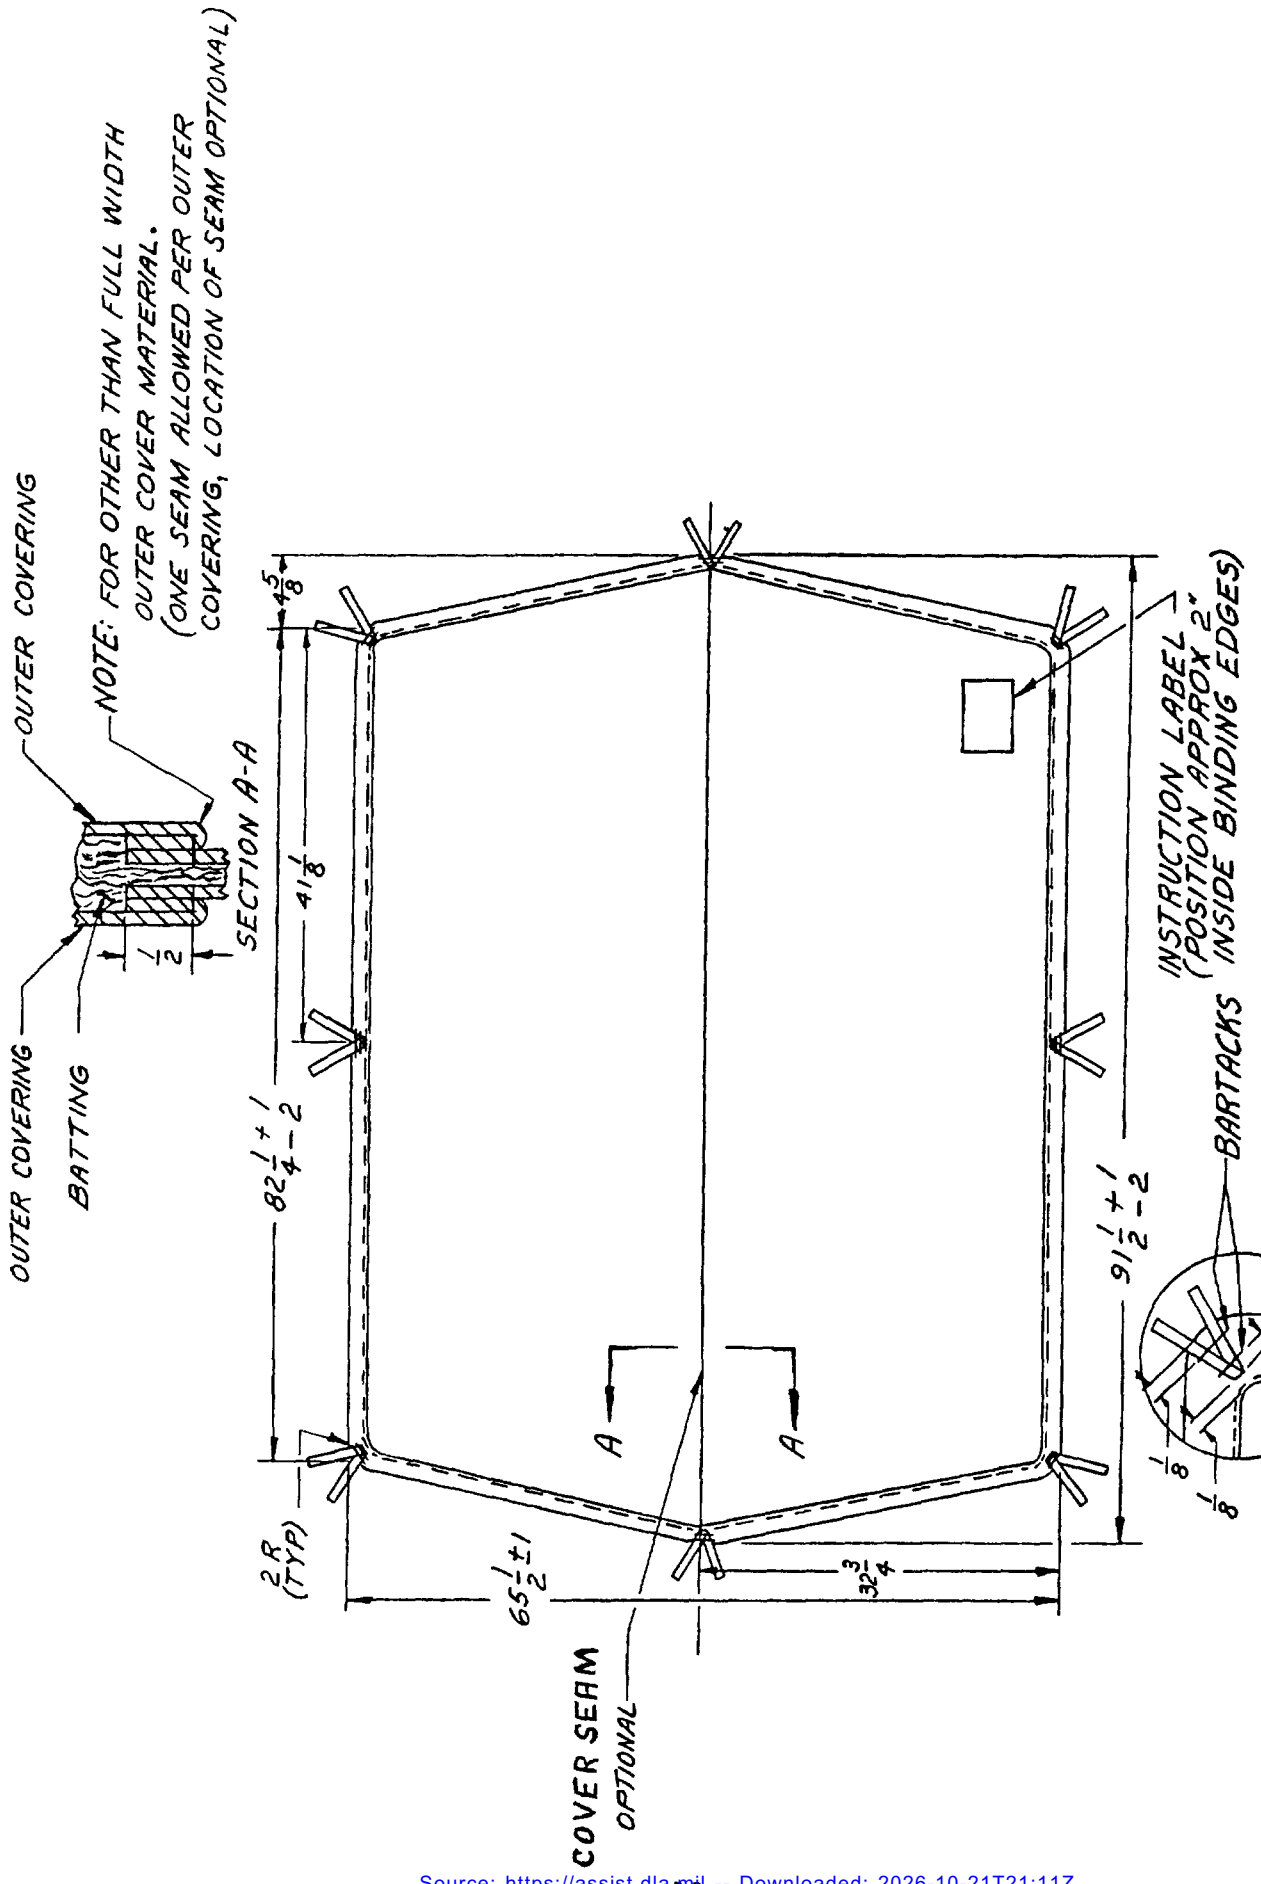


FIGURE 1 - LINER PONCHO

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:11Z
Check the source to verify that this is the current version before use.

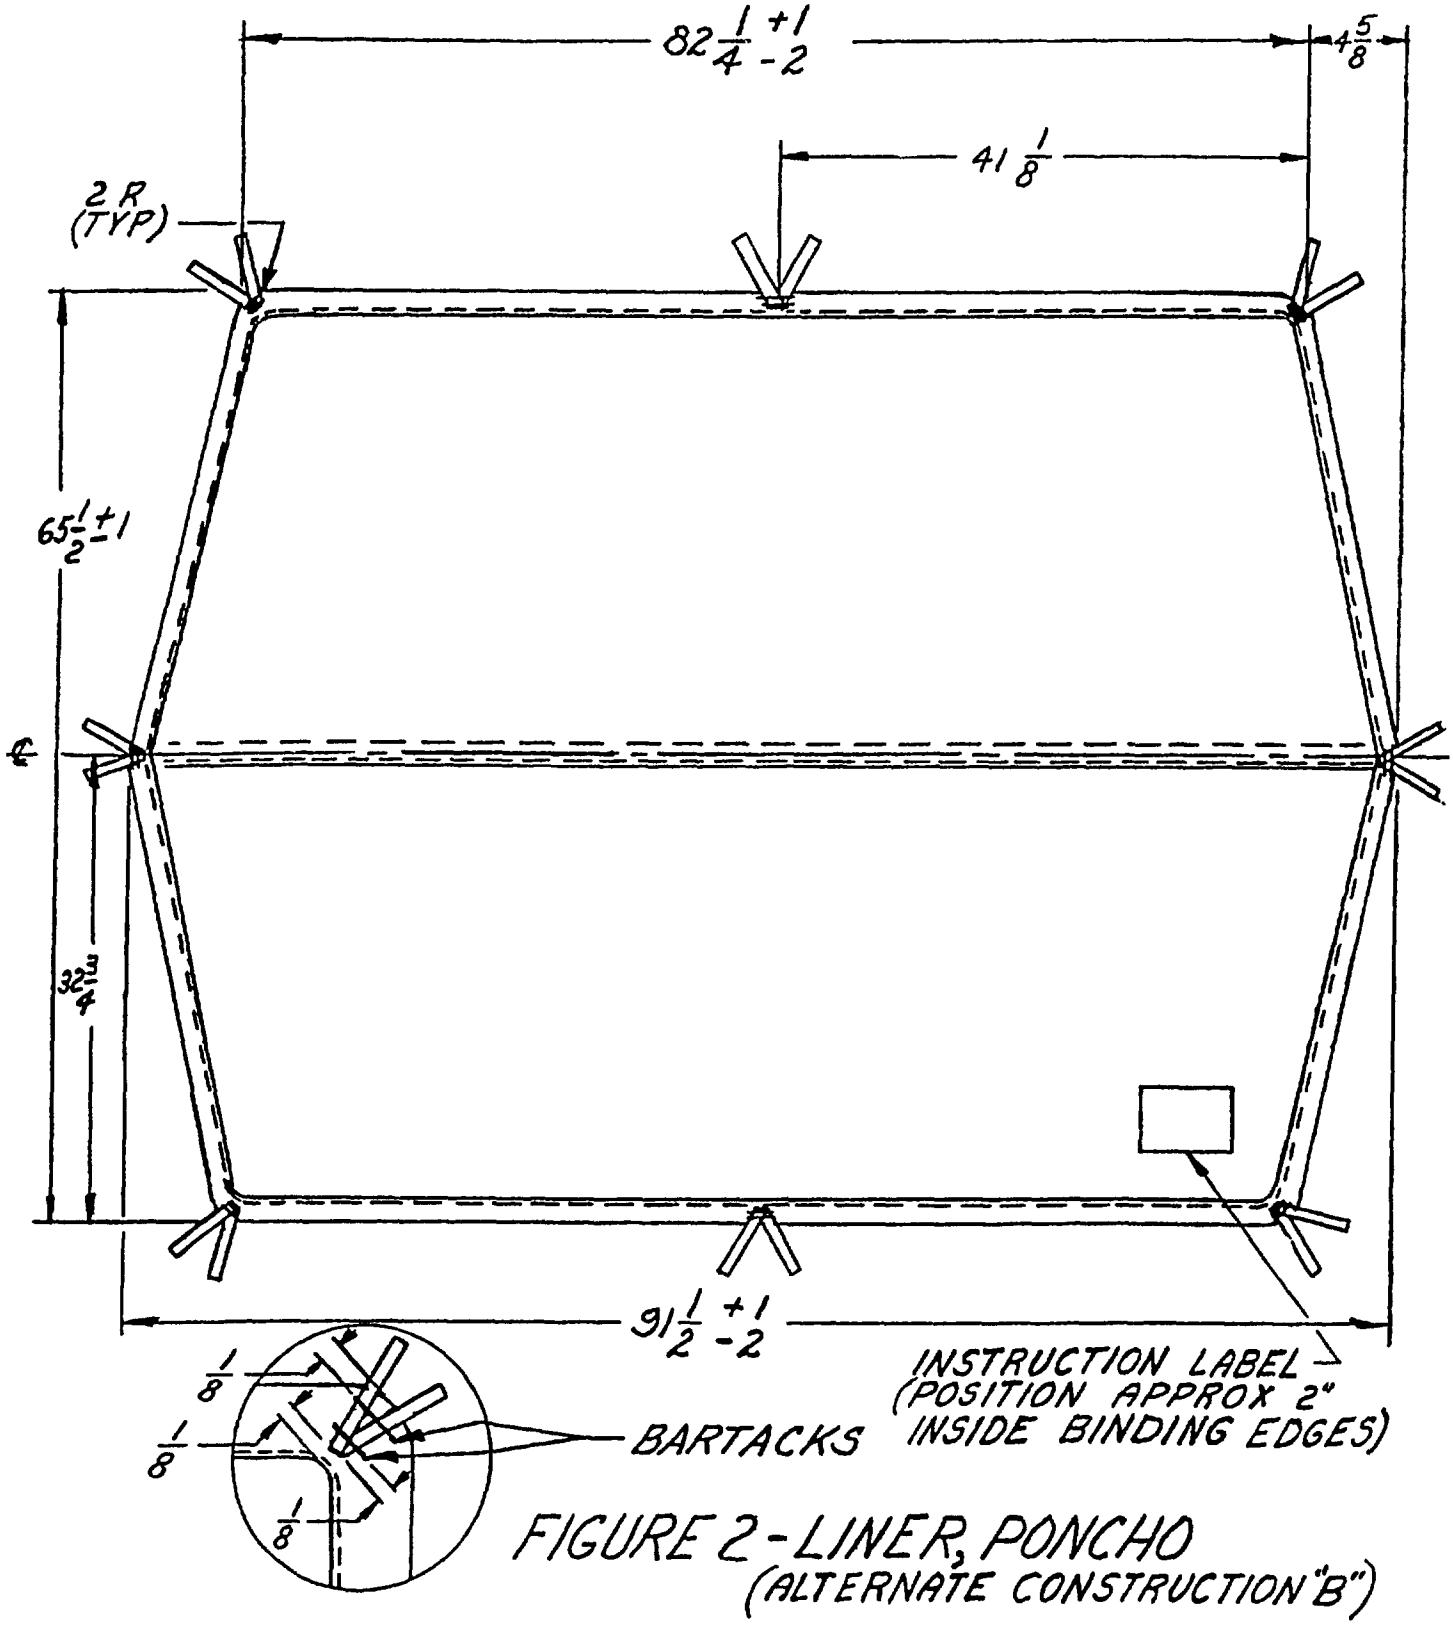


FIGURE 2 - LINER, PONCHO (ALTERNATE CONSTRUCTION "B")

2-1-858 C

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:11Z
Check the source to verify that this is the current version before use.

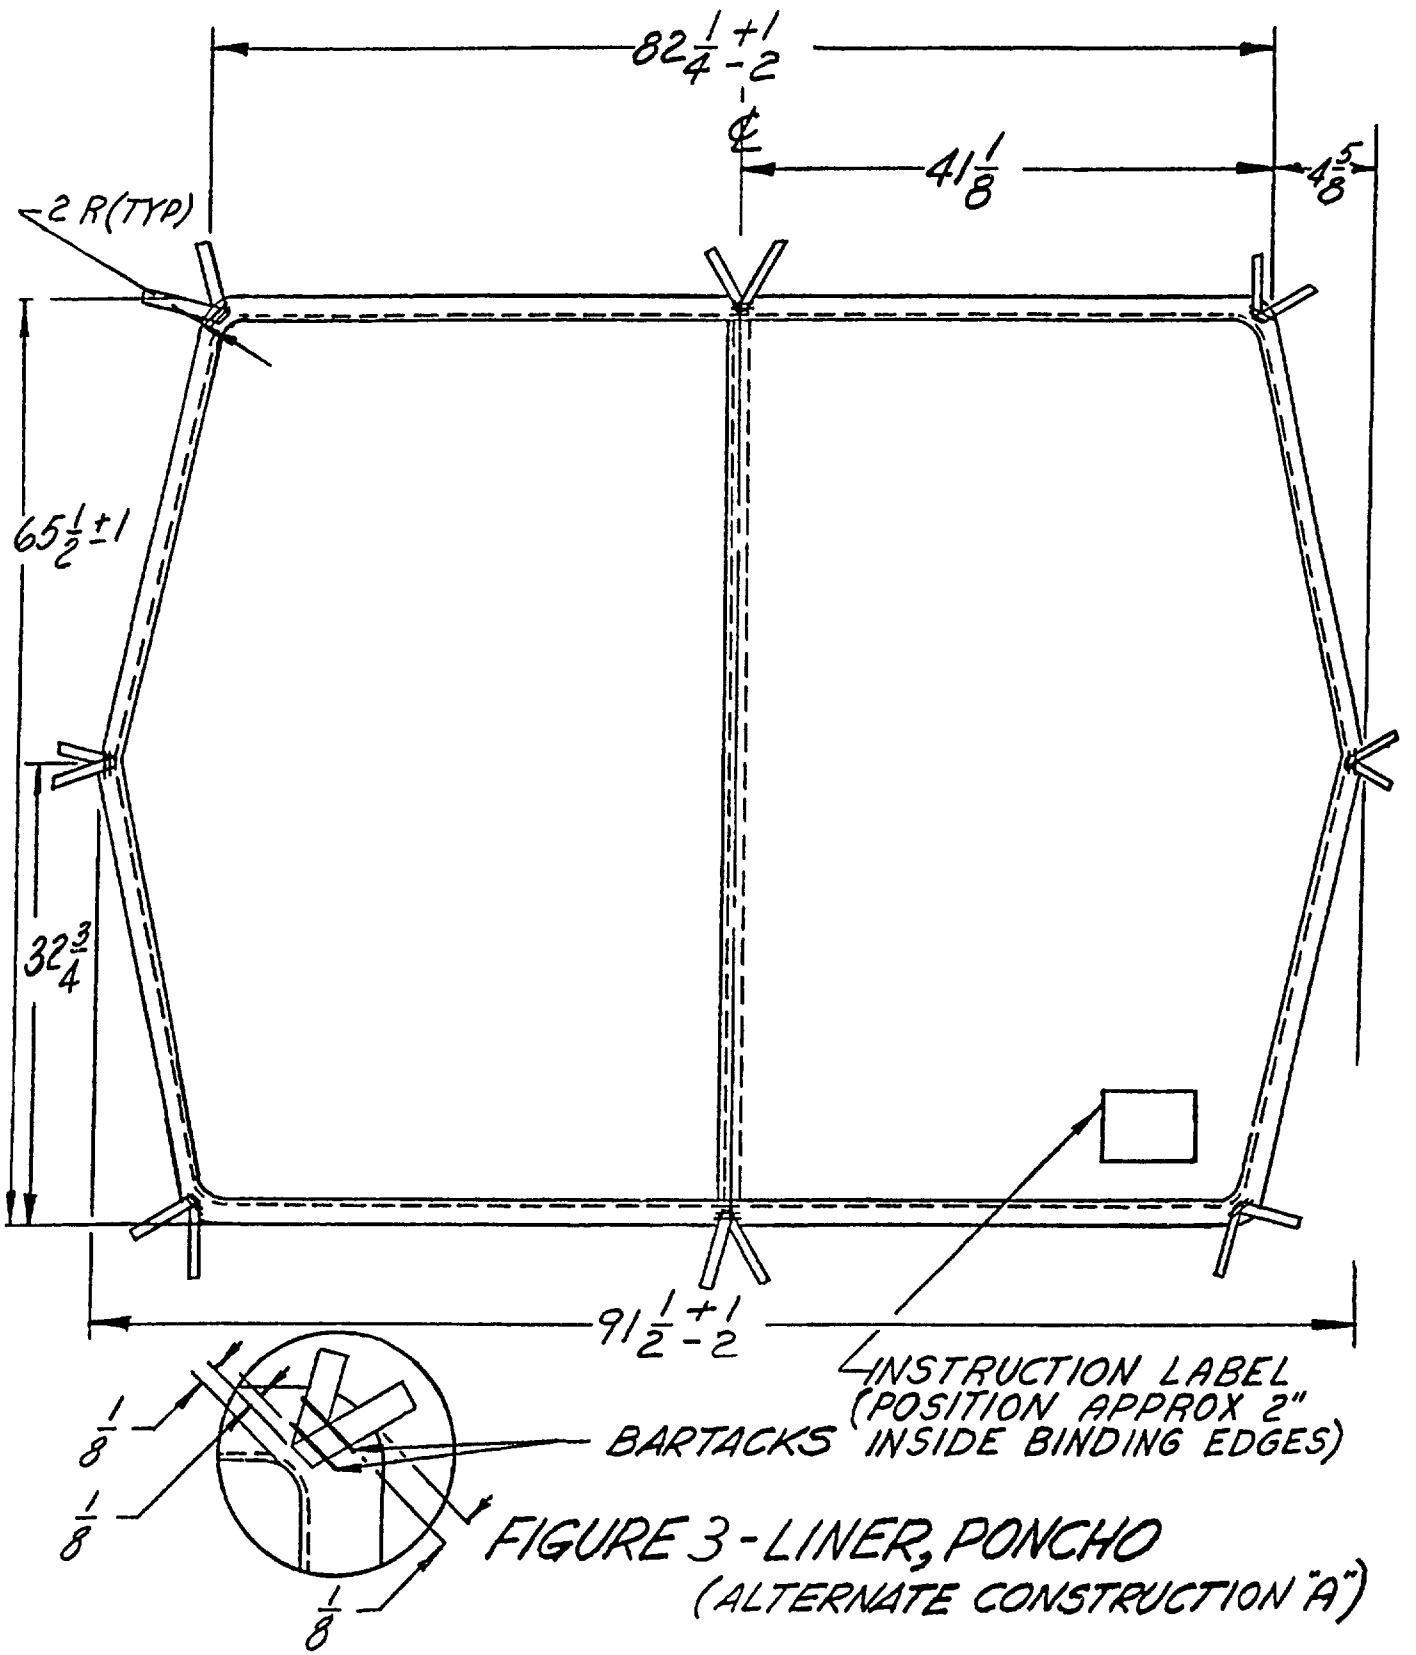


FIGURE 3 - LINER, PONCHO
(ALTERNATE CONSTRUCTION "A")

2-1-8728

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:11Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

U.S. ARMY NATICK RESEARCH, DEVELOPMENT
and ENGINEERING CENTER
ATTN: STRNC-ES
Natick, MA 01760-5014

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
U.S. Army Natick Research, Development
and Engineering Center
ATTN: STRNC-ES
Natick, MA 01760-5014

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:11Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-L-43335E	LINER, WET WEATHER PONCHO

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR
b. ADDRESS *(Street, City, State, ZIP Code)*	☐ USER
	☐ MANUFACTURER
	☐ OTHER *(Specify)* _____

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording

c. Reason/Rationale for Recommendation

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE

NATICK OP-1, Feb 86

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:11Z
Check the source to verify that this is the current version before use.