INCH-POUND

MIL-DTL-43335G
17 April, 2000
SUPERSEDING
MIL-L-43335E
20 August 1986

MILITARY DETAILED SPECIFICATION

LINER, WET WEATHER PONCHO

This document is approved for use by all departments and agencies of the Department of Defense.

1. SCOPE.

1.1 Scope. This specification covers liners for the wet weather ponchos.

1.2 Classification. The liners will be of the following classes.

Class 1 — Woodland camouflage

Class 2 — Desert camouflage (3 color)

2. APPLICABLE DOCUMENTS

2.1 General. The documents listed in this section are specified in sections 4 and 5 of this specification.This section does not include documents cited in other sections of this specification or recommended for additional information or as examples. While every effort has been made to ensure the completeness of this list, document users are cautioned that they must meet all specified requirements documents in section 4 and 5 of this specification, whether or not they are listed.

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be used in improving this document should be addressed to: Defense Supply Center Philadelphia, Clothing and Textiles Directorate, Attn.: DSCP-COCT, 700 Robbins Ave., Philadelphia, Pa. 19111-5092.

AMSC N/A FSC *8405*
DISTRIBUTION STATEMENT A. Approved for public release; Distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:11Z
Check the source to verify that this is the current version before use.

SPECIFICATIONS

FEDERAL

V-L-61	-	Laces, Nylon
V-T-285	-	Thread, Polyester
V-T-295	-	Thread, Nylon
DDD-L-20	-	Label: for Clothing, Equipment, and Tentage, (General Use)

MILITARY

MIL-C-508	Cloth, Oxford, Nylon, 3 Ounce
MIL-B-41826	Batting, Synthetic, Fibers, Polyester, (Unquilted And Quilted)

STANDARDS

MILITARY

MIL-STD-129 Marking for Shipment and Storage

HANDBOOK

DEPARTMENT OF DEFENSE

MIL-HDBK-774 Palletized Unit Loads

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Standardization Documents Order Desk, Building 4D, 700 Robbins Avenue, Philadelphia, PA 19111-5094.)

2.2 Non-Government publications. The following documents form a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DOD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D-6193 – Stitches, Seams, and Stitching

(Application for copies should be addressed to the American Society for Testing and Materials, 100 Harbor Drive, West Conshohocken, PA 19428.)

AMERICAN NATIONAL STANDARDS INSTITUTE (ANSI)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:11Z
Check the source to verify that this is the current version before use.

ASNI/ASQC Z1.4 - Sampling Procedures and Tables for Inspection by Attributes

(Copies may be obtained from the American Society for Quality Control, P.O. Box 3005, 611 E. Wisconsin Avenue, Milwaukee, WI 53201-4606.)

(Non-Government standards and other publications are normally available from the organizations that prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), a sample shall be subjected to first article inspection in accordance with 4.3.

3.2 Guide samples. Samples, when furnished, are solely for guidance and information to the contractor (see 6.4). Variation from this specification may appear in the sample, in which case this specification shall govern.

3.3 Materials. It is encouraged that recycled material be used when practical as long as it meets the requirements of this specification.

3.3.1 Batting. The quilted polyester batting shall conform to type VIII, cover C (for class 1) or cover E (for class 2), style a, class 6 of MIL-B-41826 except that the outer covering for batting intended for liners made according to figure 1 may be full width, or may be joined with a single seam (before quilting) as specified in 3.3.1.1 to achieve the full width or length required for liners. The bonded batting intended for liners made according to figure 1 shall be full width and length and butting or lapping is not permitted in either direction.

3.3.1.1 Seaming of cover material (for liners made according to figure 1). The nylon rip-stop material shall be joined before quilting, using seam type Ssa-l and stitch type 301 conforming to ASTM-D-6193. The seam allowance shall be not less than 1/2 inch and the number of stitches shall be 10 to 12 per inch. The thread for seaming of cover material shall be nylon, type *I.* class A or B, size B of V-T-295. The thread shall be dyed Camouflage Green 483 (for class 1) or Khaki P-1, C.A. 66019 (for class 2) and shall show fastness to laundering as specified for nylon thread in MIL-B-41826.

3.3.2 Binding. The cloth used for binding all sides of the liner shall be 3 ounce nylon oxford cloth dyed a good match to the ground shade of the base material, conforming to type I, class 2 of MIL-C-508, except that the test for wet-drycleaning, shall not apply.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:11Z
Check the source to verify that this is the current version before use.

3.3.3 Tie laces. The tie laces shall be spun nylon laces 18 ±1/2 inches in length, conforming to type 1, class 1 of V-L-61, except that the ends shall be fused or impregnated with cellulose acetate or cellulose acetate butyrate. The color of the laces shall be a good match to the ground shade of the base material.

3.3.4 Thread, polyester. The thread for seaming. stitching, and bartacking shall conform to type I or II, class 1, sub-class A, size B of V-T-285. The thread shall be a good match to the ground shade of the base material. When no standard sample is available, the dyed thread shall show "good" fastness to weathering.

3.3.5 Labels. Each liner shall have a combination identification-instruction label conforming to type VI, class 15 of DDD-L-20, except that the color of the label shall be medium green (for class 1) or Khaki 70188 (for class 2) and the identification label shall also include the National Stock Number.

The label shall show fastness to laundering transference and accelerated laundering.
The information required for the identification shall be printed below the information specified for the instructions. The content, description, and format of the instruction label shall be as specified below:

LINER, WET WEATHER PONCHO

1. Spread the poncho flat on the ground, making sure that the hood opening is tightly closed and is on the groundside.

2. Place liner on poncho, matching the tie laces on liner with the grommets on the poncho and tie together.

3. If the poncho and liner combination is to be used as a sleeping bag, snap the sides of the poncho together along their entire length and tuck the foot end under to keep the feet from sticking out.

CAUTION: Do not fasten the snap fasteners together when used as a sleeping bag in combat areas; it cannot be opened quickly.

4. Poncho and liner combination can be used as a wrap-around sleeping bag or as a blanket.

5. The liner, without the poncho, can be used as a blanket when sleeping under cover or in a jungle hammock.

6. Keep liner away from open fire and sparks. **DO NOT SMOKE** in bed when using liner as a blanket or sleeping bag.
7. When necessary, liner can be hand laundered. Use a mild soap and lukewarm water. Do not boil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:11Z
Check the source to verify that this is the current version before use.

8. Do not dry clean.

3.3.5.1 Bar/code label tag. Each item shall be individually bar coded with a type VIII, class 17, label/tag of DDD-L-20. The label/tag shall be located so that it is completely visible on the item when it is folded or packaged as specified and shall cause no damage to the item.

3.4 Design. The liners conforming to figure 1 shall consist of non-lapped and non-butted batting with an outer covering that is either full width (non-seamed) or with an outer covering that is seamed before quilting (see 3.3.1). The liners conforming to the alternate constructions of figures 2 and 3 shall consist of two panels of quilted batting seamed through the center on either the lengthwise or widthwise direction. One panel may contain two pieces with the seam constructed the same as the center seam and running perpendicular or parallel to the center seam. The maximum number of liners that may be pieced shall not exceed 5 percent (see 4.4.3). All liners shall be bound on all edges and shall be equipped with eight tie laces for attaching to a poncho. Except for liners made according to figure 1 (see 3.3.1) neither ply of the camouflage material shall be pieced individually.

3.5 Construction. The construction shall conform in all respects to requirements specified in table II and herein.

3.5.1 Stitches seams and stitching. All stitches, seams and stitching shall conform to ASTM-D-6193. The type of seam, stitching and stitches per inch shall be as specified in table II. Seam allowance, shall be maintained with seams sewn so that no raw edges, run-offs, pleats, puckers or open seams occur. When two or more methods of seams or stitches are given for the same operation, any one may be used. The height of overedge stitching shall be 3/16 to 1/4 inch. Unless otherwise specified, edge stitching shall be 1/4 to 5/16 inches from edge.

3.5.1.1 Type 301 stitching. Ends of all stitching shall be backstitched or overstitched not less than 1 inch except where ends are turned under or caught in other seams or stitching. Thread tensions shall be maintained so that there will be no loose stitching resulting in loose bobbin or top thread or excessively tight stitching resulting in puckering of the materials sewn. The lock shall be embedded in the materials sewn.

3.5.1.1.1 Repairs of type 301. stitching. Repairs of type 301 stitching shall be as follows:

a. When thread breaks or bobbin run-outs occur during stitching, the stitching shall be repaired by restarting the stitching a minimum of 1 inch back of the end of the stitching. 1/

b. Thread breaks or two or more consecutive skipped or run-off stitches noted during end item inspection shall be repaired by overstitching. The stitching shall start a minimum of 1 inch in back of the defective area, continue a minimum of 1 inch beyond the defective area onto the existing stitching.

Loose or excessively tight stitching shall be repaired by removing the defective stitching without damaging the materials and restitching in the required manner. 1/

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:11Z
Check the source to verify that this is the current version before use.

1/ When making the above repairs, the ends of the stitching are not required to be backstitched.

Type 502, 503 and 401 stitching. Thread tension shall be maintained so that there will be no loose or excessively tight stitching. All repairs shall be in accordance with 3.5.1.1.l, a and b.

3.5.1.3 Bartacking. Bartacks shall be 1/2 ± 1/16 inch long and 1/8 ± 1/32 inch wide and shall contain 28 stitches. Bartacks shall be free from thread breaks or loose stitching.

3.5.2 Manufacturing operations requirements. The poncho liner shall be made in accordance with all operations listed in table I. The contractor is not required to follow the exact sequence of operations.

TABLE I

No.	MANUFACTURING OPERATION REQUIREMENTS	STITCH TYPE	SEAM AND STITCH TYPE	STITCHES PER INCH	NEEDLE	THREAD BOBBIN/ LOOPER
1.	Cutting: a. Spread the batting material in uniform widths with one side of the lay even. The piles shall not be stretched or pulled. b. Cut single panel of the quilted batting in Accordance with figure 1, or two panels in accordance with figure 2 or 3. c. Cut the nylon oxford for binding edges on the bias 3 ± 1/8 inches wide. The binding may be cut, precreased, and placed on rolls for machine attachment.					

No.	MANUFACTURING OPERATION REQUIREMENTS	STITCH TYPE	SEAM AND STITCH	STITCHES PER INCH	NEEDLE	THREAD BOBBIN/ LOOPER

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:11Z
Check the source to verify that this is the current version before use.

			TYPE			
2.	Replacement of damaged parts. Care shall be exercised during the spreading, cutting and manufacturing operations to assure that material defects and damages, are classified in 4.4.3, are excluded and replaced with non-defective and properly matched material.					
3.	Join panels (applicable only to figures 2 and 3).					
	The two panels shall be seamed at the center in one direction, with a lapped, double stitched seam, 1 ± 1/16 inch gauge, with the stitching 1/8 to 3/16 inch from the turned edge.	301	301	10-12	B	B
	- or –					
	As an alternate, a modified seam with butted ends may be used. Before the seam is formed, the ends shall be over-edged. The butted ends shall not be more than 1/8 inch away from each other.	301 or 401 502 or 503	LSc-2 LSc-2 EFd-1 EFd-1	8-10 8-10 8-10 8-10	B B B B	B B B B
4	Bind edges:					
	a. Bind all edges of liner with bias cut nylon Oxford. Turn the raw edges of binding in and stitch binding 1/16 to 3/16 inch from edges through all superimposed plies of binding.	301	BSc-1	10-12	B	B

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:11Z
Check the source to verify that this is the current version before use.

No.	MANUFACTURING OPERATION REQUIREMENTS	STITCH TYPE	SEAM AND STITCH TYPE	STITCHES PER INCH	NEEDLE	THREAD BOBBIN/ LOOPER
4.	Bind edges: The binding shall finish 1 ± 1/8 inches wide and the end of binding shall turned under in the stitching.					
	b. Splicing shall be accomplished by stitching aross the entire width of the binding 1/16 to 3/16 inches from edge and shall be through all superimposed plies of binding. Not more than two plies of the binding shall be permitted per liner. Note: The beginning and end of the binding shall be considered one splice and shall be stitched across the entire width of the binding.	301 OR 1/2 INCH BARTACK	LSd-1	10-12 or 28 per tack	B	B
5.	Tie laces. a. Eight tie laces shall be positioned on the Binding with one located in each corner and one on each side equidistant from the corners and 1/8 ± 1/16 inch from the inside edge of the binding (as shown on figures 1, 2, or 3). The bartack shall be through the binding.					
	b. Fold tie laces in half and bartack across folded end to liner: spread laces so that inside edges are abutted and bartack across the width of both laces and bartack laces as indicated in figures 1, 2 and 3.	Bartack		28 per bartack	B	B

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:11Z
Check the source to verify that this is the current version before use.

No.	MANUFACTURING OPERATION REQUIREMENTS	STITCH TYPE	SEAM AND STITCH TYPE	STITCHES PER INCH	NEEDLE	THREAD BOBBIN/ LOOPER
6. 7.	Label. The combination identification-instruction label shall be positioned on the top side of the liner in the corner indicated on figure 1, 2, or 3 and stitched on all four sides not more than 3/16 inch from edges of label. Clean liners. a. Trim all thread ends to ¼ inch maximum length. b. Remove all spots and stains. c. Fold and prepare for packing.	301		8-12	B	B

3.6 Finished Measurements. The measurements of the finished liner shall be as specified on figure 1, 2, or 3.

3.7 Workmanship. The finished liner shall conform to the quality of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:11Z
Check the source to verify that this is the current version before use.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 4. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirement in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.1.2 Responsibilily for dimensional requirements. Unless otherwise specified in the contract or purchase order, the contractor is responsible for ensuring that all specified dimensions have been met. When dimensions cannot be examined on the end item, inspection shall be made at any point, or at all points in the manufacturing
process necessary to ensure compliance with all dimensional requirements.

4.2 Classification of inspections. The inspection requirements specified herein are classified as fol1ows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).

4.3 First article inspection. When a first article is required (see 3.2 and 6.2), it shall be examined for the defects specified in 4.4.3 and 4.4.4.

4.4 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with ANSI/Z1.4

4.4.1. Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced documents unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

4 4.2 In-process inspection. Inspection of subassemblies shall be made to ascertain that construction details which cannot be examined in the finished product are in accordance with specified requirements. The Government reserves the right to exclude from consideration for acceptance any material or service for which in-process inspection has indicated nonconformance.

4.4.3 End item visual examination. The end stems shall be examined for the defects listed in table II. The lot size shall be expressed in units of one liner. The sample unit shall be one liner. The inspection level shall be II and the acceptable quality level (AQL). expressed in terms of defects per hundred units, shall be 1.5 for major defects and 10.0 for total (major and minor combined) defects.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:11Z
Check the source to verify that this is the current version before use.

During the performance of end item examination, a tally of liners that contain a two-piece panel shall be maintained. At the completion of the examination if the tally exceeds 5 percent of the total liners in the sample, the lot shall be rejected (see 3.4).

NOTE: If *5* percent of the sample should result in a fractional acceptance number such as 6.25 or 15.75. the next highest whole number shall be used as the acceptance number (i.e. 7 or 16).

TABLE II. **End item visual defects**

Examine	Defect	Classification Major	Minor
Batting (applies to batting as a whole and each ply of camouflage material individually	Any hole, cut, tear, or smash	101	
	Spot, stain, or streak more than 1 inch in combined dimensions		201
	Abrasion mark, open place, broken or missing yarn, or multiple floats		202
	Style (pattern) not as specified	102	
	Stitching pattern not within established tolerances		203
	Average stitches per inch on 6-inch repeat less than 5 or more than 8		204
	Any area evidencing complete bobbin change		205
	Color not as specified	103	
	Cloth pleated in quilting operation for a distance of more than 1 inch or any pleat more than ¼ inch deep		206
	Any row of stitching omitted in the quilting	104	
Binding	Any hole, cut, or tear	105	
	Any edge not turned in and caught in stitching	106	
	Color not as specified		207
	Puckered, twisted, or pleated		208
	More than two splices (The start/finish point shall be considered as one splice)		209
	Splice incorrectly accomplished		210
Tie laces	Ends not properly fused or impregnated		211
	Color not as specified		212

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:11Z
Check the source to verify that this is the current version before use.

TABLE II. End item visual defects

Examine	Defect	Classification Major	Minor
Components and Assembly	Any component omitted or misplaced (unless otherwise classified herein)	107	
	Any operation omitted, added, or not properly performed (unless otherwise classified herein)	108	
	Any mend or patch	109	
	Any burn	110	
	Needle chew	111	
Open seam	On joining seam and binding:		
	- More than 1/8 inch but not more than than 1/2 inch		213
	- More than 1/2 inch	112	
	On batting and label:		
	- More than 1/4 inch but not more than 1 inch		214
	- More than 1 inch	113	
NOTE:	A seam shall be classified as open when when one or more stitches joining a seam are broken or when two or more continuous skipped or run-off stitches occur. On double stitched seams, a seam shall be considered open when either one or both sides of the seam are open.		
Raw edge	More than1/2 inch but not more than 1 inch		215
	More than 1 inch	114	
Gauge of Stitching	Irregular, i.e, unevenly gauged or corresponding stitching not uniformly gauged		216
	Not within range or gauge specified		217
Seam and stitch Type	Wrong seam or stitch type	115	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:11Z
Check the source to verify that this is the current version before use.

TABLE II. End item visual defects

Examine	Defect	Classification Major	Minor
Stitch tension	Loose tension resulting in a loosely secured seam or stitching		218
	Tight tension (stitches break when normal strain is applied to seam or stitching)		219
NOTE:	Puckering is evidence of tight tension. When puckering is evident, seam shall be tested by exerting normal pull in lengthwise direction of seam		
Stitches per inch	One or more stitches less than minimum specified		220
	One stitch more than maximum specified		221
	Two or more stitches more than maximum specified	116	
Stitching ends	Backstitched or overstitched less than 1/2 inch (except when caught in other seams or stitching)		222
Thread breaks, skipped stitches, or run-offs	Overstitched less than 1/2 inch		223
NOTE:	Thread breaks, skipped stitches, or run-offs not overstitched shall be classified as open seams.		
Bartack	Omitted	117	
	Not as specified or not in specified Location		224
Workmanship	Thread ends not trimmed throughout		225
Label (marking)	Omitted, incorrect, illegible, misplaced, or size of characters not as specified		226

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:11Z
Check the source to verify that this is the current version before use.

4.4.4 End item dimensional examination. The end items shall be examined for the defects listed below. The lot size shall be expressed in units of one liner. The sample size shall be one liner. The inspection level shall be S-3 and the AQL, expressed in terms of defects per hundred units, shall be 1.5.

Examine	Defect
Liner	Length less than 91 or more than 92 inches. Width less than 64 1/2 or more than 1 1/8 inches wide.
Binding	Less than 7/8 or more than 1/8 inches wide.
Tie Laces	Length less than 17 1/2 or more than 18 1/2 inches.

4.4.5 Packaging Examination. The fully packaged end items shall be examined for the defects listed below. The lot size shall be expressed in units of shipping containers. The sample unit shall be one shipping container fully packaged. The inspection level shall be S-2 and the AQL, expressed in terms of defects per hundred units shall be 1.5.

Examine	Defects
Markings (exterior and interior)	Omitted; incorrect; illegible; of improper size, location sequence, or method of application.
Materials	Any component missing, damaged, or not as specified.
Workmanship	Inadequate application of components, such as: incomplete sealing or closure of container flap, improper taping, loose strapping, or inadequate stapling. Bulged or distorted container.
Content	Number of bundles per shipping container is more or less than required. Number of liners per bundle is more or less than required.

5. **Packaging**.

5.1 Preservation. Each liner shall be laid out flat and folded in half the length and in half the width. The liner shall again be folded in half the length and in half the width, with the label visible and facing up. Ten liners reversed end for end shall be neatly stacked in a bundle and securely tied.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:11Z
Check the source to verify that this is the current version before use.

5.2 Packing. Ten liners, preserved as specified, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC-L, type CF (variety SW), class domestic, grade 275. The inside of each shipping container shall be fitted with a box liner conforming to type CF, Class domestic, variety DW, grade 275. Each shipping container shall have the contents completely covered on the top and bottom with a sheet of 30 pound minimum basis weight kraft paper.

5.3 Palletization. Liners packed as specified shall be palletized on a 4-way entry, winged-type pallet in accordance with load type 1a of MIL-HDBK-774. Palletized load shall be securely bonded in accordance with good commercial practice.

5.4 Marking. In addition to any special marking required by the contract or order, unit packs, shipping containers, and palletized unit loads shall be marked in accordance with MIL-STD-129. Each unit pack shall have attached a manila colored paper shipping tag for the identification information.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but it is not mandatory.)

6.1 Intended use. The liner is intended for use as a sleeping bag when used with a poncho or as a blanket.

6.2 First Article. When a first article is required, it will be inspected and approved under the appropriate provisions of FAR 52.209. The first article will be a pre-production sample. The contracting officer will specify the appropriate type of first article and the number of units to be furnished. The contracting officer should also include specific instructions in acquisition documents regarding arrangements for selection, inspection, and approval of the first article.

6.3 Samples. For access to samples, address the contracting office issuing the invitation for bids or request for proposal.

Custodian:

ARMY – GL

Preparing Activity

DLA - CT

(Project 8405 – 0349)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:11Z
Check the source to verify that this is the current version before use.

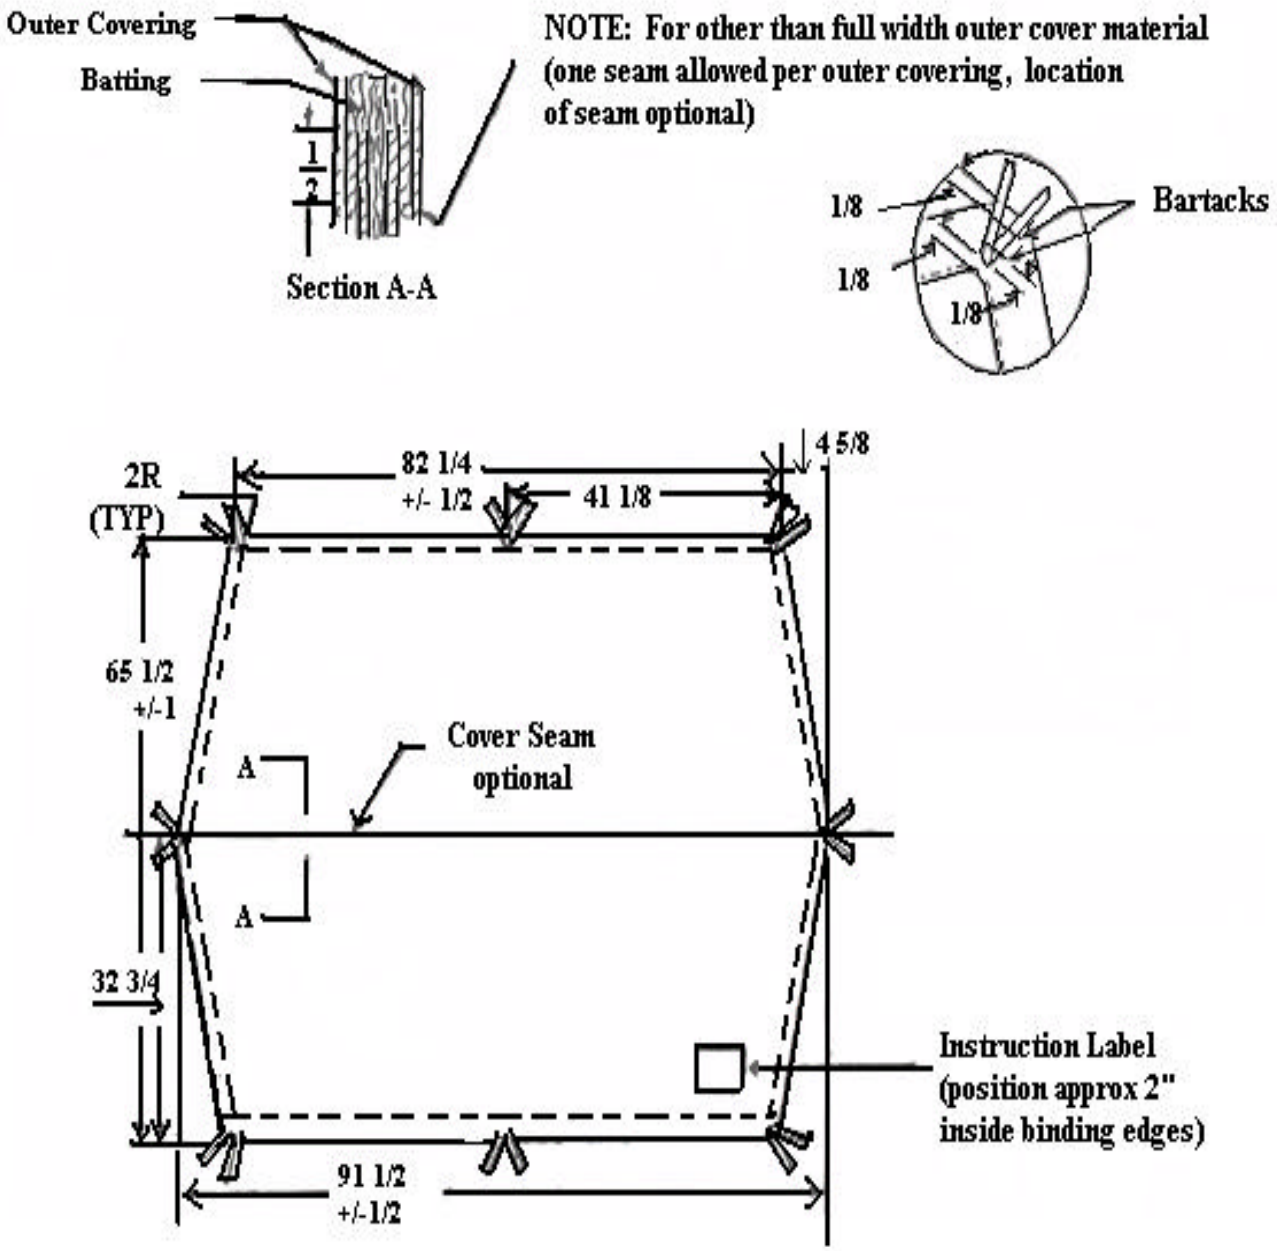


FIGURE 1 – LINER, PONCHO

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:11Z
Check the source to verify that this is the current version before use.

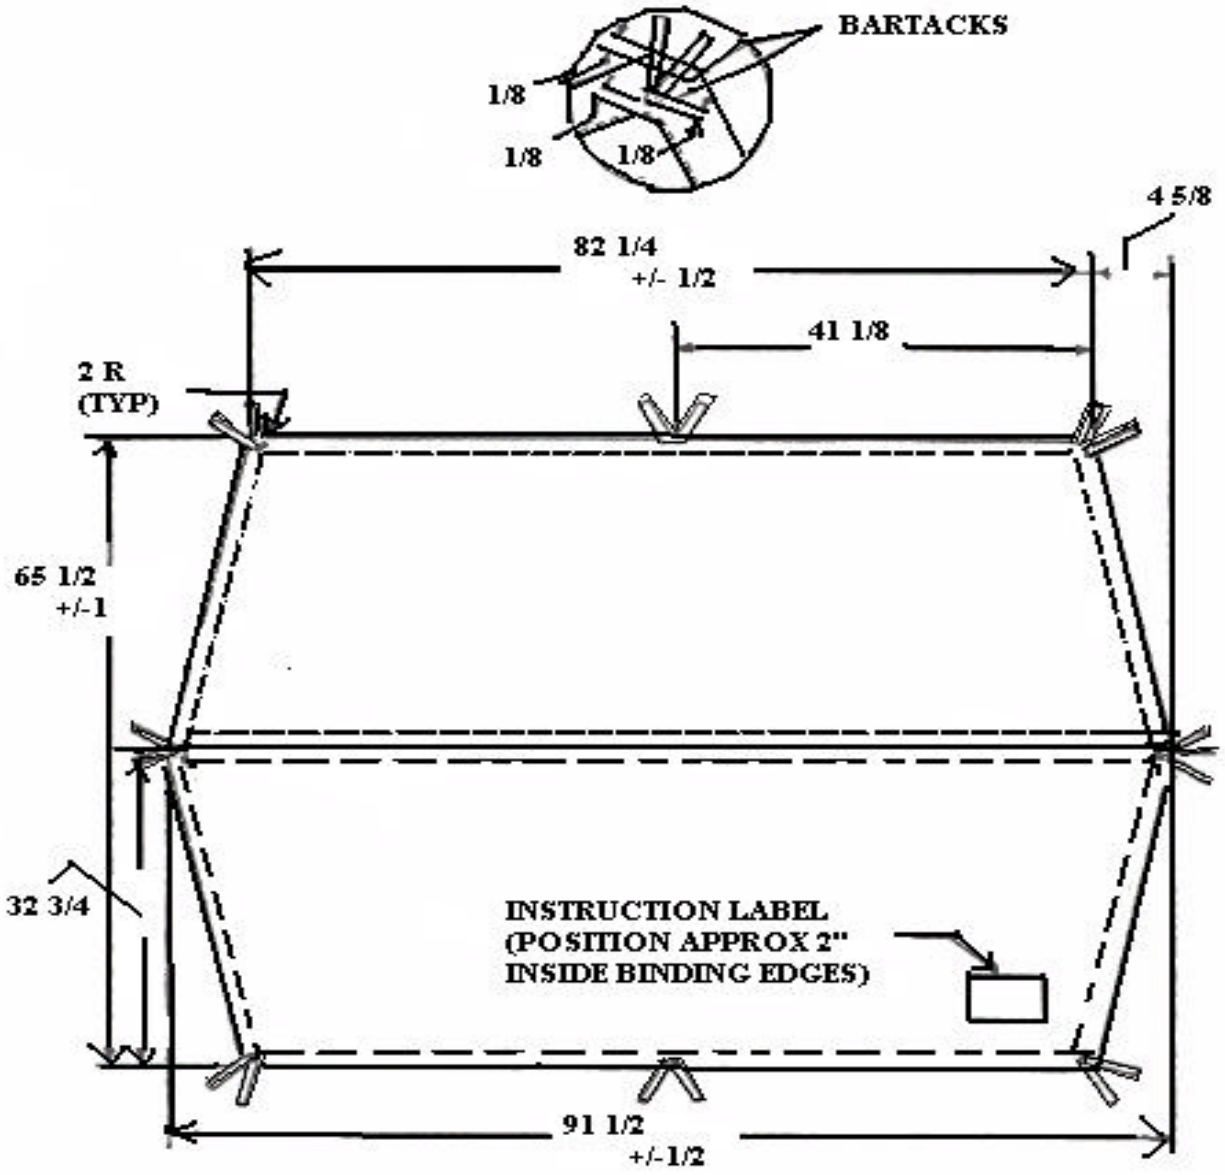


FIGURE 2 – LINER, PONCHO
(ALTERNATE CONSTRUCTION "B")

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:11Z
Check the source to verify that this is the current version before use.

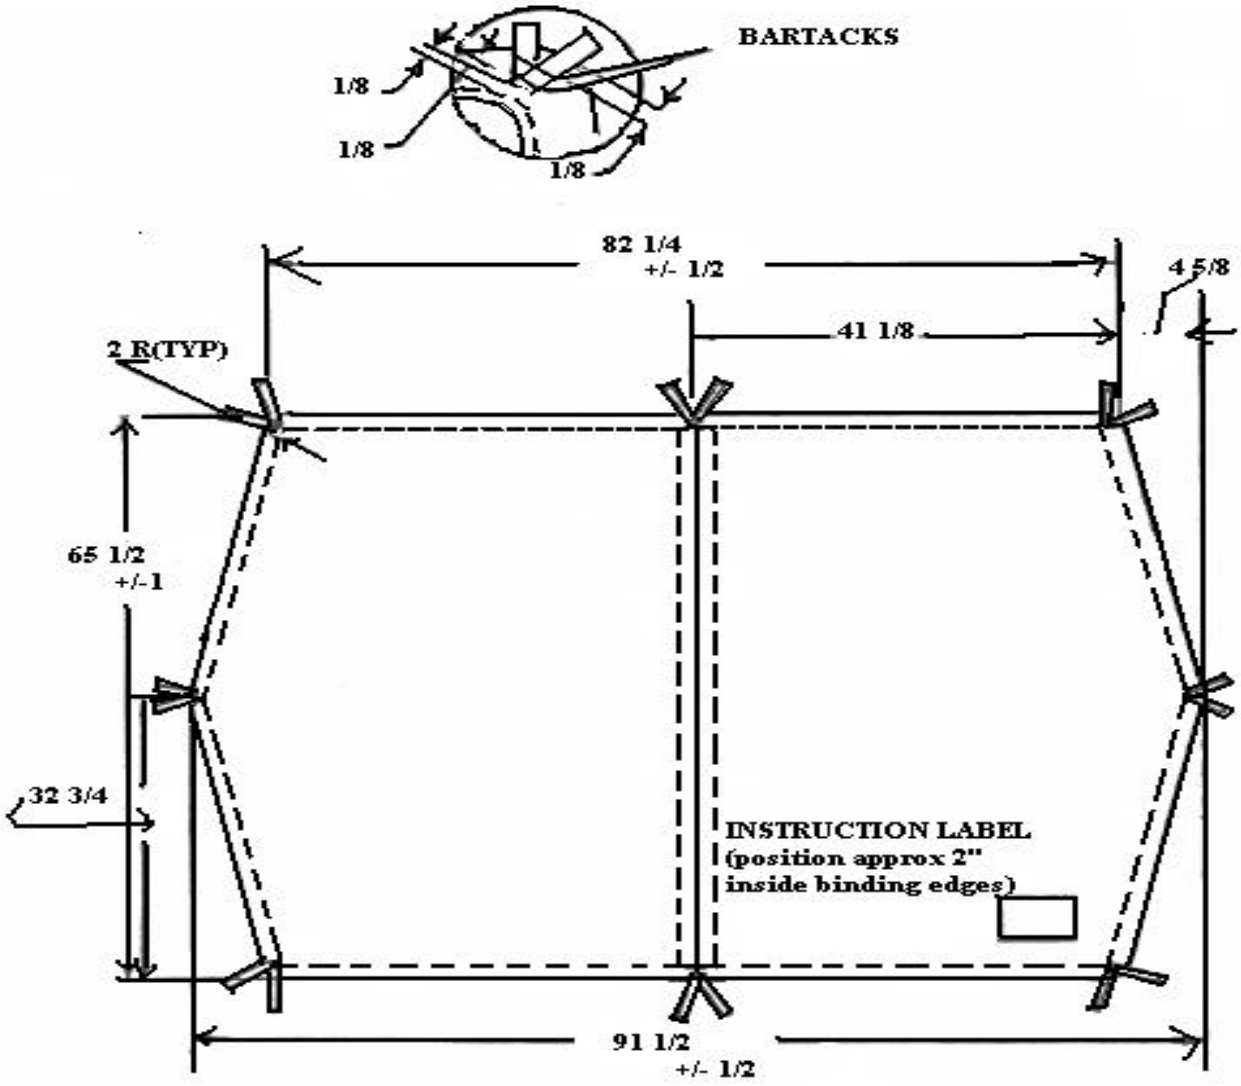


FIGURE 3 – LINER, PONCHO
(ALTERNATE CONSTRUCTION "A")

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:11Z
Check the source to verify that this is the current version before use.