INCH-POUND

MIL-M-43294C
20 January 1989
SUPERSEDING
MIL-M-43294B
19 June 1981

MILITARY SPECIFICATION

MASK, EXTREME COLD WEATHER (OLIVE GREEN 207)

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers one type and size extreme cold weather mask.

2. APPLICABLE DOCUMENTS

2.1 Government documents.

2.1.1 Specifications, standards, and handbooks. The following specifications, standards, and handbooks form a part of this document to the extent specified herein. Unless otherwise specified, the issues of these documents are those listed in the issue of the Department of Defense Index of Specifications and Standards (DODISS) and supplement thereto, cited in the solicitation (see 6.2).

SPECIFICATIONS

FEDERAL

A-A-203	-	Paper, Kraft, Untreated
V-T-285	-	Thread, Polyester
QQ-W-321	-	Wire, Copper Alloy
DDD-L-20	-	Label: For Clothing, Equipage and Tentage, (General Use)
PPP-B-636	-	Boxes, Shipping, Fiberboard

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: U.S. Army Natick Research, Development, and Engineering Center, Natick, MA 01760-5014 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

AMSC N/A FSC 8415

DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:06Z
Check the source to verify that this is the current version before use.

MILITARY

MIL-F-495	-	Finish, Chemical, Black, For Copper Alloys
MIL-F-10884	-	Fasteners, Snap
MIL-L-35078	-	Loads, Unit; Preparation of Semiperishable Subsistence Items; Clothing, Personal Equipment and Equipage: General Specification For
MIL-C-40039	-	Cloth, Coated, Nylon, Vinyl Coated
MIL-T-43566	-	Tape, Textile, Cotton, General Purpose, Natural or in Colors

STANDARDS

FEDERAL

FED-STD-191	-	Textile Test Methods
FED-STD-751	-	Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105	-	Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129	-	Marking for Shipment and Storage
MIL-STD-147	-	Palletized Unit Loads
MIL-STD-731	-	Quality of Wood Members for Containers and Pallets

(Unless otherwise indicated, copies of federal and military specifications, standards, and handbooks are available from the Naval Publications and Forms Center, (ATTN: NPODS), 5801 Tabor Avenue, Philadelphia, PA 19120-5099.)

2.2 Non-Government publications. The following document forms a part of this document to the extent specified herein. Unless otherwise specified, the issues of the documents which are DoD adopted are those listed in the issue of the DODISS cited in the solicitation. Unless otherwise specified, the issues of documents not listed in the DODISS are the issues of the documents cited in the solicitation (see 6.2).

THE COLOR ASSOCIATION OF THE UNITED STATES, INC.

Standard Color Card of America

Department of Defense Standard Shades for Sewing Threads

(Color cards may be available from the Color Association of the United States, Inc., 343 Lexington Avenue, New York, NY 10016-0927. If color cards are not available from the Color Association, individual color samples may be obtained from the contracting activity or as directed by the contracting activity.)

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:06Z
Check the source to verify that this is the current version before use.

AMERICAN SOCIETY FOR TESTING AND MATERIALS (ASTM)

D 3951 - Standard Practice for Commercial Packaging

(Application for copies should be addressed to the American Society for Testing and Materials, 1916 Race Street, Philadelphia, PA 19103.)

(Non-Government standards and other publications are normally available from the organizations which prepare or distribute the documents. These documents also may be available in or through libraries or other informational services.)

2.3 Order of precedence. In the event of a conflict between the text of this document and the references cited herein, the text of this document takes precedence. Nothing in this document, however, supersedes applicable laws and regulations unless a specific exemption has been obtained.

3. REQUIREMENTS

3.1 First article. When specified (see 6.2), a sample shall be subjected to first article inspection (see 6.3) in accordance with 4.3.

3.2 Guide sample. Guide samples, when furnished, are solely for guidance and information to the contractor (see 6.4). Variation from this specification may appear in the sample, in which case this specification shall govern.

3.3 Materials. It is encouraged that recycled material be used when practical as long as it meets the requirements of this specification.

3.3.1 Coated cloth. The coated cloth for making the outer face, nose, mouth, chin and two-ply neck shield shall be vinyl coated nylon cloth, Olive Green 207, conforming to MIL-C-40039.

3.3.2 Felt. The felt for lining the face, nose, mouth, and chin pieces of the mask shall consist of a blend of 70 percent minimum, fleece wool, pulled wool, wool noils, or reprocessed wool and the remainder shall be rayon fiber. The felt shall be white, shall weigh 7 $\pm$ 0.5 ounces per square yard, shall be 0.050 $\pm$ 0.010 inch thick, and shall have a breaking strength of not less than 45 pounds in the length direction. The fibers shall be felted and pressed to produce an even surface.

3.3.3 Straps and fastener reinforcement. The adjusting straps, the overhead retaining strap, and the snap fastener reinforcement shall be made from cotton textile tape conforming to type I, class 3 of MIL-T-43566. The tape shall be 3/4 inch wide and shall be dyed Olive Green 107.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:06Z
Check the source to verify that this is the current version before use.

3.3.4 Snap fasteners. The snap fasteners for the nose and mouth pieces and the studs for the strap fasteners shall conform to style 2A, finish 2 of MIL-F-10884. The size of the button and the eyelet component shall be selected by the contractor. The size selected shall be of sufficient length to enable the fastener components to be securely clinched.

3.3.5 Socket slide. The socket and buckle for attaching and adjusting the head straps shall be 2-prong, brass, socket slide, suitable for use with 3/4 inch wide tape, except that the material for the round spring inside the socket shall be Copper Alloy No. 510 conforming to QQ-W-321 (see 6.5). The socket and spring shall mate properly with the stud. The socket slide shall have a black chemical finish conforming to MIL-F-495.

3.3.6 Thread. The thread for seaming and stitching the mask shall be polyester thread, conforming to type I or II, class 1, sub-class b, size B of V-T-285. The color of the thread shall be Olive Drab S-1 (C.A. 66022) or white as specified (see 3.8). The dyed thread shall show fastness to light, laundering (after 3 cycles), and perspiration equal to or better than the standard sample (see 6.4). When no standard sample is available, the dyed thread shall show "good" fastness to light, laundering, and perspiration.

3.3.7 Labels. Each mask shall have an identification label, conforming to type IV, class 1 of DDD-L-20. The label shall measure not less than 1 by 1-1/2 inches. The label shall show colorfastness to laundering.

3.4 Design. The mask is a contour shaped covering for the face, having two adjustable snap fastened head straps and an overhead retainer strap. The mask, which has a waterproof outer covering and a felt lining, consists of a face piece (with eyes, nose, and mouth openings), snap fastened nose and mouth coverings, a chin piece, and a neck shield (see figure 1).

3.5 Figure. Figure 1 is furnished for information only. If there are inconsistencies between the written specification and the figure, the written specification shall control.

3.6 Patterns. Standard patterns, which provide a seam allowance around all edges of 1/8 to 3/16 inch, will be furnished by the Government. The standard patterns shall not be altered in any way and are to be used as a guide only for cutting the contractor's working patterns. The working patterns shall be identical to the standard patterns.

3.6.1 List of pattern parts. The component parts of the mask shall be cut from material as specified in accordance with the pattern parts indicated below. The use of drill holes is prohibited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:06Z
Check the source to verify that this is the current version before use.

List of pattern parts

Material	Nomenclature	Cut parts
Cloth, coated nylon	Face	1
	Nose flap	1
	Mouth flap	1
	Chin	1
	Neck shield	2
Cloth, felt	Face	2
	Nose flap	2
	Mouth flap	2
	Chin	2

3.7 Construction.

3.7.1 Stitches, seams, and stitching. All stitches, seams, and stitching shall conform to FED-STD-751. The type of seam, stitching, and stitches per inch shall be as specified in table I. Seam allowances shall be maintained with seams sewn so that no run-offs, pleats, puckers, or open seams occur. Ends of all stitching shall be backstitched or overstitched 1/2 inch minimum except when caught in other stitching or turned under in a hem. Thread tension shall be maintained so that there will be no loose stitching resulting in loose bobbin or top thread, or excessively tight stitching resulting in puckering of the materials sewn. The lock shall be embedded in the materials sewn.

3.7.1.1 Repairs of type 301 stitching. Repairs of type 301 stitching shall be as follows:

(a) When thread breaks or bobbin run-outs occur during sewing, the stitching shall be repaired by restarting the stitching a minimum of 1/2 inch back of the end of the stitching. 1/

(b) Thread breaks or two or more consecutive skipped or run-off stitches noted during inspection of the item (in-process or end item) shall be repaired by overstitching. The stitching shall start a minimum of 1/2 inch in back of the defective area and continue a minimum of 1/2 inch beyond the defective area on to the existing stitching. Loose or excessively tight stitching shall be repaired by removing the defective stitching, without damaging the materials, and restitching in the required manner. 1/

1/ When making the above repairs the ends of the stitching are not required to be backstitched.

Source: https://assist.dla.mil -- Downloaded: 202640-21T21:06Z
Check the source to verify that this is the current version before use.

3.7.2 Automatic stitching. Automatic machines may be used to perform any of the required stitch patterns provided the requirements for the stitch pattern, stitches per inch, and size and type of thread are met and at least three or more tying, overlapping, or back stitches are used to secure the ends of stitching.

3.7.3 Bartacks. Bartacks shall measure 1/2 inch to 5/8 inch long, except where otherwise indicated. Bartacking shall be free from thread breaks and loose stitching.

3.7.4 Stitches per inch. The minimum and maximum number of stitches per inch shall be as specified in table I.

3.8 Manufacturing operation requirements. The mask shall be manufactured in accordance with operation requirements specified in table I. The contractor is not required to follow the exact sequence of operations. The thread on the outside shall be Olive Drab S-1 (C.A. 66022) and the thread on the inside shall be white.

3.9 Marking. The cut parts of the mask shall be marked, ticketed, or bundled to insure a uniform shade throughout the mask. Any method of marking may be used except the following:

a. Metal fastening devices.
b. Sew-on type tickets.
c. Adhesive type tickets which leave an impression or traces of paper or adhesive on the material upon removal of the tickets.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:06Z
Check the source to verify that this is the current version before use.

TABLE I.

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
1.	Cutting and assembly. a. Cut all material in strict accordance with patterns furnished, which show directional lines, notches and locating marks for assembling all parts. The underply of the neck shield may be cut from ends. b. Mark, ticket, or bundle all coated cloth parts of the mask to insure a uniform shade throughout the mask, except those cut from ends. c. When assembling the mask, the surface of the nylon cloth which has the heaviest layer of coating shall be on the outside of the mask. (Note: The surface of the neck shield next to the wearer shall also have the heaviest layer of coating.)						
2.	Replacement of defective components. Care shall be exercised during the spreading, cutting and manufacturing operations to assure that material defects and damages, as specified in 4.4.3, are excluded and replaced with nondefective and properly matched material.						
3.	Cut fittings. a. Cut overhead strap, 15 ± 1/4 inches long (to finish 12 ± 1/4 inches long) from 3/4 inch wide tape. b. Cut upper adjusting strap, 18 ± 1/4 inches long (to finish 17 ± 1/4 inches long), from 3/4 inch wide tape. c. Cut lower adjusting strap, 17 ± 1/4 inches long (to finish 16 ± 1/4 inches long), from 3/4 inch wide tape.						

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:06Z
Check the source to verify that this is the current version before use.

TABLE I. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
3.	Cut fittings. (cont'd)						
	d. Cut five stud reinforcement pieces, approximately 7/8 inches in length, from 3/4 inch tape.						
4.	Prepunching.						
	The coated nylon cloth shall be punched wherever a stud or socket is to be attached as indicated by marks on the pattern.						
5.	Make nose flap.						
	a. Superimpose two layers of felt and one layer of vinyl coated nylon cloth and single stitch 1/8 to 3/16 inch from the edge.	301	SSa-1	6-8	B	B	
	b. Attach snap fastener sockets at positions marked on the pattern.						
6.	Make mouth flap.						
	a. Superimpose two layers of felt and one layer of vinyl coated cloth and single stitch 1/8 to 3/16 inches from the edge.	301	SSa-1	6-8	B	B	
	b. Punch eight holes through all layers of the assembled flap at marks indicated on the pattern. Holes shall conform to the following: Upper row - Four, each 3/32 to 1/8 inch diameter. Lower row - Four, each 3/16 to 7/32 inch diameter.	301	SSa-1	6-8	B	B	
	NOTE: The individual layers may be prepunched in which case the holes in the finished flap shall be identical in size, shape, and location.						

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T21:06Z
Check the source to verify that this is the current version before use.

TABLE I. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
6.	Make mouth flap. (cont'd)						
	c. Seam flap layers together as follows: One row of stitching centered along the long dimension of the flap from stitch margin to stitch margin of flap. Five rows of stitching across entire width of flap forming eight boxes 1/2 ± 1/32 inch by 5/8 ± 1/32 inch with the holes centered in each box.	301	SSa-1	6-8	B	B	
	or						
	A double needle machine may be used for this operation. When using a double needle machine, make six rows of stitching across the entire width of flap forming ten boxes 1/2 ± 1/32 inch by 5/8 ± 1/32 inch with the holes centered in eight of the boxes.						
	d. Attach snap fastener sockets at positions marked on the pattern.						
7.	Make neck shield.						
	Join the two layers of the neck shield at the lower edge with a single row of stitching.	301	SSa-1	6-8	B	B	
8.	Make chin and join to neck shield.						
	a. Superimpose two layers of felt and one layer of coated cloth.						
	b. Join neck shield to chin by placing it between the outer fabric and the felt, as indicated by marks on pattern, and stitching with a double row of stitching 3/16 to 1/4 inch gage. The seam allowance	301		6-8	B	B	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:06Z
Check the source to verify that this is the current version before use.

TABLE I. (cont'd)

NO.	MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
8.	Make chin and join to neck shield. (cont'd)						
	shall be 7/16 to 1/2 inch. The seam allowance on neck shield may be slashed to facilitate the joining operation.						
9.	Make face.						
	a. Superimpose the two layers of felt and one layer of the coated cloth and stitch around the mouth and nose opening with a single row of stitching.	301	SSa-1	6-8	B	B	
	b. Put in five studs at position shown on the pattern. The studs shall be secured to the face through the coated cloth, one layer of felt and the reinforcing tape.						
	c. Draw darts in 3/8 +1/8, -1/16 inch at marks shown on the patterns and overlap so that raw edge of coated cloth and the felt, face toward the left side of the mask (as worn). Stitch with two single rows of stitching to form a "V" without exposing the felt to the outside.	301	LSa-1	6-8	B	B	
	d. Stitch around each eyehole with a single row of stitching 1/8 to 3/16 inch from its edge.	301	SSa-1	6-8	B	B	
	e. Stitch around eyeholes with a single row of stitching, 5/8 $\pm$ 1/16 inch from edge, as indicated by marks on patterns.	301	SSa-1	6-8	B	B	

NATICK Form 903
1 Dec 76 EDITION OF 1 OCT 76 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T21:06Z
Check the source to verify that this is the current version before use.

NO.	TABLE I. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
10.	Assembly.						
	a. Join chin to lower face as indicated by marks on the pattern, with a double row of stitching 3/16 to 1/4 inch gage. The chin shall be inserted between the coated cloth and the felt.	301	LSa-2	6-8	B	B	
	b. Stitch around the outer edge of the mask and around the adjusting strap studs with a double row of stitching 3/16 to 1/4 inch gage as indicated by marks on patterns.	301	LSa-2	6-8	B	B	
	c. Join the mouth flap to the face as indicated by mark on pattern with a single row of stitching.	301	SSa-1	6-8	B	B	
	d. Place nose flap on face and lap top edge of nose flap 5/16 to 6/16 inch over top of nose opening, then adjust side edges of nose flap so they are flush with the edges of eye openings where side edges of nose flap are tangent to the eye openings. With nose flap in this position join nose flap to the face with one row of stitching 1/8 to 1/4 inch from top edge and side edges of the nose opening. The stitching shall run across top edge of nose opening and along each side of nose flap for a distance of 2 $\pm$ 1/16 inches from the top cut edge of the nose opening.	301	SSa-1	6-8	B	B	
	e. Turn in one end of the overhead retainer strap 1/2 to 9/16 inch. With turned end next to mask, box-x stitch to outside top edge of the mask at the marks indicated on the pattern. Box stitching shall be 5/8 to 11/16 inch by 3/8 to 7/16 inch, with 1/16 to 3/32 inch wide margins maintained at the bottom fold and at the side of the strap edges.	301		6-8	B	B	

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T21:06Z
Check the source to verify that this is the current version before use.

NO.	TABLE I. (cont'd) MANUFACTURING OPERATIONS REQUIREMENTS	STITCH TYPE	SEAM AND STITCHING TYPE	STITCHES PER INCH	THREAD		
					NEEDLE	BOBBIN/ LOOPER	COVER
10.	Assembly. (cont'd)						
	f. Turn the free end of the overhead retaining strap under on itself for a distance of 2-1/4 inches and with the end turned in 1/4 inch, stitch to strap. Add a second row of stitching one inch from the folded end across the full width of the strap. As an option to the second row of stitching, a bartack may be centered across the strap.	301		6-8	B	B	
		Bartack		28 per bartack	B	B	
	g. Turn in one end of each adjusting strap 1/2 to 5/8 inch. With turned end next to mask, attach the two adjusting straps at the marks indicated on the pattern with box-x stitching as specified for the overhead retainer strap.	301		6-8	B	B	
	h. Thread the free end of each adjusting strap through the appropriate loop of the overhead retaining strap. Thread the socket slide into position on each adjusting strap. Double fold free end of each adjusting strap 1/4 to 5/16 inch and secure with a row of stitching or a inch bartack.	301	EFb-1	6-8	B	B	
		or					
		Bartack		28 per bartack	B		
11.	Label.						
	Apply identification label to the underside of the neck shield by direct printing, stamping, or stenciling. The label shall be centrally positioned.						
12.	Cleaning.						
	Clip and remove all thread ends. Remove all spots, stains, and shade marking.						

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T21:06Z
Check the source to verify that this is the current version before use.

3.10 Finished measurements. The mask shall conform to the finished measurements in table II.

TABLE II. Finished measurements

Measurement	Inches	Tolerance (inches)
Mask length 1/	13-3/4	± 1/2
Forehead width 2/	10-5/8	± 1/4
Chin width 3/	10-1/2	± 1/4
Nose flap width 4/	5-3/4	± 1/8
Mouth flap width 5/	4-1/4	± 1/8

1/ Measured from top forehead edge to bottom edge of neck shield through center of mask.

2/ Measured horizontally from side edge to opposite side edge of forehead 1-5/8 inches down from top center front forehead edge.

3/ Measured from side edge to opposite side edge along bottom edge of face piece.

4/ Measured from the side edge to opposite side edge of nose flap through center of snap fastener caps.

5/ Measured from side edge to side edge of mouth flap through mid-section.

3.11 Workmanship. The finished mask shall conform to the quality of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements (examinations and tests) as specified herein. Except as otherwise specified in the contract or purchase order, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in this specification where such inspections are deemed necessary to ensure supplies and services conform to prescribed requirements.

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:06Z
Check the source to verify that this is the current version before use.

4.1.1 Responsibility for compliance. All items shall meet all requirements of sections 3 and 5. The inspection set forth in this specification shall become a part of the contractor's overall inspection system or quality program. The absence of any inspection requirements in the specification shall not relieve the contractor of the responsibility of ensuring that all products or supplies submitted to the Government for acceptance comply with all requirements of the contract. Sampling inspection, as part of manufacturing operations, is an acceptable practice to ascertain conformance to requirements, however, this does not authorize submission of known defective material, either indicated or actual, nor does it commit the Government to accept defective material.

4.1.2 Responsibility for dimensional requirements. Unless otherwise specified in the contract or purchase order, the contractor is responsible for ensuring that all specified dimensions have been met. When dimensions cannot be examined on the end item, inspection shall be made at any point, or at all points in the manufacturing process necessary to assure compliance with all dimensional requirements.

4.2 Classification of inspections. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).

4.3 First article inspection. When a first article is required (see 3.1 and 6.2), it shall be examined for the defects specified in 4.4.3 and 4.4.4.

4.4 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.

4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all the requirements of referenced documents unless otherwise excluded amended, modified, or qualified in this specification or applicable purchase document. In addition, testing shall be performed on the felt for the characteristics specified in table III. The lot size shall be expressed in units of linear yards. The sample unit shall be 1 square yard of felt. The inspection level shall be S-2 and the acceptable quality level (AQL), expressed in terms of defects per hundred units, shall be 6.5.

TABLE III. Component tests

Component	Characteristic	Requirement paragraph	Test method 1/
Felt	Wool content	3.3.2	2100 2/
	Weight	3.3.2	5041
	Thickness	3.3.2	5030

Source: https://assist.dla.mil -- Downloaded: 202640-21T21:06Z
Check the source to verify that this is the current version before use.

TABLE III. Component tests (cont'd)

Component	Characteristic	Requirement paragraph	Test method 1/
Felt (cont'd)	Breaking strength length direction only	3.3.2	5100 3/

1/ Test methods are in accordance with FED-STD-191.

2/ The wool content shall be based on the dry weight of the desized specimens.

3/ Except that the jaws shall be not less than 1 inch by 2 inches, the spacing shall be 3 inches, and the samples shall be cut 2 inches by 6 inches.

4.4.2 In-process inspection. Inspection of the face mask shall be made at any point or during any phase of the manufacturing process to determine whether operations or assemblies are in accordance with requirements indicated in table I. The Government reserves the right to exclude from consideration for acceptance, any material or service for which in-process inspection has indicated nonconformance.

4.4.3 End item visual examination. The end items shall be examined for the defects listed in table IV. The lot size shall be expressed in units of masks. The sample unit shall be one mask. The inspection level shall be I and the AQL, expressed in terms of defects per hundred units, shall be 2.5.

TABLE IV. End item visual defects

Examine	Defect
Design	Not as specified
Material	
Coated cloth	Any abrasion, blister, hard permanent crease, foreign matter, uncoated area, or area of thin coating
Hardware	Any missing Any component mismated Any piece of hardware bent, broken, or exhibiting any sharp edge Any fastener not functioning properly, i.e., fails to snap closed, to provide a secure closure, or to open freely Finish missing, marred, or scratched

Source: https://assist.dla.mil -- Downloaded: 202640-21T21:06Z
Check the source to verify that this is the currentversion before use.

TABLE IV. End item visual defects (cont'd)

Examine	Defect
Hardware (cont'd)	
	NOTE: The fasteners shall be snapped and unsnapped twice to determine whether parts of fastener separate freely and also effect a secure closure.
Straps	Any slub, float, smash, cut, frayed or scalloped edge, weak place, or weaving defect on straps
Felt	Surface nappiness Any surface pucker or ripple Any high, thick, or lumpy area Any burrs or shives Presence of any foreign matter Any spot or stain
Construction	Any operation omitted or not performed as specified
Seams and stitching	Any seam badly twisted or puckered Ends of stitching not caught in other seams, or stitching not secured as specified Gauge of stitching irregular or uneven or not within range specified Seam not repaired as specified Any open seam
	NOTE: A seam shall be classified as open when one or more stitches joining a seam are broken or when two or more continuous skipped or run-off stitches occur. A double stitched seam is considered open when either side of the seam is open.
	Seam or stitch type not as specified Any variation in number of stitches per inch from range specified Stitch tension too tight resulting in broken stitches (when normal tension is applied to seam or stitching)
Color (all components)	Not as specified Not uniform
Label	Missing. incomplete, incorrect, illegible, not specified type or size, not in proper location, or not accomplished in the specified manner

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:06Z
Check the source to verify that this is the current version before use.

TABLE IV. End item visual defects (cont'd)

Examine	Defect
Workmanship	Any needle chew Any mend, cut, tear, or hole in face mask or straps Any dirt or stain Any snap fastener too tightly or too loosely clinched Shade marking not performed as specified as evidenced by use of metal fastening devices, sew-on-tickets, or adhesive material on mask
	NOTE: Incomplete roll of end of button or eyelet barrel is evidence of improper and insecure clinching.

4.4.4 End item dimensional examination. The end items shall be examined for the dimensions specified in table II. Any dimension not within the specified tolerance shall be classified as a defect. The lot size shall be expressed in units of masks. The sample unit shall be one mask. The inspection level shall be S-3 and the AQL, expressed in terms of defects per hundred units, shall be 4.0.

4.4.5 Packaging examination. The fully packaged end items shall be examined for the defects listed below. The lot size shall be expressed in units of shipping containers. The sample unit shall be one shipping container fully packaged. The inspection level shall be S-2 and the AQL, expressed in terms of defects per hundred units, shall be 2.5.

Examine	Defect
Marking (exterior and interior)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Materials	Any component missing, damaged, or not as specified.
Workmanship	Inadequate application of components such as: incomplete closure of container flap, loose strapping, improper taping, or inadequate stapling.
Content	Number of masks per unit pack or shipping container is more or less than required. 1/

1/ For this defect, one shipping container in the sample shall be examined.

4.4.6 Palletization examination. The fully packaged and palletized end items shall be examined for the defects listed below. The lot size shall be expressed in units of palletized unit loads. The sample unit shall be one palletized unit load, fully packaged. The inspection level shall be S-1 and the AQL, expressed in terms of defects per hundred units, shall be 6.5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:06Z
Check the source to verify that this is the current version before use.

Examine	Defect
Finished dimensions	Length, width, or height exceeds specified maximum requirements.
Palletization	Pallet pattern not as specified. Interlocking of loads not as specified. Load not bonded as specified.
Weight	Exceeds maximum load limits.
Marking	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.

5. PACKAGING

5.1 Preservation. Preservation shall be level A or Commercial, as specified (see 6.2).

5.1.1 Level A. Each mask shall be folded in half lengthwise with the chin, neck shield, and straps tucked into the fold. Five folded masks shall be stacked, each mask reversed, forehead to chin, and tied in a bundle with cotton tape or twine to form a unit pack.

5.1.2 Commercial. Masks shall be preserved in accordance with ASTM D 3951.

5.2 Packing. Packing shall be level A, B or Commercial, as specified (see 6.2).

5.2.1 Level A packing. Eighty masks, preserved as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC-L, grade V2s of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class weather-resistant, variety DW, grade V15c of PPP-B-636. Level A unit packs shall be packed flat, four in length, two in width, and two in depth within the shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to A-A-203. Inside dimensions of each shipping container shall be 23-1/2 inches in length, 15-1/2 inches in width, and 6-3/4 inches in depth (+ 1/8 inch). Each shipping container shall be closed in accordance with method III, waterproofed in accordance with method V, and reinforced as specified in the appendix of PPP-B-636, except that inspection shall be in accordance with 4.4.5. Shipping containers shall be arranged in unit loads in accordance with MIL-L-35078 for the type and class of load specified (see 6.2). Strapping shall be limited to nonmetallic strapping, except for type II, class F loads.

Source: https://assist.dla.mil -- Downloaded: 202640-21T21:06Z
Check the source to verify that this is the currentversion before use.

5.2.2 Level B packing. Eighty masks, preserved as specified in 5.1, shall be packed in a fiberboard shipping container conforming to style RSC-L, type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. The inside of each shipping container shall be fitted with a box liner conforming to type CF, class domestic, variety DW, grade 275 of PPP-B-636. Level A unit packs shall be packed flat, four in length, two in width, and two in depth within the shipping container. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to A-A-203. Inside dimensions of each shipping container shall be 23-1/2 inches in length, 15-1/2 inches in width, and 6-3/4 inches in depth (+ 1/8 inch). Each shipping container shall be closed in accordance with method II as specified in the appendix of PPP-B-636, except that inspection shall be in accordance with 4.4.5.

5.2.2.1 Weather-resistant fiberboard containers. When specified (see 6.2), the shipping container shall be a grade V3c, V3s, or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III as specified in the appendix of PPP-B-636, except that inspection shall be in accordance with 4.4.5.

5.2.3 Commercial packing. Masks, preserved as specified in 5.1, shall be packed in accordance with ASTM D 3951.

5.3 Palletization. When specified (see 6.2), masks packed as specified in 5.2.2 and 5.2.3 shall be palletized on a 4-way entry pallet in accordance with load type Ia of MIL-STD-147. Pallet types shall be type I (4-way entry), type IV, or type V in accordance with MIL-STD-147. Pallets shall be fabricated from wood groups I, II, III, or IV of MIL-STD-731. Each prepared load shall be bonded with primary and secondary straps in accordance with bonding means K and L or film bonding means O or P. Pallet pattern shall be number 3 in accordance with the appendix of MIL-STD-147. Interlocking of loads shall be effected by reversing the pattern of each course.

5.4 Marking. In addition to any special marking required by the contract or purchase order, the shipping containers and palletized unit loads shall be marked in accordance with MIL-STD-129 or ASTM D 3951, as applicable.

6. NOTES

(This section contains information of a general or explanatory nature that may be helpful, but is not mandatory.)

6.1 Intended use. The masks are intended to be worn when performing operational duties in extreme low temperatures below 14°F (-10°C).

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:06Z
Check the source to verify that this is the currenversion before use.

6.2 Acquisition requirements. Acquisition documents must specify the following:

a. Title, number, and date of this specification.
b. Issue of DODISS to be cited in the solicitation, and if required, the specific issue of individual documents referenced (see 2.1.1 and 2.2).
c. When a first article is required (see 3.1, 4.3, and 6.3).
d. Selection of applicable levels of preservation and packing (see 5.1 and 5.2).
e. Type and class of unit load required (see 5.2.1).
f. When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).
g. When palletization is required (see 5.3).

6.3 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of FAR 52.209. The first article should be a preproduction sample. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should include specific instructions in acquisition documents regarding arrangements for selection, inspection, and approval of the first article.

6.4 Sample. For access to samples, address the contracting activity issuing the invitation for bids or request for proposal.

6.5 Information on socket slides. Carr Fastener Company, Part No. XX-12622 is known to meet the performance requirements for the socket slide. This information is furnished only to indicate a possible source of supply. Any manufacturer's item which is equal to the referenced commercial type item will be acceptable.

6.6 Subject term (key word) listing.

Cold weather clothing
Face protection

6.7 Changes from previous issue. Marginal notations are not used in this revision to identify changes with respect to the previous issue due to the extensiveness of the changes.

Source: https://assist.dla.mil -- Downloaded: 202640-21T21:06Z
Check the source to verify that this is the currentversion before use.

Custodians

Army - GL
Navy - NU

Review activities:


Army - MD
Navy - MC
DLA - CT

Preparing activity:

Army - GL

(Project 8415-0598)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:06Z
Check the source to verify that this is the current version before use.

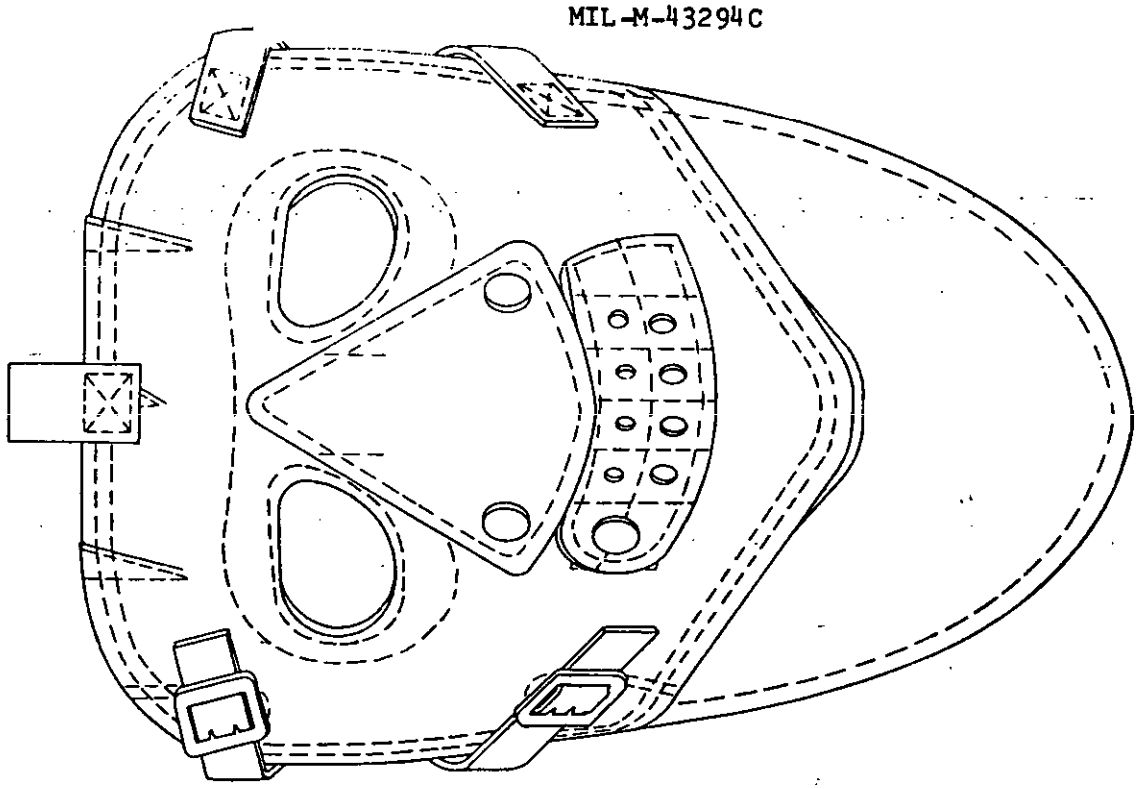

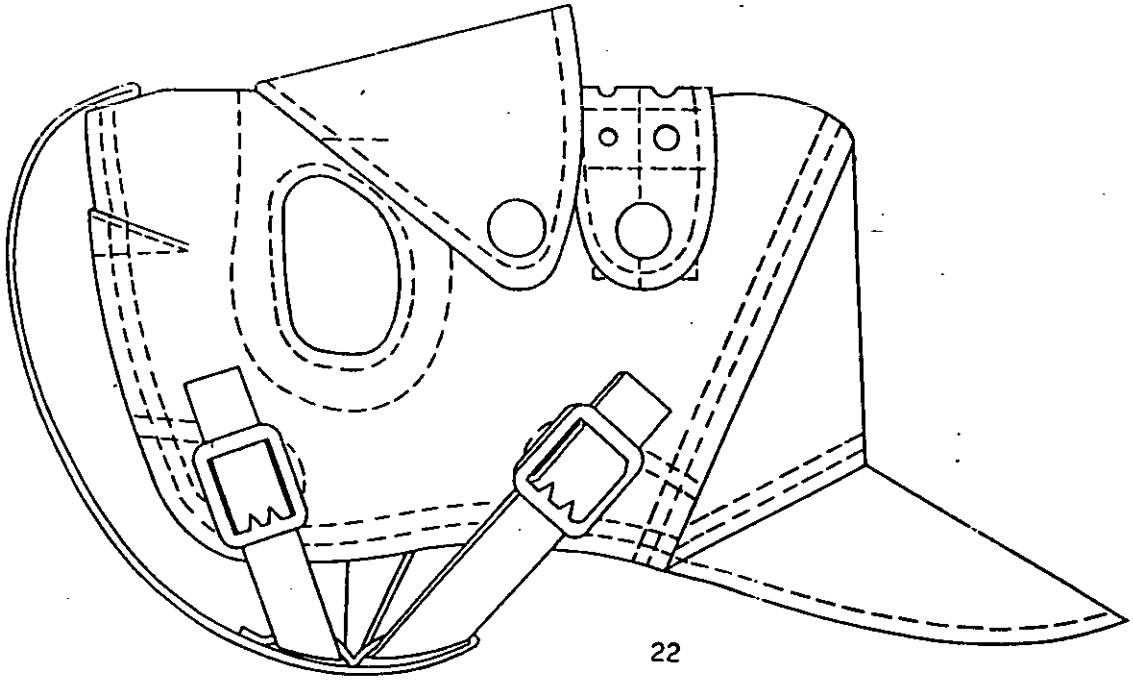


FIGURE-1 MASK, EXTREME COLD WEATHER (OLIVE GREEN 107)

8-1-62

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:06Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document*(s)* or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

U.S. ARMY NATICK RESEARCH, DEVELOPMENT
and ENGINEERING CENTER
ATTN: STRNC-ES
Natick, MA 01760-5014

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.
POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
U.S. Army Natick Research, Development
and Engineering Center
ATTN: STRNC-ES
Natick, MA 01760-5014

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:06Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE
MIL-M-43294C	Mask, Extreme Cold Weather (Olive Green 207)

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:06Z
Check the source to verify that this is the current version before use.