MIL-P-43304C
30 March 1981
SUPESEDING
MIL-P-43304B
16 May 1968

MILITARY SPECIFICATION

PACK AND HARNESS ASSEMBLY, PARACHUTIST'S WEAPONS AND

INDIVIDUAL EQUIPMENT

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers one type of parachutist's weapons and individual equipment pack and harness assembly.

2. APPLICABLE DOCUMENTS

2.1 Issues of documents. The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

UU-P-268	-	Paper, Kraft, Wrapping
PPP-B-601	-	Boxes, Wood, Cleated-Plywood
PPP-B-636	-	Boxes, Shipping, Fiberboard
PPP-T-45	-	Tape, Gummed, Paper, Reinforced and Plain, For Sealing and Securing

MILITARY

MIL-L-10547	-	Liners, Case, and Sheet, Overwrap; Water-Vaporproof or Waterproof, Flexible

Beneficial comments (recommendations, additions, deletions) and any pertinent data which may be of use in improving this document should be addressed to: US Army Natick Research and Development Laboratories, Natick, MA 01760 by using the self-addressed Standardization Document Improvement Proposal (DD Form 1426) appearing at the end of this document or by letter.

FSC 8465

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:07Z
Check the source to verify that this is the currentversion before use.

STANDARDS

FEDERAL

FED-STD-751 - Stitches, Seams, and Stitchings

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage
MIL-STD-1188 - Commercial Packaging of Supplies and Equipment

DRAWINGS

US ARMY NATICK RESEARCH AND DEVELOPMENT LABORATORIES

5-4-692 - Pack and Harness Assembly, Parachutist's Weapons and Individual Equipment; Assembly Complete and Illustration
5-4-693 - Pack and Harness Assembly, Parachutist's Weapons and Individual Equipment; Pack Assembly
5-4-697 - Pack and Harness Assembly, Parachutist's Weapons and Individual Equipment; Harness Assembly
5-4-916 - Pack and Harness Assembly, Parachutist's Weapons and Individual Equipment; Attachment of Push Pull Actuator Assembly to Harness
5-4-1006 - Pack and Harness Assembly, Parachutist's Weapons and Individual Equipment; Drawing and Material List

(Figures 1 through 5 are miniature reproductions of referenced drawings and are attached for information only.)

(Copies of specifications, standards and drawings required by contractor's in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Samples.

* 3.1.1 Guide sample. Samples, when furnished, are solely for the guidance and information to the contractor (see 6.3). Variation from the specification may appear in the sample in which case the specification shall govern.

* 3.1.2 First article. When specified (see 6.2), the contractor shall furnish a sample for first article inspection and approval (see 4.3 and 6.4).

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:07Z
Check the source to verify that this is the current version before use.

3.2 Materials. Materials shall conform to the requirments specified on Drawing 5-4-1006, to subsidiary specifications, standards and drawings applicable thereto, and as specified herein.

3.3 Construction. Construction details shall conform to the requirements specified on Drawing 5-4-1006, subsidiary specifications, standards and drawings applicable thereto, and as specified herein.

* 3.3.1 Stitches, seams and stitchings. All stitches, seams and stitchings shall be performed using stitch type 301 of FED-STD-751 with a 1/8 inch stitching margin.

* 3.3.1.1 Automatic stitching. Automatic machine stitch patterns providing equal strength, conforming to the overall dimensions and which do not adversely affect form, fit and function of the end item may be utilized in lieu of those specified, upon approval of procuring agency. The contractor may be required to provide proof of equivalency.

* 3.3.1.2 Type 301 stitching. Ends of all stitching shall be backstitched or backtacked not less than 1/2 inch except where ends are caught in other seams or stitching. Thread tensions shall be maintained so that there will be no loose or tight stitching and the lock will be imbedded in the materials sewed.

* 3.3.1.2.1 Repairs of type 301 stitching. Repairs of type 301 stitching shall be as follows:

a. When thread breaks, skipped stitches, run-offs, or bobbin runouts occur during sewing, the stitching shall be repaired by restarting the stitching a minimum of 1 inch back of the end of the stitching. 1/

b. Thread breaks, or two or more consecutive skipped or run-off stitches noted during inspection of the item (in-process or end item) shall be repaired by over-stitching. The stitching shall start a minimum of 1 inch in back of the defective area, continue over the defective area and continue a minimum of 1 inch beyond the defective area onto the existing stitching. Loose or excessively tight stitching shall be repaired by removing the defective stitching without damaging the materials and restitching in the required manner. 1/

1/ When making the above repairs, the ends of stitching are not required to be backstitched.

* 3.3.1.3 Thread ends. All thread ends shall be trimmed to 1/4 inch maxmimum length.

3.3.2 Searing of nylon strap ends. The exposed ends of all nylon webbing and straps shall be seared smooth to prevent fraying.

3.3.3 Wax. Ends of tie-tapes and elastic keepers shall be wax dipped not less than 1/2 inch.

Source: https://assist.dla.mil -- Downloaded: 20260-21T21:07Z
Check the source to verify that this is the current version before use.

3.3.4 Setting of rivets. The hole for the rivet shall be formed by either forcing the rivet through the material or prepunching with a cutting punch not larger than 1/8 inch diameter. The rivet shall be tightly clinched and shall not cut or damage the materials.

3.4 Assembly. The complete pack and harness assembly, Drawing No. 5-4-692, shall consist of one complete pack, Drawing No. 5-4-693, and one complete harness, Drawing No. 5-4-697.

3.5 Function. The two-point release mechanism, including adapter links, assembled to the harness as shown on Drawing 5-4-916, shall effect positive lock and positive release of the adpater links when the knob is operated through the full-stroke cycle.

* 3.6 Workmanship. The workmanship shall conform to the quality of product established by this specification. The occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsiblity for inspection. Unless otherwise specified in the contract, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract, the contractor may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

* 4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).

* 4.3 First article inspection. When a first article is required (see 6.2), it shall be examined for the defects specified in 4.4.2.1, 4.4.2.2, 4.4.2.3 and 4.4.2.4. The presence of any defect shall be cause for rejection of the first article.

* 4.4 Quality conformance inspection. Unless otherwise specified, sampling for inspection shall be performed in accordance with MIL-STD-105.

* 4.4.1 Component and material inspection. In accordance with 4.1, components and materials shall be inspected in accordance with all requirements of referenced specifications, drawings and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:07Z
Check the source to verify that this is the current version before use.

* 4.4.2 End item examination.

4.4.2.1 Visual examination of pack. The pack shall be examined for the defects listed below. The sample unit shall be one pack, Drawing 5-4-693. The inspection level shall be II and the acceptable quality level (AQL) shall be 2.5 major and 6.5 total defects per hundred units.

Examine	Defect	Classification Major	Minor
Fabric (duck and felt)	Any hole, cut or tear -		
	less than 1/2 inch in any direction		X
	1/2 inch or more in any direction	X	
	Broken or missing yarns, abrasion mark or fine filling bar	X	
	Shade bar, coarse filling bar or multiple floats		X
Webbing	Any hole, cut, tear, abrasion mark	X	
	Any exposed end of nylon webbings not seared	X	
	Frayed or scalloped edges	X	
	Color not as specified		X
	Not specified type or class	X	
Open seams	1/2 inch or less in length		X
	More than 1/2 inch in length	X	
NOTE:	A seam shall be classified as open where one or more stitches joining a seam are broken or where two or more continuous skipped or run-off stitches occur. Raw edges not caught in stitching shall be classified as open seams.		
Seams	Wrong type	X	
Stitches	Wrong type		X
Stitching	Tension loose, resulting in loose top or bottom thread		X
	Tension tight, resulting in puckering of material		X
	One stitch per inch less than minimum specified		X
	Two or more stitches per inch less than minimum specified	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:07Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor
Stitching (cont'd)	One stitch per inch more than maximum specified		X
	Two or more stitches per inch more than maximum specified	X	
	Any required row of stitching missing or incomplete (except on box stitching)	X	
	Thread breaks not overstitched as specified		X
	Ends of stitching not backstitched 1/2 inch where required		X
	Needle chews	X	
	Stitch patterns not as specified (unless otherwise authorized, see 3.3.1.1)	X	
Box stitching	One row of stitching omitted		X
	Two or more rows of stitching omitted	X	
Straps	Ends not square		X
	Any strap not one piece construction, i.e., spliced	X	
	Any exposed strap end not seared	X	
Suspender A	Felt pad missing	X	
	Felt pad on wrong side	X	
	More than one piece of webbing, i.e., spliced	X	
	Ends not square		X
Suspender C	Ends not square		X
	More than one piece of webbing, i.e., spliced	X	
Hardware	Not specified type or size	X	
	Burrs, slivers or sharp edges	X	
	Bent, broken or otherwise damaged	X	
	Finish omitted or incorrect	X	
	Adapter attached with friction grip facing wrong direction	X	
Body	Corner not formed as specified	X	
	More than two pieces of duck	X	
	Except as otherwise covered, any part omitted or not located as specified	X	

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:07Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor
Rivets	Rivet and washer not securely clinched or clinched too tight cutting fabric	X	
	Rivet not located inside stitch pattern as specified	X	
	Washer omitted	X	
	Washer on wrong side		X
Marking	Special marking missing, incorrect, illegible, improper location or size, facing wrong direction, or color not as specified	X	
	Identification marking omitted, incorrect, illegible, improper location, or size or color not as specified		X
Workmanship	Thread ends not trimmed as specified		X
	Grease, oil, ink or other stain		X

4.4.2.2 Visual examination of harness. The harness shall be examined for the defects listed below. The sample unit shall be one harness. The inspection level shall be II and the AQL shall be 2.5 major and 6.5 total defects per hundred units.

Examine	Defect	Classification Major	Minor
Fabric (duck)	Any hole, cut or tear, weak places or broken yarns	X	
	Color not as specified		X
	Not specified type or class	X	
Webbing and tape	Any hole, cut, tear, abrasion, weak place, broken or missing yarns, or edges frayed or scalloped	X	
	Any exposed end of nylon webbings not seared (unless otherwise classified)	X	
	Color not as specified		X
	Not specified type or class	X	
Open seam	1/2 inch or less in length		X
	More than 1/2 inch in length	X	

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:07Z
Check the source to verify that this is the currentversion before use.

Examine	Defect	Classification Major	Minor
Open seams (cont'd)	NOTE: A seam shall be classified as open where two or more stitches joining a seam are broken or where two or more continuous skipped or run-off stitches occur. Raw edges not caught in stitching where required shall be classified as open seams. On double stitched seams, a seam shall be classified as an open seam where either one or both sides of the seam are open.		
Runoffs	(Classify under open seams)		
Seams	Wrong type	X	
Stitches	Wrong type	X	
	Tension loose, resulting in loose top or bobbin thread		X
	Tension tight, resulting in puckering of fabric	X	
	One stitch per inch less than minimum specified		X
	Two or more stitches less than minimum specified	X	
	One to two stitches in excess of maximum specified		X
	Two or more stitches in excess of maximum specified	X	
Stitching	Any required row of stitching missing or incomplete (except on box stitching)	X	
	Thread breaks not overstitched 2 inches as specified	X	
	Ends not backstitched 1/2 inch where required	X	
	Needle chews	X	
Box stitching	One row of stitching omitted		X
	Two or more rows of stitching omitted	X	
Leg strap	Buffer omitted		X
	Adapter incorrect type	X	
	Adapter attached with friction grip facing wrong direction	X	
	Turn-under reversed		X
	Webbing spliced	X	
	Free end not square		X
	Not attached as specified on Drawing 5-4-697	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:07Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor
Strap A	Buffer omitted	X	
	Release fastener assembly reversed	X	
	Top of stitch pattern not through reinforcement "G"	X	
Release strap	Less than five thicknesses at rolled end	X	
	Link adapter incorrect type	X	
	Link adapter not attached as specified	X	
	Elastic keeper missing		X
	Snap incorrect type	X	
Leg strap guide	Folded edge not facing direction specified		X
Pocket	Located on wrong side	X	
Web straps E, H, L	Adapter attached with friction grip facing wrong direction	X	
	End not square		X
Web strap and handle	Adapter incorrect type	X	
	Adapter attached with friction grip facing wrong direction	X	
	Handle fold not as specified on Drawing 5-4-697	X	
	End not square		X
Handle	Fold reversed	X	
Web strap D	Buffer omitted	X	
	"V" ring incorrect type	X	
	"V" ring missing	X	
	"V" ring incorrectly attached	X	
Snap chape	Snap hook incorrect type	X	
	Snap hook incorrectly attached	X	
Keeper pin strap	Keeper pin missing	X	
	Strap color incorrect		X
	Strap incorrectly attached	X	
Pocket tie tape	Tape missing	X	
	Ends not waxed		X
	Not attached as specified	X	

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:07Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor
Hardware	Fractured, bent or damaged	X	
	Burrs, slivers, or sharp edges	X	
	Finish omitted or incorrect	X	
	Any area of corrosion	X	
Construction	Any component omitted or incorrectly located	X	
Marking	Marking omitted, incorrect, illegible, improper location or size or color not as specified		X
Workmanship	Thread ends not trimmed throughout as specified		X
	Grease, oil, ink, or stain		X
	Darn or patch	X	

* 4.4.2.3 Examination of visual and functional characteristics of release assembly. The release assembly shall be examined for the defects listed below. The sample unit for this examination shall be one harness with release and link adapters attached. The inspection level shall be III and the AQL shall be 0.15 defects per hundred units.

Examine	Defect
Release fastener assembly	Any required part omitted
	Release assembly is not positioned as shown on Drawing 5-4-916
	Release knob out of position, indicating torsional strain on cable
	Hook portion of latch fails to engage link adapter
	Any defect of latch, body of release fasteners or link adapter, resulting in failure of release action
	Release fasteners reversed, i.e., set with right hand fastener on left side of container
	Release pins fail to clear both latches when the release knob is in the release postion
	Nuts connecting actuator assembly to fastener assembly not secure

* 4.4.2.4 Dimensional examination. The sample unit for this examination shall be one pack and harness assembly. Examination shall be made of dimensional characteristics pertaining to overall dimensions and location and size of parts. Any deviation from dimensional requirements as specified on the applicable drawings shall constitute a defect. The inspection level shall be S-3 and the AQL shall be 2.5 defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 202640-21T21:07Z
Check the source to verify that this is the current version before use.

* 4.4.3 Packaging inspection. An examination shall be made to determine that the preservation, packing, and marking comply with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully packaged except that it need not be closed. Examination of closure defects listed below shall be made in two phases; first an interior examination; and second, an examination of the container sealed or closed for delivery. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per hundred units.

Examine	Defect
Marking (interior and exterior)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Materials	Any component missing, damaged, or not as specified.
Workmanship	Inadequate application of components, such as incomplete closure of container flaps, improper taping, loose strapping, inadequate stapling. Bulged or distorted container.
Contents	Number per shipping container is not as specified.
Preservation application	Naphthalene flakes missing.

* 5. PACKAGING

* 5.1 Preservation. Preservation shall be level A or Commercial as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Pack assembly. The felt pad of each pack assembly shall be freely sprinkled with naphthalene flakes and the pack assembly folded to dimensions approximately 24 by 19 inches. The straps shall be placed on the outside of the folded pack assembly. Each strap may be rolled and fastened with a rubber band.

5.1.1.2 Harness assembly. Each harness assembly shall be folded to dimensions approximately 24 by 14 inches and unit packed flat within a fiberboard box conforming to style RSC, type CF, class domestic, variety SW, grade 175, of PPP-B-636 except that the inspection shall be in accordance with 4.4.3. Inside dimensions of the fiberboard box shall be 24 inches in length, 14 inches in width, and 3-1/2 inches in depth. The box shall be closed with a 2-inch minimum width gummed tape conforming to type III, grade B of PPP-T-45.

Source: https://assist.dla.mil -- Downloaded: 202640-21T21:07Z
Check the source to verify that this is the currentversion before use.

5.1.1.3 Pack and harness assembly, complete. Each pack and harness assembly, consisting of a harness assembly folded as specified in 5.1.1.2, placed on top of a pack assembly prepared and folded as specified in 5.1.1.1, shall be packed flat within a intermediate fiberboard box. Each box shall conform to style RSC, type CF, class domestic, variety SW, grade 175, of PPP-B-636, except that the inspection shall be in accordance with 4.4.3. Inside dimensions of each fiberboard box shall be 24 inches in length, 19 inches in width and 5-1/2 inches in depth. The box shall be closed with a 2-inch minimum gummed tape conforming to type III, grade B of PPP-T-45.

* 5.1.2 Commercial. Each pack assembly, harness assembly, or complete pack and harness assembly shall be preserved in accordance with MIL-STD-1188.

5.2 Packing. Packing shall be level A, B, or Commercial as specified (see 6.2).

5.2.1 Level A packing.

5.2.1.1 Pack assembly. Six pack assemblies, preserved as specified in 5.1, shall be packed in a shipping container as hereinafter specified. Level A unit packs shall be packed flat, six in depth within a container. Approximate inside dimensions of containers shall be 24-1/2 inches in length, 19-1/2 inches in width, and 15 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely covered on the top and bottom with a sheet of 30 pound minimum basis weight kraft paper conforming to type I, grade B of UU-P-268.

5.2.1.2 Harness assembly. Six harness assemblies, preserved as specified in 5.1, shall be packed in a shipping container as hereinafter specified. Level A unit packs shall be packed flat, two in length, one in width, and three in depth within a container. Inside dimensions of each container shall approximate 29 inches in length, 24-1/2 inches in width, and 12 inches in depth. Approximate dimensions are furnished as a guide only.

5.2.1.3 Pack and harness assembly, complete. Three complete pack and harness assemblies, preserved as specified in 5.1, shall be packed in a shipping container as hereinafter specified. Level A intermediate packs shall be packed flat, three in depth, within a container. Inside dimensions of each container shall approximate 24-1/2 inches in length, 19-1/2 inches in width, and 18 inches in depth. Approximate dimensions are furnished as a guide only.

5.2.1.4 Shipping container. Each shipping container shall conform to style RSC, grade V2s of PPP-B-636; or overseas type, style A, type 2 load of PPP-B-601, as specified (see 6.2). Each fiberboard container packed with unboxed pack assemblies shall be fitted with a box liner conforming to type CF, class weather-resistant, variety DW, grade V15c of PPP-B-636. Each fiberboard shipping container shall be closed in accordance with method III, waterproofed in accordance with method V, and reinforced as specified in the appendix of PPP-B-636. Inspection of fiberboard shipping containers shall be in accordance with 4.4.3. Each wood shipping container shall be waterproofed with a case liner conforming to type I or II, grade C of MIL-L-10547, and closed and reinforced with steel strapping in accordance with the appendix of PPP-B-601.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:07Z
Check the source to verify that this is the current version before use.

5.2.2 Level B packing.

5.2.2.1 Pack assembly. Six pack assemblies, preserved as specified in 5.1, shall be packed in a fiberboard container conforming to style RSC-L, type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. The inside of each container shall be fitted with a box liner conforming to type CF, class domestic, variety DW, grade 275 of PPP-B-636. Level A unit packs shall be packed flat, six in depth within a container. Inside dimensions of each container shall approximate 24-1/2 inches in length, 19-1/2 inches in width, and 15 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall have the contents completely covered on the top and bottom with a sheet of 30-pound minimum basis weight kraft paper conforming to type I, grade B of UU-P-268. Each container shall be closed in accordance with method II as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.3.

5.2.2.2 Harness assembly. Six harness assemblies, preserved as specified in 5.1, shall be packed in a fiberboard container conforming to style RSC, type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. Level A unit packs shall be packed flat, two in length, one in width, and three in depth within a container. Inside dimensions of each container shall approximate 29 inches in length, 24-1/2 inches in width, and 12 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall be closed in accordance with method II as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.3.

5.2.2.3 Pack and harness assembly, complete. Three complete pack and harness assemblies, preserved as specified in 5.1, shall be packed in a fiberboard container conforming to style RSC, type CF (variety SW) or SF, class domestic, grade 275 of PPP-B-636. Level A intermediate packs shall be packed flat, three in depth within a container. Inside dimensions of each container shall approximate 24-1/2 inches in length, 19-1/2 inches in width, and 18 inches in depth. Approximate dimensions are furnished as a guide only. Each container shall be closed in accordance with method II as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.3.

5.2.2.3.1 Weather-resistant containers. When specified (see 6.2), shipping containers in 5.2.2.1, 5.2.2.2, and 5.2.2.3 shall be a grade V3c, V3s or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III as specified in the appendix of PPP-B-636, except that the inspection shall be in accordance with 4.4.3.

* 5.2.3 Commercial packing. Pack assemblies, harness assemblies and complete pack and harness assemblies, preserved as specified in 5.1, shall be packed in accordance with MIL-STD-1188.

5.3 Marking. In addition to any special marking required by the contract, unit packs, intermediate packs, and shipping containers shall be marked in accordance with MIL-STD-129 or MIL-STD-1188, as applicable.

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:07Z
Check the source to verify that this is the current version before use.

6. NOTES

6.1 Intended use. The pack and harness is used by the airborne personnel as a container for weapons and individual equipment required for effective and efficient operation in a tactical airborne situation. The harness is removable so that the pack can be transported as a field pack by the shoulder straps. The pack and harness can be adjusted to loads of varying shapes and sizes. A lowering line is not furnished with this assembly.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) When a first article sample is required (see 3.1.2, 4.3 and 6.4).
(c) Selection of applicable levels of preservation and packing (see 5.1 and 5.2).
(d) Type of shipping container desired (see 5.2.1.4).
(e) When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.3.1).

6.3 Samples. For access to samples, address the procuring activity issuing the invitation for bid.

6.4 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of paragraph 7-104.55 of Defense Acquisition Regulation. The first article should be a preproduction sample, initial production item, or other specific item described under the definition of a first article in the DAR. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should include specific instructions in all procurement instruments regarding arrangements for inspection and approval of the first article.

6.5 Methods of repair.

6.5.1 Patching lined area. If felt is not damaged, cut cotton duck patch 2 inches longer and 2 inches wider than damaged area, turn under edges of patch 1/2 inch, and center patch (outside of pack) over damaged area and sew patch to container body with a row of stitching, type 301, 1/8 inch from edge around entire patch. If felt lining is removed and cut duck patch as above. Position felt plug over damaged area, center duck patch over plug (inside pack) and stitch with single X box type stitch.

6.5.2 Patching unlined area. Use same method for patching lined area as above, except on inside of pack remove damage fabric and cut duck diagonally at corners, turn under edges 1/2 inch and sew one row of stitching, type 301, 1/8 inch from edge around entire patch.

6.6 Changes from previous issue. The margins of this specification are marked with an asterisk to indicate where changes (additions, modification, corrections, deletions) from the previous issue were made. This was done as a convenience only

Source: https://assist.dla.mil -- Downloaded: 202640-21T21:07Z
Check the source to verify that this is the currentversion before use.

and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the last previous issue.

Custodians:

Army - GL
Navy - AS

Review activities:

Army - MD
Navy - MC
DLA - CT


Preparing activity:

Army - GL

Project No. 8465-0586

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:07Z
Check the source to verify that this is the current version before use.


Low-Security Padlocks - Continued

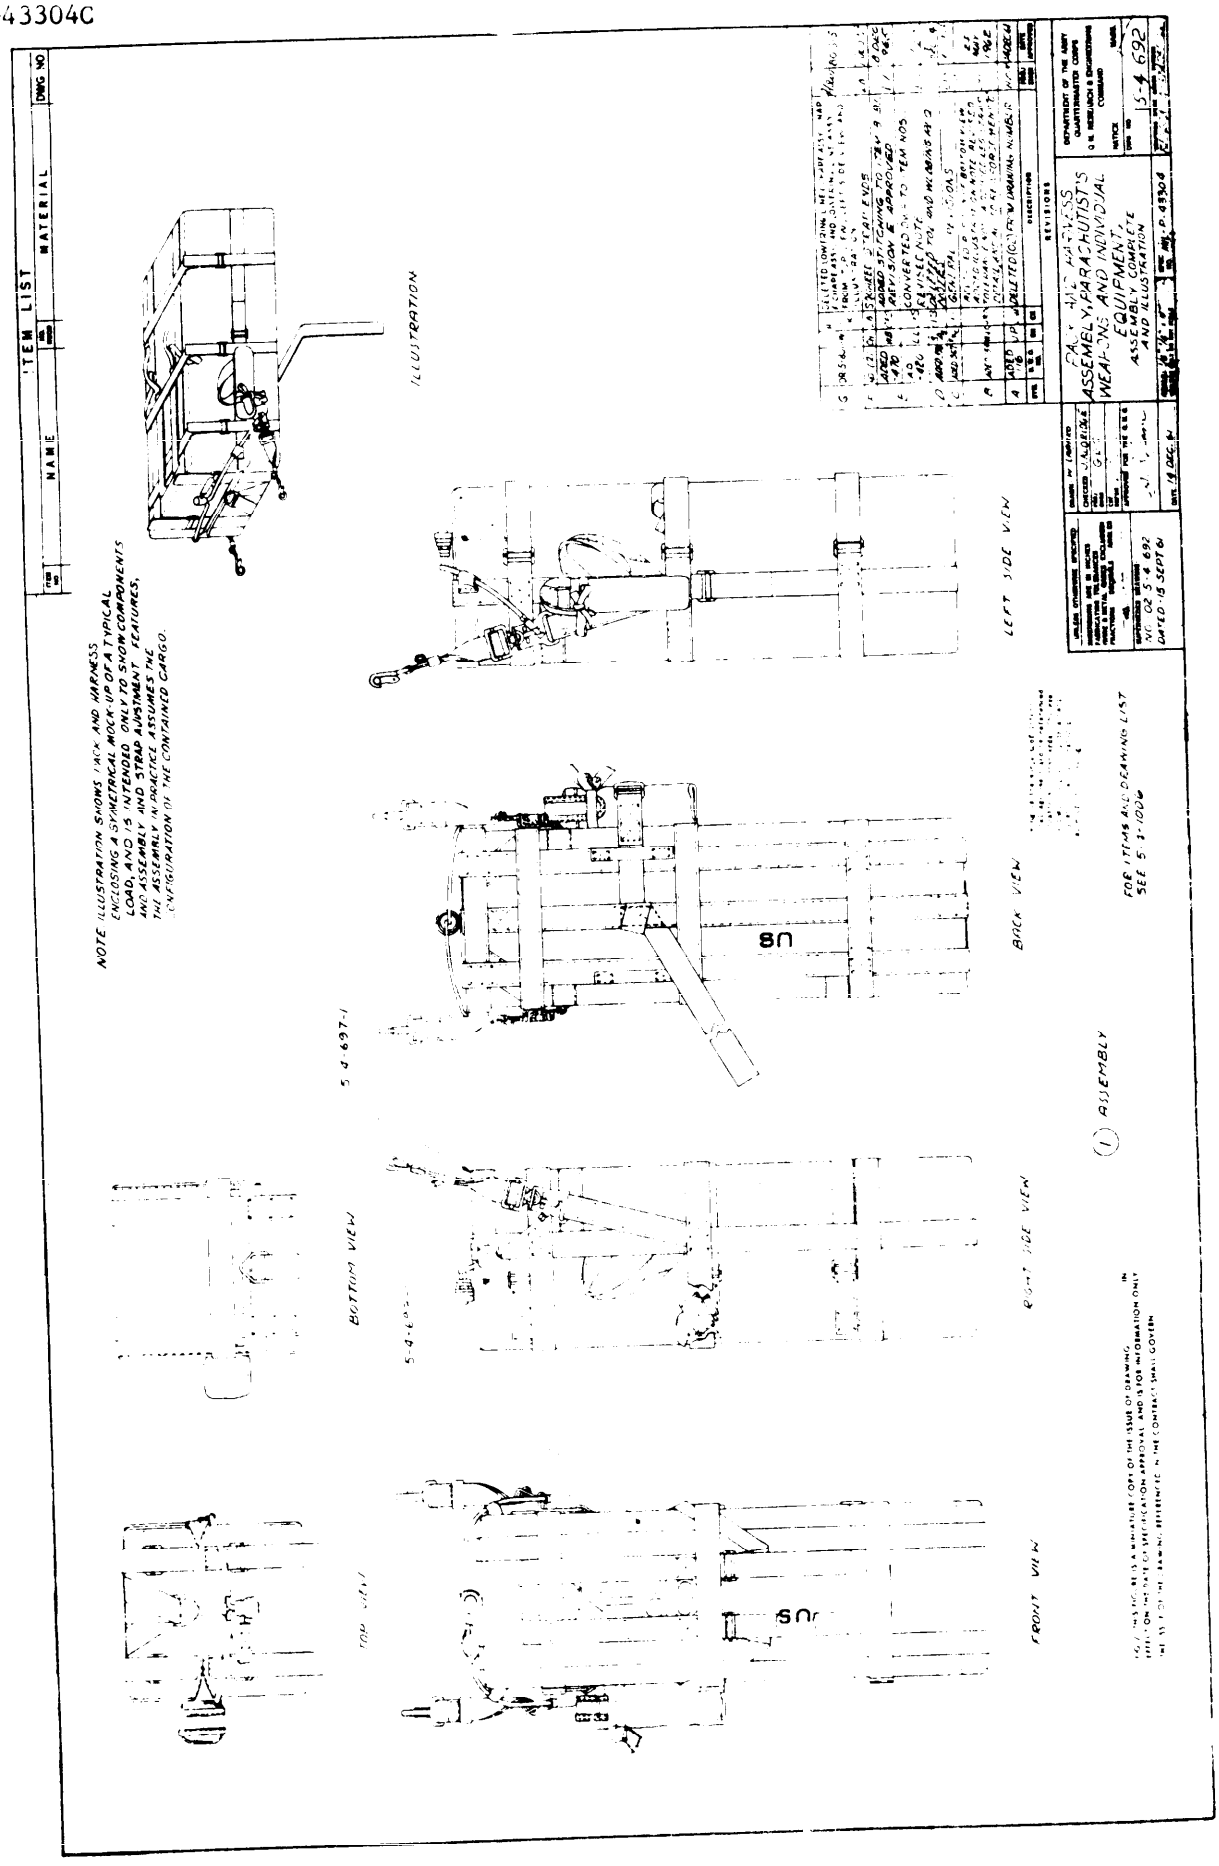


Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:07Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 20260-21T21:07Z
Check the source to verify that this is the current version before use.


REVISIONS			
ZONE	LTR	DESCRIPTION	DATE	APPROVED
	J	ITEM PLACES REVISED CHANGES 1. ADDED 0.25 THREAD TO NOTE 3 2. REV NOTE 6 & 7 ADDED NOTE 8	78 6-23	S...

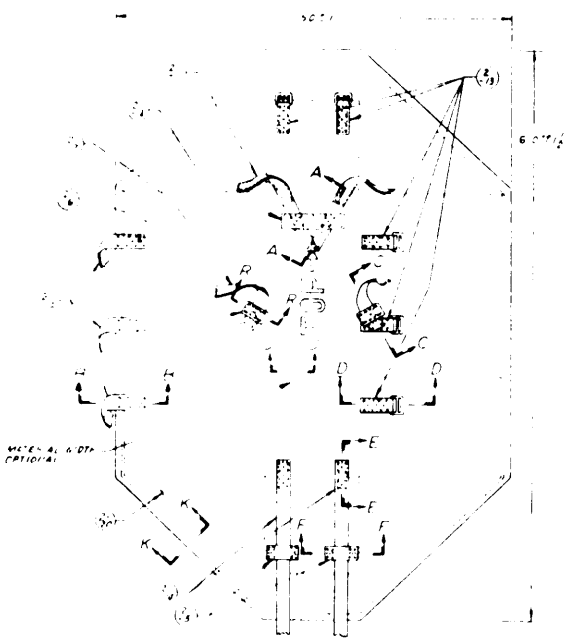

OUTSIDE VIEW
(BEFORE FORMING TOP)



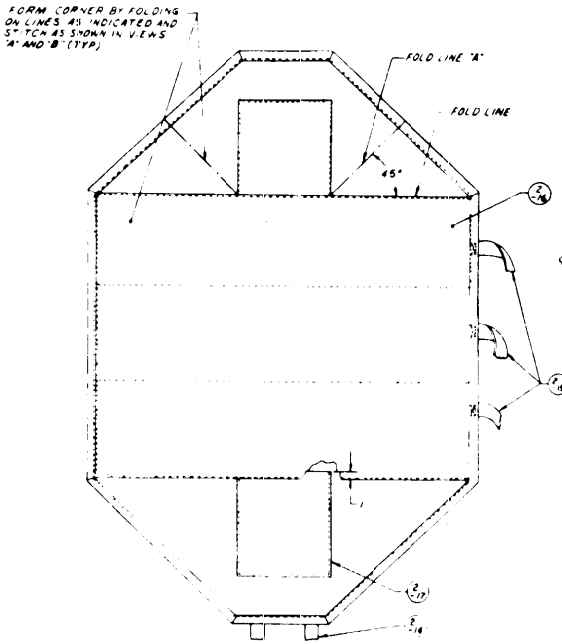INSIDE VIEW
(BEFORE FORMING TOP)




VIEW "A"
SHOWING METHOD OF FORMING CORNER INSIDE SHOWN

NOTES:

1. UNLESS OTHERWISE SPECIFIED, TOLERANCES SHALL BE AS FOLLOWS:-
   UP TO ½ ± 1/16
   ½ TO 2 ± 1/8
   2 TO 6 ± 1/4
   6 TO 12 ± 1/8
   12 AND OVER ± 1/4
2. FOR SECTIONS A A THRU H H AND K K THRU R-R SEE DWG 5-4-695.
3. ALL STITCHING SHALL BE TYPE 301, FED STD NO 751 WITH 2-24 AND 2-25 THREAD
4. FOR ITEMS AND DRAWING LIST SEE 5-4-1006
5. LEGEND
   LOCATION LINE
   STITCHING LINE
   FOLD LINE
6. ALL 2-24 THREAD STITCHING SHALL BE WITH 5 TO 7 STITCHES PER INCH EXCEPT FOR ATTACHING ITEMS 2-9, 2-16 AND 2-17 WHICH SHALL BE WITH 4 TO 5 STITCHES PER INCH. ALL 2-25 THREAD STITCHING SHALL BE WITH 6 TO 8 STITCHES PER INCH. ENDS OF ALL STITCHING SHALL BE BACKSTITCHED ½ INCH MINIMUM UNLESS TURNED UNDER IN A HEM OR HELD DOWN BY OTHER STITCHING
7. SEAR EXPOSED ENDS OF NYLON WEBBING
8. HEMMING AND QUILTING STITCHING SHALL BE WITH 2-25 THREAD




TOP VIEW



METHOD FOR SELVAGE EDGE MATERIAL

SECTION J J
SECTION J-J: TYPICAL LAP SEAM, TURN UNDER ½ INCH IF RAW EDGE IS USED



ENLARGED VIEW B
(OUT SIDE VIEW SHOWN)

ITEM NO	QTY REQD	CODE IDENT	PART NO. OR IDENTIFYING NO.	NOMENCLATURE OR DESCRIPTION	MATERIAL	MAT'L SPEC

PARTS LIST

NO. 2 THIS ISSUE IS IN ALPHANUMERIC COPY OF THE ISSUE OF DRAWING 7 P. 07) IN EFFECT ON THE DATE OF SPECIFICATION APPROVAL AND IS FOR INFORMATION ONLY. THE ISSUE OF THE DRAWING REFERENCED IN THE CONTRACT SHALL GOVERN.

SIZE	CODE IDENT NO
E	81337
SCALE	
UNIT WT	
SHEET	OF

NEXT ASSY	USED ON
APPLICATION	

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. WIRE AND METAL EDGES ENCLOSED

TOLERANCES
FRACTIONS ±
ANGLES ±
2 PLACE DECS ±
3 PLACE DECS ±


MATERIAL

DRAWN		DATE	78 6 19
TRACED			
CHECKED			
ENGINEER			
APPROVED			
APPROVAL OTHER			

U.S. ARMY NATICK LABORATORIES


PACK AND HARNESS ASSEMBLY
PARACHUTIST'S WEAPON'S AND INDIVIDUAL EQUIPMENT
PACK ASSEMBLY


5-4-693

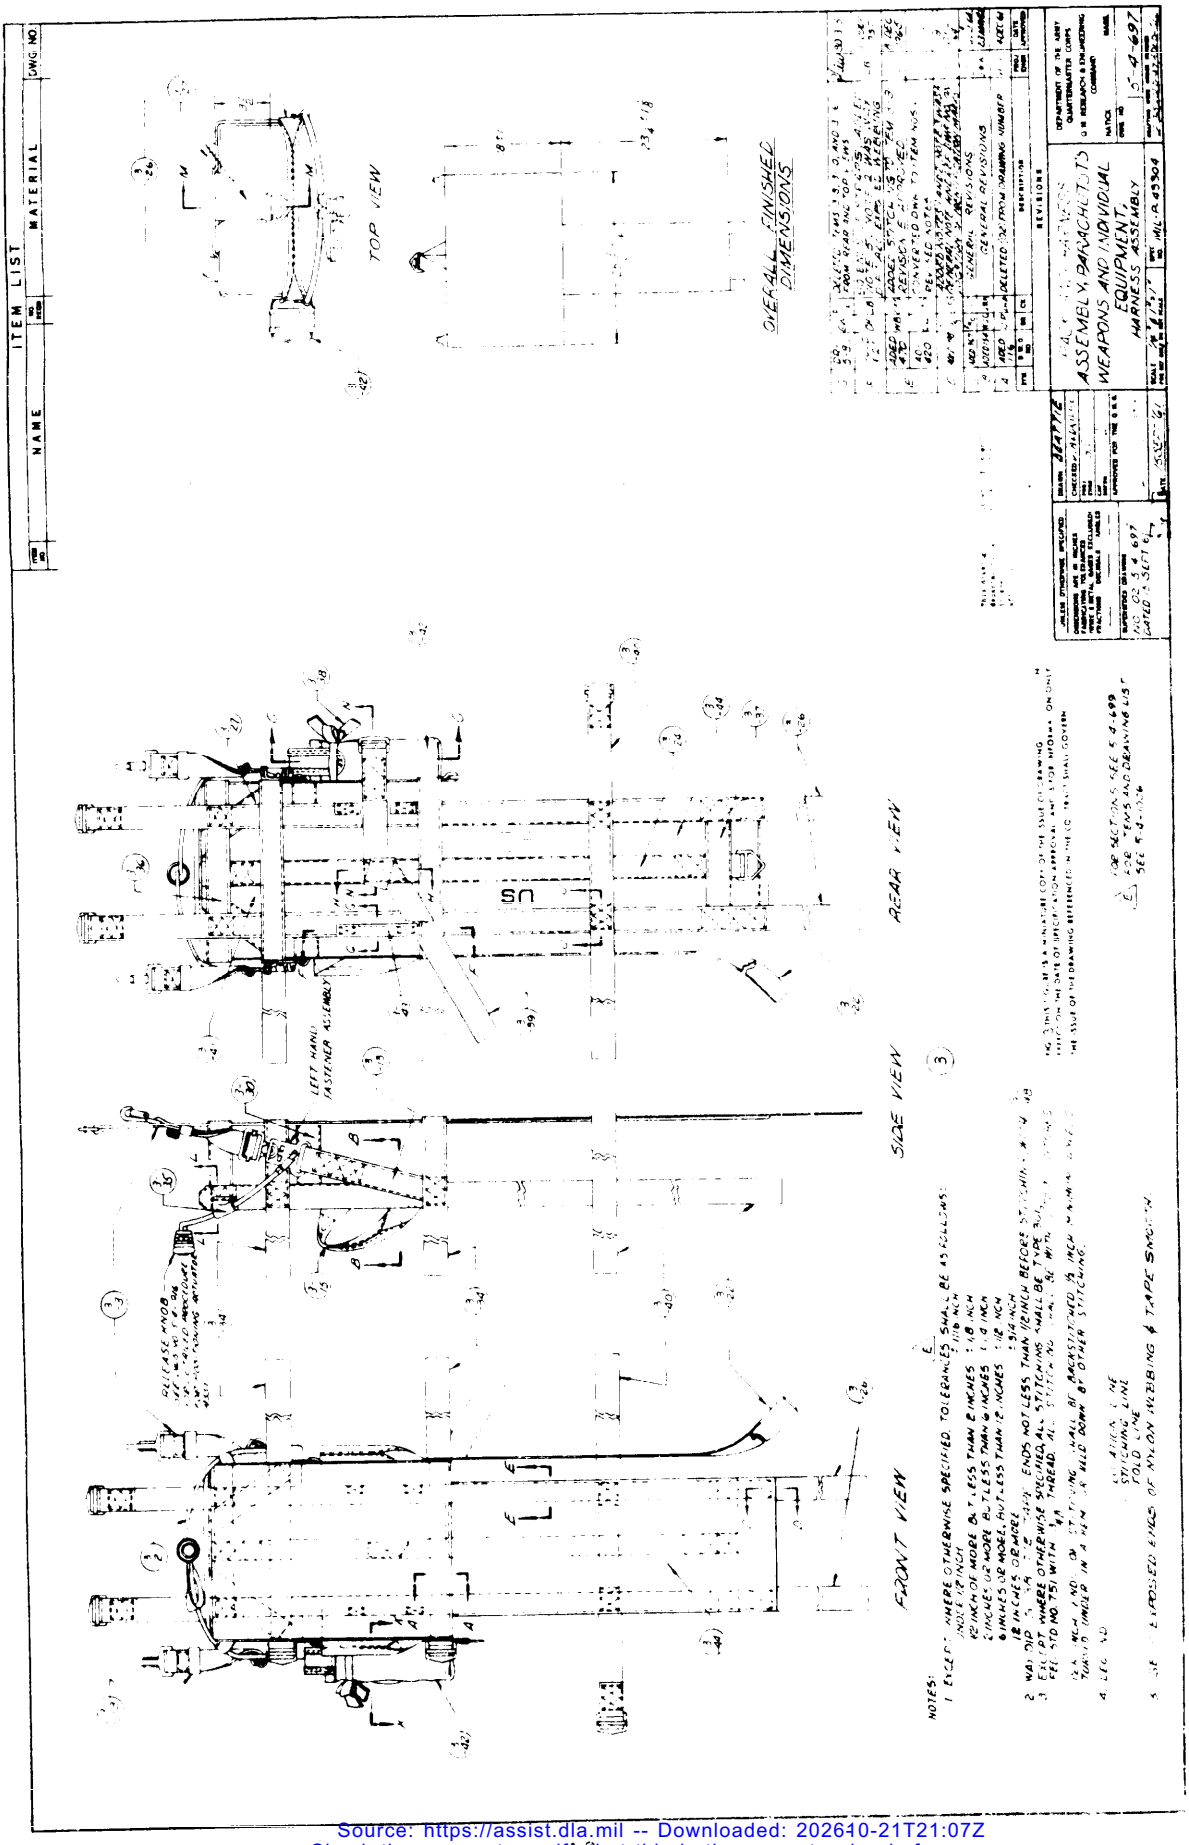

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:07Z
Check the source to verify that this is the current version before use.

REVISIONS						
ITEM	SHEET NO.	BY	CK	DESCRIPTION	DATE	APP'D
10	AD-630	LL	[illegible]	CONVERTED DWG TO ITEM NOS. ADDED NOTE	1/10	[illegible]
11	[illegible]	[illegible]	[illegible]	ARMYSON A APPROVED	1/10	[illegible]
12	AD-632	CF	10	SQUARED STRAP ENDS	1/10	[illegible]

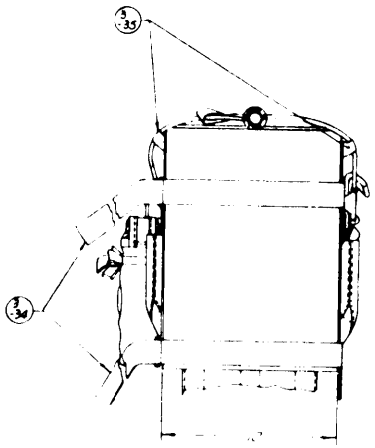

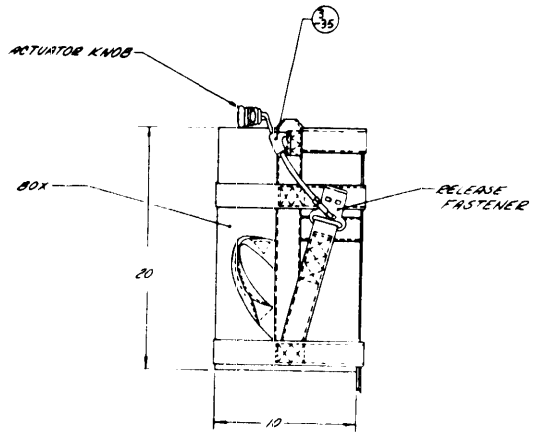

TO INSTALL PUSH PULL ACTUATOR ASSEMBLY TO HARNESS USE THE FOLLOWING PROCEDURE:

1. POSITION A 20"X12"X10" WOODEN OR RIGID PAPERBOARD BOX IN THE TOP PART OF HARNESS AND SECURE WITH THE TWO "H" WEB STRAPS 3-34 AS SHOWN.
2. WITH THE WORDS "PULL TO RELEASE" ON THE ACTUATOR KNOB FACING UP AS SHOWN, INSERT THE CONDUIT THROUGH THE RETAINING LOOPS ON BOTH SIDES OF HARNESS AS SHOWN
3. ATTACH TO RELEASE FASTENERS WITH THE NUTS AS SHOWN. WHEN TIGHTENING THE NUTS ASSURE THAT THE RELEASE FASTENERS ARE NOT TWISTED AWAY FROM THE HARNESS BODY. WHEN THE NUTS ARE FULLY TIGHTENED THE ACTUATOR KNOB SHALL BE LOCATED IN THE POSITION SHOWN.

FIG. 4 THIS FIGURE IS A MINIATURE COPY OF THE ISSUE OF DRAWING 5-4-1176 IN EFFECT ON THE DATE OF SPECIFICATION APPROVAL AND IS FOR INFORMATION ONLY THE ISSUE OF THE DRAWING REFERENCED IN THE CONTRACT SHALL GOVERN

FOR ITEMS AND DWG LIST SEE 5-4-1006

This drawing is the subject of letters [illegible] agreement and is referenced in specifications or standards changes affecting [illegible]

ITEM NO.	DESCRIPTION	NO. REQ'D	MATERIAL	MAT. SPEC	NO.
	ITEM LIST				

DRAWN	[illegible]-7
CHECKED	ICFS
ENGR	[illegible]
SUPV	[illegible]
ARMORAL DESIGN ACTIVITY	
ARMORAL OFFICER	
DATE	14 JUNE 66


U.S. ARMY NATICK LABORATORIES
NATICK, MASS.

PACK AND HARNESS ASSEMBLY, PARACHUTIST'S WEAPONS AND INDIVIDUAL EQUIPMENT
ATTACHMENT OF PUSH PULL ACTUATOR ASSY TO HARNESS

CODE	SIZE	DWG NO.
91897	D	5-4-976
SCALE NONE	WGT	SHEET 1 of 1

MIL-P-43304C

Source: https://assist.dla.mil -- Downloaded: 2026-02-21T21:07Z
Check the source to verify that this is the current version before use.

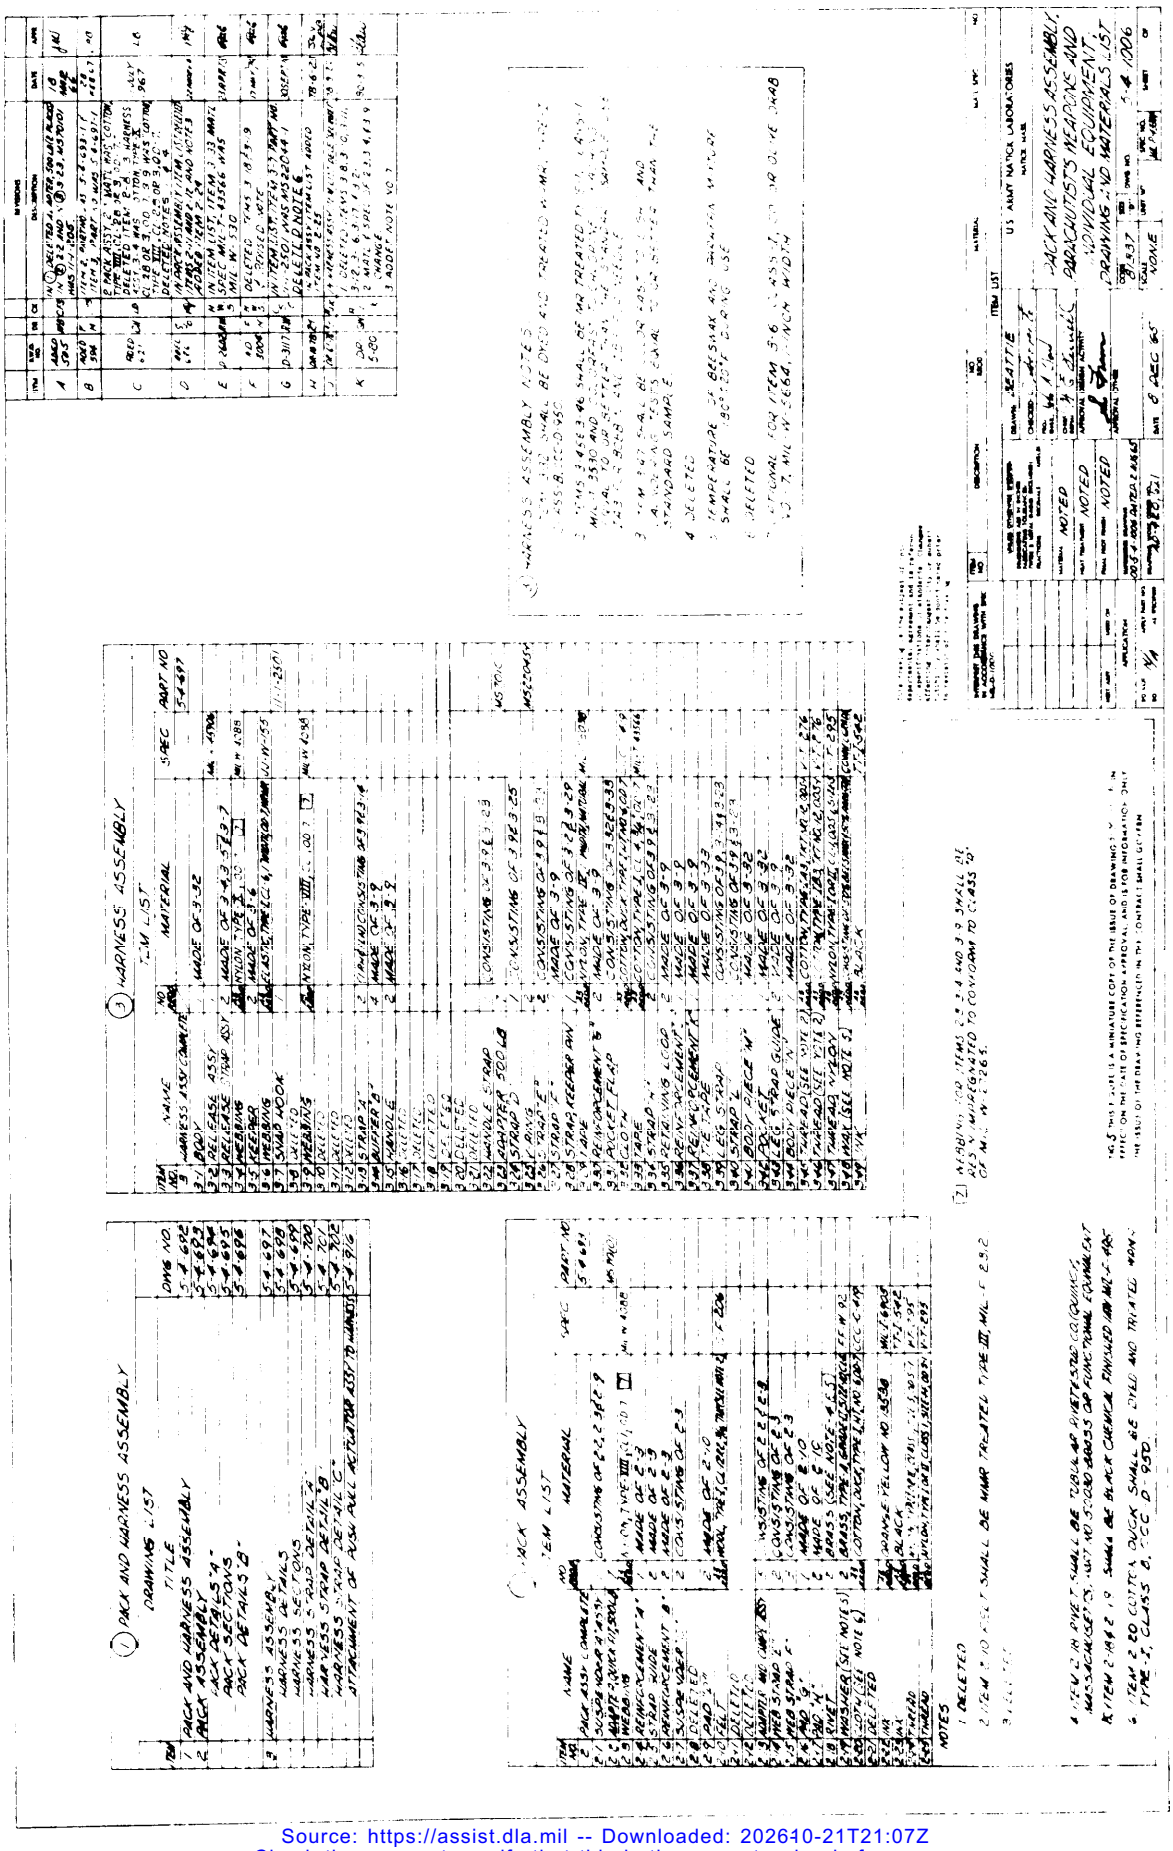

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:07Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

INSTRUCTIONS: This form is provided to solicit beneficial comments which may improve this document and enhance its use. DoD contractors, government activities, manufacturers, vendors, or other prospective users of the document are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity. A response will be provided to the submitter, when name and address is provided, within 30 days indicating that the 1426 was received and when any appropriate action on it will be completed.
NOTE: This form shall not be used to submit requests for waivers, deviations or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

DOCUMENT IDENTIFIER *(Number)* AND TITLE
MIL-P-43304C Pack And Harness Assembly, Parachutist's Weapons And Individual Equipment

NAME OF ORGANIZATION AND ADDRESS OF SUBMITTER

☐ VENDOR ☐ USER ☐ MANUFACTURER

1. ☐ HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE? ☐ IS ANY PART OF IT TOO RIGID, RESTRICTIVE, LOOSE OR AMBIGUOUS? PLEASE EXPLAIN BELOW.

A. GIVE PARAGRAPH NUMBER AND WORDING

B. RECOMMENDED WORDING CHANGE

C. REASON FOR RECOMMENDED CHANGE(S)

2. REMARKS

SUBMITTED BY *(Printed or typed name and address — Optional)*

TELEPHONE NO

DATE

DD FORM 1426 1 OCT 76

EDITION OF 1 JAN 72 WILL BE USED UNTIL EXHAUSTED.

Source: https://assist.dla.mil -- Downloaded: 202610-21T21:07Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

NO POSTAGE
NECESSARY
IF MAILED
IN THE
UNITED STATES

BUSINESS REPLY CARD

FIRST CLASS PERMIT NO. 12062 WASHINGTON D. C.

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Natick Research and Development Command
ATTN: DRDNA-ES
Natick, MA 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:07Z
Check the source to verify that this is the current version before use.