MIL-S-43306B
5 February 1974
SUPERSEDING
MIL-S-43306A
26 May 1970

MILITARY SPECIFICATION

SLING, BAG AND CASE CARRYING, ST-33

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 This specification covers one type of adjustable bag and case carrying sling made of cotton tape and equipped with metal snaps, loops, and slide.

2. APPLICABLE DOCUMENTS

* 2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

V-T-285	-	Thread, Polyester.
QQ-Z-325	-	Zinc Coating, Electrodeposited Requirements for.
DDD-L-20	-	Label; For Clothing, Equipage, And Tentage, (General Use).
PPP-B-636	-	Boxes, Shipping, Fiberboard.

MILITARY

MIL-E-480	-	Enamel, Baking, Phenol- or Urea-Formaldehyde.
MIL-L-3851	-	Loops, Slide (For Equipage).
MIL-F-10884	-	Fasteners, Snap.
MIL-L-11075	-	Loops, Strap Fastener.
MIL-T-43566	-	Tape, Textile, Cotton, General Purpose, Natural or in Colors.

FSC 8465

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:07Z
Check the source to verify that this is the current version before use.

STANDARDS

FEDERAL

FED-STD-751 - Stitches, Seams, and Stitchings.

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

DRAWINGS

ARMY NATICK LABORATORIES

2-3-175 - Sling, Bag and Case, Carrying (ST-33); Assembly and Details.

(Miniature reproduction of referenced drawing is attached for information only.)

(Copies of specifications, standards, publications and drawings required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

* 2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply:

National Motor Freight Traffic Association, Inc., Agent

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Inc., Tariff Order Section, 1616 P Street, N.W., Washington, DC 20036.)

Uniform Classification Committee, Agent

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:07Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

* 3.1 Samples.

* 3.1.1 Guide sample. Guide samples of the end item, when furnished, are solely for guidance and information to the supplier (see 6.3). Variations from this specification may appear in the sample, in which case this specification shall govern.

* 3.2 First article. When specified (see 6.2), the supplier shall furnish a sample for first article inspection and approval (see 4.3 and 6.4).

3.3 Materials.

3.3.1 Tape, cotton. The cotton tape shall be Olive Drab 7, and shall conform to type I, class 4, 3/4 inch width of MIL-T-43566.

3.3.2 Thread, polyester. The thread for all stitching shall be a polyester thread size E conforming to type I, class 1, subclass A of V-T-285.

* 3.3.2.1 Color. The thread shall be dyed Olive Drab S-1 (C.A. 66022) and shall show fastness to weathering equal to or better than the standard sample. When no standard sample is available the thread shall show good fastness to weathering.

3.3.3 Fastener, snap. The snap fastener shall be brass, black finish, conforming to style 3, finish 2 of MIL-F-10884. The male components shall consist of a stud and eyelet, and the female components shall consist of a pronged ring and socket.

* 3.3.4 Slide, steel. The slide shall be 3/4 inch, steel, conforming to class 3, style 2, construction "C" of MIL-L-3851.

* 3.3.5 Loop, steel. The loop shall be steel wire, 3/4 by 5/16 inch conforming to type III, style MM of MIL-L-11075.

3.4 Construction. The construction shall conform to the drawing listed in section 2 and as specified herein.

3.4.1 Stitches, seams, and stitchings.

* 3.4.1.1 All stitches, seams, and stitchings except bartacking shall be performed using stitch type 301 of FED-STD-751, with 6 to 8 stitches per inch and 1/8 inch stitching margin unless otherwise specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:07Z
Check the source to verify that this is the current version before use.

3.4.1.2 Automatic stitching. Any of the stitching operations cited in this specification may be performed with an automatic machine provided the requirements for stitch pattern, stitches per inch, and size and type of thread are met; and at least three tying, overlapping or backstitches are used to secure the ends of stitching.

3.4.1.3 Type 301 stitching. Thread breaks in stitching shall be overstitched not less than 1/4 inch back of the break. Ends of stitching shall be backstitched or backtacked not less than 1/4 inch except where ends are caught in other seams and stitching. Thread tension shall be maintained so that there will be no loose or tight stitching and the lock will be imbedded in the materials sewed.

3.4.1.3.1 Repairs of type 301 stitching. Repairs of type 301 stitching shall be as follows:

a. When thread breaks or bobbin run-outs occur during seaming, the stitching shall be repaired by restarting the stitching a minimum of 1/4 inch back of the end of stitching. 1/

b. Thread breaks, or two or more consecutive skipped stitches or runoffs noted during inspection of the item (in-process or end item), shall be repaired by overstitching. The stitching shall start a minimum of 1/4 inch in back of the defective area, continue over the defective area and continue a minimum of 1/4 inch beyond the defective area onto the existing stitching. Loose or excessively tight stitching shall be repaired by removing the defective stitching without damaging the materials, and restitching in the required manner. 1/

1/ When making the above repairs, the ends of stitching are not required to be backstitched.

* 3.4.1.4 Bartacking. Bartacking shall be 7/16 ± 1/16 inch in length and 1/8 ± 1/32 inch in width and shall contain 28 stitches. Bartacking shall be free from thread breaks and loose or tight stitching.

* 3.4.1.5 All thread ends shall be trimmed to 1/4 inch maximum length.

* 3.4.2 Setting of style 3 snap fasteners. Holes prepunched before inserting the male part of the fastener shall be smaller than the outside diameter of the fastener barrel so that the barrel must be forced through the hole. The fasteners shall be securely clinched without cutting the material. Surfaces around the hole edge shall be free of uncut thread ends.

3.5 Marking. The 3/8 inch identification marking shall consist of the item nomenclature "ST-33 SLING", Federal stock number and contract number. The identification marking shall be stamped in one continuous line, in the location specified on Drawing 2-3-175 and shall conform to type IV, class 9 of DDD-L-20. Fastness of class 9 marking shall be as specified for class 5 marking.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:07Z
Check the source to verify that this is the current version before use.

3.6 Workmanship. The finished sling with assembled components as required shall conform to the quality and grade of product established by this specification. Occurrence of defects shall not exceed the applicable acceptable quality levels.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

* 4.2 Classification of inspection. The inspection requirements specified herein are classified as follows:

a. First article inspection (see 4.3).
b. Quality conformance inspection (see 4.4).

* 4.3 First article inspection. When required (see 6.2), the first article submitted in accordance with 3.2 shall be visually inspected as specified in 4.4.3.1 and 4.4.3.2 for compliance with design, construction, workmanship and dimensional requirements.

* 4.4 Quality conformance inspection. Sampling for inspection shall be performed in accordance with MIL-STD-105, except where otherwise indicated hereinafter.

4.4.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be tested in accordance with all requirements of referenced specifications, drawings and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase documents.

4.4.2 Intermediate examination. Prior to final assembly of the sling, the tape shall be examined for conformance to the cut length requirements specified in Drawing 2-3-175. Any cut length not within the specified tolerances shall be scored as a defect. The sample unit shall be one complete unassembled sling. The inspection level shall be S-3 and the acceptable quality level (AQL) shall be 2.5 defects per hundred units.

4.4.3 Examination of the end item. The classification of defects shall be in accordance with 4.4.3.1 and 4.4.3.2. The inspection levels and AQLs shall be in accordance with 4.4.3.3. The sample unit for these examinations shall be one finished sling.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:07Z
Check the source to verify that this is the current version before use.

* 4.4.3.1 Examination for visual characteristics.

Examine	Defect	Classification Major	Minor
Tape	Not specified color.	X	
	Any hole, cut or tear.	X	
	Frayed or scalloped edges, not firmly or tightly woven.	X	
Hardware	Broken or malformed, failing to serve intended purpose; corroded area, burr or sharp edge.	X	
	Finish omitted.	X	
	Areas of no finish.		X
	Color not as specified.		X
Snap fasteners	Any fastener not functioning properly, i.e. fails to snap closed, provide a secure closure or to open freely.	X	
	Clinched loosely, permitting male components to rotate freely in the hole in the material.	X	
	Clinched excessively tight, cutting surrounding material.	X	
	NOTE: The fasteners shall be snapped and unsnapped twice to determine whether parts of fastener separate freely and also effect a secure closure.		
Open seams	Any.	X	
	NOTE: A seam shall be classified as open when one or more stitches joining a seam are broken or when two or more continuous skipped stitches or runoffs occur.		
Seam and stitch type	Wrong seam or stitch type.	X	
Bartacks (when applicable)	One or more bartacks omitted.	X	
	Any bartack not as specified or not in specified location.		X
	Number of stitches not as specified.		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:07Z
Check the source to verify that this is the current version before use.

Examine	Defect	Classification Major	Minor
Stitch tension	Loose, resulting in a loosely exposed top or bobbin thread; tight, resulting in tightness or puckering of tape on seams.		X
Stitches per inch	One stitch less than minimum specified.		X
	Two or more stitches less than minimum specified.	X	
	One or more stitches in excess of maximum specified.		X
Stitching margin	Not as specified.		X
Thread breaks	Backstitched less than 1/4 inch.		X
NOTE:	Thread break not backstitched shall be classified as an open seam.		
Stitching ends	Not backstitched or secured.	X	
	Backstitched less than 1/4 inch, (or not secured as specified when stitching is performed on automatic machine).		X
Components and assembly	Any component part or any operation omitted or not as specified (unless otherwise classified herein).	X	
	One or more rows of stitching omitted.	X	
	Needle chews.	X	
Thread ends	Not trimmed to 1/4 inch maximum length.		X
Cleanness	Grease or oil stains clearly noticeable.		X
Marking	Omitted, illegible, incorrect, not specified type or size, misplaced.		X

4.4.3.2 Dimensional examination. The sling shall be examined for defects in dimensions. Any dimension not within the established tolerances shall be classified as a defect.

4.4.3.3 Inspection levels and AQLs. The inspection levels and AQLs expressed in defects per hundred units shall be as follows:

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:07Z
Check the source to verify that this is the current version before use.

Examination	Inspection level	AQL Major	AQL Total
For defects applicable to 4.4.3.1	II	2.5	6.5
For defects applicable to 4.4.3.2	S-3	-	4.0

4.4.4 Examination of preparation for delivery requirements. An examination shall be made to determine that the packaging, packing and marking comply with the section 5 requirements. Defects shall be scored in accordance with the list below. The sample unit shall be one shipping container fully prepared for delivery except that it need not be closed. Shipping containers fully prepared for delivery shall be examined for defects of closure. The lot size shall be the number of shipping containers in the end item inspection lot. The inspection level shall be S-2 and the AQL shall be 2.5 defects per hundred units.

Examine	Defect
Marking (exterior)	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application.
Materials	Any component missing or not as specified. Any component damaged.
Workmanship	Inadequate application of components, such as incomplete closure of container flaps, improper taping, loose strapping, or inadequate stapling. Bulged or distorted container.
Content	Number of bundles per container is more or less than required. Number of slings per bundle is more or less than required. 1/

1/ For this defect, 5 bundles shall be examined from each shipping container in the sample.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A or C as specified (see 6.2).

5.1.1 Level A. Each sling shall be adjusted to its shortest length and folded in half to measure approximately 11 inches. Five folded slings, alternately reversed end for end, shall be stacked to form a bundle. The bundle shall be securely tied with cotton tape or twine approximately two inches in from each end.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:07Z
Check the source to verify that this is the current version before use.

5.1.2 Level C. Slings shall be packaged to afford adequate protection against physical damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets this requirement.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.2).

* 5.2.1 Level A. Five hundred slings, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to grade V2s, style RSC of PPP-B-636. Each shipping container shall be closed in accordance with method III, waterproofed in accordance with method V, and reinforced as specified in the appendix of the container specification.

5.2.2 Level B. Five hundred slings, packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to type CF (variety SW) or SF, class domestic, grade 200, style RSC of PPP-B-636. Each shipping container shall be closed in accordance with method II as specified in the appendix of the container specification.

* 5.2.2.1 When specified (see 6.2), the shipping container shall be a grade V3c, V3s or V4s fiberboard box fabricated in accordance with PPP-B-636 and closed in accordance with method III as specified in the appendix of the container specification.

5.2.3 Level C. Slings, packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with Uniform Freight Classification Rules or National Motor Freight Classification Rules, as applicable.

5.3 Marking. In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The sling is a component of a bag and case used by military personnel of the Department of Defense in carrying a sound ranging set.

* 6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) When a first article is required (see 3.2, 4.3 and 6.4).
(c) Selection of applicable levels of packaging and packing (see 5.1 and 5.2).
(d) When weather-resistant grade fiberboard shipping containers are required for level B packing (see 5.2.2.1).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:07Z
Check the source to verify that this is the current version before use.

* 6.3 For access to samples, address the procuring office issuing the invitation for bids.

* 6.4 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of ASPR 7-104.55. The first article should consist of one completed sling. The contracting officer should include specific instructions in all procurement instruments regarding arrangements for inspection and approval of the first article.

6.5 The margins of this specification are marked with an asterisk to indicate where changes (additions, modifications, corrections, deletions) from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and suppliers are cautioned to evaluate the requirements of this document based on the entire content, irrespective of the marginal notations and relationship to the last previous issue.

Custodians:

Army - GL
Air Force - 82

Review activity:

Army - MD

User activity:


Navy - MC

Preparing activity:

Army - GL

Project No. 8465-0553

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:07Z
Check the source to verify that this is the current version before use.

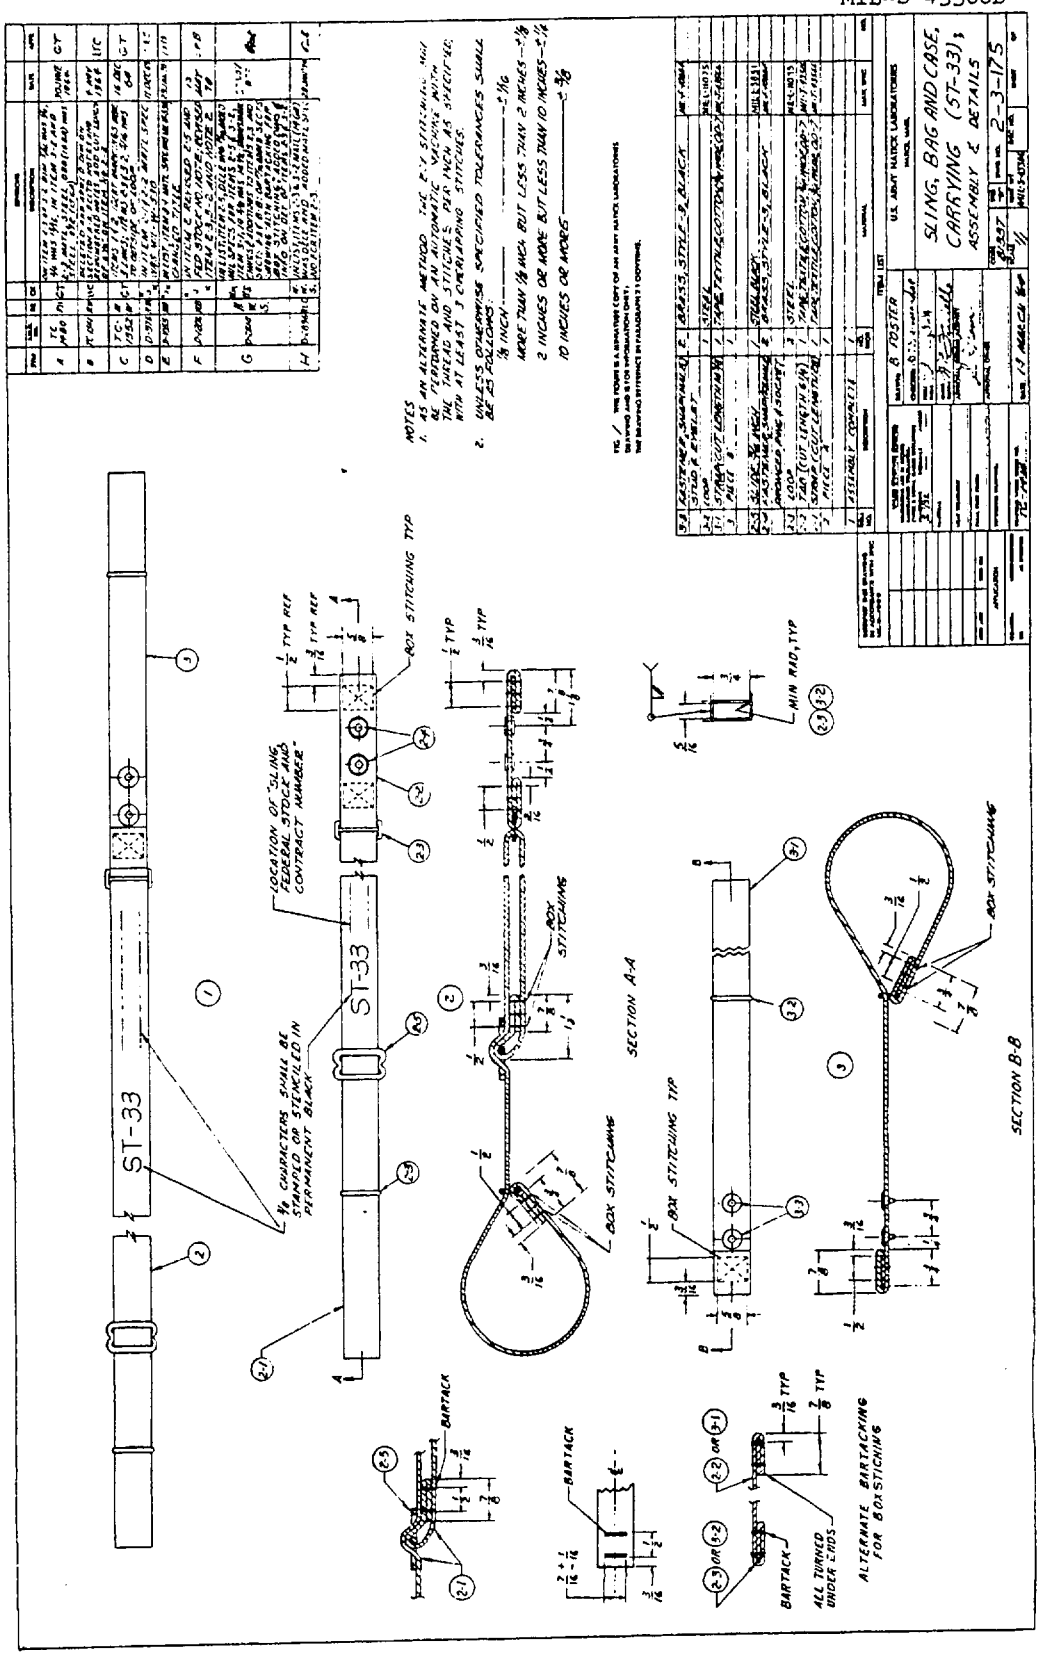

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:07Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:07Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

Sling, Bag And Case Carrying, ST-33 MIL-S-43306B

NAME OF ORGANIZATION AND ADDRESS	CONTRACT NUMBER
	MATERIAL PROCURED UNDER A ☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?
   A. GIVE PARAGRAPH NUMBER AND WORDING.

   B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

   ☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*	TELEPHONE NO.
	DATE

DD FORM 1 JAN 72 1426

REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:07Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE ARMY
US Army Natick Laboratories
Natick, MA 01760

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

STSNLT-EQS

POSTAGE AND FEES PAID
DEPARTMENT OF THE ARMY
DOD – 314



Commander
US Army Natick Laboratories
ATTN: STSNLT-EQS
Natick, MA 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:07Z
Check the source to verify that this is the current version before use.