MILITARY SPECIFICATION

TRUCKS, DRYING, BINDERY

This specification is approved for use by all Departments and Agencies of the Department of Defense.

1. SCOPE

1.1 Scope. This specification covers one type of bindery drying trucks with swivel casters and removable shelves.

1.2 Classification. Trucks shall be of the following sizes as specified (see 3.4 and 6.2).

Size 1 - 25 inches in length by 20 inches in width by 56 inches in height, 4 shelves

Size 2 - 38 inches in length by 25 inches in width by 55 inches in height, 4 shelves

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issue in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein:

SPECIFICATIONS

FEDERAL

L-P-378	-	Plastic Sheet and Strip, Thin Gauge, Polyolefin
PPP-B-636	-	Boxes, Shipping, Fiberboard
PPP-C-650	-	Crates, Wood, Open and Covered

MILITARY

MIL-P-116	-	Preservation, Method Of

FSC 3610

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:11Z
Check the source to verify that this is the current version before use.

STANDARDS

MILITARY

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage
MIL-STD-130 - Identification Marking of U.S. Military Property

(Copies of specifications and standards required by suppliers in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

* 2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply:

National Motor Freight Traffic Association, Inc., Agent

National Motor Freight Classification

(Application for copies should be addressed to the American Trucking Associations, Inc., Tariff Order Section, 1616 P Street, N.W., Washington, DC 20036.)

Uniform Classification Committee, Agent

Uniform Freight Classification

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago, IL 60606.)

(Technical society and technical association specifications and standards are generally available for reference from libraries. They are also distributed among technical groups and using Federal agencies.)

3. REQUIREMENTS

* 3.1 First article. When specified (see 6.2), the supplier shall furnish a sample of the item to be procured under this specification for first article inspection and approval (see 4.2 and 6.3).

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:11Z
Check the source to verify that this is the current version before use.

* 3.2 Standard product. The truck delivered under this specification shall be the manufacturer's commercial product, except for any changes necessary to comply with specification requirements. All like items furnished on any one contract, including parts and subassemblies thereof, shall be new and interchangeable.

* 3.3 Materials and components. Materials and components shall be as specified herein. Materials not definitely specified shall be of the quality normally used by the manufacturer in his standard commercial truck provided the completed item complies with all provisions of this specification.

3.4 Design and construction. The trucks shall consist of an upright frame with 3 sides and base mounted on 4 swivel casters with 4 removable shelves and be similar to figure 1. The construction of all components and assemblies of the items covered by this specification shall conform to the requirements specified herein.

3.4.1 Frame. The frame shall be fabricated of steel tubing of the size and grade normally used in the manufacture of this item.

3.4.2 Sides. The three sides shall be constructed of steel rods of the grade normally used in the manufacture of this item. The rods shall be not less than 5/16 inch diameter, spaced 1-7/8 inches apart ± 1/4 inch and shall be permanently attached to the frame.

3.4.3 Shelves. The shelves shall be fabricated of selected hardwood of the grade normally used in the manufacture of this item. The shelves shall be inclined toward the back of the truck to prevent printed matter from sliding off. The shelves shall be so attached that they may be quickly and easily removed.

* 3.4.4 Casters, swivel. The casters shall be the ball-bearing swivel type, having not less than 4-inch diameter wheels equipped with either ball or roller bearings.

3.5 Tolerance. Overall dimensions specified are approximate and a ± tolerance of 1-1/2 inches will be acceptable (see 1.2).

3.6 Performance.

3.6.1 Shock load. The truck shall be capable of withstanding a load of 500 pounds and shall show no evidence of permanent deformation or failure of any part when tested as specified in 4.4.1.

3.7 Marking for identification. Marking shall be in accordance with MIL-STD-130.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:11Z
Check the source to verify that this is the current version before use.

3.8 Finish. The truck shall be finished in accordance with the manufacturer's standard commercial practice for this type of item.

3.9 Workmanship. The finished truck shall conform to the quality and grade of product established by this specification. There shall be no evidence of scale, burrs, pits, cracks, or warped surfaces. All sharp edges and corners shall be removed.

4. QUALITY ASSURANCE PROVISIONS

* 4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

* 4.2 First article. When a first article is required, the truck shall be examined for defects in table I, dimensions specified and tested as specified in 4.4.1. The presence of any defect or failure of the test shall be cause for rejection of the first article.

* 4.3 Quality conformance inspection. Except as otherwise specified herein, sampling for inspection shall be performed in accordance with the provisions set forth in MIL-STD-105.

* 4.3.1 Component and material inspection. In accordance with 4.1 above, components and materials shall be inspected and tested in accordance with all the requirements of referenced specifications, drawings, and standards unless otherwise excluded, amended, modified or qualified in this specification or applicable purchase document.

* 4.3.2 End item inspection. The inspection lot shall consist of all trucks of one size submitted for inspection at one time.

* 4.3.2.1 Visual examination. The truck, drying, bindery shall be examined for defects as set forth in table I. The inspection level shall be level II, with an acceptable quality level (AQL) of 2.5 for major defects and 6.5 for total defects, expressed in terms of defects per hundred units.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:11Z
Check the source to verify that this is the current version before use.

TABLE I. Classification of defects

Examine	Defect	Classification Major	Minor
Construction and workmanship	Missing component	X	
	Shelves not inclined toward the back	X	
	Scale, burrs, pits, cracks, warped surfaces or sharp edges	X	
	Shelves not quickly and easily removed	X	
	Casters not as specified	X	
	Not similar to figure 1	X	
Finish	Not manufacturer's commercial practice		X
Marking	Missing, not legible, incomplete		X

* 4.3.2.2 Dimensional examination. The truck, drying, bindery shall be examined for compliance with dimensions specified herein. Any dimension not within the specification tolerance shall be a defect. The inspection level shall be S-2 with an AQL of 4.0 defects, expressed in terms of defects per hundred units.

* 4.3.3 End item testing. When a first article is not required, the first produced truck shall be tested as specified in 4.4.1. Sample production trucks shall be tested as specified in 4.4.1. Failure of a test shall be recorded as a defect. Inspection level shall be S-2 with an AQL of 2.5 defects, expressed in terms of defects per hundred units.

* 4.3.4 Examination of preparation for delivery. An examination shall be made to determine that preservation, packaging, packing and marking as required by section 5 of this specification are complied with. Defects shall be scored as specified in table II. The sample unit shall be one shipping container fully prepared for delivery inspection. The lot shall be the number of containers offered for delivery at one time. The inspection level shall be S-2 and the AQL shall be 4.0 defects, expressed in terms of defects per hundred units. Examination for closure and strapping shall be in accordance with PPP-B-636 and PPP-C-650.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:11Z
Check the source to verify that this is the current version before use.

TABLE II. Examination of preparation for delivery

Examine	Defect
Marking, exterior and interior	Omitted; incorrect; illegible; of improper size, location, sequence, or method of application
Preservative	Improperly applied or missing
Materials	Any nonconforming component, component missing, damaged or otherwise defective
Content	Contents per container is more or less than required

4.4 Tests.

4.4.1 Shock load. The truck shall be placed on a raised platform 1 inch high. An equally distributed load of 125 pounds shall be placed on each shelf of the truck. The truck shall be rolled completely off the raised platform at a minimum speed of 2 miles per hour (mi/h) on to a level concrete surface. This test shall be repeated five (5) times. After completion of the test, the load shall be removed and the truck shall be examined for compliance with 3.6.1.

5. PREPARATION FOR DELIVERY

5.1 Preservation and packaging. Trucks shall be preserved and packaged level A or C as specified (see 6.2).

5.1.1 Level A.

5.1.1.1 Disassembly and lubrication. The casters shall be detached from the truck: The casters shall be lubricated to capacity with the manufacturer's recommended lubricant containing a rust inhibitor.

* 5.1.1.2 Cleaning. All exposed, uncoated ferrous metal surfaces including nuts, bolts, and washers shall be cleaned process C-1 of MIL-P-116 and thoroughly dried.

5.1.1.3 Preservative. All exposed, uncoated ferrous metal surfaces, cleaned as specified in 5.1.1.2, shall be coated with preservative conforming to type P-1 of MIL-P-116.

* 5.1.1.4 Packaging. The nuts, bolts, washers of each truck, shall be placed in a cotton cloth drawstring bag. The casters shall be completely

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:11Z
Check the source to verify that this is the current version before use.

wrapped in kraft paper having a minimum basis weight of 60 pounds (24 by 36-500) and the wrap secured with tape. The casters and bagged hardware of each truck shall be packaged in a snug-fitting fiberboard box conforming to style RSC, type CF or SF, class domestic, variety optional of PPP-B-636. Closure shall be in accordance with the appendix of the container specification. The shelves shall be removed, stacked one on top of the other, slipsheeted and completely wrapped with kraft paper, as specified, and then placed in the bottom of the truck. The wrapped shelves shall then be secured in place with cotton, sisal, or jute twine having a minimum breaking strength of 80 pounds.

* 5.1.2 Level C. Each truck shall be perserved and packaged to afford adequate protection against corrosion, deterioration and damage during shipment from the supply source to the first receiving activity. The supplier may use his standard practice when it meets these requirements.

5.2 Packing. Trucks shall be packed level A, B or C as specified (see 6.2).

* 5.2.1 Level A. Each size 1 or 2 truck, preserved and packaged as specified in 5.1, shall be packed in a snug-fitting crate conforming to type I, style A of PPP-C-650, except that the dimensional limitations shall be waived. The fiberboard box containing hardware and casters shall be secured within the truck in such a manner as to prevent movement during transit. The truck shall be blocked, braced, bolted and cushioned as required in accordance with the appendix of the crate specification. The contents shall be provided with a full length shroud in accordance with the appendix of the crate specification, except that the shroud may be made of polyethylene. The polyethylene flexible film shall be minimum 0.004-inch thick conforming to type II, grade A, B or C, finish 1 of L-P-378. All seams shall be heat sealed. The crate shall be closed and strapped in accordance with the appendix of the crate specification.

5.2.2 Level B.

* 5.2.2.1 Size 1 trucks. Unless otherwise specified (see 5.2.2.1.1), each size 1 truck, preserved and packaged as specified in 5.1, shall be packed in a snug-fitting fiberboard shipping container conforming to style RSC, type CF or SF, class domestic, variety optional, grade 350 of PPP-B-636. The fiberboard box containing the hardware and casters shall be secured within the truck in such a manner as to prevent movement during transit. The truck shall be blocked, braced, and cushioned by means of die-cut pads or forms as required to prevent movement or damage during transit. The die-cut pads or forms shall be made of fiberboard as specified for the container. Closure shall be in accordance with method II of the appendix of the container specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:11Z
Check the source to verify that this is the current version before use.

* 5.2.2.1.1 When specified (see 6.2), the shipping container shall be V3c, V3s, or V4s, fabricated and closed in accordance with PPP-B-636.

5.2.2.2 Size 2 trucks. Each size 2 truck, preserved and packaged as specified in 5.1, shall be packed as specified in 5.2.1.

* 5.2.3 Level C. Trucks, preserved and packaged as specified in 5.1, shall be packed in a manner to insure carrier acceptance and safe delivery at destination at the lowest transportation rate for such supplies. Containers shall be in accordance with Uniform Freight Classification or National Motor Freight Classification rules, as applicable.

5.3 Marking. In addition to any special marking required by the contract or order, interior packages and shipping containers shall be marked in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. Trucks are used in the handling of printed matter from press room to bindery.

6.2 Ordering data. Procurement documents should specify the following:

(a) Title, number and date of this specification.
(b) Size truck required (see 1.2).
(c) When a first article is required (see 3.1, 4.2 and 6.3).
(d) Selection of applicable levels of preservation, packaging and packing (see 5.1 and 5.2).
(e) When water resistant fiberboard is required (see 5.2.2.1.1).

* 6.3 First article. When a first article is required, it shall be inspected and approved under the appropriate provisions of ASPR 7-104.55. The first article should be a preproduction sample, initial production item or other specific item described under the definition of a first article in the ASPR. The contracting officer should specify the appropriate type of first article and the number of units to be furnished. The contracting officer should include specific instructions in all procurement instruments regarding arrangements for inspection and approval of the first article.

6.4 Illustration. Figure 1 shown herein is for the purpose of illustration only and is not intended to preclude the purchase of bindery drying trucks which are otherwise in accordance with this specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:11Z
Check the source to verify that this is the current version before use.

* 6.5 Revision changes. The margins of this specification have been marked with an asterisk (*) to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and suppliers are cautioned to evaluate the requirements of this document based on the entire content as written irrespective of the marginal notations and relationship to the last previous issue.

Custodian:

Army - GL

Review activity:

Army - MD

Preparing activity:

Army - GL

Project No. 3610-A169

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:11Z
Check the source to verify that this is the current version before use.

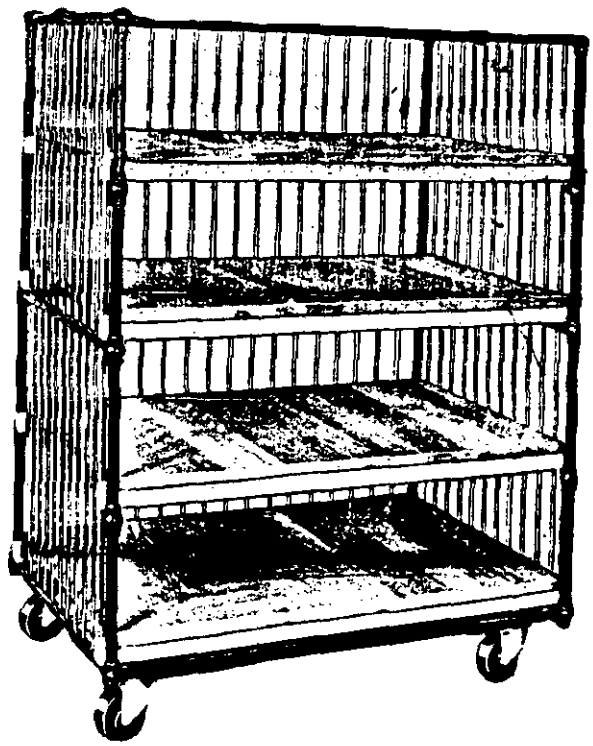


Figure 1. Truck, Drying, Bindery

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:11Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID

U.S.MAIL

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

Commander
US Army Natick Research & Development Command
ATTN: DRXNM-TD
Natick, MA 01760

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:11Z
Check the source to verify that this is the current version before use.

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

OMB Approval
No. 22-R255

INSTRUCTIONS: The purpose of this form is to solicit beneficial comments which will help achieve procurement of suitable products at reasonable cost and minimum delay, or will otherwise enhance use of the document. DoD contractors, government activities, or manufacturers/vendors who are prospective suppliers of the product are invited to submit comments to the government. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements. Attach any pertinent data which may be of use in improving this document. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity.

DOCUMENT IDENTIFIER AND TITLE

MIL-T-43332A(GL) TRUCKS, DRYING, BINDERY

NAME OF ORGANIZATION AND ADDRESS	CONTRACT NUMBER
	MATERIAL PROCURED UNDER A ☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE DOCUMENT CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY DOCUMENT REQUIREMENT CONSIDERED TOO RIGID

3. IS THE DOCUMENT RESTRICTIVE?

☐ YES ☐ NO *(If "Yes", in what way?)*

4. REMARKS

SUBMITTED BY *(Printed or typed name and address - Optional)*	TELEPHONE NO.
	DATE

DD FORM 1 JAN 72 1426 REPLACES EDITION OF 1 JAN 66 WHICH MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 2026-10-21T21:11Z
Check the source to verify that this is the current version before use.