AA-C-45B
June 29, 1977
SUPERSEDING
Int. Fed. Spec. AA-C-0045A (GSA-FSS)
August 1, 1962 and
MIL-T-22953
June 26, 1961

FEDERAL SPECIFICATION

CABINET, TOOL, MOBILE

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers the requirements for hand-pushed mobile tool cabinets with wheels or casters for rolling the cabinet and tools to the job.

1.1.1 Federal specification coverage. Federal specifications do not include all varieties of the commodity as indicated by the title of the specification, or which are commercially available, but are intended to cover only those generally used by the Federal Government.

1.2 Classification.

1.2.1 Types and styles. The tool cabinets covered by this specification shall be of the following types and styles, as specified (see 6.1).

Type I - Two wheeled, tilt-to-roll type.
  Style A - Two-door, three-enclosed-drawer style.
  Style B - Two-door, seven-enclosed-drawer style.
  Style C - Panel enclosed compartment, three-drawer style.

Type II - Four caster-wheel type.
  Style A - With drawers and lower compartment.
  Style B - With all drawers and no compartment.

Type III - Two-wheeled, two caster type.
  Style A- With drawers and compartments.

1.2.2 Design. Type II and III tool cabinets shall be of the design shown in figure 5 through 11, as specified (see 6.1).

2. APPLICABLE DOCUMENTS

2.1 The following documents, of the issues in effect on date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

Federal Specification:

PPP-P-40 - Packaging and Packing of Hand Tools.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, DC 20402.

FSC 5140

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:38Z
Check the source to verify that this is the current version before use.

(Single copies of this specification and other Federal Specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, DC, Atlanta, Chicago, Kansas City, MO, Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, WA.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Standard:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

3. REQUIREMENTS

3.1 Design. Tool cabinets furnished under this specification shall be designed for storing and transporting various powered and nonpowered hand tools within a building or shop, and shall consist of a various quantity of drawers and compartments in a container (shell) mounted on wheels or casters.

3.2 Construction. Tool cabinets shall be new and suitable for industrial use. Cabinets shall be made of sheet steel of adequate gage, and reinforced where required, to withstand the load test in 4.4.1. Surfaces not chemically treated or plated to resist corrosion shall have a durable baked enamel finish. Unless a particular color is specified (see 6.1), the color of the enamel shall be gray, red, green, or blue. All components shall be fabricated and assembled in accordance with good commercial practice. Welded joints and seams shall be neat in appearance and stronger than the base metal. Bending, flanging, drawing, or other similar operations shall be performed in a manner to insure there are no ruptures, cracks, wrinkles, or other defects in the material. Screws, bolts, rivets, or other fasteners shall be installed in a manner that will prevent loss of proper tightness. All burrs and sharp corners shall be removed to prevent injury.

3.2.1 Container. The container or shell of the cabinet shall have a topside, backside, two ends, and a bottom. The front side of the container will provide access to the drawers and compartments. Doors or panels shall be provided on tool cabinets which have a compartment and shall enclose the compartment only, or the compartment and some or all of the drawers. An integral lock (or locks) with two keys, shall be provided to lock all drawers and compartments. Hinges used on the doors or panels shall be of the continuous-type (piano) with hinge pins made to be nonremovable except by a means that would damage the tool cabinet. The method used to insure nonremoval of the hinge pin shall be readily visible when visually inspected. Fabrication of the container shall be such as to support a 60-pound load on the top surface of type II cabinets, and a test load in the drawers and compartments as specified in 4.4.1. During and after completion of the load tests, the container shall show no signs of weakness or other defects which would hinder the serviceability of the cabinet.

3.2.2 Drawers. Drawers shall be mounted in the container on compound slides which permit the drawers to be fully opened without noticeable sagging or binding. The slides shall be provided with stops to prevent accidental removal of the drawer, and a release mechanism to permit easy intentional removal. Suitable drawer pulls shall be provided on each drawer. The quantity, size, and arrangement of the drawers shall be as specified herein for each applicable style and design. Unless otherwise specified (see 6.1), drawers shall be furnished with either fixed or adjustable separators as normally furnished on tool cabinets supplied to the commercial market.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:38Z
Check the source to verify that this is the current version before use.

3.2.3 Compartments. Compartments shall be the storage spaces within the container which are not occupied by drawers. Compartments may be a single space in the lower portion of the container, or multiple spaces separated by drawer sections or shelves.

3.2.4 Wheels and casters. Wheels, casters, or wheels and casters shall be provided as specified herein for each applicable type and style cabinet.

3.3 Dimensions. Dimensions for tool cabinets are in inches. Dimensions not specified shall be in accordance with good commercial practice and within other limiting dimensions and capacities. The overall dimensions of tool cabinet containers, excluding projections, shall be width (dimension from end to end), depth (dimension from front to back), and height (dimension from top surface to floor). Dimensions of drawers shall be expressed by the width (longest dimension of front of drawer), depth (dimension from front to back), and height (dimension from top to bottom of front side of drawer). Actual inside dimensions of the drawers shall be less due to allowances for clearances and slides supporting the drawers. Compartments are not dimensioned as their size shall be determined by the space remaining within the inside dimensions of the container that is not filled by drawers.

3.4 Type I. Type I tool cabinets shall be equipped with two wheels and a handle on the side opposite the side on which the drawers open to provide the capability of tilting the cabinet back and rolling it like a hand truck. The rear wheels shall be at least 10 inches in diameter by 2 inches wide with semi-pneumatic or solid rubber tires and ball or roller bearings. The handle shall be made of a single piece of steel, and of an adequate diameter to serve its intended purpose. The handhold portion shall be covered with a rubber or plastic covering to facilitate gripping and prevent slipping. A means shall be provided to adjust the height of the handle in order to provide a comfortable position for operators of different heights.

3.4.1 Style A and style B. Type I, style A and style B tool cabinets shall be similar to figure 1. When in an upright position, the cabinet shall stand on four pedestal supports, or two pedestal supports and the two rear wheels.

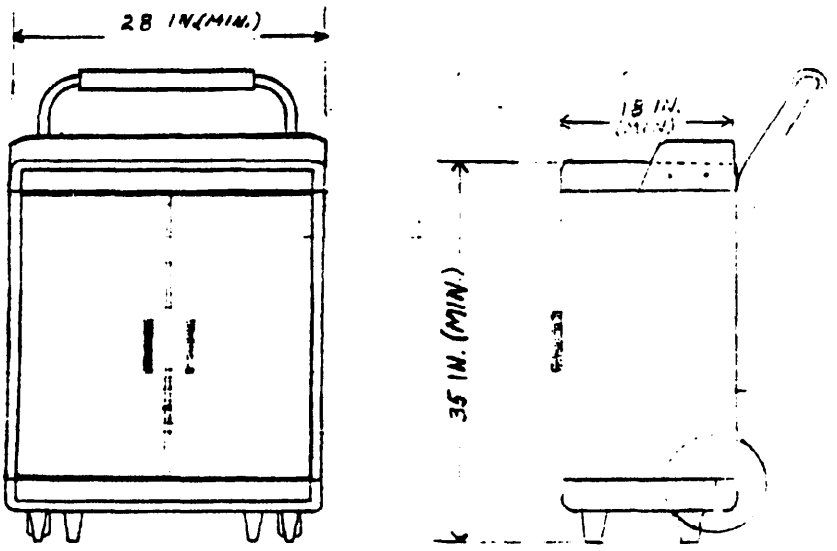


Figure 1. Type I, style A and style B tool cabinets.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:38Z
Check the source to verify that this is the current version before use.

3.4.1.1 Dimensions (over-all). The overall dimensions of type I, style A and B cabinets, excluding projections, shall be 28 inches, minimum, 30 inches, maximum width; 18 inches minimum depth; and 35 inches minimum, 37 inches maximum height from floor to working surface.

3.4.1.2 Back guard. A one-piece, wrap-around back guard made of at least 20 gage steel and extending at least 3 inches above the top surface of the cabinet shall be attached to the back and sides to prevent items from falling when the cabinet is tilted.

3.4.1.3 Doors. Two doors of equal size shall be attached to each side of the cabinet opening with a continuous piano hinge of sufficient size to support at least 25 pounds of tools hanging on each door. One door shall have a removable rack on the inner side for tool storage. The rack shall be fabricated from not less than 20-gage steel, be approximately 11-1/2 inches wide, 24-1/2 inches high and 3-1/4 inches deep, and have four evenly spaced shelves with a 2-inch minimum upturned flange to prevent items from falling out. The other door shall be provided with a steel peg-board with perforations on approximately 1-inch centers on the inside surface, and furnished with three tension springs suitable for holding hanging tools taut and in position. Suitable handles and means for locking the cabinet doors shall be provided.

3.4.2 Style A tool cabinets. Type I, style A cabinets shall be similar to figure 2, and shall be provided with three full width drawers located within the cabinet between the upper compartment and the lower compartment. The minimum capacity of the three drawers combined shall be 1,000 cubic inches and the minimum width of each drawer shall be 20 inches. The bottom of the top compartment shall have a 90 degree flange turned up on the front edge a minimum of 1/2 inch, and the height of the top compartment shall be a minimum of 6 inches.

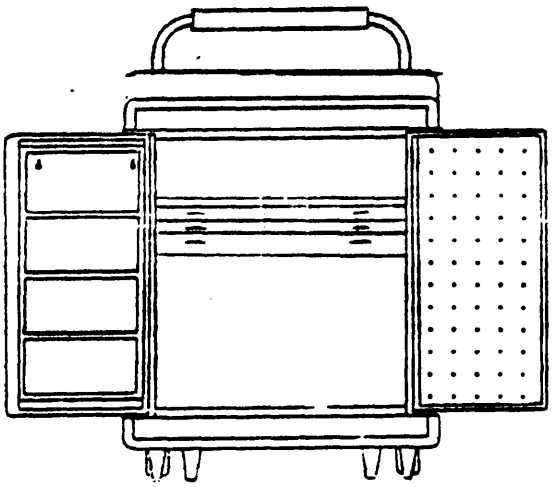


Figure 2. Type I, style A tool cabinet

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:38Z
Check the source to verify that this is the current version before use.

3.4.3 Style B tool cabinets. Type I, style B cabinets shall be similar to figure 3, and shall consist of a top compartment, a row of four partial width drawers, a second compartment comparable in size to the top compartment, a row of three partial width drawers, and another compartment on the bottom comprising the remaining space. The four upper drawers shall be approximately 4-3/4 inches wide, 11-3/4 inches deep, and 1-1/2 inches high. The lower drawers shall consist of one drawer at least 9 inches wide by 1-1/2 inches high; one drawer 5-1/2 inches wide by 1-1/2 inches high; and one drawer 5-1/2 inches wide by 6 inches high; all drawers 11-3/4 inches deep. The four upper drawers, and the 5-1/2 inch wide by 1-1/2 inch high lower drawer shall be furnished with 4 dividers for each drawer, and be adjustable on 1-1/2 inch centers.

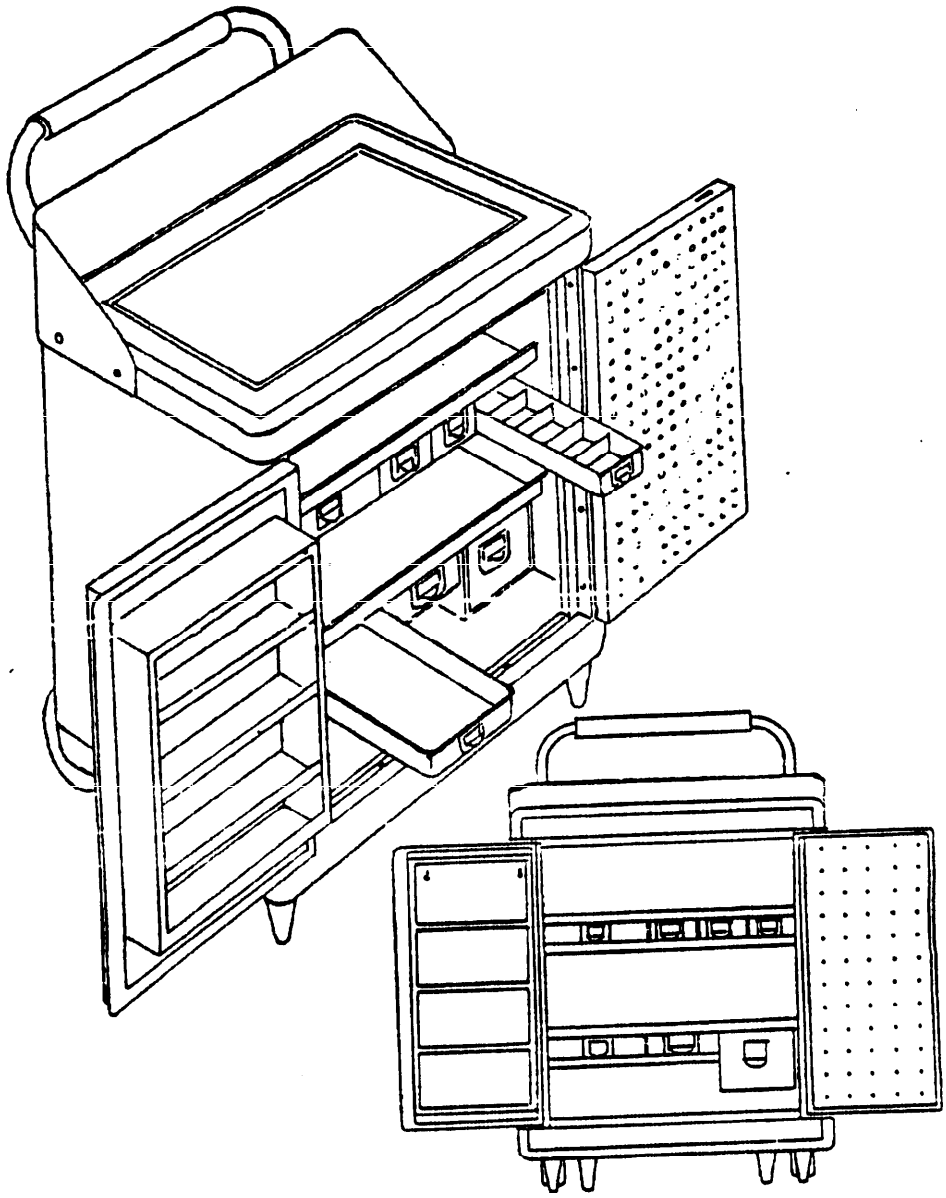


FIGURE 3. Type I, style B Tool Cabinet

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:38Z
Check the source to verify that this is the current version before use.

3.4.4 Style C tool cabinets. Type I, style C tool cabinets shall be similar to Figure 4, and shall consist of three full width drawers and a lower compartment with a self-storing panel cover.

3.4.4.1 Wheels. Style C tool cabinets shall have two 4-inch minimum diameter lock-type swivel casters on the front side (side on which the drawers open), and two wheels as specified in 3.4 on the rear side.

3.4.4.2 Drawers. The style C tool cabinet shall have three full-width drawers and a lower compartment. The drawers shall have minimum dimensions of 21 inches wide, 17 inches from front to back, and 3-3/4 inches high.

3.4.4.3 Lower compartment. The lower compartment shall have a self-storing panel covering a compartment with minimum dimensions of 21 inches wide by 17-3/4 inches deep by 12 inches high.

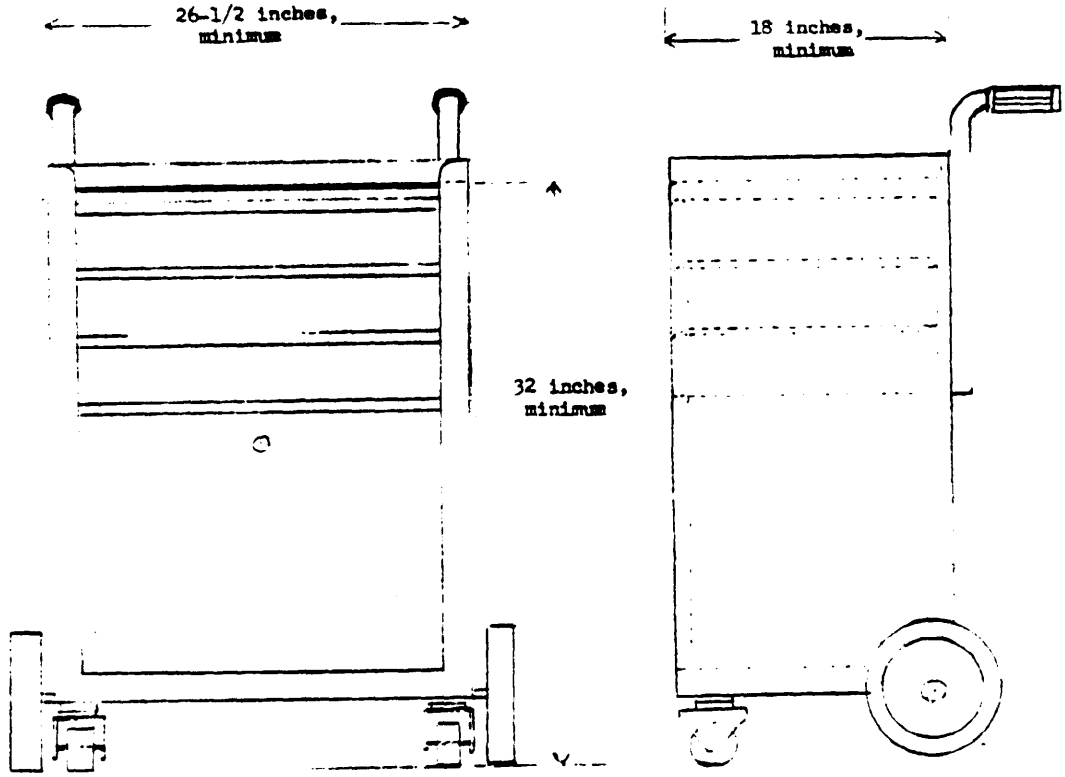


Figure 4. Type I, style C tool cabinet

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:38Z
Check the source to verify that this is the current version before use.

3.5 Type II. Type II tool cabinets shall be mounted on two rigid nonlocking casters, and two swivel casters provided with brakes for locking the caster wheel. Each caster shall have a minimum load capacity rating of 200 pounds, a minimum wheel diameter of 4 inches, a minimum wheel width of 1-1/4 inches, and ball, roller, or oil-impregnated sleeve bearings.

3.5.1 Style A. Type II, style A tool cabinets shall contain a quantity of drawers in the top portion of the container as required for each design, and a compartment in the lower portion. The minimum depth of the cabinet shall be 18 inches, and the quantity of drawers and dimensions of the front side shall be as shown in figures herein for the design specified. The inside dimensions of the drawers and compartments shall be substantially the same as the outside dimensions after deducting space for clearance, drawer slides, reinforcements, and other design factors which subtract from the usable space within the container.

3.5.1.1 Panel. A panel shall be provided to enclose and secure the compartment. The panel may enclose the compartment only, or the compartment and some or all of the drawers. When the compartment is open, the panel shall be self-storing within the container.

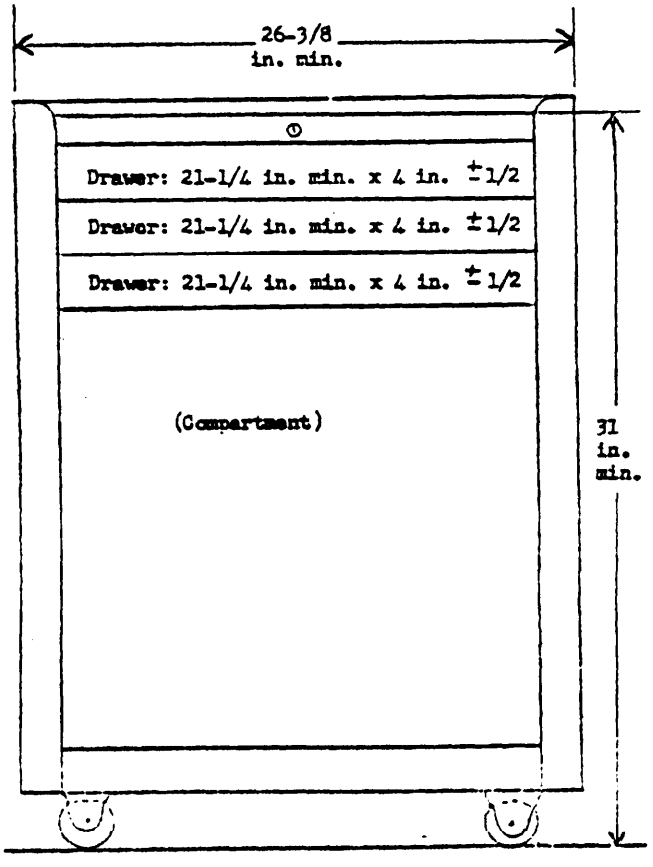


Figure 5. Type II, style A, design 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:38Z
Check the source to verify that this is the current version before use.

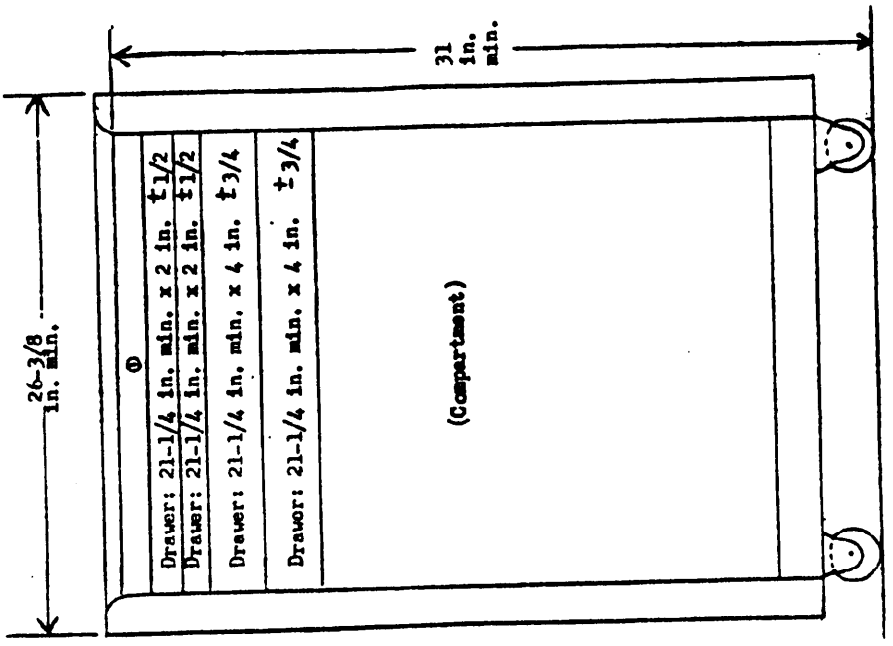


FIGURE 7. Type II, style A, design 3

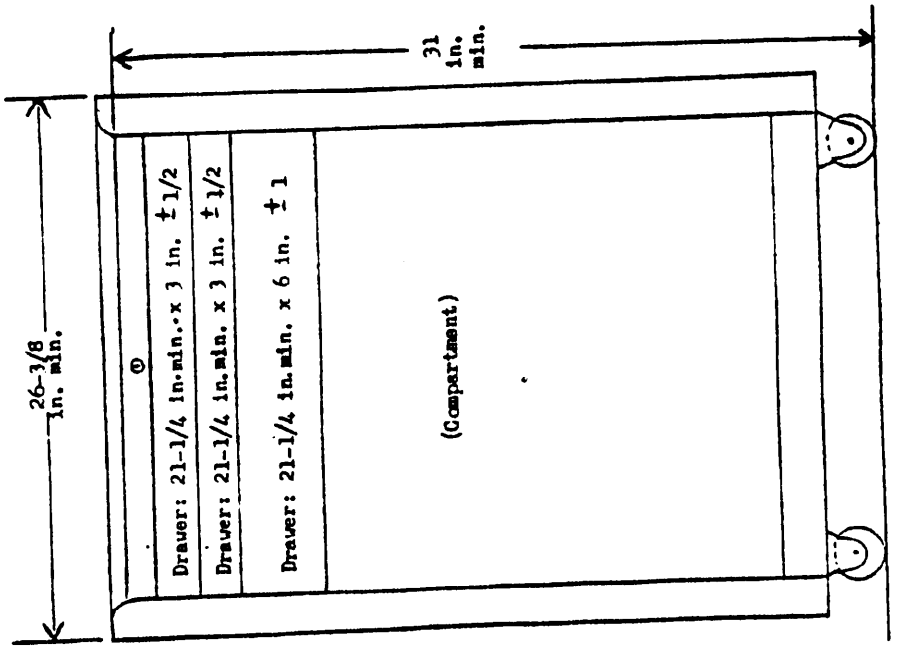


FIGURE 6. Type II, style A, design 2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:38Z
Check the source to verify that this is the current version before use.

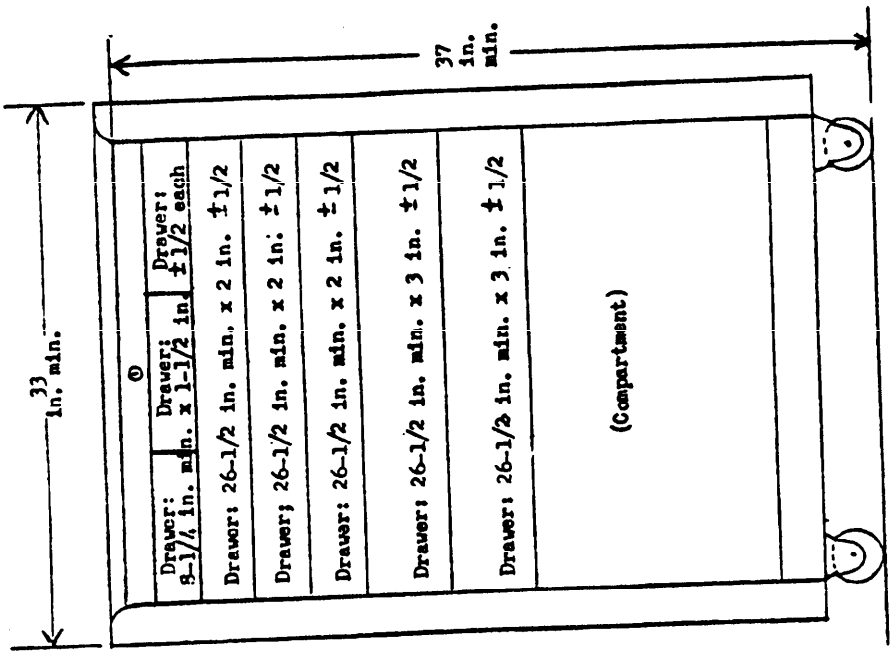


FIGURE 9. Type II, style A, design 5

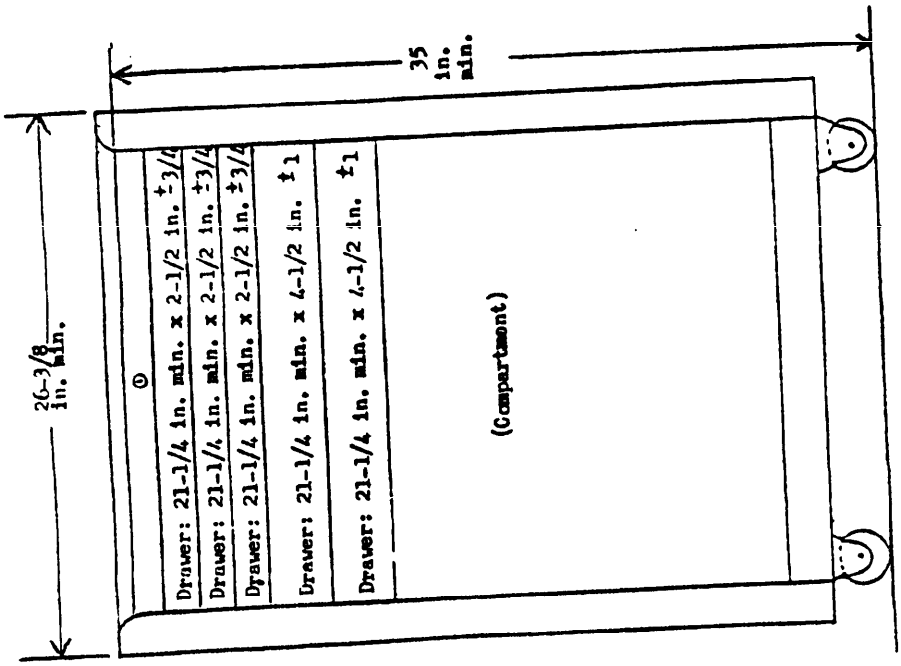


FIGURE 8. Type II, style A, design 4

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:38Z
Check the source to verify that this is the current version before use.

3.5.2 Style B. Type II, style B cabinets shall be similar to style A cabinets except that the container shall be filled with all drawers and no compartment, and may be furnished with or without a panel. The quantity of drawers and dimensions of the front side shall be as shown in figures herein for the design specified.

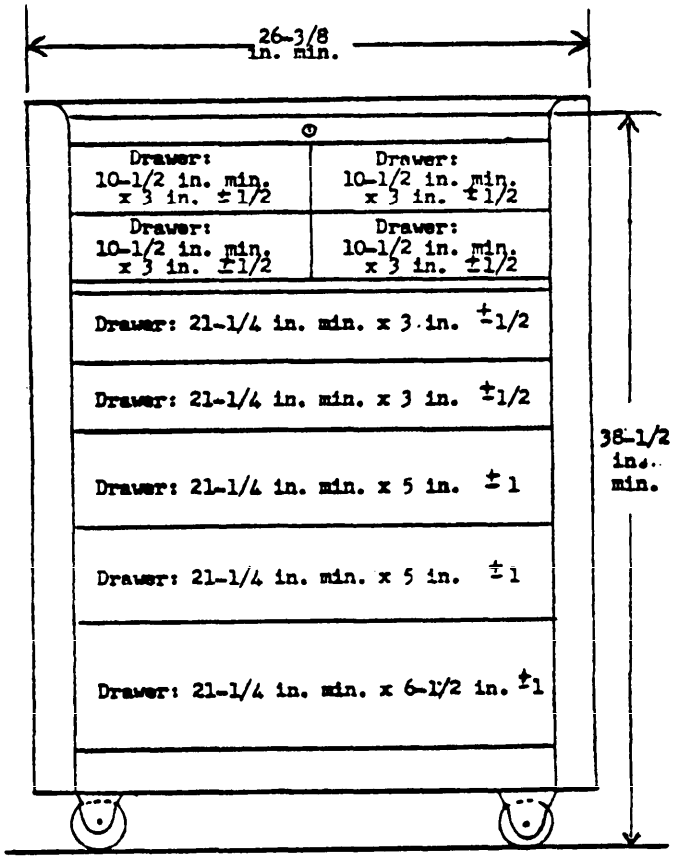


Figure 10. Type II, style B, design 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:38Z
Check the source to verify that this is the current version before use.

3.6 Type III. Type III tool cabinets shall be mounted on two 10-inch wheels with 4-ply pneumatic, or semi-pneumatic tires, and two swivel casters with 5-inch or 6-inch wheels with brakes.

3.6.1 Style A. Type III, style A tool cabinets shall contain a quantity of drawers and one or more compartments. The quantity of drawers and compartments shall be as shown in figures herein for the design specified.

3.6.1.1 Design 1. Design 1 cabinets shall be similar to figure 11 and contain seven drawers and a compartment on the front side, and a rear compartment containing eight equal-size bins. The end of the cabinet with the casters shall have a sturdy handle for pushing or pulling the cabinet. All drawers and both compartments shall have provisions for locking.

3.6.1.1.1 Drawers. The drawers shall have a minimum depth of 15 inches. The dimensions on the front side shall be 26-1/2 inches minimum width by 2 inches high for drawers A and B; by 3 inches high for drawers C, D, E, and F; and 8 inches high for drawer G.

3.6.1.1.2 Front compartment. The compartment beside the drawers shall be provided with a vertical-hinged door and two removable shelves. The height of the shelves shall be adjustable or equally spaced. Minimum dimensions of the compartment shall be 15 inches wide, 28 inches high, and 23 inches deep.

3.6.1.1.3 Rear compartment. The compartment on the side opposite the drawer fronts shall have a top-opening, bottom-hinged cover and braces at each end for support when opened to a horizontal position. The compartment shall have minimum dimensions of 27 inches wide, 17 inches high, and 6 inches deep, and be divided into 8 equal size bins with a 3/4-inch high lip on each separator to prevent tools or parts from falling out when the cover is opened.

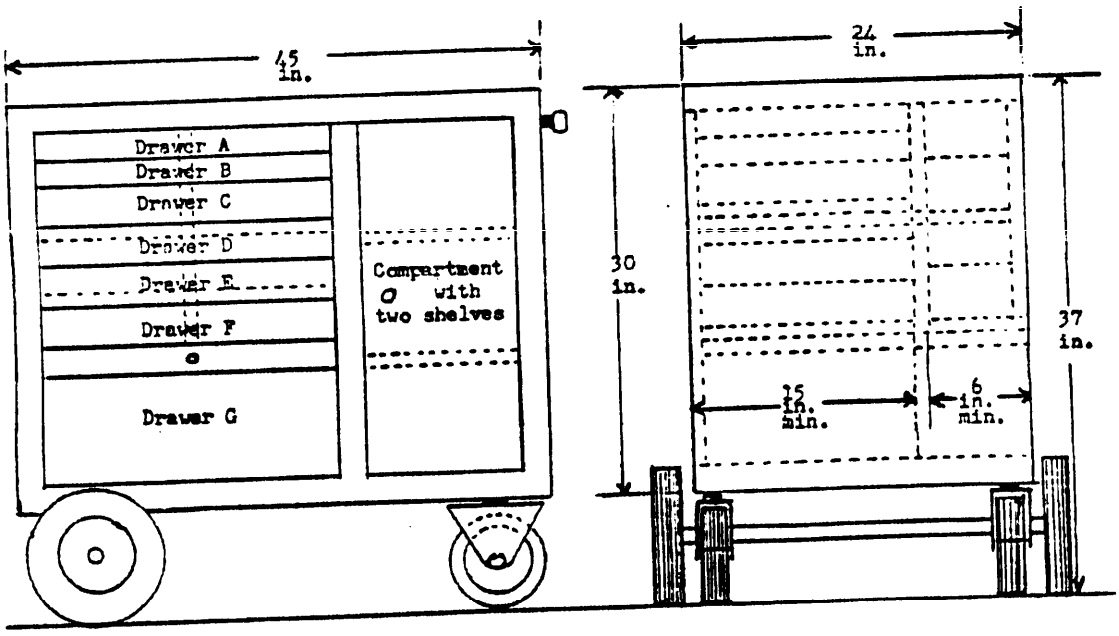


Figure 11. Type III, style A, design 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:38Z
Check the source to verify that this is the current version before use.

3.7 Identification marking. Each tool cabinet shall be clearly marked with the manufacturer's name. Except when a metal plate or decal is used, marking shall be stenciled on the underside of the container.

3.8 Workmanship. Tool cabinets shall be free from defects which could possibly impair safety of operation or performance and shall be free of defects which affect appearance. All sharp edges and burrs shall be removed.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the contractor is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the contractor may utilize his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.1.1 Inspection of materials and components. In accordance with 4.1, the supplier is responsible for insuring that materials and components used were manufactured, tested, and inspected in accordance with the requirements of referenced subsidiary specifications and standards to the extent specified herein, or, if none, in accordance with this specification.

4.2 Sampling procedures. Sampling procedures shall be in accordance with MIL-STD-105. Data for sampling shall be as stated in table I.

TABLE I. Sampling data

Category	Sample unit	Inspection level	Acceptable quality level (AQL)	AQL expressed in terms of	Reference
Visual examination	1 each	II	10	Defects per 100 units	4.3.1
Dimensional examination	1 each	S-2	10	Defects per 100 units	4.3.2
Testing	1 each	S-2	4.0	Defects per 100 units	4.4 through 4.4.4
Inspection of preparation for delivery	One	S-2	4.0	Defects per 100 units	4.5

4.3 Examination.

4.3.1 Visual examination. Each sample unit shall be examined for any nonconformance in design, finish, coating, construction, workmanship, and marking.

4.3.2 Dimensional examination. Each sample unit shall be examined for any nonconformance to dimensional requirements.

4.4 Testing. Each sample unit shall be tested in accordance with 4.4.1 through 4.4.4.

4.4.1 Load tests. Each drawer and compartment of each sample unit shall be loaded to test the load supporting ability of the drawers and cabinet. The load shall be either 1/4-inch thick by 4-inch square steel plates, tools, or other bulk objects. The weight of the load shall equal the weight of as many plates that can be placed on the bottom of the drawer or compartment (as computed without separators in the drawers) multiplied by 1.13 pounds for each plate. Type II cabinets shall also be loaded with 60 pounds on the top surface. After the sample unit has been loaded as specified above, and no damage is evident, the cabinet shall be rolled forward and backward over a 3/4-inch diameter steel bar while still loaded. In addition, type I cabinets shall be raised up and lowered down at least three steps having risers of 6 inches or higher.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:38Z
Check the source to verify that this is the current version before use.

4.4.2 Drawer test. The drawers shall be tested while still loaded to determine compliance with 3.2.2. Noticeable sagging or binding of the drawers, when fully opened, or the inability of the drawer to be released for removal shall be considered a defect.

4.4.3 Hinge pin test. Each sample unit with hinges shall be tested to determine if the hinge pin can be removed from the hinge. Removal of the hinge pin without causing noticeable damage to the tool cabinet shall be considered a defect.

4.4.4 Lock test. Locks shall be tested to determine adequacy of securing all drawers and compartments. Inadequate locks shall be considered a defect.

4.5 Examination of preparation for delivery. Examination of preparation for delivery shall be in accordance with the quality assurance provisions of PPP-P-40.

5. PREPARATION FOR DELIVERY

5.1 Preservation, packaging, packing and marking. The tool cabinets shall be preserved, packaged, packed and marked in accordance with PPP-P-40. The levels of preservation and packaging, and packing shall be as specified (see 6.2), and marking shall be for civil agencies or military activities as specified (see 6.2).

6. NOTES

6.1 Ordering data. Purchasers should select the preferred options permitted herein, and include the following information in procurement documents:

(a) Title, number, and date of this specification.
(b) Type and style of cabinets required (see 1.2.1).
(c) Color, if different (see 3.2).
(d) Type of drawer separators, if different (see 3.2.2).
(e) When a handle is required (see 3.5).
(f) Selection of applicable level of packaging, packing, and marking (see 5.1).

MILITARY INTEREST:

Custodians:

Army - GL

Review activities:

Army - AT

User activities:

Army - WC
Navy - MC

Preparing activity

GSA-PSS

Orders for this publication are to be placed with the General Services Administration, acting as an agent for the Superintendent of Documents. See section 2 of this specification to obtain extra copies and other documents referenced herein. Price 35 cents each.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:38Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:38Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS: In a continuing effort to make our standardization documents better, the DoD provides this form for use in submitting comments and suggestions for improvements. All users of military standardization documents are invited to provide suggestions. This form may be detached, folded along the lines indicated, taped along the loose edge *(DO NOT STAPLE)*, and mailed. In block 5, be as specific as possible about particular problem areas such as wording which required interpretation, was too rigid, restrictive, loose, ambiguous, or was incompatible, and give proposed wording changes which would alleviate the problems. Enter in block 6 any remarks not related to a specific paragraph of the document. If block 7 is filled out, an acknowledgement will be mailed to you within 30 days to let you know that your comments were received and are being considered.

NOTE: This form may not be used to request copies of documents, nor to request waivers, deviations, or clarification of specification requirements on current contracts. Comments submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or to amend contractual requirements.

(Fold along this line)

(Fold along this line)

DEPARTMENT OF THE ARMY

NO POSTAGE NECESSARY IF MAILED IN THE UNITED STATES

OFFICIAL BUSINESS
PENALTY FOR PRIVATE USE $300

BUSINESS REPLY MAIL
FIRST CLASS PERMIT NO 12062 WASHINGTON D. C

POSTAGE WILL BE PAID BY THE DEPARTMENT OF THE ARMY

Commander
US Army Natick Research and Development
Laboratories
ATTN: DRDNA-ES (Mr. D. Luppino)
Natick, MA 01760

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:38Z
Check the source to verify that this is the current version before use.

(TO DETACH THIS FORM, CUT ALONG THIS LINE.)

STANDARDIZATION DOCUMENT IMPROVEMENT PROPOSAL

(See Instructions – Reverse Side)

1. DOCUMENT NUMBER	2. DOCUMENT TITLE

3a. NAME OF SUBMITTING ORGANIZATION	4. TYPE OF ORGANIZATION *(Mark one)*
	☐ VENDOR ☐ USER ☐ MANUFACTURER ☐ OTHER *(Specify)*: _____
b. ADDRESS *(Street, City, State, ZIP Code)*	

5. PROBLEM AREAS

a. Paragraph Number and Wording:

b. Recommended Wording:

c. Reason/Rationale for Recommendation:

6. REMARKS

7a. NAME OF SUBMITTER *(Last, First, MI)* – Optional	b. WORK TELEPHONE NUMBER *(Include Area Code)* – Optional
c. MAILING ADDRESS *(Street, City, State, ZIP Code)* – Optional	8. DATE OF SUBMISSION *(YYMMDD)*

DD FORM 82 MAR 1426 PREVIOUS EDITION IS OBSOLETE.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:38Z
Check the source to verify that this is the current version before use.