AA-D-00201C
AMENDMENT-1
August 16, 1976

AMENDMENT

TO

INTERIM FEDERAL SPECIFICATION

DESKS, DESK ATTACHMENTS, WOOD, GENERAL OFFICE

This amendment was developed by General Services Administration, Federal Supply Service, Washington, DC 20406, based upon currently available technical information. The General Services Administration has authorized this amendment as a part of Interim Federal Specification AA-D-00201C, dated January 4, 1971.

PAGE 1

Paragraph 1.2.1, Type III Desk Attachment, at end of description add "(Knock-down)".

Paragraph 2.1, delete the following:

"QQ-S-781 - Steel Strapping, Flat.
PPP-B-601 - Boxes, Wood, Cleated-Plywood.
PPP-B-621 - Boxes, Wood, Nailed and Lock-Corner.
PPP-B-636 - Box, Fiberboard.
PPP-F-320 - Fiberboard; Corrugated and Solid, Sheet Stock (Container Grade), and Cut Shapes.
PPP-S-760 - Strapping, Non metallic, (and Connectors).
Fed. Std. No. 123 - Marking for Domestic Shipment (Civil Agencies).
MIL-L-10547 - Liners, Case and Sheet, Overwrap, Water-Vapor proof or Waterproof, Flexible.
MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-731 - Quality of Wood Members for Containers and Pallets.

and substitute the following: "PPP-P-1877 - Packaging and Packing of Wood Office Furniture".

PAGE 2

Paragraph 2.2, line 5: Delete "CS 53 - Hardwood Plywood" and substitute "PS 51 - Hardwood and Decorative Plywood".

Line 7: Delete "CS-251 - Hardboard" and substitute "PS-58 - Basic Hardboard".

PAGE 3

Paragraph 3.2.1, Table I, column titled "Kind of Adhesives", lines 9 and 10:
Delete "the Commercial Standard CS 35 for Hardwood Plywood" and substitute "Product Standard PS 51 for Hardwood and Decorative Plywood".

Paragraph 3.2.2.1 Decorative face sheets. line 2 and 3, delete "nominal thickness shall be 1/16 inch." and substitute: "thickness shall be 0.050 inch (plus/minus .004 inch).

Paragraph 3.2.2.2 Non decorative backing sheets. line 2, delete: "nominal thickness shall be 1/32 inch." and substitute: "thickness shall be 0.050 inch (plus/minus .005 inch)."

Paragraph 3.2.3.1 - add at end of paragraph "Edge bands of panels may be maple. Back veneer of panels for typewriter platform may be yellow poplar provided the applied finish gives the same appearance texture and gloss as the exterior surfaces."

Paragraph 3.2.3.2, line 2: Add "red alder".

Paragraph 3.2.4, line 2: Delete "Commercial Standard CS 35" and substitute "Product Standard PS 51".

Paragraph 3.2.4, at end of paragraph add "Plywood will be permitted which otherwise meets the provisions of PS 51 but consists of an even number of plies, with the two center plies running in the same direction."

FSC 7110

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

Paragraph 3.2.4.2 - delete in its entirety.

Paragraph 3.2.5, third line, after "edge" insert "for boards up to 1 inch in thickness".

Paragraph 3.2.6, delete and substitute:

"3.2.6 Hardboard. The minimum requirements for hardboard for drawer bottoms shall be Standard, Surface SIS, drawer partitions shall be Tempered, Surface S2S as required in PS-58.

Paragraph 3.2.7, delete in its entirety.

Paragraph 3.2.11.1, line 4: Delete "R-32-49" and substitute "R-32-35, R-30-38".

PAGE 5

Paragraph 3.3.1.1.2, line 2 delete "plus 1/64, minus 1/64 inch" and substitute "plus 1/16, minus 1/32 inch".

Insert the following paragraph after paragraph 3.3.1.1.2:

"3.3.1.1.3 Dimensions not otherwise specified. Plus 1/8. minus 1/8 inch."

Paragraph 3.3.2: Delete entire paragraph and substitute the following:

"3.3.2 Desk top. The desk top shall be a plastic laminate assembly consisting of particleboard, specified in 3.2.5, surfaced with plastic laminate face sheets, specified in 3.2.2.1, and backing sheets, specified in 3.2.2.2. The assembly shall be constructed in accordance with type IV of L-T-0041. The nominal thickness of the top shall be 1-3/16 inches. All edges of the top shall be banded with exposed solid wood strips, specified in 3.2.3.1, lap or butt-joined at the corners. All banding strips shall be full length, straight grained, and shall be a minimum of 5/16 inch thick. Alternatively, the banding strips may be tongued into the particleboard core top. When this method is used, the minimum thickness of the banding strip shall be 5/16 inch, excluding the tongue. All banding strips shall be applied before application of the plastic laminate. The grain pattern of banding strips shall be horizontal. The adhesives, specified in 3.2.1, shall be used for the banding and plastic laminate assembly. Alternatively, adhesive conforming to the requirements of MMM-A-130 may be used for the plastic laminate assembly. All corners of the top shall be rounded to a 3/16 inch radius, minimum. All top edges of the top shall be chamfered a minimum of 1/16 inch at a 45 degree angle. The bottom edges of the top shall be eased. The type I, size 1 desk top shall be 60 by 30 inches and it shall overhang the corner posts 5/8 inch on all four sides. The type I, size 2 desk top shall be 68 inches by 38 inches and it shall overhang the corner posts 4-5/8 inches on each side, 8-5/8 inches on the back and 5/8 inch on the front. The type II desk top shall be 55 inches by 24 inches and it shall overhang the corner post 5/8 inch on all four sides."

Paragraph 3.3.3, line 9, after "Figure 3" insert "with a "T" band or a 5/16 inch flat band".

Paragraph 3.3.4:

Line 3: After "and for" add "file drawer".

Line 4: After "back rail of" add "file drawer".

Paragraph 3.3.5, line 8: Delete entire sentence beginning with "The pedestal" and substitute "A back cleat 1-1/8 by 1-5/8 inches (minimum), shall be glued and screwed to the back panel. The pedestal bottom panel shall consist of one piece of plywood, specified in 3.2.4 or particleboard, specified in 3.2.5, and it shall be ½ inch, minimum, thick. The pedestal bottom panel shall be glued and tenoned into the side panels, bottom front pedestal rail, and the back cleat.

Alternatively, in lieu of the one piece bottom panel construction, the pedestal bottom may consist of two panels of plywood, specified in 3.2.4, or particleboard, specified in 3.2.5. When this method is used each panel shall be ½ inch, minimum, thick and shall be glued and tenoned into the bottom front rail and back cleat. A panel shall be glued and screwed to each bottom framing rail. Each pedestal bottom panel shall be of sufficient width to extend the entire distance between the leg base and the side panel and shall be glued and screwed to a bottom framing rail."

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

Paragraph 3.3.6:

Line 4: After "figure 3" add "Alternatively, in lieu of a solid hardwood base, a 3-ply, minimum, lumber core plywood base may be used."

Line 9: After "figure 3" add "Alternatively, when the one piece bottom panel construction, specified in 3.3.5, is used, the leg base shall be centered on the width axis of the pedestal and secured in place by two, 1/4-10 machine screws and caged nuts, self-tapping self-locking inserts or "Tee" nuts at both front and rear of pedestal as shown in figure 3."

Paragraph 3.3.7, line 3: Delete entire sentence beginning with "Side and back pedestal" and substitute "Side and back pedestal panels shall be either particleboard, specified in 3.2.5, or 5-ply, minimum, plywood, specified in 3.2.4, and shall be 3/4 inch thick, minimum."

Line 6 - after "3.2.4.1" insert a period and delete the rest of the sentence.

PAGES 6 AND 7

Paragraph 3.3.9, delete in its entirety and substitute the following:

"3.3.9 Drawers. The drawers of Type I, size 1 and size 2 desks shall be of the dimensions (minimum) listed below. (All dimensions are inside). The Type II desk storage drawers shall have a minimum depth of 19-½ inches.

Storage drawer	- Width	-	12-3/4 inches.
	Height	-	4-3/4 inches.
	Depth	-	23 inches.
File drawers	- Width	-	12-3/4 inches.
	Height	-	11-1/8 inches.
	Depth	-	23 inches.

The drawer fronts shall be of 3/4-inch thick, 5-ply lumber core or veneer core plywood with the exposed face in veneer specified in 3.2.4.1. The exposed corner of the lower horizontal edge of the two upper storage drawers of the left drawer pedestal, and the storage drawer of the right pedestal, shall be chamfered between 3/32 and 1/8 of an inch. The drawer sides shall be dovetailed to the front and back of the drawer with both sides and back 7/16 inch solid wood specified in 3.2.3.1, including oak, sweetgum and sycamore. The top edges of the drawer sides shall be coved or rounded. Top clearance and total side clearance of the drawer front shall be between 1/16 and 1/8 of an inch. The drawer front, back and sides shall be grooved 3/16 inch deep to receive a plywood or hardwood drawer bottom, a minimum of 3/16 inch in thickness, of the plywood specified in 3.2.4, or hardboard specified in 3.2.6. All storage drawer sides shall be grooved to receive 3/16 inch thick by 4 inches minimum high partitions of plywood or hardboard faced two sides, and located 5-5/8, 8-13/16, and 11-3/16 inches from the inside of the drawer front. Two partitions shall be furnished with each storage drawer. A pencil tray shall be provided in top right storage drawer, either Ronthor R-11-90 plastic utility tray or equal, or a similar tray of wood construction provided with a pencil compartment and a minimum of 4 small compartments. Compartments shall have a minimum depth of 7/8 inch. Pencil tray shall be supported by drawer sides or wood strips. The lower drawer of the right pedestal shall be of double height and of the same construction as the storage drawer. The file drawer shall be equipped with one removable partition of either plywood, faced two sides or solid wood, 3/8 inch thick, dry dovetailed into the drawer sides 14 inches from the inside face of the drawer front, and also 17 inches from the inside face of the drawer front. Drawer stops shall be provided for all storage drawers and the file drawer to prevent accidental removal but permit removal when desired. Two drawer stops shall also be glued and nailed at rear of drawer bearers. Nylon rollers specified in 3.2.11.1, supported in a metal frame, Knape and Vogt No. 422, or equal, shall be let into post ends of bottom rail under drawer sides of file drawer. Nylon rollers, Knape and Vogt No. 420, shall be let into upper rear edge of drawer sides of file drawer. Ronthor No. R-32-35 or 30-38, or equal, plastic drawer glides specified in 3.2.11.1 shall be secured to post end of p...ing rails under storage drawers. A plastic drawer glide, Ronthor No. R-23-2, or equal, shall be secured to each lower back edge of all file drawer sides. Each back edge (both upper and lower) of all storage drawer sides shall be equipped with a plastic drawer glide, Ronthor No. R-23-2, or equal. Alternatively, Ronthor No. R-32-128, or equal, plastic drawer glides may be used on the lower back edge of the storage and file drawer sides.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

All drawer glides shall be stapled and glued to wood components with adhesive compatible with both plastic and wood, except the No. R-30-38 which need only be glued. A track with steel follower, easy to operate and positive in action, shall be mounted crosswise in the desk file drawer and secured by screws. The desk file drawer shall be furnished with a lock positioned as shown in Figure 1. The lock shall be surface mounted on the inside face of the drawer front with steel bolt engaging strike plate mounted to kneespace post. The face of the lock shall project a minimum of 1/16 inch and a maximum of 1/8 inch beyond the face of the drawer. A shaped finger grip 9/16 inch deep at the top center, shall be machined out of the inside face of the upper edge of each drawer front. It shall be 4 inches wide when measured across the top and shall be 3/4 inch high at the center, smoothly shaped to approximately 1/16 inch or less at each end."

Paragraph 3.3.10, line 12, after "be of" insert "minimum".

Paragraph 3.3.11, delete the first sentence, and substitute the following:

"The secretarial attachment shall consist of a top with mounting plate, and end panel and a back panel with dimensions as shown in Figure 4. The unit shall be designed for knock-down shipment of the above component and easy, simple assembly by the user. The top shall be 1-3/16 inch thick of the construction specified in 3.3.2."

Line 24 thru 26: Delete last two sentences and substitute the following:

"A 13/16 inch square cleat as specified in 3.3.3 shall secured to the upper edge of the end panel by 3 screws and glue. Predrilled holes in the cleat and matching holes in the underside of the top shall be provided for assembly of the end panel to the top. A ½ inch tubular steel brace, approximately 9 inches long and flattened 1 inch at each end, shall be provided to brace the end panel and the top. It shall be predrilled in the flatteded portions, with matching holes in the end panel and the top for proper attachment. The completed assembled unit shall be sturdy and provide a steady typing attachment which attaches to the desk as specified. All necessary hardware shall be packed with each desk attachment. The top shall overhang the end panel 5/8 inch and the back panel 1/8 inch to 3/8 inch. The legs shall have glides which provide a minimum of 3/4 inch vertical adjustment."

PAGE 7

Paragraph 3.4 Finish. delete entire paragraph and substitute the following:

"3.4 Finish. The wood finish shall match the standard walnut laminate sample in color only (see 6.3). Grain appearance may vary depending on the wood used. Final finish shall be satin."

PAGE 8

Paragraph 3.4.1, delete in its entirety.

Paragraph 3.4.2.2, delete the last sentence.

Paragraph 3.5, line 1: After "3.5.1" insert "and 3.5.3".

Paragraph 3.5, at end of paragraph, add the following:

"An illustrated instruction sheet shall also be provided describing the assembly of the desk attachment (typewriter platform) including a bill of material listing all components."

PAGE 9

Add new paragraph 3.5.3 as follows:

"3.5.3 Desk attachment (typewriter platform). An instruction sheet illustrating the method of reversing the back panel of the desk attachment shall be mounted to the underside of the desk attachment top. It may be incorporated in the same instruction sheet described in 3.5.1."

PAGE 10

TABLE II- delete portion relating to Vinyl or polyester film.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

PAGE 16 and 17

Paragraph 4.3.3 and Table V. Delete entirely and substitute the following:

"4.3.3 Examination of preparation for delivery requirements. The preparation for delivery of the desks shall be examined in accordance with the quality assurance provisions of PPP-P-1877."

Paragraph 4.4.1, 4.4.1.1 and 4.4.1.2, 4.4.1.3, and 4.4.1.4.

PAGES 17, 18 and 19

2. Section 5 - Delete in its entirety and substitute the following:

"5. PREPARATION FOR DELIVERY

5.1 Packaging, packing and marking.

5.1.1 Desk. Each desk shall be packaged, packed and marked in accordance with PPP-P-1877. Packaging shall be level A, B or C as specified (see 6.2), packing shall be level A, B or C as specified (see 6.2), and marking shall be for civil agencies or military activities as specified (see 6.2).

5.1.2 Desk attachments. Each desk attachment shall be furnished knocked-down and shall be packaged, packed and marked in accordance with PPP-P-1877. Packaging shall be level A, B or C as specified (see 6.2), packing shall be level A, B or C as specified (see 6.2), and marking shall be for civil agencies or military activities as specified (see 6.2).

5.1.3 Stationery trays. Stationary trays shall be packaged, packed and marked in accordance with PPP-P-1877. Packaging shall be level A, B or C as specified (see 6.2), packing shall be level A, B or C as specified (see 6.2), and marking shall be for civil agencies or military activities as specified (see 6.2).

5.2 Palletization. Unless otherwise specified (see 6.2), packed desks shall be palletized in accordance with the palletization requirements of PPP-P-1877 for desks. Desks packed in accordance with the level C requirements of PPP-P-1877 shall not be palletized."

PAGE 19

Paragraph 6.2 - Delete items d, e, and f, and substitute the following:

"(d) - Selection of applicable levels of packaging and packing (see 5.1.1, 5.1.2, 5.1.3).

(e) - Marking requirements (see 5.1.1, 5.1.2, 5.1.3).

(f) - When palletization is not required (see 5.2)."

PAGE 20

Paragraph 6.3 Standard sample. delete entire paragraph and substitute the following:

"Laminated plastic samples. Sample panels of the walnut (FSS-L-01002), and a list of products which exemplify the standard color/grain and finish may be obtained from:

Technical Support Branch
National Furniture Center
GSA-FSS
Washington, DC 20406"

FIGURES

FIGURE 2: Delete and substitute new Figure 2A attached.

FIGURE 3: Add the following note - "Alternatively, the wood band at the bottom of the panels may be applied to the core before veneering."

GSA DC 76-12488

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

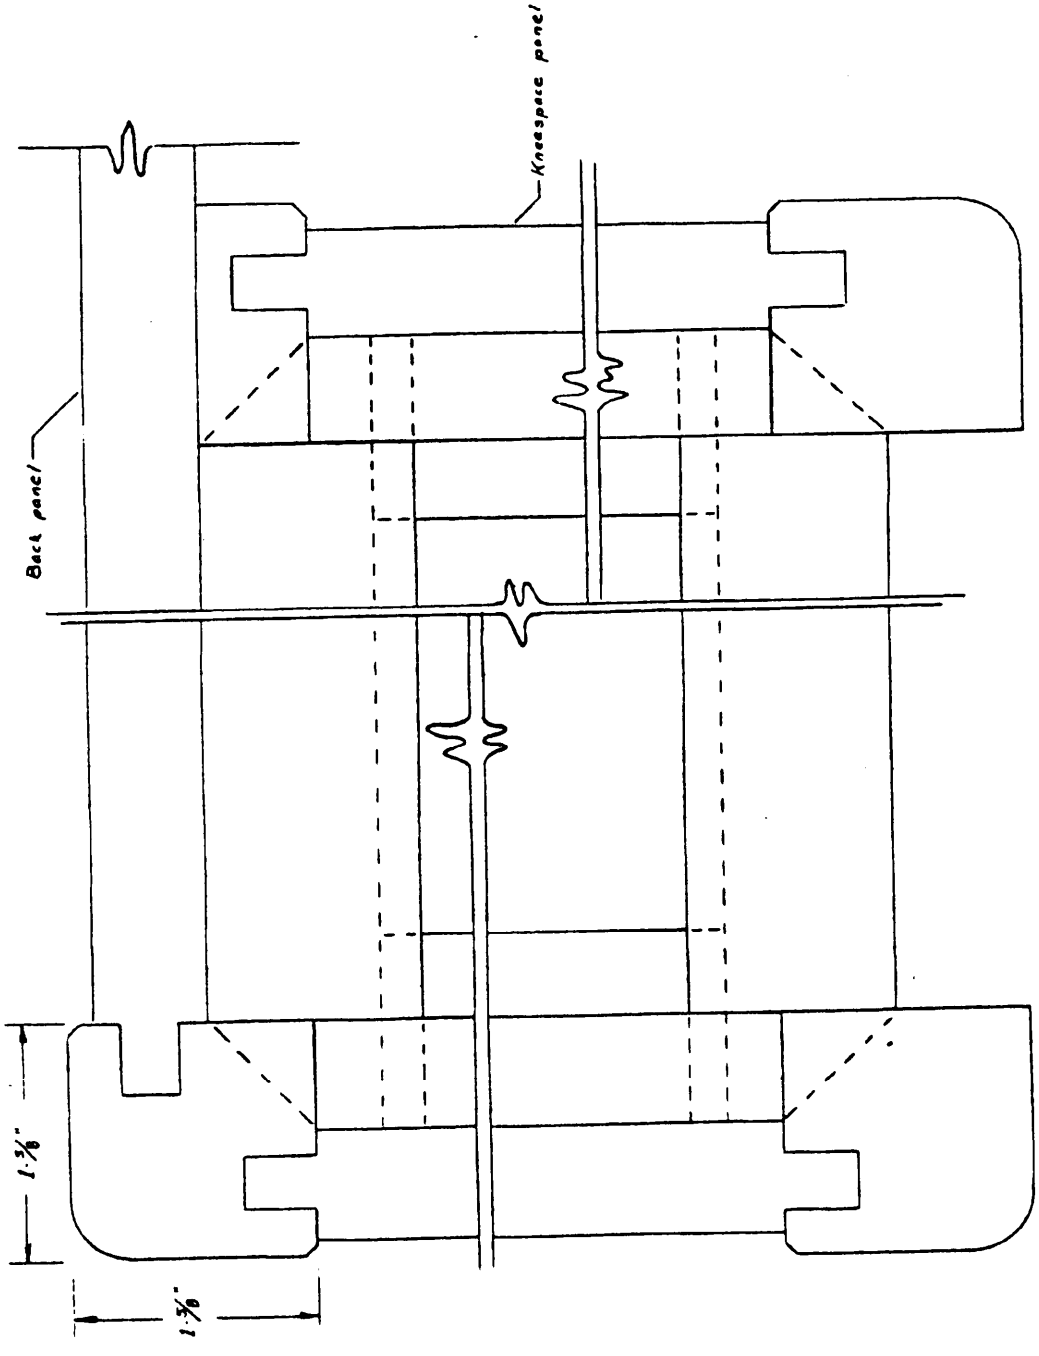


FIGURE 2A PEDESTAL CONSTRUCTION DETAILS

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.