AA-D-191a

August 4, 1955

SUPERSEDING
Int. Fed. Spec. AA-D-00191a (GSA-FSS)
Revision 1, January 5, 1955
Fed Spec. AA-D-191
31 March 1931

FEDERAL SPECIFICATION

DESKS, STEEL, GENERAL OFFICE

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies

1 SCOPE AND CLASSIFICATION

1.1 **Scope.**—The flat top four leg desks covered by this specification are of the Federal standard general office type The single-pedestal desks are intended for use where work duties do not require a double-pedestal desk and where floor space is a determining factor. Calculating machine and other special duty desks are not covered by this specification and should be purchased as required for specific functions

1.2 Classification.

1.2.1 *Types, classes and styles* —The desks shall be of the following types, classes, and styles, as specified in the invitation for bids

Type I —Clerical desks
- Class 1 — Double-pedestal — 60 inches wide by 34 inches deep by 30½ inches high
- Class 2 —Single right pedestal—45 inches wide by 34 inches deep by 30½ inches high

Type II —Secretarial desks
- Class 1 — Double-pedestal — 60 inches wide by 34 inches deep by 30½ inches high
  - Style A —Typewriter compartment in left pedestal
  - Style B —Typewriter compartment in right pedestal
- Class 2 —Single right pedestal—45 inches wide by 34 inches deep by 30½ inches high, with fixed typewriter bed on left

1.2.2 *Colors of finish* —The colors of finish of the desks shall be as specified in the invitation for bids, and shall match the following standard colors adopted by the Federal Supply Service, General Services Administration:

Gray
Olive Green

(Sample panels of the standard colors of finish and samples of the standard colors of linoleum are obtainable, without charge, from the Business Service Center, Regional Office Building, Federal Supply Service, General Services Administration Washington 25, D C or from the Business Service Center of the nearest GSA Regional Office)

2. APPLICABLE SPECIFICATIONS AND STANDARDS

2.1 The following specifications and standards of the issues in effect on date of invitation for bids, form a part of this specification

Federal Specifications


NN-B-591—Boxes, Fiberboard, Wood-Cleated (for Domestic Shipment)
NN-B-621—Boxes, Wood, Nailed and Lock-Corner
LLL-L-354—Linoleum, Desk-Top
PPP-B-601—Boxes, Wood, Cleated-Plywood

Military Specifications:

JAN-P-106 — Packaging and Packing for Overseas Shipment—Boxes, Wood, Nailed.

862241—55—(13)


Source: https://assist.dla.mil -- Downloaded: 202640-26T11:39Z
Check the source to verify that this is the current version before use.

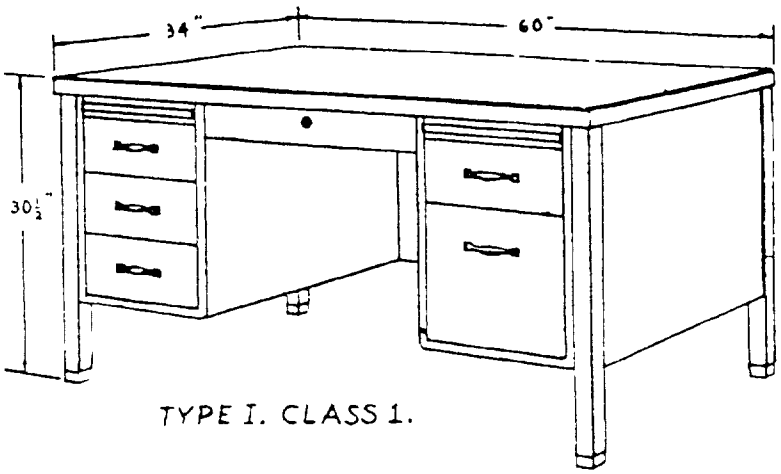

TYPE I. CLASS 1.

DESK CONTAINS

4 — STORAGE	DRAWERS	12"W X 5½"H X 24"D CLEAR
1 — LETTER	DRAWER	12⅝"W X 10⅛"H X 22¾"D CLEAR
1 — CENTER	DRAWER	22—W X 2"-H X 18"-D CLEAR

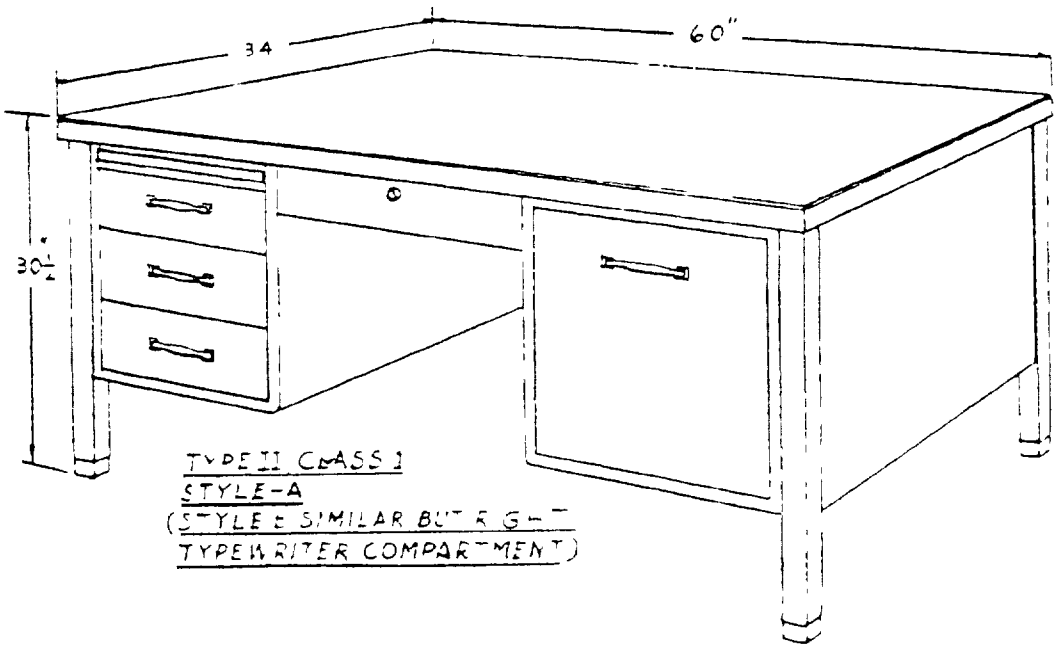

TYPE II CLASS 1
STYLE-A
(STYLE B SIMILAR BUT HAS TYPEWRITER COMPARTMENT)


DESK CONTAINS

3 — STORAGE	DRAWERS	12"W X 5½"H X 24"D CLEAR
1 — CENTER	DRAWER	17"W X 2"H X 18"D CLEAR

TYPEWRITER COMPARTMENT DOOR 18"W. X 18½"H

FIGURE 1.


Source: https://assist.dla.mil -- Downloaded: 202640-26T11:39Z
Check the source to verify that this is the current version before use.

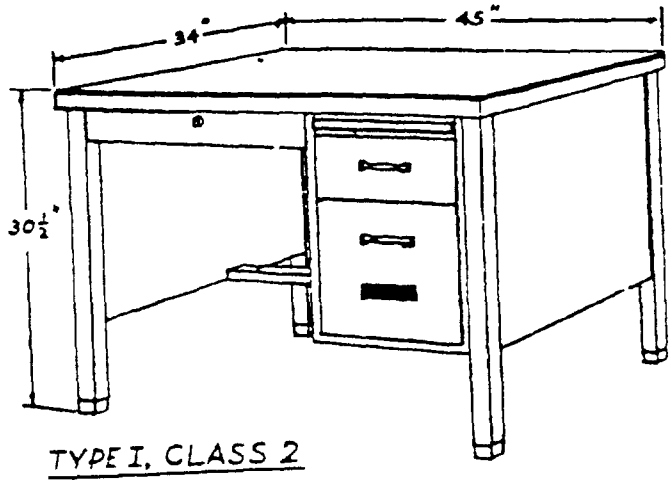

TYPE I, CLASS 2

DESK CONTAINS

1 - STORAGE DRAWER 12"W X 5½"H X 24"D CLEAR
1 - CENTER DRAWER 22"W X 2"H X 18"D CLEAR
1 - LETTER DRAWER 12⅛"W.X 10⅛"H X 22¼"D CLEAR

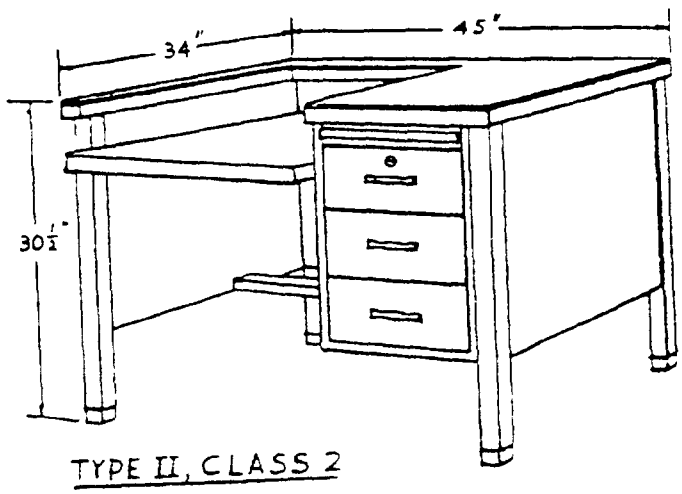

TYPE II, CLASS 2

DESK CONTAINS

3-STORAGE DRAWERS 12"W X 5½"H X 24"D CLEAR

FIGURE 2

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:39Z
Check the source to verify that this is the current version before use.

JAN–P–125 — Packaging and Packing for Overseas Shipment—Barrier-Materials, Waterproof, Flexible

MIL–A–140 — Adhesive, Water-Resistant, Waterproof Barrier-Material

MIL–C–490—Cleaning and Preparation of Ferrous and Zinc-Coated Surfaces for Organic Protective Coating

MIL–C–11456 — Crates; Wood, Nailed, Unsheathed, Domestic Shipment, 1500 Pounds Maximum Load

Military Standards

MIL–STD–105 — Sampling Procedures and Tables for Inspection by Attributes

MIL–STD–129—Marking for Shipment and Storage

MIL–STD–130—Identification Marking of U S Military Property

(Activities outside the Federal Government may obtain copies of Federal Specifications and Standards as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U S Government Printing Office, Washington 25, D C

Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Atlanta, Chicago, Kansas City, Mo, Dallas, Denver, San Francisco, Los Angeles, Seattle, and Washington, D C

(Federal Government activities may obtain copies of Federal Specifications and Standards and the Index of Federal Specifications and Standards from established distribution points in their agencies

(Copies of Military specifications and standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer)

3 REQUIREMENTS

3.1 Material

3.1.1 *Steel* —The steel sheets used for all exposed parts shall be cold rolled, stretcher leveled, full pickled and oiled, and free from imperfections. Other sheets shall be hot rolled, pickled, and oiled. The sheet steel for parts to be formed shall withstand the bend test specified in 4 3.3. The gages shown herein are the Manufacturers' Standard Gage for Steel Sheet The decimal equivalents shown for the steel sheet thickness are subject to the established standard tolerances or ordering limits.

3.1.2 *Linoleum* —The linoleum shall conform to the requirements of Federal Specification LLL-L-354, except that burlap or felt back may be used The thickness of linoleum shall be not less than 0 075 inch The linoleum colors shall be green for olive green desks and gray for gray desks The colors shall match the standard linoleum colors adopted by the Federal Supply Service, General Services Administration (see 1.2 2 for samples)

3.1.3 *Hardware*

3.1.3.1 *Face hardware* —The face hardware shall be satin finished anodized aluminum or type 430 corrosion-resistant steel or brushed chromium on steel or on die-cast zinc, brass or bronze

3.1.3.2 *Foot sockets* —Foot sockets shall be of the materials specified in 3 1 3 1 The steel foot sockets shall be not less than 0 0299 inch thick and aluminum foot sockets shall be not less than 0 039 inch thick by not less than 1½ inches high and shall be formed to conform to the shape of the leg The foot sockets shall be flush with the outside surface of the leg and shall be firmly secured by fastenings which are designed to protect floors and to be removable with simple tools

3.1.3.3 *Locks* — Each center or control drawer shall have a disk tumbler, not less than ¾-inch-diameter tube, concealed lock operated by a grooved key The face of the locks shall be of the materials specified in 3 1.3.1 Each lock on any order up to 200 desks shall be of a different key change in that no one key will open more than one of the 200 locks Two keys shall be furnished with each lock When the locking drawer is locked, it shall control a positive locking device capable of locking all drawers in one

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

operation, and also permit closing and locking any drawer after the control drawer is locked, without distorting the locking mechanism. Alternatively, the locking mechanism shall permit the opening of any drawer without opening the unlocked control drawer.

3.1.3.4 *Drawer pull* —The drawer and typewriter door pulls shall be of the materials specified in 3.1 3.1 The pulls shall be similar to the design shown in the figures with all surfaces and edges ground smooth to eliminate roughness and sharp edges Pulls shall be securely attached with screws or nuts and lockwashers which shall be surface mounted if attached to the inside of the drawer head or countersunk if mounted to the double wall of the drawer front.

3.1.3.5 *Linoleum binding strip* —The linoleum binding strip material shall be as specified in 3.1 3 1 The strip shall have not less than a 3/16-inch quarter round bead with the inside beveled to hold the beveled edge of the linoleum firmly secured to the top or edge-molding but made easily removable in order to replace the linoleum. The top of the strip shall not project above the top surface of the linoleum

3.1.4 *Typewriter platform mechanism.*— The typewriter-platform mechanism shall be constructed of steel, having sufficient structural strength and designed to withstand the load test specified in 4 3.1 The mounting of the mechanism and platform shall also be included in the test The mechanism shall be properly spring counter-balanced and shall have a readily accessible positive metal locking device which operates automatically or by a hand-operated locking lever, the platform shall be held rigidly in place in the elevated position and function satisfactorily in its operations The bottom of the platform in raised position shall be not less than 24 inches above the floor and shall be free of any obstacles which interfere with the user of the typewriter The mechanism shall operate easily and smoothly with the typewriter in place and shall have ample clearance for all standard correspondence model typewriters when lowered into the pedestals. The mechanism shall be smoothly finished with lacquer or enamel and moving parts shall be properly lubricated A label shall be permanently affixed to the back of the compartment door captioned "Warning" or "Caution" and setting forth complete operating instructions for the typewriter platform mechanism.

3.1.5 *Finishing materials.*

3.1.5.1 *Cleaning.*—All metal surfaces, except exposed hardware, shall be cleaned and surface preparation processed in accordance with any of the grades or types specified in Military Specification MIL-C-490, Cleaning and Preparation of Ferrous and Zinc Coated Surfaces for Organic Protective Coatings

3.1.5.2 *Enamel* —Enamel for the final coat shall be in accordance with manufacturers' commercial practice, except the colors shall be as specified in 1.2.2 of this specification, and the enamel shall be baked for not less than 45 minutes at 300° F. or in accordance with the enamel manufacturer's directions Enamel shall withstand the test specified in 4.3 4

3.2 **Construction.**

3.2.1 *Design* —The design and dimensions of the desks shall be as shown in figures 1 and 2, which illustrate the general exterior appearance and typical features of construction required but are not intended to preclude the purchase of desks which are otherwise in accordance with the minimum detail requirements of this specification.

3.2.1.1 *Preproduction sample* —When specified in the invitation for bids, before production is commenced, a complete desk shall be made available at the contractor's plant for approval by the contracting officer. When the initial preproduction sample is approved, it shall be retained by the contractor as a control guide for subsequent production on the contract. Approved samples may be included as part of the last shipment

3.2.2 *Tolerance.*—Width of top, plus or minus ⅛ inch; depth of top, plus or minus ⅛ inch; height of top, plus or minus ⅛ inch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

3.2.3 *Assembly.* — Pedestals shall be secured to the top, and legs to pedestals by nuts, lockwashers and bolts or extruded holes and self-tapping screws, and legs may be of the slip-on type, being securely held in place by continuous spring clips or brackets which shall be welded to the pedestal. Bolt holes shall be true and even in joining members Welding for sub-assemblies shall be as specified for each part and pits or extortions on the face of the parts shall be filled and ground smooth, and shall not show on the exposed finished parts of the desks The joining of all members shall result in a compact unit of sufficient strength to prevent the distortion, breakage or loosening of any part of the desks during heavy duty daily usage and to withstand rough handling in moving while fully loaded

3.2.4 *Tops* —The top plate shall be not less than 18-gage (0.0478 inch) stretcher leveled steel, and shall be rigidly reinforced to meet the required test specified in 4.3.2 The top plate shall be covered with linoleum as specified in 3.1.2, which shall be cemented uniformly to the top plate by a cement recommended by the linoleum manufacture. The over-all height of the edge molding and the linoleum binder strip shall be not less than 1½ inches The edge molding shall be not less in thickness than the thickness of the top plate and may be formed from one or more pieces, and shall provide for a linoleum binding strip as specified in 3.1.3.5 which shall be securely held in place but allow for easy removal and shall closely fit the linoleum The exposed edge molding and the binder strip shall be of not more than two pieces each and shall be butt joined or either end or both ends of the desk All corners of the top shall be rounded on not less than ¾-inch radius

3.2.5 *Drawers* — The number kind and minimum inside clear dimensions of the drawers required shall be as shown on the figures The drawer fronts shall have double-wall construction The outside drawer fronts shall be not less than 20-gage (0.0359 inch) steel if only the outside wall is used in attaching the drawer pull or may be 22-gage (0.0299 inch) if the drawer pull is attached to both the inner and outer drawer front. The ends and bottom edges shall be box formed and flanged for spotwelding to the drawer body. The inside drawer front shall be of not less than 24-gage (0.0239-inch) steel, flanged on all edges, and the top edge shall interlock with the top channel of the outside front and the bottom edge shall be held in place by extrusions in the drawer bottom The drawer body shall be formed from one piece of not less than 24-gage (0.0239-inch) steel, and the back edges shall be flanged for spotwelding of the back to the body. The top edge of all drawer sides shall be beaded, channeled or folded for safety and reinforcement, and all pedestal drawer sides shall be not less than 4¾ inches high All storage drawers shall have provision made for adjustment of crosswise partitions at intervals of 1 inch or for two rows each of 5- by 3-inch or 6- by 4-inch index cards, and for one row each of 5- by 3-inch, 6- by 4-inch, and 8- by 5-inch cards The back of all storage drawers shall be securely welded to the drawer sides and bottoms, and shall be not less than 24-gage (0.0239-inch) steel with the top edge formed for additional strength or may be of 20-gage (0.0359-inch) steel without the top formation (see 3.5) The backs shall be the same height as the drawer sides The back and the hood of the center or knee-space drawer shall be formed from one piece of steel not less than 24-gage (0.0239-inch) The hood shall be not less than 1½ inches wide flanged in on the horizontal ends for spot welding to the drawer sides The full width of the front edge of the hood shall be formed for strength The center or knee-space drawer shall be equipped with a convenience tray which shall extend the full width of the drawer The tray shall have not less than three compartments 3 inches wide and one pencil compartment The tray shall be not less than 1 inch high and 2 inches wide The letter filing drawer shall have not less than 22¾ inches of open and easily accessible clear filing space and provision shall be made for proper operation of a compressor. The compressor shall be controlled by spring tension and shall operate easily within the

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

drawer when released and be held firmly when engaged The compressor face shall be not less than 18-gage (0 0478-inch) steel and the tension release lever shall be smoothly formed and reinforced for strength and convenience of releasing The back of the letter file drawer shall be not less than 18-gage (0 0478-inch) steel securely welded to the flanges of the drawer body or alternatively, the back of letter file drawer may be of 22-gage (0.0299-inch) steel with the top edge formed for strength (see 3.5). Spot welds for all drawer assemblies shall be on not more than 4-inch centers The file drawer shall have one or two pulls as commercially produced by the manufacturer

3.2.5.1 *Drawer suspensions and stops* — The drawer suspension shall be constructed without rough or sharp edges and to insure durability and ease of operation and without excessive friction, noise, sagging, wobble or vibration in fully extending the drawer with a minimum test load of 40 pounds evenly distributed in the letter file drawer, 20 pounds in each of the storage drawers, and 10 pounds in the center of knee-space drawer Pedestal drawers shall not touch when loaded and fully extended The double height letter filing drawer shall be located in accordance with the manufacturer's commercial standards and shall operate on a zinc or cadmium plated or black oxide finished progressive suspension slide or a ball-bearing roller channel suspension Each drawer shall be equipped with stops which shall prevent the drawer from falling out when fully extended but will permit easy removal of the drawer when desired The drawers shall contact rubber bumpers on both the inner and outer movement to reduce noise to a minimum when in use The front of the drawers shall be flush with the front section of the desk or may be inset not more than 1/16 inch, when in a closed position

3.2.5.2 *Drawer partitions and stationery trays* —The drawer partitions and stationery trays shall be formed for strength and safety of not less than 24-gage (0 0239-inch) steel or heavier steel may be used without forming except for across the top edge which shall be folded or beaded. Drawer partitions made of 24-gage (0.0239-inch) steel shall be double walled forming a rounded top edge and shall have not less than two reinforcing dimples for spotwelding the two walls together. One partition shall be furnished for each storage drawer which shall fit securely into the adjustment feature of the drawer sides All type II desks shall have a sloping stationery compartment in one drawer containing not less than four trays The trays shall be not less than ¾ inch apart and shall adequately accommodate 8½- by 11-inch paper. The trays shall be interlocking and interlock with the vertical partition or the stationery trays and the vertical partition shall be constructed as one unit The trays shall be snugly fitted into any storage drawer to maintain their slope and eliminate vibrations

3.2.6 *Pedestal* — The pedestal sides and back shall be formed from either one or two pieces If the sides and back are formed from one piece, the steel shall be not less than 20-gage (0.0359-inch) with the edges channel shape and provision made for securing the legs at the front and back of the outside section If the pedestal sides and back are formed from two pieces, the inside and back panel shall be of one piece of not less than 22-gage (0 0299-inch) steel with the front edge channeled forming part of the front section, and with the back flanged for securing the back leg The end panel or outside section shall be not less than 20-gage (0 0359-inch) steel with provision made for securing the legs The top of all pedestal sides and back sections shall be flanged with provision made for securing the pedestal to the desk top as specified in 3 2 3 The bottom edge of all pedestal sides and backs shall be flanged for the bottom All pedestal bottoms shall be not less than 22-gage (0 0299-inch) steel and shall be attached by welding to the flanges of the pedestal sides and back The front of the bottom plate shall be channeled along the front edge forming the bottom part of the front of the pedestal section All other structural parts of the front of the pedestal shall be channel formed from not less than

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

22-gage (0.0299-inch) steel The parts forming the pedestal front shall be securely welded together and the exposed joints filled and ground smooth Reinforcing steel angles or gussets of not less than 16-gage (0 0598-inch) steel shall be welded to the lower front corners Each pedestal side shall be reinforced by not less than two "Z"-shaped braces of not less than 20-gage (0 0359-inch) steel to which the drawer suspensions shall be secured by welding, spring clips, or screws The lower edge and inside corner of the front of the pedestals and the lower edge of the knee-space panels shall be rounded full length not less than ¼-inch radius to minimize possible injury to the user Knockouts may be provided for concealed wiring either to the front or rear of the pedestal and shall be not greater than ⅝-inch diameter.

3.2.7 *Legs* —The legs shall be formed from not less than 18-gage (0 0478-inch) steel 2 inches square plus or minus ⅛ inch with not less than ¼-inch radius on outside corners Provisions for rigid attachment to the panels and pedestals shall be as specified in 3.2.3 When legs are not tubular their entire length, a 16-gage (0 0598-inch) steel angular or curved reinforcing member not less than 10 inches long, and extending not less than 5 inches above and below the lower edge of pedestal, shall be welded to the inside of each leg.

3.2.8 *Outside end panels for class 2 desks* — The outside end panels shall be formed in box shape from not less than 20-gage (0 0359-inch) steel with the bottom edge formed channel shape and the top and side flanges punched for attachment to the top plate and legs as specified in 3 2 3 End panels may have knockouts not greater than ⅝-inch diameter for concealed wiring

3.2.9 *Inside end panels for class 2 desks* — The inside end or knee-space panels for class 2 desks shall be formed from not less than 22-gage (0 0299-inch) steel with provision made for attachment to the top plate as specified in 3.2.3. Sides shall be flanged in and bottom edge shall be folded to interlock with outside end panel, or the two panels may be formed and tack-welded together.

3.2.10 *Rear knee-space panel.*—The rear knee-space panel for all desks shall be formed from not less than 22-gage (0.0299-inch) steel with return flanges on all edges and channel formed or formed into a round bead on the exterior face at the bottom. It shall be secured to pedestals and top plate as specified in 3.2.3 and shall be the full height of the pedestal The rear-knee-space panel may be flush with the back of pedestal panel or may be inset not to exceed 8 inches.

3.2.11 *Knee-space brace for type I and type II, class 2 desks* —The knee brace shall be of not less than 18-gage (0 0478-inch) cold-rolled steel formed channel shape on front and rear edges The ends shall be formed, punched, and attached to the underside of the end panel and pedestal The width shall be not less than 3 inches and the height not less than 1 inch The brace shall provide ample support to prevent sway on end panels or pedestal and shall be conveniently located and free from injurious surfaces

3.2.12 *Sliding shelf* —The sliding shelf for drawer pedestal of all class 1 desks and for type 1, class 2 desks, shall be not less than 18-gage (0 0478-inch) steel formed channel shape on the front and side edges and with the front edge folded over Alternatively, the sliding shelf may be formed of not less than 20-gage (0 0359-inch) steel formed channel shape along the sides, back and front with the front edge folded over and reinforced with not less than 16-gage (0 0598-inch) channels inset and spotwelded to the side channels of the top plate The shelf shall operate on 16-gage (0 0598-inch) steel runners formed channel and "Z"-shape which will permit the shelf to extend horizontally not less than 14⅜ inches from the front of the desk Rubber or felt bumpers or a coil spring shall be provided as a noise-reducing stop when shelf is fully extended or pushed into the pedestal

3.2.13 *Typewriter compartment for type II, class 1 desks.*—The typewriter pedestal shall be on either the right or left hand (facing) as

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

specified. The pedestals shall have a hinged door with three pulls in alignment with the pulls on the opposite pedestal or one pull centrally located at the side or top of the door. The door shall be double-wall construction. The outside door plate shall be not less than 18-gage (0.0478-inch) steel formed channel shape on all edges. The inside door plate shall be not less than 20-gage (0.0359-inch) steel flanged on all edges and gas welded to the outside door. Alternatively, the outside door panel may be of 20-gage (0.0359-inch) steel and the inside panel of 22-gage (.0299-inch) with both panels formed for welding and reinforced by not less than two bar reinforcements between the panels or the space may be filled with sound-deadening material. The gas welds shall encompass each corner of either construction and there shall be two intermediate perimeter welds between each corner weld. Corners of the outside door shall be gas welded and ground smooth. The typewriter bed shall be designed to withstand the test specified in 4.3.1, and shall extend not less than 19 inches from the front of the desk when in the raised position. All exposed corners of the bed shall be gas welded and ground smooth. The mechanism shall be as specified in 3.1.4 and the pedestal shall provide for mounting of the mechanism. Doors shall be provided with a stop in the closed and open positions and with means for holding the door in the closed and open positions.

3.2.14 *Fixed typewriter bed and convenience tray.*—The fixed typewriter bed on type II, class 2 desks shall be not less than 18-gage (0.0478-inch) steel with front-edge channel and box formed to prevent raw edges. The side and back edges shall be flanged upward for attaching to the top plate. The underside of the fixed bed shall be reinforced to withstand top test specified in 4.3.2. Platform shall be not less than 20 inches wide by 20 inches deep and 26 inches from the floor. A convenience tray of equivalent construction shall take the place of the sliding shelf and shall be formed into three equally divided compartments across the front for office supplies such as paper clips, pens and rubber bands and one narrow compartment running along one side for pencils and rulers. The remainder of the tray shall form a compartment for stationery or carbon paper.

3.3 *Finish.*—All exterior and interior steel surfaces of the desk, except hardware, shall be prepared for painting in accordance with 3.1.5.1. All surfaces of the desks and drawers shall be enameled. The enamel shall conform to the requirements of 3.1.5.2. The minimum total finished film thickness on exposed enameled surfaces shall be not less than 1.0 mil. The finish shall level out to produce smooth, uniform exposed surfaces without runs, wrinkles, grit, areas of thin film or no film, and separation of color. Special attention shall be given to the bottoms and to the interior to insure that all surfaces are adequately protected against rust. Finish panels shall withstand the test specified in 4.3.4.

3.4 *Identification marking.*—Unless otherwise specified, each desk shall be permanently marked on the underside of the center drawer or platform in a plain and legible manner with the specification number, the Federal stock number, the date of manufacture, and the contractor's name or trade-mark, and the contract order number, so that the source of supply may be readily determined. When specified, identification marking shall be in accordance with Military Standard MIL-STD-130.

3.5 **Workmanship.**—The desks shall be constructed in strict accordance with the detailed requirements specified herein and be of a similar design as shown in figures 1 and 2. The edges of all parts and sheets shall be further protected by folding, beading, flanging, or grinding to eliminate possible injury from the burrs or raw edges. The desks shall be free from any other defects which might affect the durability, serviceability or appearance.

4. SAMPLING, INSPECTION AND TEST PROCEDURES

4.1 Sampling for lot acceptance.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

4.1.1 *Inspection lot* —Normally, the inspection lot size shall consist of all units submitted for inspection at one time.

4.1.2 *Sampling for inspection* —A representative random sample shall be selected from the lot in accordance with table I. Acceptance or rejection of the lot shall be based on the number of defective units found in the sample selected and inspected, as being equal to or less than the specified acceptance number or equal to or greater than the specified rejection number of table I

TABLE I —*Sampling for visual and dimensional inspection based on—Acceptable Quality Level (AQL) of 2 5 percent*

Lot size	*Sample size*	*Acceptance Number*	*Rejection Number*
15 and under	3	0	1
16 to 40	7	0	1
41 to 110	15	1	2
111 to 300	35	2	3
301 to 500	50	3	4
500 and over	75	4	5

NOTE 1 The Government Inspector may institute tightened or reduced inspection in accordance with section 9 of MIL-STD-105

NOTE 2 The above is a single sampling procedure Alternate double or multiple sampling procedures of alternate Acceptable Quality Levels for different classes of defects may be specified at the discretion of the procuring agency

4 2 Inspection —The desks shall be inspected to determine compliance with this specification as to workmanship materials, design details of construction hardware finish marking and packing Inspection may be made at the factory by a representative of the Government at any time during process of manufacture, or at point of delivery

4 3 Tests

4.3.1 *Typewriter mechanism and platform test* —After satisfactory preliminary inspection has been accomplished, the test shall be performed with the back edge of the desk secured to avoid tipping and with the platform in the raised or operating position but without any support to the platform by the compartment door A load of 120 pounds shall be applied to an area of not more than one square foot in the center of the platform starting four inches from the outer end. The load shall be allowed to remain in place for a period of three hours Accurate measurements of the distance between the floor and the bottom of the front of the typewriter platform shall be taken before the load is applied, immediately afterwards and at the end of the testing period The deflection of the platform shall not exceed 3/8 inch at any time during the test, and after the load is removed shall not have taken a permanent set of more than 1/8 inch Any loosening of parts or any deflection which exceeds the above maximum allowance will be considered as failing to meet the requirements of this specification

4 3.2 *Top test* —A Weight of not less than 600 pounds shall be applied to an area not to exceed 12 inches in diameter for at least 5 minutes The test area shal be at the front center of the knee-space The desk top or fixed platform shall not deflect more than 1/8 inch and shall not take on any permanent set

4 3.3 *Bend test for steel sheets* —The steel sheets used for parts to be formed shall withstand a 180° bend at room temperature with and across the grain without showing any crystallization, cracks or fractures on the outside of the bend

4 3 4 *Finish test for steel panels* —A 20-gage steel panel prepared in accordance with 3.3 shall be bent at room temperature around a 1/4-inch rod to 180°, without cracking flaking or loss of adhesion of the enamel

5 PREPARATION FOR DELIVERY

5.1 **Application** —Subject commodity shall be packaged and packed for domestic shipment (immediate use), domestic shipment (storage), overseas shipment (commercial export) or overseas shipment (military) as specified (see 6 1)

5.2 **Domestic shipment (immediate use)** — Unless otherwise specified, subject commodity shall be packed in containers, which (together

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

with packaging, wrapping and inner packing) are acceptable by common or other carriers for safe transportation to point of destination specified in shipping instructions at the lowest transportation rate for such supplies

5.3 For domestic shipment (storage).— When specified

5.3.1 *Packaging* —All drawers and reference shelves in pedestal sections shall be securely closed by means of commercial-type acetate-fiber pressure-sensitive adhesive tape, minimum 3-inch width, applied over all edges of drawer front and adjacent body or frame surfaces.

5.3.1.1 The center drawer shall be securely closed by means of a pad, fabricated of built-up corrugated fiberboard or equivalent cushioning material, bearing directly over the entire area of center drawer face The thickness of the built-up pad shall be equal to projection of desk top beyond center drawer when closed The pad shall be secured in position over the drawer face in such a manner as to remain in position during transit When the desk is packed in wood crate an additional intermediate crate frame member shall be placed to bear against the pad as a means of keeping the center drawer securely closed The cushioning material specified in 5 3 1 4 shall be placed between the additional intermediate crate frame member and the fiberboard pad

5 3.1.2 When the desk is equipped with a typewriter elevator shelf, the shelf shall be securely held in position inside the compartment by locking the elevator mechanism or by providing adequately designed interior blocking and bracing forms of corrugated fiberboard, lumber or a combination of both materials Interior forms shall be cushioned to prevent marring of finished surfaces of shelf or interior of compartment

5.3.1.3 Unless otherwise specified, all finished surfaces of the desk shall be completely covered with sheets of 30-pound basis weight (24 by 36—500) machine glazed kraft paper to prevent abrasions.

5.3.1.4 All surfaces of the top, sides, back and front of desks shall be protected with cushioning material, fabricated in the form of pads or blankets, made of the following materials or a combination of these materials to provide a built-up cushioning of not less than ¾ inch thickness:

Macerated paper	Excelsior (sealed ends)
Shredded paper	Cotton wadding
Wood wool	Molded pulpboard
Wood-fiber felt	
Creped-cellulose wadding	

Laminated creped cellulose wadding backed with corrugated fiberboard

When crepe-cellulose wadding, cotton wadding, or laminated creped cellulose wadding backed with corrugated fiberboard are used, the initial sheet of glazed kraft paper may be omitted.

5.3.2 *Packing.*

5.3.2.1 Desks wrapped and cushioned as specified in 5 3.1 shall be packed in wood-cleated fiberboard boxes conforming to style A of Federal Specification NN-B-591, except that minimum thickness and width of cleats shall be ¾ by 1¾ inches and fiberboard shall test not less than 275 p s i One additional cleat shall be placed through the center of the top and bottom panels parallel to the width of the box and one additional cleat shall be placed through the center of the front and back panels parallel to the depth of the box The bottom panel of box shall have additional cleats provided so that all legs of desk will rest on cleat members placed across box bottom to provide an equal degree of load bearing surface for all legs regardless of desk construction or location of legs along bottom of desk Cleats, on which legs of desk are brought to bear shall be of sufficient width to equal the thickness of legs plus adequate projection at each side of legs to prevent legs from being shifted off cleat while in transit.

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:39Z
Check the source to verify that this is the current version before use.

5.3.2.1.1 Alternatively, desks may be packed in cleated-plywood boxes conforming to style A of Federal Specification PPP-B-601, (domestic type), or in nailed wood boxes conforming to style 2, 2½ or 4 of Federal Specification NN-B-621.

5.3.2.1.2 Alternatively, desks may be packed in nailed wood crates conforming to styles B-1, B-2, B-3 (as applicable—see table I), of Military Specification MIL–C–11456. Crates shall have skid frames so designed that all legs of the desk will rest on cleat members placed across crate bottom to provide an equal degree of load bearing surface for all legs regardless of desk construction or location of legs along bottom of desk Skid members, on which legs of desk are brought to bear, shall be of sufficient width to equal the thickness of legs plus adequate projection at each side of legs to prevent legs from being shifted off the skid while in transit

5.4 For overseas shipment, commercial export.—When specified, subject commodity shall be packed in containers which, together with packaging, wrapping and inner packing, are acceptable by oceangoing vessels for safe transportation to the points of destination specified in the shipping instructions at the lowest transportation rate for such supplies.

5.5 For overseas shipment (military), when specified

5.5.1 *Packaging.*—Shall be as specified in 5 3 1.

5.5.2 *Packing* —Desks packaged as specified in 5 3 1 shall be packed in snug-fitting nailed wood boxes constructed and strapped in accordance with style 2, 2½, 3 or 4, of Military Specification JAN-P-106 A cleated-plywood box may be used as an alternate overseas shipping container, constructed and strapped in accordance with style A of Federal Specification PPP-B-601 Each desk shall be provided with a shroud made of waterproof barrier-material in accordance with Military Specification JAN-P-125, type L-2 or M. All seams shall be completely sealed with a continuous seam of minimum ¾-inch width water resistant adhesive in conformance with Military Specification MIL-A-140 The dimensions of the set-up shroud shall be based on the over-all length and width of the cushioned piece and the depth dimension shall be such, so that the shroud shall extend over the sides and ends to the base of the desk

5.6 Marking.—Unless otherwise specified in the invitation to bid, shipping containers shall be clearly marked with the name, type, class, and style and color of the commodity, the Federal Stock Number, the name of the contractor, and the number of the contract or order and the full name and address of the consignee. When specified, each shipping container shall be marked in accordance with Military Standard MIL–STD–129 In addition, each shipping container shall have arrow indicators placed on the side of the container to indicate the position in which the container shall be handled in transit. The word "UP" shall be placed at the point of arrows in letters at least 2 inches high The front panel of each shipping container shall be plainly marked as follows.

UP FURNITURE UP
FRAGILE, HANDLE WITH CARE

Top panels shall be marked as follows

FRAGILE, HANDLE WITH CARE
TOP
THIS SIDE UP

6. NOTES

6.1 Ordering data.—Purchase documents should specify the type, class and style and the color of finish of the desks required, if a different A.Q L. is required, and whether the subject commodity is to be packaged and packed for other than domestic shipment (immediate use) (see 1.2.1, 1.2.2, 3.2.1.1, 4.1, 5.1, 5.2, 5.3.1.3, 5.4, and 5.6).

a Domestic shipment (immediate use), applies to that material required for immediate use without storage or reshipment by the initial domestic receiving activity (see 5.2).

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:39Z
Check the source to verify that this is the currentversion before use.

b Domestic shipment (storage), applies to that material for storage and reshipment to a domestic receiving activity not involving sea transportation, (see 5.3).

c. Overseas shipment (commercial export), applies to that material which is transported by oceangoing vessel, accorded normal cover storage at destination and where the end use of the item is to be at the initial receiving activity, (see 5.4)

d Overseas shipment (military), applies to that material to be transported by oceangoing or coastwise vessel and handled, issued, and stored in the military supply system (see 5.5)

6.2 Federal specifications do not include all types, classes, grades, sizes, etc., of the commodities indicated by the titles of the specifications, or which are commercially available, but are intended to cover the types, etc., which are suitable for Federal Government requirements and as referenced in Federal Standard No. 16.

6.3 It is believed that this specification adequately describes the characteristics necessary to secure the desired material, and that normally no samples will be necessary prior to award to determine compliance with this specification. If, for any particular purpose, samples with bids are necessary, they should be specifically asked for in the invitation for bids, and the particular purpose to be served by the bid sample should be definitely stated. The specification to apply in all other respects.

Patent notice.—When Government drawings, specifications or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever, and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data, is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

6.4 Transportation description.—Transportation description applicable to this item is:

Desk, steel, with one or more enclosed pedestals, (indicate set-up or knock-down)

Carload weights

In cars 40′ 9″ or less in length, inside measurements—10,000, 12,000, 15,000, 18,000; and 22,000 and 30,000 pounds.

In cars exceeding 40′ 9″ in length, inside measurements—16,000, 18,000, 21,000, 24,000, 30,000 and 40,000 pounds.

Truckload weights

Set-up 20,000 pounds, knocked-down 30,000 pounds.

Minimum weights shown apply when material is transported at Classification rating. They will vary when material moves on commodity rates. When in doubt consult General Services Administration Regional Traffic Manager.

MILITARY INTERESTS

Army—MQ
Navy—MC Md S Y
Air Force

U. S. GOVERNMENT PRINTING OFFICE: 1955

Copies of this specification may be purchased for 15 cents

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.