AA-D-195b
MARCH 2, 1961
SUPERSEDING
Int. Fed. Spec. AA-D-00195a(GSA-FSS)
February 6, 1959

FEDERAL SPECIFICATION

DESK, FLAT TOP, STEEL, CONFERENCE-TYPE

This specification was approved by the Commissioner, Federal Supply Service, General Services Administration, for the use of all Federal agencies

1 SCOPE AND CLASSIFICATION

1.1 **Scope.**—The steel conference-type desk covered by this specification is designed for use in a private or semi-private office, and because of the overhanging back and sides, will eliminate the need for a conference table. Metal general office accessory furniture items and the bookcase and credenza covered by Federal Specification AA-O-240, Office Furniture, Steel, Unitized, are recommended for use with this style of desk.

1.2 **Classification.**

1.2.1 *Type and size.*—The conference-type desk covered by this specification shall be of but one type and one size. The desk shall be 78 inches wide by 40 inches deep by 30½ inches high with an 8-inch overhang on the back and two sides.

2 APPLICABLE SPECIFICATIONS, STANDARDS AND OTHER PUBLICATIONS

2.1 **Specifications and standards.**—The following specifications and standards, of the issues in effect on date of invitation for bids, form a part of this specification:

Federal Specifications

L-P-508 — Plastic Sheet, Laminated, Decorative, and Nondecorative.
QQ-S-781—Strapping, Flat; Steel
UU-P-271 — Paper, Wrapping, Waterproofed Kraft
LLL-L-354—Linoleum, Desk-Top
PPP-B-591—Boxes, Fiberboard, Wood-Cleated
PPP-B-601—Boxes, Wood, Cleated-Plywood
PPP-B-621—Boxes, Wood, Nailed and Lock-Corner

Federal Standards

Fed Std No 102—Preservation, Packaging, and Packing Levels
Fed Std No 123—Marking for Domestic Shipment (Civilian Agencies)
Fed Std No 595—Color.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards and Handbooks as outlined under General Information in the Index of Federal Specifications, Standards and Handbooks and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington 25, D. C.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, Los Angeles, Seattle, and Washington, D. C.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications, Standards, and Handbooks from established distribution points in their agencies.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

Military Specifications·

MIL–A–140 — Adhesive, Water-Resistant, Waterproof Barrier-Material

MIL–C–490—Cleaning and Preparation of Ferrous and Zinc Coated Surfaces for Organic Protective Coating

MIL–C–11456 — Crates, Wood, Nailed, Unsheathed Domestic Shipment, 1,500 Pounds Maximum Load

Military Standards

MIL–STD–105 — Sampling Procedures and Tables for Inspection by Attributes

MIL–STD–129—Marking for Shipment and Storage

MIL–STD–130 — Identification Marking for U S Military Property

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer)

2.2 Other publications. — The following publications form a part of this specification Unless otherwise indicated, the issue in effect on date of invitation for bids shall apply

Uniform Freight Classification Rules

(Application for copies may be addressed to the Uniform Freight Classification Committee, 202 Chicago Union Station, Chicago 6 Illinois)

Steel Products Manual, Carbon Steel Sheets

(Copies may be obtained from the American Iron and Steel Institute 350 Fifth Avenue New York 1 New York)

3 REQUIREMENTS

3.1 Material

3.1.1 *Steel* —The steel sheets used for all exposed parts shall be cold-rolled, stretcher leveled, standard of flatness as defined in table 24 of Steel Products Manual, full pickled and oiled, and free from imperfections Other sheets shall be hot-rolled, pickled, and oiled The sheet steel for parts to be formed shall withstand the bend test specified in 4 5 2 The gages shown herein are the Manufacturer's Standard Gage for Steel Sheet The decimal equivalents shown for the steel sheet thickness are subject to the established standard tolerances or ordering limits

3.1.2 *Linoleum* —The linoleum shall conform to the requirements of Federal Specification LLL–L–354 except that burlap or felt back may be used The thickness of linoleum shall be not less than 0 075 inch The linoleum color shall be as specified in 3.2.2.2 (See 3 2 2 2 for samples)

3.1.3 *Plastic sheet* —When plastic tops are specified in the invitation for bids, the plastic sheet shall conform to the requirements of Federal Specification L–P–508, Style D, Type I, Grade HP, Class 1, Finish A. The plastic sheet shall be 0 062 inch thick with a plus or minus tolerance of 0 005 inch The plastic sheet color shall be as specified in 3.2.2 3 (See 3 2 2.3 for samples)

3 1 4 *Face hardware* —The face hardware shall be satin finished anodized aluminum or type 430 corrosion-resistant steel or brushed chromium on steel or on die-cast zinc, brass, or bronze

3.1.5 *Cleaning* —All metal surfaces, except exposed hardware, shall be cleaned and surface preparation processed in accordance with any of the grades or types specified in Military Specification MIL–C–490

3.1.6 *Enamel* —Enamel for the final coat shall be in accordance with manufacturers' commercial practice except the color shall be as specified in 3.2 2 1 of this specification, and the enamel shall be baked for not less than 45 minutes at 300° F or in accordance with the enamel manufacturer's directions. Enamel shall withstand the test specified in 4 5 3 An additional coat of lacquer of the same color and which is compatible will be acceptable

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

3.2 **Construction.**

3.2.1 *Design.*—The conference type desk covered by this specification shall be center of pedestal leg support style The design and dimensions shall be as shown in figure 1 which illustrates the general exterior appearance and typical features of construction required but is not intended to preclude the purchase of desks of similar design which are otherwise in accordance with the detail requirements of this specification The desk shall be 78 inches wide by 40 inches deep with a minimum overhang of 8 inches on the back and two sides The height shall be 30½ inches

3.2.2 *Color*

3.2.2.1 *Metal finish* —The color of the metal finish of the desk shall be gray, Color No. 26134, of Federal Standard No 595 Sample panels of the standard color of metal finish are obtainable, without charge, from the Business Service Center, Federal Supply Service, Genera Services Administration Washington 25, D C. or from the Business Service Center of the nearest General Services Administration Regional Office

3.2.2.2 *Linoleum* —The linoleum color shall be gray and shall match the standard linoleum color adopted by the Federal Supply Service, General Services Administration Samples of the standard color of linoleum are obtainable, without charge from the Business Service Center, Federal Supply Service, General Services Administration Washington 25, D C or from the Business Service Center of the nearest General Services Administration Regional Office

3.2.2.3 *Plastic sheet* — The plastic sheet color shall be green and shall match the standard color adopted by the Federal Supply Service, General Services Administration. Sample panels of the color are obtainable, without charge, from the Business Service Center, Federal Supply Service, General Services Administration, Washington 25, D C, or from the Business Service Center of the nearest General Services Administration Regional Office

3.2.3 *Tolerances* —Unless otherwise specified herein, permissible tolerances shall be as follows Desk top width, plus or minus ⅛ inch Desk top depth plus ⅛ inch Desk height, plus or minus 1/16 inch Pedestal depth, plus or minus 2 inches

3.2.4 *Assembly* —The joining of all members shall result in a compact and rigid unit of sufficient strength to prevent distortion (warpage), breaking or loosening of any part of the desk during usage or moving with drawers loaded Pedestals shall be securely fastened to the top, and legs securely fastened to pedestal bottoms by extruded holes and self tapping screws or other equally secure means Welding for sub-assemblies shall be as specified for each part The general assembly is to be such as to provide for the replacement of any major unit assembly without the necessity of returning the desk to the manufacturer

3.2.5 *Locks* —Each center or control drawer shall have a disc tumbler lock operated by a grooved key The face of the lock shall be of the material specified in 3.1.4, or alternately, shall be dull nickel finish on die cast zinc Each lock on an order up to 200 desks shall be of a different key change, in that no one key will open more than one of the 200 locks Two keys shall be furnished with each lock The locking mechanism is to be such that in its unlocked position, the center drawer may remain closed without locking pedestal drawers The lock catches on all pedestal drawers are to be spring controlled in order that any drawer may be pushed in and locked with the locking mechanism in the locked position

3.2.6 *Drawer pulls* — The drawer pulls shall be similar in design and located as indicated in figure 1. All pulls shall be of the material specified in 3.1.4. The material and finish of all pulls used on one unit shall

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

match All surfaces and edges of the pulls shall be ground smooth to eliminate roughness and sharp edges A design which incorporates open or squared-off ends will not be permitted The pulls shall be securely attached by a method which is not visible on the outside of the drawer The pulls shall have threaded studs or shall have a flat base with tapped holes for attachment and shall be securely attached with screws or with nuts and lock washers The screws or nuts and lock washers shall be countersunk if attached to the double wall of the drawer front The hand hold shall be a minimum of 7½ inches in length. The sliding shelf shall be equipped with a knob or with a drawer pull having a hand hold of at least 1½ inches

3.2.7 *Binding strip* —The binding strip material shall be as specified in 3.1.4 This binding strip shall be not less than 5/32-inch nor more than ½-inch wide It shall interlock with the top plate and top frame molding The binding strip shall not project above the top surface of the linoleum or plastic sheet and shall be made of not more than two pieces joined at the end with only hair line fitted joints The binding strip shall be easily removable

3.2.8 *Legs* —Legs shall be similar in design and position to figure 1 which indicates a shaped leg with tapering sides in a curved or straight design Leg support columns with coverings of nonwoven fiberglass-matfilled polyester may be furnished The polyester color shall match the color of the desk Legs or leg support columns shall be constructed of at least 18 gage (0.0478-inch) steel All sides and bottom shall be fully closed and shall have no rough or sharp edges Legs shall have a corrosion-resisting plating or painted finish Painted metal legs shall have foot sockets as specified in 3.2.9 Legs may be adjustable in height from 29 inches to 30½ inches. If a height adjusting device is used to achieve the 30½ inch height. it shall include a continuous tube with a cross-section of an area of at least one square inch and shall be set at the 30½-inch height Corrosion-resisting leveling glides are acceptable if the desk is 30½ inches high when the glides are unextended Legs shall be attached to pedestal by a secure method which will permit sliding or upending of desk

3.2.9 *Foot sockets* —Foot sockets not less than 1½ inches high of the materials specified in 3.1.4 are mandatory if a painted metal leg is used The foot sockets shall be flush with the outside surface of the leg and shall be firmly secured by fastenings which are designed to protect floors

3.2.10 *Tops* —The top plate shall be not less than 18 gage (0.0478-inch) steel, stretcher leveled standard of flatness, and shall be rigidly reinforced with no less than three lengthwise reinforcing members. These reinforcements are to be 18 gage (0.0478-inch) steel moldings formed in channel shaped box braces and at least 1½ inches deep The reinforcement members are to be electric welded to the top plate at intervals of not more than 6 inches The edges and corners of the top shall be reinforced by means of 20 gage (0.0359-inch) steel moldings formed in channel shape and electric welded to the edges of the top plate The edge of the top shall be bound with binding strip specified in 3.2.7 This binding is to project slightly to protect the finish of the steel strip below The overall thickness of the top, including linoleum or plastic shall be not less than 1 5/16 inches

3.2.10.1 *Linoleum top covering* —The top plate shall be covered with linoleum as specified in 3.1.2 which shall be cemented uniformly to the top plate by a cement recommended by the linoleum manufacturer. The cement shall be free of lumps or foreign matter

3.2.10.2 *Plastic top covering* —When specified in the invitation for bids, the top plate shall be covered with plastic sheet as specified in 3.1.3 which shall be bonded uniformly to the top plate by an adhesive recommended by the adhesive manufacturer for use with metal

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

and shall be applied at a temperature recommended by the adhesive manufacturer to insure even adhesion The steel top plate shall be properly cleaned prior to application of the adhesive Adhesive shall be applied to both top plate and plastic sheet and dried to remove solvents After the plastic has been applied to the steel top plate, pressure shall be applied within the range of 5 pounds per square inch minimum and 16 pounds per square inch maximum by a method which will not cause uneven adhesion over the reinforcing members of the top plate

3.2.11 *Drawers* —The number, kind, and minimum inside clear dimensions (usable space) of the drawers required shall be as shown in figure 1 Each letter file drawer shall be equipped with one suitable compressor or file support for front to back filing When specified in the invitation for bids, each letter file drawer shall also be equipped with one suitable removable legal size compressor for across the drawer filing, together with one vertical drawer partition Alternatively a removable legal size cross-tray with compressor or file support may be furnished The storage drawers are to be of sufficient depth to accommodate trays for 5 by 3 inch, 6 by 4 inch or 8 by 5 inch cards with clearance for index tabs A minimum of one partition shall be furnished for each storage drawer The front of the drawers shall be flush with the front section of the desk

3.2.11.1 *Drawer fronts* — The drawer fronts shall have double wall construction The outside drawer front shall be not less than 20 gage (0 0359 inch) steel The top and side edges shall be formed in a channel shape which shall be at least $\frac{7}{16}$-inch wide The bottom edge is to be flanged back with three extrudes that bend up into the drawer body assembly or alternatively, shall be beveled, offset and flanged back and electric welded to the drawer body assembly. The inside drawer front shall be not less than 26 gage (0 0179 inch) steel The four edges shall be flanged and shall be secured in place by electric welding the side and bottom flanges to the drawer body, or alternatively, flanged on all sides, snugly fit, and held in place by the drawer handle bolts Alternatively, the inside drawer front shall be flanged at top and bottom and shall have a continuous channel formed across the entire width to provide full rigidity and be a spacer between the inner and outer front

3.2.11.2 *Storage drawer body* —The storage drawer body is to be of not less than 24 gage (0 0239 inch) steel The sides and bottom shall be formed in one piece The upper edges shall be formed in a bead or channel To provide for the insertion of adjustable partitions, the sides are to be formed and slotted on one inch centers from front to back The slots may begin 5¼ inches from inside drawer front. The storage drawer back shall be 22 gage (0 0299 inch) steel The upper edge shall be folded over and the sides and bottom edges flanged for attachment to the sides and bottom of the drawer body Alternatively, the storage drawer back may be 19 gage (0 0418 inch) steel The upper edge shall be ground and sanded and the sides and bottom edges flanged for attachment to the drawer body The back shall be the same height as the drawer sides

3.2.11.3 *Letter drawer body* —The letter drawer body is to be of not less than 24 gage (0 0239 inch) steel The sides and bottom shall be formed in one piece The upper edge of the body shall be formed in a bead or channel shape for safety and reinforcement The letter drawer back shall be of not less than 22 gage (0 0299 inch) steel with the sides and bottom edges flanged for attachment to the sides and bottom of the drawer body and the upper edge folded over Alternately, the storage drawer back shall be 19 gage (0 0418 inch) steel The upper edge shall be ground and sanded and the sides and bottom edges flanged for attachment to the drawer body The back shall be the same height as the drawer sides Provision shall be made for the proper operation of a compressor. The compressor shall be controlled by spring tension and shall operate easily within the drawer when released and be held firmly when engaged

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

3.2.11.4 *Center drawer.*—The center drawer shall be equipped with a convenience tray which shall extend the full width of the drawer The tray shall have not less than three compartments 3 inches wide and one pencil compartment The tray shall be not less than 1 inch high and 2 inches wide The center drawer shall be equipped with a hood formed from not less than 24 gage (0 0239 inch) steel The hood shall be not less than 1½ inches wide flanged in on the horizontal ends for spot welding to the drawer sides The full width of the front edge shall be formed for strength

3.2.11.5 *Drawer suspensions and stops* — The drawer suspension shall be constructed without rough or sharp edges and to insure durability and ease of operation and without excessive friction noise, sagging, wobble or vibration in fully extending the drawer with a minimum test load of 40 pounds evenly distributed in the letter file drawer, 20 pounds in each of the storage drawers, and 10 pounds in the center drawer Pedestal drawers shall not touch when loaded and fully extended or during the full cycle of opening and closing All storage drawers and center drawer are to be mounted on smooth operating cold drawn channel suspensions of not less than 16 gage (0 0598 inch) steel The suspension members are to be formed to eliminate raw edges The suspension assemblies shall incorporate no less than four nylon bearing surfaces to reduce metal to metal contact in storage drawer operation The letter size filing drawers shall operate on a zinc, nickel or cadmium plated or black oxide finished progressive suspension with ball or roller bearings Each drawer shall be equipped with a stop which shall prevent the drawer from falling out when fully extended but will permit easy removal of the drawer when desired The drawers shall contact rubber bumpers on the closing movement to reduce noise

3.2.11.6 *Drawer partitions and stationery trays* —Double wall partitions shall be made of not less than 24 gage (0 0239 inch) steel with a rounded top edge Single wall partitions shall be made of not less than 18 gage (0 0478 inch) steel. The top edge shall be folded or beaded or ground and sanded Alternately, single wall partitions may be made of not less than 22 gage (0 0299 inch) steel if the partition is of a ribbed formation and the top edge is folded or beaded or ground and sanded A minimum of one partition shall be furnished for each storage drawer which shall fit securely into the adjustment feature of the drawer sides When specified in the invitation for bids, sloping stationery compartments shall be included The stationery compartments shall interlock with the vertical partition or with the drawer sides Four compartments shall be provided which shall be not less than ¾ inch apart and shall accommodate 8½- by 11-inch paper The partitions shall have a cut-out portion to facilitate removal of paper and the bottom edge shall be flanged to prevent paper from falling out of place All edges shall be folded, beaded, or ground and sanded to eliminate rough or sharp edges The compartments shall fit snugly into the storage drawer to maintain slope, eliminate vibrations and remain in place

3.2.12 *Pedestal* —The pedestal shell sides and back shall be formed of one piece of not less than 22 gage (0 0299 inch) steel with top and bottom edges flanged The bottom flanges of the pedestal sides and back are to be electric welded to the pedestal bottom The pedestal bottom shall be of not less than 22 gage (0 0299 inch) steel There shall be an interior frame or structure consisting of two front and two rear uprights of not less than 18 gage (0 0478 inch) steel and top and bottom horizontal reinforcements on each side of not less than 20 gage (0 0359 inch) steel The front and rear uprights shall be punched and slotted to accommodate drawer suspension members The pedestal shall be securely electric welded to the interior frame or structure to produce a solid pedestal assembly. The pedestal bottom shall be reinforced by means of box channel supports of not less than 18 gage (0 0478 inch) steel at front and rear for attaching pedestal supports

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

3.2.13 *Knee space back panel* —The rear knee space back panel shall be formed of not less than 20 gage (0 0359 inch) steel flanged on the top and side edges The lower edge is to be rounded and folded or formed into a channel shape for appearance and strength The back panel is to extend the full height of the pedestal, or alternately, the panel shall extend from the bottom of the pedestal to the bottom of the center drawer and shall fold around the center drawer to the full height of the pedestal The back panel shall be located 1¾ inches in from the back of the pedestal

3.2.14 *Sliding shelf* —Each drawer pedestal shall have a sliding pull-out shelf of not less than 20 gage (0 0359 inch) steel, suitable formed and reinforced which shall be located at the top of the pedestal The shelf shall be provided with suitable stops and bumpers to provide silent and safe operation and shall move on channel suspension. The shelf shall extend horizontally not less than 14¾ inches from the front of the desk Alternately, a drawer shaped pull-out may be furnished To permit use as a writing shelf as well as a drawer, it shall be equipped with a hinged metal cover with rubber cushions on the under side, or a sliding plastic or metal cover

3.2 15 *Sound deadening material* —The inside of the desk pedestals shall have nonorganic sound deadening material applied to sides and back as a liquid which hardens

3.3 **Finish.**—All exterior and interior steel surfaces of the desks, except hardware, shall be prepared for painting in accordance with 3.1.5 All surfaces of the desks and drawers shall be enameled The enamel shall conform to the requirements of 3 1 6 The minimum total finished film thickness on exposed enameled surfaces shall be not less than 1 0 mil The finish shall level out to produce smooth, uniform exposed surfaces without runs, wrinkles, grit, areas of thin film or no film, and separation of color Special attention shall be given to the bottoms and to the interior to insure that all surfaces are adequately protected against rust Finish panels shall withstand the test specified in 4.5.3

3.4 **Identification marking.**—Unless otherwise specified, each desk shall be permanently marked on the underside of the center drawer and the underside of the top in a plain and legible manner with the specification number, the Federal Stock Number the date of manufacture, (month and year) and the contractor's name or trademark, and the contract order number, so that the source of supply may be readily determined. When specified, identification marking shall be in accordance with Military Standard MIL-STD-130

3 5 **Workmanship** —The desk shall be constructed in strict accordance with the detailed requirements specified herein and be of a similar design as shown in figure 1. The edges of all parts and sheets shall be further protected by folding, beading, flanging, or grinding to eliminate possible injury from burrs or raw edges The desk shall be free from any other defects which might affect its durability, serviceability, or appearance No visible spot welds on pedestal sides or back will be permitted The desk shall meet the tests specified in 4.5.1, 4 5 2 and 4 5 3

3.6 **Knocked-down construction** — Unless otherwise specified, desks may be furnished either completely set-up, or knocked-down to the extent only that either the top or the legs are to be attached after delivery The supplying of both unattached tops and legs is not permitted When legs are furnished detached they shall be furnished in the same container as the desk body

4 SAMPLING INSPECTION, AND TEST PROCEDURES

4.1 Sampling for lot acceptance

4.1.1 *Inspection lot* —Normally, the inspection lot size shall consist of all units submitted for inspection at one time

4.1.2 *Sampling for visual and dimensional inspection.*—Sampling shall be conducted in accordance with Military Standard MIL-STD-105 when specified herein

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

4.2 **Inspection.** — The desks shall be inspected to determine compliance with this specification as to workmanship, materials, design, details of construction, hardware, finish, tests, marking and packing Inspection shall be made at any time during process of manufacture, or at point of delivery

4.3 **Contractor inspection** —Unless otherwise specified, the supplier is responsible for the performance of all inspection requirements prior to submission for Government inspection and acceptance Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government Inspection records of the examinations and tests shall be kept complete and available to the Government as specified in the contract or order

4.3.1 *Contractor quality assurance system* —The contractor shall provide and maintain an effective quality assurance system acceptable to the Government covering the supplies under this specification Results of all examinations and tests performed under the quality assurance system shall be made available to the Government A current written description of the system shall be submitted to the Government prior to initiation of production The written description will be considered acceptable when, as a minimum, it provides the quality assurance required by this specification and other documents referenced herein The contractor will not be restricted to the inspection station or the method of inspection listed provided that an equivalent control is included in the approved quality assurance procedure In cases of dispute as to whether certain procedures of the system provide equal assurance, the comparable procedure of the detail specification will be used The contractor shall notify the Government of and obtain approval for any change to the written procedure that affects the degree of assurance required by this specification or other documents referenced herein

4.3.2 *Government verification* —All quality assurance operations performed by the contractor shall be subject to Government verification at unscheduled intervals Verification will consist of surveillance of the operations to determine whether the practices, methods, and procedures of the written inspection plan are being properly applied, and Government product inspection to measure quality of product offered for acceptance Deviation from the prescribed or agreed-upon procedures, or instances of poor practices which might have an effect upon the quality of the product will be immediately called to the attention of the contractor Failure of the contractor to promptly correct deficiencies discovered shall be cause for suspension of acceptance until correction has been made or until conformance of product to prescribed criteria has been demonstrated To avoid interference with operations, the contractor shall designate a responsible official or officials to whom the Government inspector will report such instances

4.4 **Sampling for inspection** —A representative random sample shall be selected from the lot in accordance with table I Acceptance or rejection of the lot shall be based on the number of defective units found in the sample selected and inspected, as being equal to or less than the specified acceptance number or equal to or greater than the specified rejection number of table I

TABLE I —*Sampling for visual and dimensional inspection based on acceptable quality level (AQL) of 2.5 percent*

Lot size	Sample size	Acceptance number	Rejection number
15 and under	3	0	1
16 to 40	7	0	1
41 to 110	15	1	2
111 to 300	35	2	3
301 to 500	50	3	4
501 and over	75	1	5

Note 1 —The Government Inspector may institute tightened or reduced inspection in accordance with section 9 of MIL–STD–105

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

Note 2 — The above is a single sampling procedure. Alternate double or multiple sampling procedures of alternate acceptable quality levels for different classes of defects may be specified at the discretion of the procuring agency.

4.5 **Tests.**

4.5.1 *Top test* —A weight of not less than 600 pounds shall be applied to an area not to exceed 12 inches in diameter for at least 5 minutes. The test area shall be at the front center of the knee space. The desk top shall not deflect more than 1/8 inch and shall not take on any permanent set.

4.5.2 *Bend test for steel sheets* —The steel sheets used for parts to be formed shall withstand a 180° bend at room temperature with and across the grain without showing any crystallization, cracks or fractures on the outside of the bend.

4.5.3 *Finish test for steel panels* —A 20 gage steel panel prepared in accordance with 3.3 shall be bent at room temperature around a 1/4-inch rod to 180°, without cracking, flaking or loss of adhesion of the enamel.

5 PREPARATION FOR DELIVERY

(Federal Standard No. 102 shall be referred to for definitions and application of the various levels of packaging and packing for civilian procurements.)

5.1 **Packaging** —Packaging shall be Level A, B or C as specified (see 6.1).

5.1.1 *Level A*

5.1.1.1 *Drawers and shelves* — The desk key shall be placed in the center drawer of desk and taped to drawer. All drawers and sliding shelves shall be prevented from vibrating while in transit by wedging cushioning material as specified in 5.1.1.1.1 between the drawer and drawer frame. All drawers and sliding shelves in pedestal sections shall be securely closed by means of commercial type acetate-fiber pressure-sensitive adhesive tape, minimum of three inches in width, applied over all edges of drawer front and adjacent body or frame surface.

5.1.1.1.1 The center drawer shall be securely closed by means of a pad, fabricated of built-up corrugated fiberboard or equivalent cushioning material, bearing directly over the entire area of center drawer face. The thickness of the built-up pad shall be equal to projection of desk top beyond center drawer when closed. The pad shall be secured in position over the drawer face in such a manner as to remain in position during transit. When the desk is packed in the shipping container, an additional intermediate container member shall be placed to bear against the pad as a means of keeping the center drawer securely closed. Alternative to an additional container member, the pad may be secured by strapping conforming to type I, class A or B of Federal Specification QQ–S–781. Surfaces of the desk in contact with strapping shall be cushioned to prevent damage to the desk.

5.1.1.2 *Cushioning* — Each desk shall be completely covered with 30-pound basis weight (24 by 36 – 500) machine-glazed kraft paper, highly calendared paper, or waxed paper. The desk top, edges of top, desk front, and drawer handles shall be protected with cushioning material fabricated in the form of pads or blankets made of the following materials or a combination of these materials to provide a built-up cushioning of not less than three-fourths of an inch in thickness.

Macerated paper, plain	Excelsior (sealed ends)
Macerated paper tissue faced	Cotton wadding
Shredded paper	Molded pulpboard
Wood wool	Laminated cellulose wadding backed with corrugated fiberboard
Wood fiber felt	
Cellulose wadding	

When cellulose wadding, cotton wadding, or laminated cellulose wadding backed with corrugated fiberboard is used, the initial sheet of kraft or waxed paper may be omitted under the cushioning material.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

5.1.2 *Level B (civil agencies).*—Desks shall be packaged as specified in the invitation for bids

5.1.3 *Level C.*—Unless otherwise specified, desk top and desk body shall be packaged in accordance with the manufacturer's standard practice to insure protection during shipment to initial destination for immediate use

5.2 Packing.—Desk bodies and desk tops, or when specified, completely assembled desks, shall be packed Level A, B or C as specified (see 6.1)

5.2.1 *Level A.* — Each desk, packaged as specified in 5.1.1 shall be packed in a shipping container conforming to class 2, style 2, 2½, 3 or 4 of Federal Specification PPP-B-621 or overseas type of Federal Specification PPP-B-601. The desk shall be braced, blocked, bolted, or strapped within the shipping container to prevent movement and subsequent damage to the desk. Surfaces of the desk in contact with blocks, braces, or straps shall be cushioned to prevent damage to the desk. End grain nailing shall not be used to hold blocking in place. Strapping used for anchoring shall conform to type I, class A or B of Federal Specification QQ-S-781. When specified, the desk shall be blocked and braced in a manner to insure that the weight of the desk will not rest upon the desk legs. Each desk shall be covered with a full length shroud made of waterproof barrier-material conforming to class E-2, H-1, H-5 or M of Federal Specification UU-P-271. All seams of the shroud shall be sealed with a minimum three-fourths of an inch wide continuous seam of water-resistant adhesive conforming to Military Specification MIL-A-140. Closure and strapping shall be in accordance with the appendix of the applicable container specification.

5.2.2 *Level B (Military).*—Each desk packaged as specified in 5.1.1 shall be packed in a shipping container conforming to domestic type, style A or B of Federal Specification PPP-B-591. The bottom panel of the shipping container shall have additional cleats provided so that all legs of the desk will rest on cleat members. Cleats on which legs of desk are brought to bear shall span the entire interior width of the container and shall be of sufficient width to equal the thickness of legs plus adequate projection at each side of legs to prevent legs from being shifted off cleats while in transit. The desk shall be braced, blocked, bolted, or strapped within the shipping container to prevent movement and subsequent damage to the desk. Surfaces of the desk in contact with blocks, braces, or straps shall be cushioned to prevent damage to the desk. End grain nailing shall not be used to hold blocking in place. Strapping used for anchoring shall conform to type I, class A or B of Federal Specification QQ-S-781. When specified, the desk shall be blocked and braced in a manner to insure that the weight of the desk will not rest upon the desk legs.

5.2.2.1 Alternatively, shipping containers may be used that conform to domestic type, style A or B of Federal Specification PPP-B-601 or class 1 style 2, 2½, or 4 of Federal Specification PPP-B-621.

5.2.2.2 Alternatively, shipping containers may be used that conform to style B-4 of Military Specification MIL-C-11456. Crates shall have skid frames so designed that all legs of the desk will rest on cleat members placed across crate bottom to provide an equal degree of load bearing surface for all legs. Cleats on which legs of desk are brought to bear shall be of sufficient width to equal the thickness of legs plus adequate projection at each side of legs to prevent legs from being shifted off cleats while in transit. When specified, the desk shall be blocked and braced in a manner to insure that the weight of the desk will not rest upon the desk legs.

5.2.3 *Level B (Civil agencies).* — Desks shall be packed as specified in the invitation for bids.

5.2.4 *Level C.*—Unless otherwise specified, desks, tops or desk bodies, packaged and packed to insure safe transportation to point of destination and immediate use, may be

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

packed in accordance with manufacturer's standard commercial practice when such is acceptable to common or other carrier

5.3 **Marking.**

5.3.1 *Civil agencies* —In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with Federal Standard No 123

5.3.2 *Military agencies* —In addition to any special marking required by the contract or order, shipping containers shall be marked in accordance with Military Standard MIL–STD–129

5.3.3 *Additional marking* — Arrows and the word "UP" shall be printed or stenciled on the upper third of the sides of the containers and "FRAGILE, THIS SIDE UP" shall be printed or stenciled on the top of the containers in letters not less than 2 inches high Other markings as required by carriers shall be applied in accordance with carrier regulations

6 NOTES

6.1 **Ordering data.** — Purchasers should exercise any desired options offered herein and procurement documents should specify the following

(*a*) Title, symbol, and date of this specification

(*b*) Whether linoleum or plastic tops are required (see 3.2.10.2)

(*c*) Whether removable legal size cross filing compressor or tray is required (see 3.2.11)

(*d*) Whether sloping stationery trays are required (see 3.2.11.6).

(*e*) Whether special identification marking is required (see 3.4)

(*f*) Whether completely set-up desk is required (see 3.6).

(*g*) Selection of applicable levels of packaging, packing and marking (see 5.1, 5.2 and 5.3)

6.2 Federal specifications do not include all types, classes, grades, and sizes of the commodities indicated by the titles of the specifications, or which are commercially available, but are intended to cover the types, etc , which are suitable for Federal Government requirements

6.3 **Transportation description.**—Transportation description and minimum weight applicable to this commodity are

Rail

Desks, steel (Specify S.U. or K.D.)
Carload minimum weights·
In cars 40'9" or less in length, inside measurements — 10,000; 12,000, 15,000, 18,000· 22,000, and 30,000 pounds
In cars exceeding 40'9' in length, inside measurements — 16,000, 18.000, 21,000, 24,000, 30,000 and 40.000 pounds

Motor

Desks, steel (Specify S U or K D)
Truckload minimum weights — (W) 10 6, (W)12 6, (W)15 6, (W)18 6, (W)22 6 and (W)30.6 pounds, subject to Rule 34, National Motor Freight Classification

Notice. — When Government drawings, specifications or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever, and the fact that the Government may have formulated furnished or in any way supplied the said drawings, specifications, or other data is not to be regarded, by implication or otherwise as in any manner licensing the holder or any other person or corporation or conveying any rights or permission to manufacture, use or sell any patented invention that may in any way be related thereto

MILITARY INTEREST·
Army—Q
Navy—S MC CG
Air Force—MOAMA

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

Desk Contains:

Minimum Inside Clear Dimensions (Usable Space)

2 Storage Drawers 12" W x 5-13/16" H x 24-7/16" D
1 Center Drawer 20-1/8" W x 1-5/16" H x 18-1/16" D
2 Letter Drawers 12" W x 11-1/8" H x 23-15/16" D

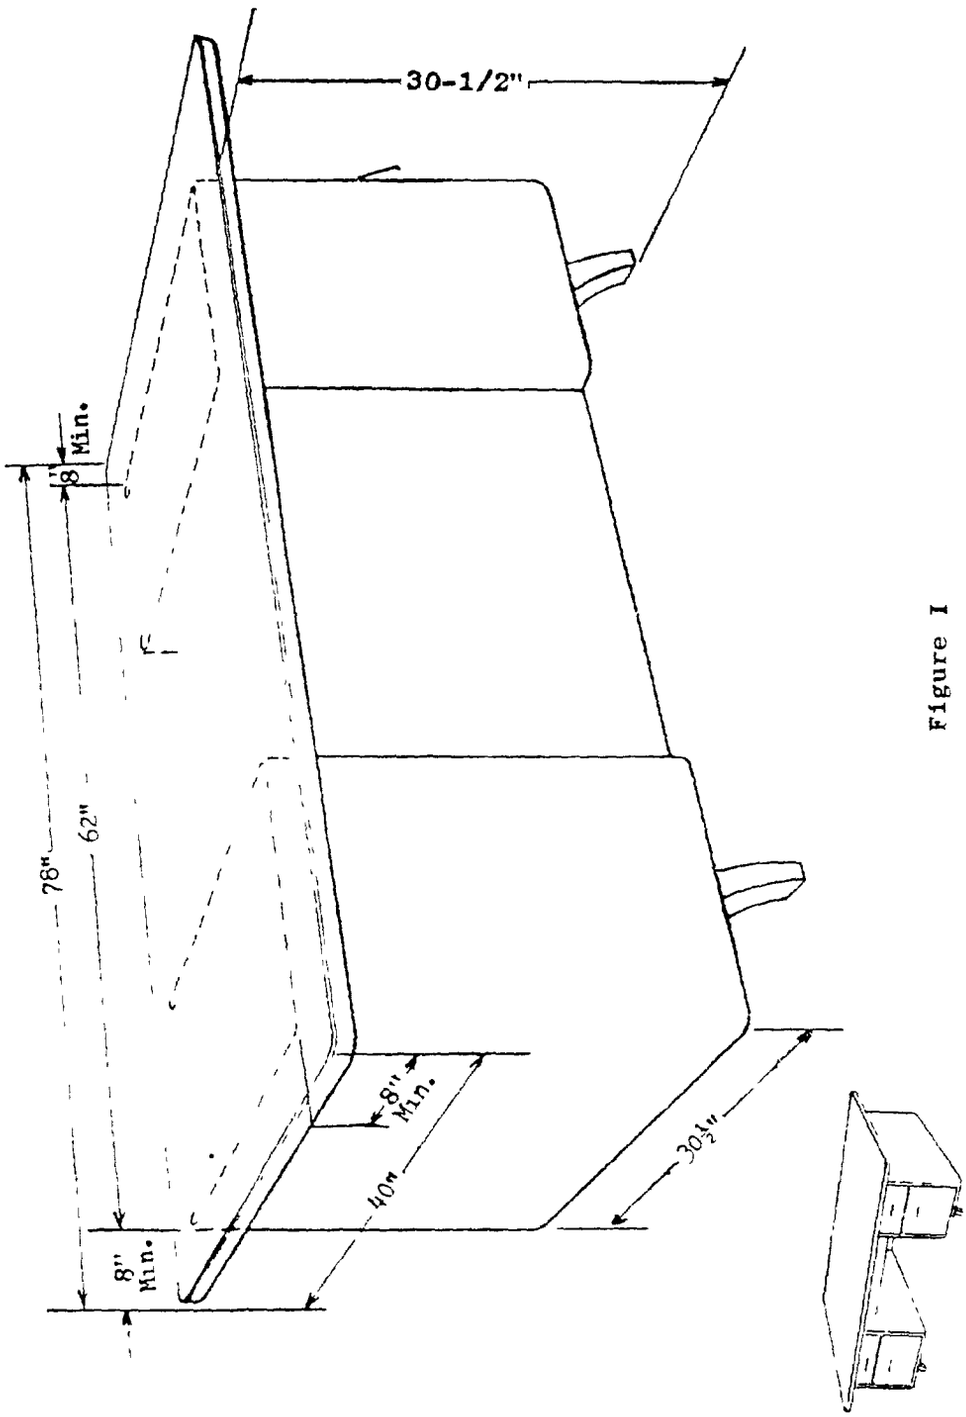


Figure I

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.