AA-O-00210a(GSA-FSS)
AMENDMENT-3
August 2, 1971
SUPERSEDING
AMENDMENT-2
March 1, 1968

AMENDMENT

TO

INTERIM FEDERAL SPECIFICATION

OFFICE FURNITURE, EXECUTIVE, COMBINATION METAL AND WOOD

CHAIRS, STRAIGHT, CHAIRS, ROTARY

This amendment was developed by the Standardization Division, Federal Supply Service, General Services Administration, Washington, D. C. 20406, based upon currently available technical information. The General Services Administration has authorized the use of this amendment as a part of Interim Federal Specification AA-O-00210a(GSA-FSS), dated March 15, 1966.

PAGE 1

Paragraph 1.2.1:

Line 1: After "styles" add "forms", both places.

Below line 6: Add the following "Style D - Rotary, tilting, with jury base".

Line 13: Delete "(Figures 11, 12)" and substitute "(Figures 11, 12, 19, 20, and 21)".

Below line 14: Add the following new lines:

"Form 1 - Open arms and back.
Form 2 - Closed arms and back, channeled, low back.
Form 3 - Closed arms and back, channeled, high back.
Form 4 - Closed arms and back, tufted, high back.

PAGE 2

Paragraph 2.1:

Under "Federal Specifications":

Line 4: Delete "FF-S-00109 - Screws, Wood: Cross-recessed head".

Line 10: Delete "TT-F-336 - Filler, Wood, Paste".

Line 12: Delete "TT-S-720 - Stain: Wood, Non-grain-raising, Solvent-dye Type".

Line 13: Delete "CCC-A-00680" and substitute "CCC-A-680".

Line 17: Delete "CCC-T-191 - Textile Test Methods".

Under "Federal Standards", line 2: Delete "175 - Adhesives: Methods of Testing" and substitute "191 - Textile Test Methods".

FSC 7110

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

Under "Military Specifications": Add "MIL-C-7769 - Cushioning Material, Uncompressed Bound Fiber for Packaging".

Under "Military Standards", line 4: After "MIL-STD-171" delete remainder of line and substitute "Finishing of Metal and Wood Surfaces."

PAGE 3

Paragraph 2.2, below line 14: Add the following new lines:

ASTM D 905 - Standard Method of Test for Strength Properties of Adhesives in Shear By Compression Loading.

Paragraph 3.2.2: Delete entire paragraph and substitute the following:

3.2.2 Filler. The filler shall be compatible with the finish system and shall not cause failure of the finish panels in tests specified in 4.3.1.1.

Paragraph 3.2.3: Delete entire paragraph and substitute the following:

3.2.3 Stain. The stain shall consist of an organic dye in an organic solvent and shall not cause failure of the finish panels in ultraviolet resistance test specified in 4.3.1.1.

PAGE 4

Paragraph 3.2.6.1: Delete entire paragraph and substitute the following:

3.2.6.1 Varieties of wood. The wood used in the construction of the unexposed component parts shall be of the following species: birch, maple, oak, ash, beech, or hackberry. Unexposed component parts shall be constructed of either one piece of wood or from full-length glued-up stock. There shall be no open joints in the completed component parts. Tests specified in 4.4.2 shall be performed daily on a minimum of 5 representative glued-up component parts. Glue joints shall show at least 85 percent wood failure. The armrests for type III, styles A and B chairs and type IV chairs shall be of genuine black walnut (Juglans nigra) and they shall be contructed of one piece of wood.

Paragraph 3.2.6.3.1, last sentence: Delete entire sentence and substitute "Unless otherwise specified herein, the maximum thickness of veneer core plies shall be 3/16 inch."

Paragraph 3.2.8.1, line 1: Delete "or FF-S-00109(COM-NBS)".

PAGE 5

After paragraph 3.2.8.3: Add the following new paragraphs:

3.2.8.4 Springs. Springs shall be of the sinuous type and shall be approximately 2 inches wide. They shall be finished with baked black enamel.

3.2.8.4.1 Back springs. Back springs shall be of 12 gage spring wire and shall have a minimum tensile strength range of 235,000 to 265,000 pounds per square inch.

3.2.8.4.2 Seat springs. Seat springs shall be of 9 gage spring wire and shall have a minimum tensile strength range of 220,000 to 250,000 pounds per square inch.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

Paragraph 3.2.10.1: Delete entire paragraph and substitute the following:

3.2.10.1 Leg glides. Leg glides shall be rubber cushioned with the lower surface (in contact with the floor) of type 430 corrosion-resistant steel. Glide diameter shall approximate but not exceed the diagonal measurement of the tubular legs by more than 1/8 inch.

3.2.10.1.1 Glides for types I and II, style A chairs. The glides for the types I and II, style A chairs shall be of the threaded stem type.

3.2.10.1.2 Glides for type III, style A chairs. The glides for the type III, style A chairs shall be of the rubber shank, expanding adapter type.

Paragraph 3.2.11, line 3: After "FF-C-82" delete the remainder of the paragraph and substitute ",except that wheel shall be spherical shaped and the minimum diameter, between hubs, shall be 2 inches for types I, II, III, and IV chairs and 1-5/8 inches for type V chairs. All casters shall be hooded and shall have a chrome plated finish."

Paragraph 3.2.12.2, line 1: After "class" delete "1 of CCC-A-00680" and substitute "2, treatments (a) 1 and (b) of CCC-A-680."

Paragraph 3.2.12.7: Delete entire paragraph and substitute the following:

3.2.12.7 Nonwoven fabric and wadding. The nonwoven fabric and wadding shall consist of new materials with or without a binder. The thickness shall be either 1/4 or 1/2 inch (approximately) as specified herein. The minimum weight shall be 1-1/4 and 1-3/4 ounces per square foot for the 1/4 and 1/2 inch thick nonwoven fabric and wadding, respectively, when tested as specified in 4.3.1.1. The compression set shall be less than 10 percent of its measured thickness when tested as specified in 4.3.1.1.

Paragraph 3.2.12.8.1:

Line 1: Before "The slab stock" add "Unless otherwise specified herein,".

Line 4: After "1055" delete "-62)" and add "The slab stock foam rubber for the type IV, Forms 2 and 3 chairs shall conform to Grade Number RU 20 (used for back and headrest) of ASTM Designation D 1055."

Paragraph 3.2.12.8.2:

Line 1: Before "Pin-core foam" add "Unless otherwise specified herein,".

Line 3: After "D 1055", delete "-62)" and add "The pincore foam rubber for the Type IV, Forms 2, 3, and 4 chairs shall conform to Grade numbers RC 20 (used for headrest), RC 25 (used for back), and RC 30 (used for seat) of ASTM Designation D 1055."

After paragraph 3.2.12.11: Add the following new paragraphs:

3.2.12.12 Twine. Twine shall be of soft American hemp (Cannabis sativa) or flax, 6-ply minimum, with a minimum breaking strength of 200 pounds when tested as specified in 4.3.1.1.

3.2.12.13 Cotton felting. The cotton felting shall be made of unbroken laminated sheets of garnetted felt at least equal in quality to felt made from a blend of 75 percent U. S. Standard grade 2 linters and 25 percent U. S. Standard grade low middling cotton, 7/8 inch staple. Supplier shall furnish a certificate of compliance covering the foregoing requirement. Each layer of the felt shall weigh either not less than 7 ounces or 14 ounces per linear yard on a 27-inch width basis, as specified herein, when tested as specified in 4.3.1.1. The felt shall be new and thoroughly clean.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

Paragraph 3.3.1, line 2: Delete "16" add substitute "21".

Paragraph 3.3.2, line 2(a): Delete entire line and subsitute the following:

"(a) Any overall height dimension - plus or minus 1 inch."

PAGE 7

Paragraph 3.3.5:

Line 7: Before "Chairs" add "Form 1".

Line 11: After "for the" add "Form 1 chair".

Line 11: After "adjustable" add "The mechanism for the Forms 2, 3, and 4 chairs shall be as specified for the Form 1 chair except that the mechanism shall not provide for raising the back."

NOTE, line 3: After "unassembled." add "The key slot in the spindle shall face either side and shall be at right angles to the spider arms."

PAGE 8

Paragraph 3.3.7.2, last sentence: Delete "heavy duty" and substitute "1/2 inch".

Paragraph 3.3.7.3, at end of paragraph: Add "Each leg shall be tapped to receive the 1/4 inch (minimum) threaded stem of the glide and shall be furnished with a glide, specified in 3.2.10.1.1".

Paragraph 3.3.7.4:

Line 1: After "base" add "and mechanism".

Line 2: Delete "3.2.9.1" and substitute "3.2.9.2".

Below paragraph 3.3.7.4: Add the following new paragraphs:

3.3.7.5 Base, style C chairs. The base and mechanism for the style C chairs shall be as specified in 3.2.9.2 and 3.3.5 and as shown in figure 17.

3.3.7.6 Base, style D chairs. The base and chair rotating and tilting mechanism for the style D chairs shall be Collier-Keyworth Model No. 515 or equal. Self centering device attached to base shall return chair to starting position. The total height of the base and chair control mechanism shall be approximately 14 inches. All surfaces shall be thoroughly cleaned of grease or foreign matter and receive a prime coat and not less than one coat of baked enamel, color, without graining, to match the color of wood, as specified in purchase order.

PAGE 9

Paragraph 3.3.8.1: Delete entire paragraph and substitute the following:

3.3.8.1 Dimensions. The minimum finished dimensions in inches of the high back chair shall be as follows:

Overall width	28-1/4
Seat width	22
Back width (Top)	23-1/2
Front wing (Top)	24-1/4
Overall height	37
Arm height (from floor including glides)	24-1/2
Arm height (from platform, outside)	12-1/2
Arm height (from seat inside)	8

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

Paragraph 3.3.8.2.1:

Line 1: Between "The dimensions" insert "minium".

Table II, column titled "Member":

Line 11: After "Bottom arm filler strips(2)" delete "1-1/16 by 2" and substitute "1-1/16 by 1-3/4".

Line 12: After "Back braces(2)" delete "1-1/16 by 1-1/4" and substitute "1-1/16 square."

Line 14: After "Wing blocks(2)" delete "1-1/4 stock" and substitute "1-1/16 stock."

Line 15: After "Back post strip(2)" delete "1-1/16 by 1-1/4" and substitute "1-1/16 square."

PAGE 11

Paragraph 3.3.8.2.6, line 9: Delete "heavy duty".

Paragraph 3.3.8.2.7: Delete last sentence and substitute the following: Each leg shall be tapped to receive the 1/4 inch (minimum) threaded stem of the glide and shall be furnished with a glide, specified in 3.2.10.1.1."

Paragraph 3.3.9.1.2, line 11: After "3/4 inch" add "minimum".

PAGE 12

Paragragh 3.3.9.1.3, line 6: After "chair" add "The foam rubber seat pad shall be banded with 1/4 inch (minimum) thick slab stock of sufficient width to cover the edges of the seat frame."

Paragraph 3.3.9.1.4:

Line 1: Delete entire first sentence and substitute "The back shall be of 5-ply, minimum, hardwood plywood, specified in 3.2.6.3.1, and shall be a minimum of 1/2 inch thick."

Line 2: After "3/4 inch" add "minimum".

Line 5: After "top." add "The foam rubber back pad shall be banded with 1/4 inch (minimum) thick slab stock of sufficient width to cover the edges of the back."

Line 10: After "seat brace block" delete remainder of paragraph and substitute "by a minimum of one No. 9 x 1 inch flat head screw and attached to the plywood back by one 1 inch x 1/4 inch carriage bolt. A layer of 1/4 inch nonwoven fabric and wadding, specified in 3.3.12.7, shall be applied to the outside face of the back before application of the outer cover."

Paragraph 3.3.9.1.5:

Line 7: Delete "1-3/4 inch wide" and substitute "1-1/2 inches wide."

Line 11: After "rest" delete "shown in Figure 7" and add "support".

Lines 16 and 17: Delete these two lines and substitute "There shall be two 11 gage steel angle-shape seat supports extending between and continuously fusion welded to the spreaders at the locations shown in Figure 7. The seat support angles shall be a minimum of 1 inch by 1 inch and shall not extend below the bottom edge of the spreaders."

At end of second paragraph: Add "Each leg shall be furnished with a glide, specified in 3.2.10.1.2."

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

PAGE 13

Paragraph 3.3.10, line 1: After "posture chair" add "Form 1".

Paragraph 3.3.10.1:

Below line 5: Add the following new line: "Back (tapered) bottom dimension 18".

Line 9: Delete "arm (from bottom of frame) 11-1/2" and substitute "Arm (from bottom of wood seat frame) 11".

PAGE 14

Paragraph 3.3.10.4:

Line 2: After "3-ply" add "minimum".

Line 2: Delete entire sentence beginning with "The dimensions".

Line 4: After "3/4 inch" add "minimum".

At end of paragraph: Add "A layer of 1/4 inch nonwoven fabric and wadding, specified in 3.3.12.7, shall be applied to the outside face of the back before application of the outer cover."

Paragraph 3.3.10.5, line 2: Delete "3.2.9.2" and substitute "3.2.9.1".

Paragraph 3.3.11.1, line 6: After "Back width (rounded corners)" delete "16 tapered from top to bottom of 12" and substitute "15 tapered from top to bottom to 11".

Paragraph 3.3.11.2:

Lines 7 and 8: After "3/4 inch" add "minimum".

At end of paragraph: Add "A layer of 1/4 inch nonwoven fabric and wadding, specified in 3.3.12.7, shall be applied to the outside face of the back before application of the outer cover."

Renumber paragraphs "3.3.12 and 3.3.12.1" to read "3.3.15 and 3.3.15.1".

Insert new paragraphs 3.3.12 through 3.3.14.10 as follows:

3.3.12 Type IV, Form 2, posture chair (figure 19).

3.3.12.1 Dimensions. The dimensions in inches of the Type IV, form 2 chair shall be as follows. Unless otherwise specified herein, dimensions are finished dimensions.

Overall height at lowest setting	38-1/2
Overall depth	28
Seat width, measured at front between arms	20-1/2
Seat depth	18-1/2
Seat height from floor at lowest setting	18-1/2

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

3.3.12.2 Dimensions of major frame members. The minimum dimensions of the major framing members shall be as shown in table IVA.

Table IVA - Dimensions of Major Framing Members - Type IV, Forms 2 and 3 chairs

Member	Finished Dimensions (in inches)
Seat:	
Front rail	1-1/16 thick by 3 wide
Back rail	1-1/16 thick by 1-1/2 wide
Side rails	1-1/16 thick by 3 wide
Front spring rail	1-1/16 thick by 2 wide
Back spring rail	1-1/16 thick by 2 wide
Spring rail brace	1-1/16 thick by 1-1/16 wide by 3 long
Back:	
Upper back top rail	1-1/16 thick by 2-1/2 wide
Upper back bottom rail	1-1/16 thick by 1-1/2 wide
Lower back top rail	1-1/16 thick by 1-1/2 wide
Lower back center rail	1-1/16 thick by 2-1/2 wide
Lower back bottom rail	1-1/16 thick by 4 wide
Back posts, shaped as shown in figures 19 and 20 as applicable	1-1/16 thick by 5-5/8 wide at widest point
Arms:	
Front stump	1-3/4 thick by 1-3/4 wide
Back stump	1-3/4 thick by 1-3/4 wide 1/
Top rails	1-3/4 thick by 1-3/4 wide
Bottom rail	1-1/16 thick by 1-1/2 wide

1/ Alternatively, the back stump may be 1-3/4 inches thick by 3-1/2 inches wide at the widest point tapered to 3/4 inch wide at the narrowest point.

3.3.12.3 Frame construction. Frame members shall be fabricated of the woods, specified in 3.2.6.1. With the exception of corner blocks and spring rails, each frame member shall be carefully fitted, thoroughly glued using adhesives, specified in 3.2.1, and doweled using dowels, specified in 3.2.5. There shall be not less than one dowel in members up to and including 1-3/4 inches in width. Two dowels, minimum, shall be used for members exceeding 1-3/4 inches and not exceeding 3 inches in width. Members greater than 3 inches wide shall have not less than three dowels. Alternatively, two dowels and one screw may be used in members greater than 3 inches wide. Spring rails shall be secured to front and back rails by adhesive, specified in 3.2.1, and a minimum of three screws, no. 9 size, minimum. Corner blocks, a minimum of 1-1/16 inches thick, shall be secured to each seat side rail and the back spring rail by adhesive, specified in 3.2.1, and screws, no. 9 size, minimum. There shall be a minimum of one screw through the corner block into the back spring rail and one screw through the corner block into the seat side rail.

3.3.12.4 Seat. The seat shall contain 5 sinuous springs specified in 3.2.8.4.2. Each spring shall be 14 inches long and shall be secured to the front and back spring rails by insulated or brass clips using not less than two drive screws, 1 inch long, or three blue or cement-coated barbed nails, 7/8 inch long, minimum, for securing each clip. The springs shall be fastened together with a steel reinforced tiewire covered in kraft paper. The tiewire shall be clipped to each spring at point of contact. Alternatively, the springs may be joined together with two rows of evenly spaced twine, specified in 3.2.12.12, knotted around each spring and secured to the side rails. Burlap, specified in 3.2.12.5.1, shall be stretched over the springs and secured to each spring rail and side rail by tacks or staples, specified in 3.2.8.3, or a combination thereof. The edges of the burlap shall be folded over and again tacked or stapled, or a combination thereof. The tacks or staples shall

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

be spaced not more than 2 inches apart. A wire mat permalator shall be placed over the burlap and secured to the springs by hog rings. The hog rings shall be spaced not more than 5 inches apart. A pincore foam rubber cushion (RC 30) shall be placed over the permalator and secured to the top edge of the front rail by adhesive. The cushion shall be of pincore foam rubber, specified in 3.2.12.8.2, and shall be a minimum of 3 inches thick. All edges of the cushion shall be banded with a 2-inch thick by 3-inch wide, minimum, strip of slab stock foam rubber, specified in 3.2.12.8.1. The minimum thickness of the slab stock banding on the back of the cushion after it is mitered (or shaped) shall be 2 inches. There shall be a 1/4-inch thick by 3-inch wide, minimum, strip of slab stock foam rubber secured to the face of the front rail and the face of each side rail ("T" portion) by adhesive. A layer of 14-ounce, minimum, cotton felting, specified in 3.2.12.13, shall be applied over the seat cushion and a layer of 7-ounce, minimum, cotton felting, specified in 3.2.12.13, shall be applied over all other foam rubber surfaces. The final covering of upholstery material, specified in 3.2.12.1, 3.2.12.2, or 3.2.12.3, shall be secured to the underside of the seat frame. There shall be a welt around the entire top edge of the seat cushion and the exposed bottom edge of the seat cushion including the "T" portion. Cambric, specified in 3.2.12.6, with glazed side exposed, shall be secured to the underside of the seat frame by tacks or staples, specified in 3.2.8.3, or a combination thereof. The tacks or staples shall be spaced not more than 2 inches apart.

3.3.12.5 Inside back. The lower back shall contain 4 springs specified in 3.2.8.4.1. Each spring shall be 12 inches long and shall be secured to the lower back top rail and lower back center rail by insulated or brass clips using not less than two drive screws, 1 inch long, or three blue or cement-coated barbed nails, 7/8 inch long, minimum, for securing each clip. The springs shall be fastened together with a steel reinforced tiewire covered in kraft paper. The tiewire shall be clipped to each spring at a point of contact. Alternatively, the springs may be joined together with two rows of evenly spaced twine, specified in 3.2.12.12, knotted around each spring and secured to the back posts. Burlap, specified in 3.2.12.5.1, shall be stretched over the springs and secured to each of the following: the lower back center rail, lower back top rail and both back posts by tacks or staples, specified in 3.2.8.3, or a combination thereof. The edges of the burlap shall be folded over and again tacked or stapled, or a combination thereof to the frame members. The tacks or staples shall be spaced not more than 2 inches apart. A wire mat permalator shall be placed over the burlap and secured to the springs by hog rings. The hog rings shall be spaced not more than 5 inches apart. The permalator shall be covered with a layer of pincore foam rubber (RC 25) specified in 3.2.12.8.2. The pincore foam rubber shall be a minimum of 1-1/2 inches thick and of sufficient length to extend from the lower back top rail to the lower back center rail. Each edge of the foam rubber shall have a muslin tacking strip secured by adhesive. A tacking strip shall be secured to each of the following: the lower back top rail, lower back center rail and both back posts by tacks or staples, specified in 3.2.8.3, or a combination thereof. The tacks or staples shall be spaced not more than 2 inches apart.

There shall be a piece of hardboard, 0.054 inch thick, minimum, by sufficient width to extend approximately the entire distance between the back posts, secured to the inside face of the upper back top rail and upper back bottom rail by tacks or staples, specified in 3.2.8.3, or a combination thereof. The tacks or staples shall be spaced not more than 1-1/2 inches apart. The hardboard shall be covered with a layer of pincore foam rubber (RC 20) specified in 3.2.12.8.2. The pincore foam rubber shall be 1-1/2 inches thick, minimum, and each edge of foam rubber shall have a muslin tacking strip secured by adhesive. A tacking strip shall be secured to each of the following: the upper back top rail, upper back bottom rail, and both back posts by tacks or staples, specified in 3.2.8.3, or a combination thereof. The pincore foam rubber shall be covered with a layer of slab stock foam rubber (RU 20) specified in 3.2.12.8.1.

The slab stock foam rubber shall be 1-1/2 inches thick, minimum, and each edge of the foam rubber shall have a muslin tacking strip secured by adhesive. A tacking strip shall be secured to each of the following: the upper back top rail, upper back bottom rail, and both back posts by tacks or staples, specified in 3.2.8.3,

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

or a combination thereof. The tacks or staples for securing the tacking strips shall be spaced not more than 2 inches apart. A strip of slab stock foam rubber, specified in 3.2.12.8.1, shall be securely attached to the outside face of the back posts and the top edge of the upper back top rail by adhesive. The slab stock foam rubber strip shall be 1/4 inch thick, minimum, and of sufficient width to cover the frame members. A layer of 7-ounce, minimum, cotton felting, specified in 3.2.12.13, shall be applied over all foam rubber surfaces. The final covering of upholstery material, specified in 3.2.12.1, 3.2.12.2, or 3.2.12.3, shall be secured to the outside of the back frame.

The upholstery cover for the upper back shall be plain and the upholstery cover for the lower back shall have 13 channels. There shall be a welt at the joint of the plain portion to the channeled portion and a welt on each side.

3.3.12.6 Outside back. There shall be a piece of hardboard, 0.054 inch thick, minimum, of sufficient dimensions to cover approximately the entire area of the outside back, secured to the outside edge of the back posts and the outside face of the upper back top rail and lower back bottom rail by tacks or staples, specified in 3.2.8.3, or a combination thereof. The tacks or staples shall be spaced not more than 1-1/2 inches apart. The hardboard shall be covered with a layer of 14-ounce, minimum, cotton felting, specified in 3.2.12.13. Alternatively, the hardboard may be covered with a 1/2 inch layer of nonwoven fabric and wadding, specified in 3.2.12.7. The final covering of upholstery material, specified in 3.2.12.1, 3.2.12.2, or 3.2.12.3, shall be secured to the outside face of the upper back top rail by hardboard tack strip, to the outside edge of each back post by a metal tack strip and to the underside of the frame by tacks or staples, specified in 3.2.8.3, or a combination thereof.

3.3.12.7 Arms. The front arm height (frame dimension) shall be 11-5/8 inches, plus or minus 1/8 inch, when measured from the bottom edge of the seat side rail to the top of the arm. The height of the arm at maximum elevation (frame dimension) shall be 14-1/4 inches, plus or minus 1/8 inch, when measured from the bottom edge of the seat side rail to the top of the arm. There shall be a piece of hardboard, 0.054 inch thick, minimum, of sufficient dimensions to cover the entire area of the arm rails and arm stumps, secured to the inside edge of each of the following: the top and bottom arm rails and the front and back arm stumps. Hardboard shall be secured by tacks or staples, specified in 3.2.8.3, or a combination thereof spaced not more than 1-1/2 inches apart. A layer of slab stock foam rubber, specified in 3.2.12.8.1, shall be securely attached to the inside face of the hardboard by adhesive. The foam rubber layer shall be 3/16 inch thick, minimum, of sufficient dimensions to cover the entire area between the arm rails and arm stumps, including the inside edges of these members. A strip of slab stock foam rubber, specified in 3.2.12.8.1, shall be securely attached to the outside face of the front and back arm stumps and top arm rails by adhesive. The foam rubber shall be 3/4 inch thick, minimum, of sufficient width to cover the members. A piece of hardboard, 0.054 inch thick, minimum, of sufficient dimensions to cover approximately the entire outside arm area, shall be secured to the outside edge of each of the following: the top and bottom arm rails, the front and back arm stumps, and seat side rail. Hardboard shall be secured by tacks or staples, specified in 3.2.8.3, or a combination thereof spaced not more than 1-1/2 inches apart. A layer of 7-ounce, minimum, cotton felting, specified in 3.2.12.13, shall be applied over all foam rubber surfaces. A layer of 14-ounce, minimum, cotton felting, specified in 3.2.12.13, shall be applied over the entire outside arm surface. Alternatively, in lieu of cotton felting, the entire outside arm surface may be covered with a 1/2 inch layer of nonwoven fabric and wadding, specified in 3.2.12.7. The final covering of upholstery material, specified in 3.2.12.1, 3.2.12.2, or 3.2.12.3, shall be secured to the frame members.

Arm upholstery material seams shall have welts.

3.3.12.8 Base and mechanism. The base for the form 2 chair shall be as shown in figure 18 and as specified in 3.2.9.1. The mechanism shall be as specified in 3.3.5.

3.3.13 Type IV, form 3, posture chair (figure 20).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

3.3.13.1 Dimensions. The dimensions in inches of the Type IV, form 3 chair shall be as follows. Unless otherwise specified herein, dimensions are finished dimensions.

Overall height at lowest setting	44-1/2
Overall depth	28
Seat width, measured between front arm stumps	20-1/2
Seat depth	18-1/2
Seat height at lowest setting	18-1/2

3.3.13.2 Construction. The Type IV, form 3 chair shall be contructed in the same manner as specified in the foregoing paragraphs for the Type IV, form 2 chair, except that the springs used for the inside back shall be 18 inches long and the upper portion of the chair back shall be designed as a headrest.

3.3.14 Type IV, Form 4, posture chair (figure 21).

3.3.14.1 Dimensions. The dimensions in inches of the Type IV, Form 4 chair shall be as follows. Unless otherwise specified herein, dimensions are finished dimensions.

Overall height at lowest setting	45
Overall depth	31
Seat width, measured at front between arms	20
Seat depth	19
Seat height from floor at lowest setting	20

3.3.14.2 Dimensions of major frame members. The minimum dimensions of the major framing members shall be as shown in Table IVB.

Table IVB - Dimensions of Major Framing Members - Type IV, Form 4 Chair

Member	Finished Dimensions (in inches)
Seat:	
Front rail	1-1/16 thick by 3 wide
Back rail	1-1/16 thick by 3 wide
Side rails	1-1/16 thick by 3 wide
Front webbing rail	1-1/16 thick by 2 wide
Side webbing rails	1-1/16 thick by 1-1/16 wide
Support rail	1-1/16 thick by 1-1/16 wide
Back:	
Headrest top rail	1-1/16 thick by 1-3/4 wide
Headrest top webbing rail	1-1/16 thick by 1-1/16 wide
Headrest back post webbing rails	1-1/16 thick by 1-1/16 wide
Headrest back posts	1-1/16 thick by 1-3/4 wide
Back top rail	1-1/16 thick by 1-1/16 wide
Back center rail	1-1/16 thick by 1-3/4 wide
Back posts, shaped as shown in figure 21	1-1/16 thick
Back post webbing rails	1-1/16 thick by 1-1/16 wide
Back center webbing rail	1-1/16 thick by 1-1/16 wide
Back bottom rail	1-1/16 thick by 4 wide
Arms:	
Front stump	1-1/16 thick by 2-1/4 wide
Back stump	1-1/16 thick by 2-1/4 wide
Top rail	1-1/16 thick by 2-1/4 wide
Bottom rail	1-1/16 thick by 2-1/4 wide
Center rail	1-1/16 thick by 1-1/16 wide

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

3.3.14.3 Frame construction. Frame members shall be fabricated of the woods specified in 3.2.6.1. With the exception of webbing rails and support rails, each frame member shall be carefully fitted, thoroughly glued using adhesives, specified in 3.2.1, and doweled using dowels, specified in 3.2.5. There shall be not less than one dowel in members up to and including 1-3/4 inches in width. Two dowels, minimum, shall be used for members exceeding 1-3/4 inches and not exceeding 3 inches in width. Members greater than 3 inches wide shall have not less than three dowels. Alternatively, two dowels and one screw may be used in members greater than 3 inches wide. Webbing rails shall be secured to frame members by adhesive, specified in 3.2.1, and screws. There shall be a minimum of three screws, No. 9 size, minimum, in each webbing rail and each support rail.

3.3.14.4 Seat. The seat shall contain rubber webbing strips, specified in 3.2.12.9. The rubber webbing strips shall be interlaced, evenly spaced, and secured by tacks or staples, specified in 3.2.8.3, or a combination thereof, using not less than 5 tacks or staples to each end. The seat shall have a minimum of 4 strips front-to-back and 4 strips side-to-side secured to each of the following: front webbing rail, seat back rail and both side webbing rails. The outside face and top edge of the side rails and front rail shall be covered with slab stock foam rubber, specified in 3.2.12.8.1. The slab stock foam rubber shall be a minimum of 1/4 inch thick and shall be secured by adhesive, specified in 3.2.1. A layer of 7-ounce, minimum, cotton felting, specified in 3.2.12.13, shall be applied over all foam rubber surfaces prior to application of the upholstery material. Alternatively, the slab stock foam rubber may be omitted on that portion of the seat rails where the arms are placed.

3.3.14.5 Inside back and headrest. The inside back and headrest shall contain rubber webbing strips, specified in 3.2.12.9. The rubber webbing strips shall be interlaced, evenly spaced, and secured by tacks or staples, specified in 3.2.8.3, or a combination thereof, using not less than 5 tacks or staples to each end. The back shall have a minimum of 3 strips top-to-bottom and 4 strips side-to-side secured to each of the following: top back rail, center back webbing rail, and both back post webbing rails. The headrest shall have a minimum of 2 strips top-to-bottom and 2 strips side-to-side secured to each of the following: headrest top webbing rail, top back rail and both headrest back post webbing rails.

The outside face and inside edge of the back posts and headrest back posts and the top surface and inside edge of the headrest top rail shall be covered with slab stock foam rubber, specified in 3.2.12.8.1. The slab stock foam rubber shall be a minimum of 1/4 inch thick and shall be secured by adhesive, specified in 3.2.1. A layer of 7-ounce, minimum, cotton felting, specified in 3.2.12.13, shall be applied over all foam rubber surfaces prior to application of the upholstery material.

3.3.14.6 Arms. The front arm height (frame dimension) shall be 11-1/4 inches, plus or minus 1/8 inch, when measured from the bottom of the seat side rail to the top of the arm. The back arm height (frame dimension) shall be 13-5/8 inches, plus or minus 1/8 inch, when measured from the bottom of the seat side rail to the top of the arm. There shall be a piece of hardboard, 0.054 inch thick, minimum, of sufficient dimensions to cover the entire area of the arm stumps, top arm rail and center arm rail, secured to the inside edge of each of the following: Top and center arm rails and the front and back arm stumps. Hardboard shall be secured by tacks or staples, specified in 3.2.8.3, or a combination thereof, spaced not more than 1-1/2 inches apart. A layer of slab stock foam rubber, specified in 3.2.12.8.1, shall be securely attached to the inside face of the hardboard by adhesive. The layer of slab stock foam rubber shall be 1/4 inch thick, minimum, of sufficient dimensions to cover the entire area between the arm stumps, top arm rail and center arm rail, including the inside edges of these members. A strip of slab stock foam rubber, specified in 3.2.12.8.1, shall be securely attached to the outside face of the front and back arm stumps and top arm rail by adhesive. The slab stock foam rubber strip shall be 3/4 inch thick, minimum, of sufficient width to cover the rails. A piece of hardboard, 0.054 inch thick, minimum, of sufficient dimensions to cover approximately the entire outside arm area, shall be secured to the outside edge of each of the following: the top and bottom arm rails, and the front and back arm stumps. Hardboard shall be secured by tacks or staples, specified in 3.2.8.3, or a combination thereof, spaced not more than 1-1/2 inches apart.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

A layer of 7-ounce, minimum, cotton felting, specified in 3.2.12.13, shall be applied over all foam rubber surfaces. A layer of 14-ounce, minimum, cotton felting, specified in 3.2.12.13, shall be applied over the entire outside arm surface. Alternatively, in lieu of cotton felting, the entire outside arm surface may be covered with a 1/2 inch layer of nonwoven fabric and wadding, specified in 3.2.12.7. The final cover of upholstery material, specified in 3.2.12.1, 3.2.12.2. or 3.2.12.3, shall be secured to the frame members.

3.3.14.7 Seat cushion. The seat cushion shall consist of a cover of upholstery material, specified in 3.2.12.1, 3.2.12.2, or 3.2.12.3, pincore foam rubber (RC 30), specified in 3.2.12.8.2, muslin, specified in 3.2.12.4, and a plywood insert. The pincore foam rubber shall be 4 inches thick, minimum, by sufficient dimensions to cover all inside edges of the frame. All edges of the pincore foam rubber cushion shall be banded with slab foam rubber specified in 3.2.12.8.1. The slab stock foam rubber shall be a minimum of 2 inches thick by 4 inches wide. A layer of muslin shall be applied over the entire foam rubber cushion. The plywood insert members shall be a minimum of 1/4 inch thick by 2 inches wide. The entire void area in the center of the plywood frame shall be filled with a layer of 3/4 inch, minimum, thick pincore foam rubber (RC 30). The unexposed side (underside) of the cover shall be stapled to the plywood insert. A cushion unit shall be placed over the seat area and securely attached to the rubber webbing by staples. The staples shall be inserted through the rubber webbing strips into the plywood insert. The seat cushion shall have 4 buttonless biscuit tufts.

3.3.14.8 Back and headrest cushions. The back and headrest cushions shall consist of a cover of upholstery material, specified in 3.2.12.1, 3.2.12.2, or 3.2.12.3, pincore foam rubber (RC 20 for headrest and RC 25 for back), specified in 3.2.12.8.2, muslin, specified in 3.2.12.4, and a plywood insert. The pincore foam rubber shall be 4 inches thick, minimum, by sufficient dimensions to cover all inside edges of the frame. All edges of the pincore foam rubber cushion shall be banded with slab stock foam rubber specified in 3.2.12.8.1. The slab stock foam rubber shall be a minimum of 2 inches thick by 4 inches wide. A layer of muslin shall be applied over the entire foam rubber cushion. The plywood insert members shall be a minimum of 1/4 inch thick by 2 inches wide. The entire void area in the center of the plywood frame shall be filled with a layer of 3/4 inch, minimum, thick pincore foam rubber (RC 20 for headrest and RC 25 for back). The unexposed side (underside) of the cover shall be stapled to the plywood insert. A cushion unit shall be placed over the back area and securely attached to the rubber webbing by staples. In addition, a cushion unit shall be placed over the headrest area and securely attached to the rubber webbing by staples. The staples shall be inserted through the rubber webbing strips into the plywood insert. The headrest cushion shall have 2 buttonless biscuit tufts and the back cushion shall have 4 buttonless biscuit tufts.

3.3.14.9 Outside back. There shall be hardboard, 0.054 inch thick, minimum, of sufficient dimensions to cover approximately the entire area of the outside back, secured to the outside edge of the back and headrest frame members by tacks or staples, specified in 3.2.8.3, or a combination thereof. The tacks or staples shall be spaced no more than 1-1/2 inches apart. The hardboard shall be covered with a layer of 14-ounce, minimum, cotton felting, specified in 3.2.12.13. Alternatively, the hardboard may be covered with a 1/2 inch layer of nonwoven fabric and wadding, specified in 3.2.12.7. The final covering of the upholstery material, specified in 3.2.12.1, 3.2.12.2, or 3.2.12.3, shall be secured to the outside face of the headrest top rail by a hardboard tack strip, to the outside edge of each back post by a metal tack strip and to the underside of the frame by tacks or staples, specified in 3.2.8.3, or a combination thereof.

Cambric, specified in 3.2.12.6, with glazed side exposed, shall be secured to the underside of the seat frame by tacks or staples, specified in 3.2.8.3, or a combination thereof. The tacks or staples shall be spaced not more than 2 inches apart.

3.3.14.10 Base and mechanism. The base for the Form 4 chair shall be as shown in figure 18 and as specified in 3.2.9.1. The mechanism shall be as specified in 3.3.5.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

PAGE 15

Paragraph 3.4.1: Delete entire paragraph and substitute the following:

3.4.1 Zinc plating. Zinc plating shall be in accordance with 5.1 (Inorganic finishes), finish number 1.9.2.1 of MIL-STD-171. The final finish shall be bright.

Paragraph 3.4.2: Delete entire paragraph and substitute the following:

3.4.2 Chromium plating. Chromium plating shall be in accordance with class 1, type II of QQ-C-320. The copper plus nickel undercoat on the steel base shall conform to class 1, type III (KS) of QQ-N-290. Alternatively, nickel only may be used for the undercoat in which case the minimum thickness shall be 0.001 inch. Chromium plating with discolored streaks or not uniform in appearance will not be accepted.

Paragraph 3.4.3.1:

Line 6: After "4.3.1.1" add "without whitening or cracking".

Line 10: After "4.3.1.1" add "without whitening or cracking".

PAGE 17

Table V, under column titled "Test Method":

Lines 1 and 2: Delete "1031 of Federal Test Method Std. No. 175" and substitute "ASTM D 005".

Line 4: After "5050" delete ".1".

Delete all references to "CCC-T-191" and substitute "Fed. Test Method Std. No. 191".

Last line: Delete "4.3.1.1.1" and substitute "4.4.1".

Table V: Delete data for "nonwoven fabric and wadding" and substitute and add the following data under the appropriate columns:

Component	Characteristic	Requirement Reference	Test Method	Sample Unit
Cotton felting	Weight per linear year	3.2.12.13	5041 of Fed. Test Method Std. No. 191	1/2 yard
Nonwoven fabric and wadding	Weight per square foot	3.2.12.7	5041 of Fed. Test Method Std. No. 191	1 yard
	Compression set		4.4.3.3 of MIL-C-7769	
Twine	Identification of flax	3.2.12.12	1210 of Fed. Test Method Std. No. 191	1 spool, cone, or tube
	Identification of hemp		1220 of Fed. Test Method Std. No. 191	
	Breaking strength		4102 of Fed. Test Method Std. No. 191	

Paragraph 4.3.1.1.1: Delete entire paragraph.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

After paragraph 4.3.4: Add the following new paragraphs:

4.4 Test Method.

4.4.1 Toughness and adhesion test. The toughness and adhesion test shall be made by using Bell Laboratories Adhesion Tester, U. S. Testing Company, Model Number 1001, in accordance with instructions for using, as provided for by the manufacturer of the tester (see 6.4). The panel shall be marred both parallel and perpendicular to the grain. The resulting indentation shall be examined for whitening or cracking.

4.4.2 Edge-glued joint test. A chisel test on edge-glued joints shall be conducted as follows:

a. Place a sample component with an edge-glued joint end wise on a bench or other solid object.

b. Take a chisel, wider than the thickness of the member being tested, and carefully align it on the glue joint on the upper end of the member.

c. With chisel being held firmly in a vertical position, strike it sharply with a mallet or hammer so as to split the member longitudinally. Care should be exercised to insure that the force of the blow is directed to the glue line. The resulting split should reveal a failure of the glue line or in the area adjacent to it.

d. Inspect the glue joint area to determine the kind of failure and estimate the amount of wood failure.

Delete figures 1, 2, 4, 5, 6, 7, 9, 11, 12, 13, 14, and 16 and substitute new figures 1, 2, 4, 5, 6, 7, 9, 11, 12, 13, 14, and 16 attached.

Add new figures 19, 20, and 21 attached.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

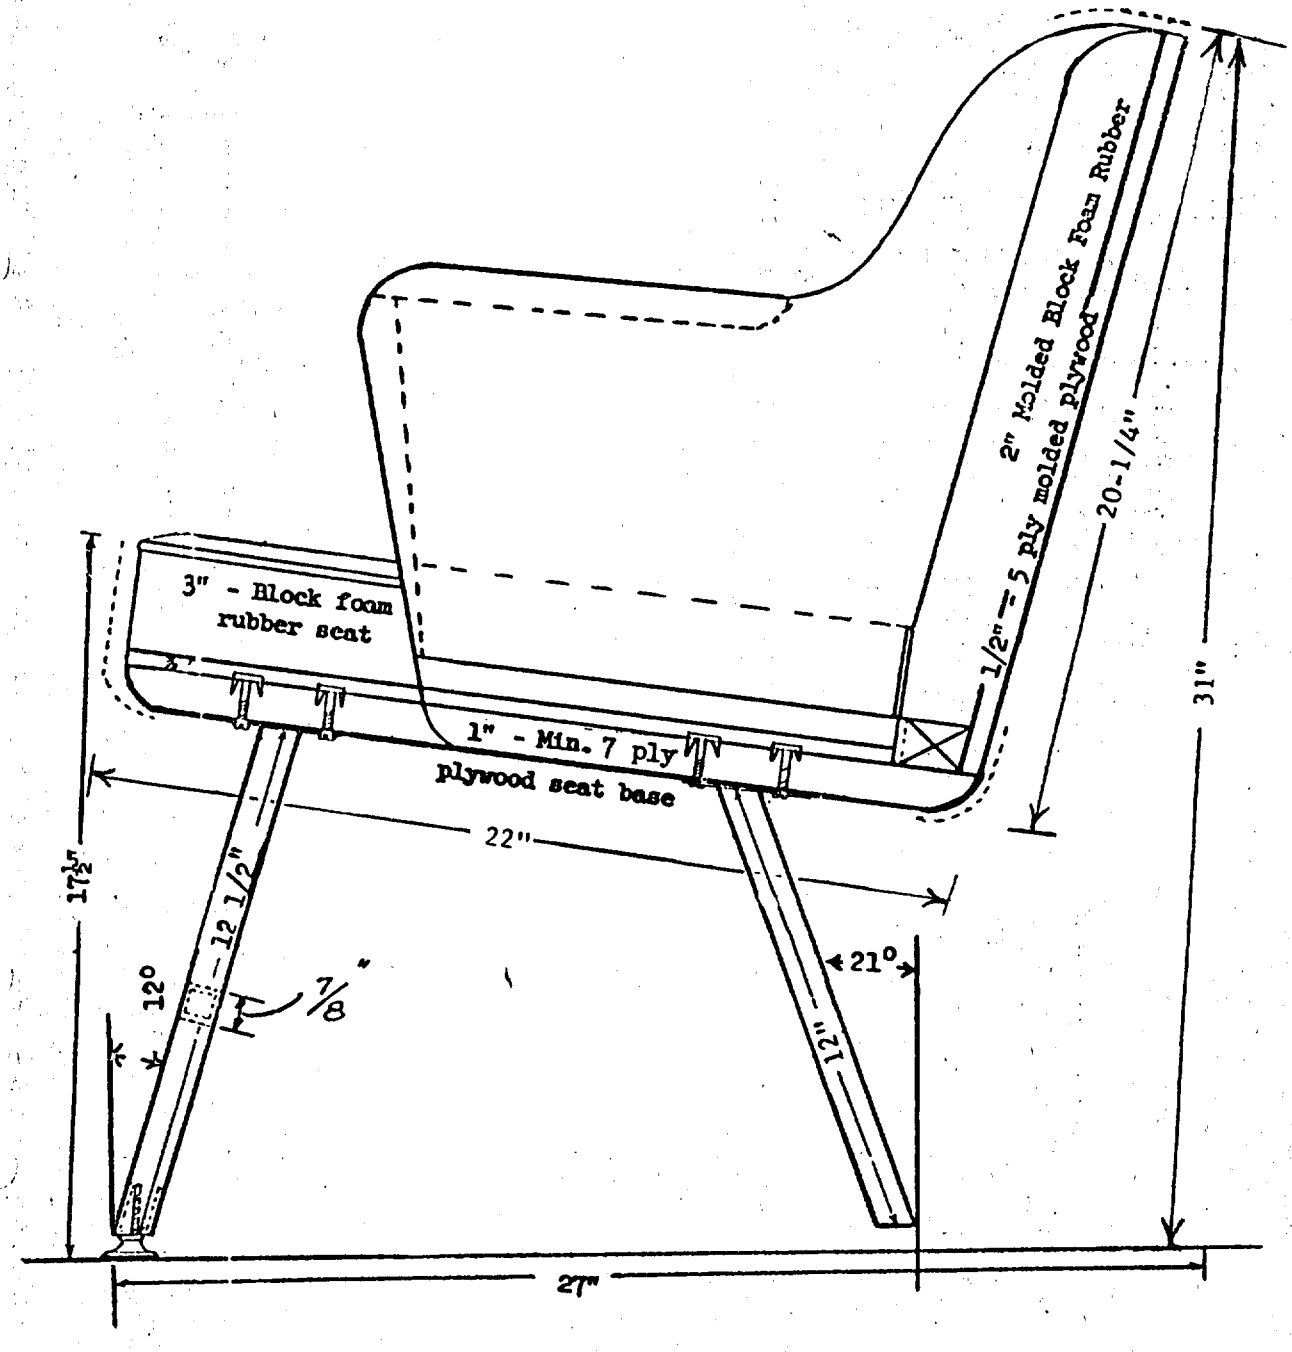


Figure 1. Type I, Style A Bucket Straight Chair.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

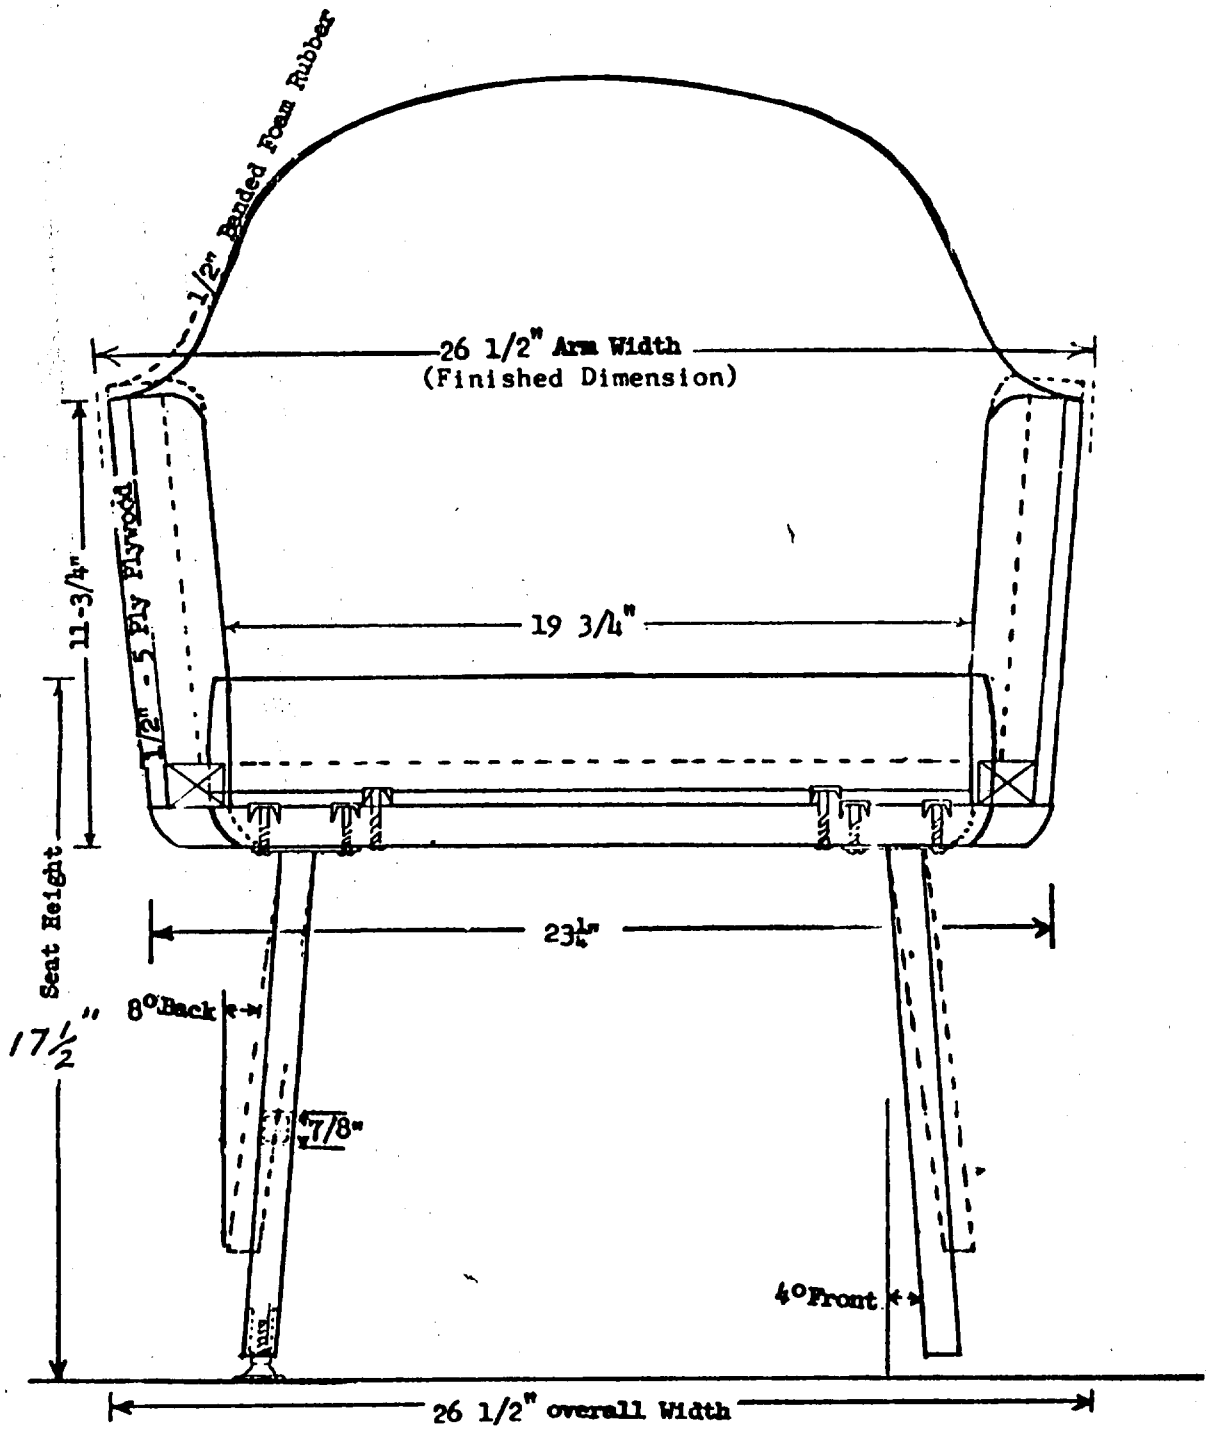


Figure 2. Type I, Style A Bucket Straight Chair.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

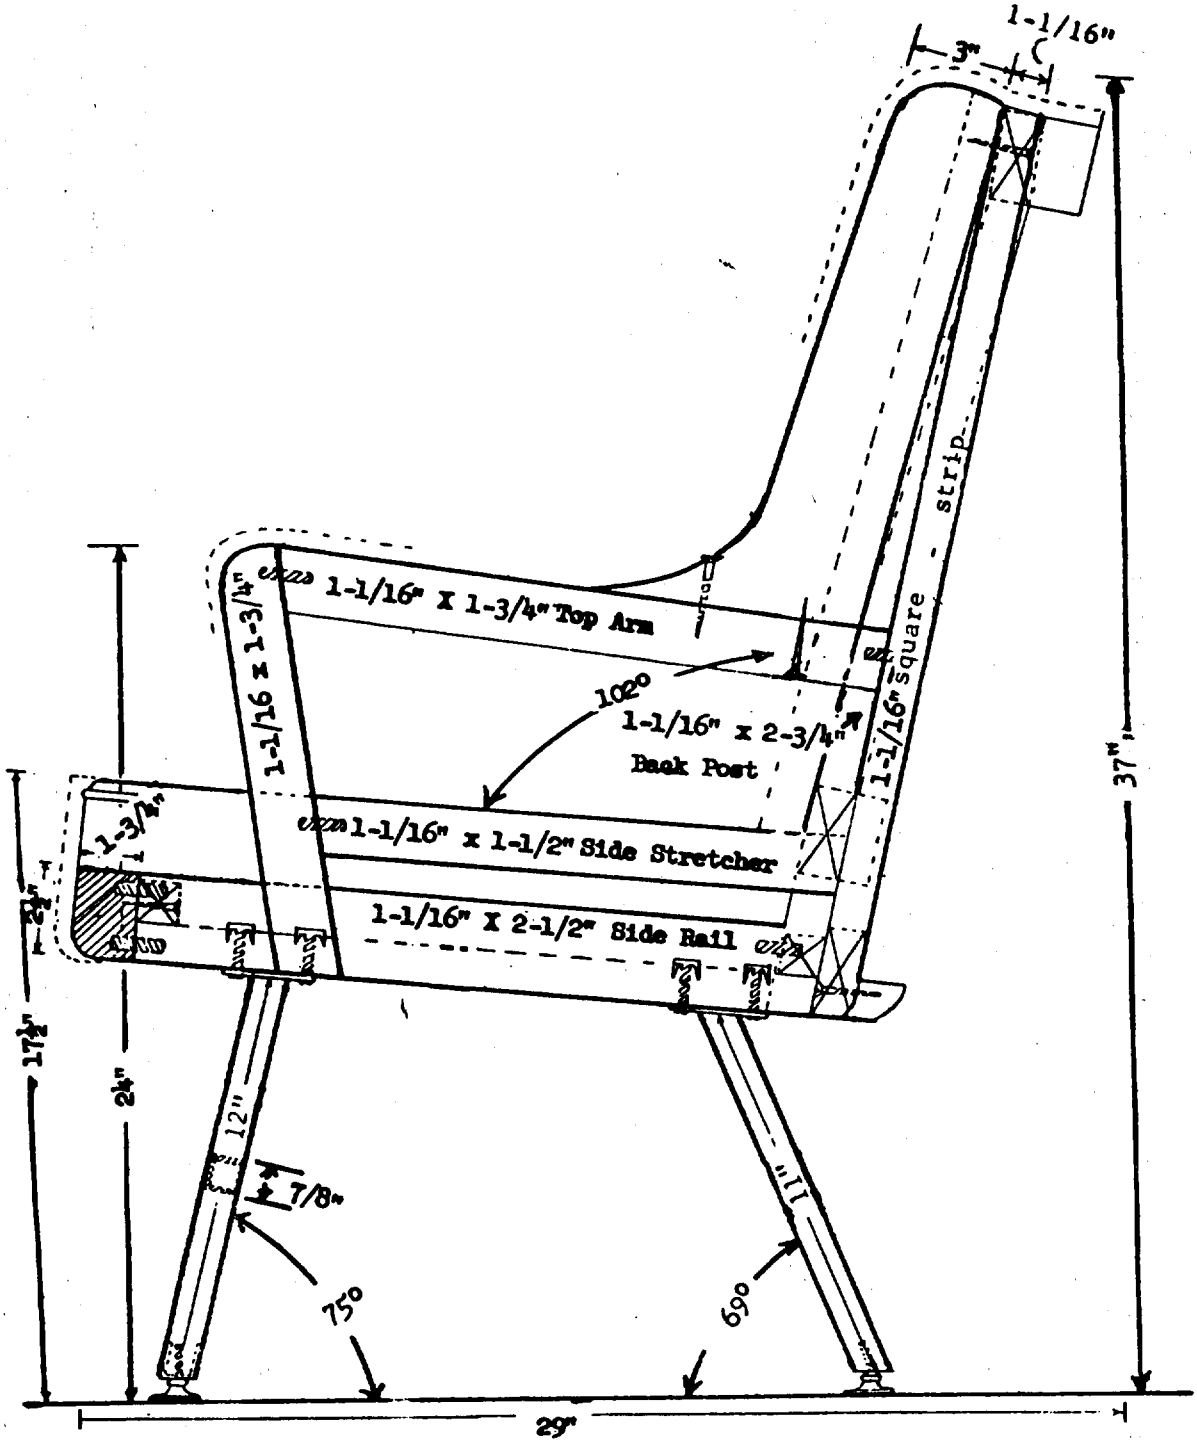


Figure 4. Type II, Style A High Back Straight Chair.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

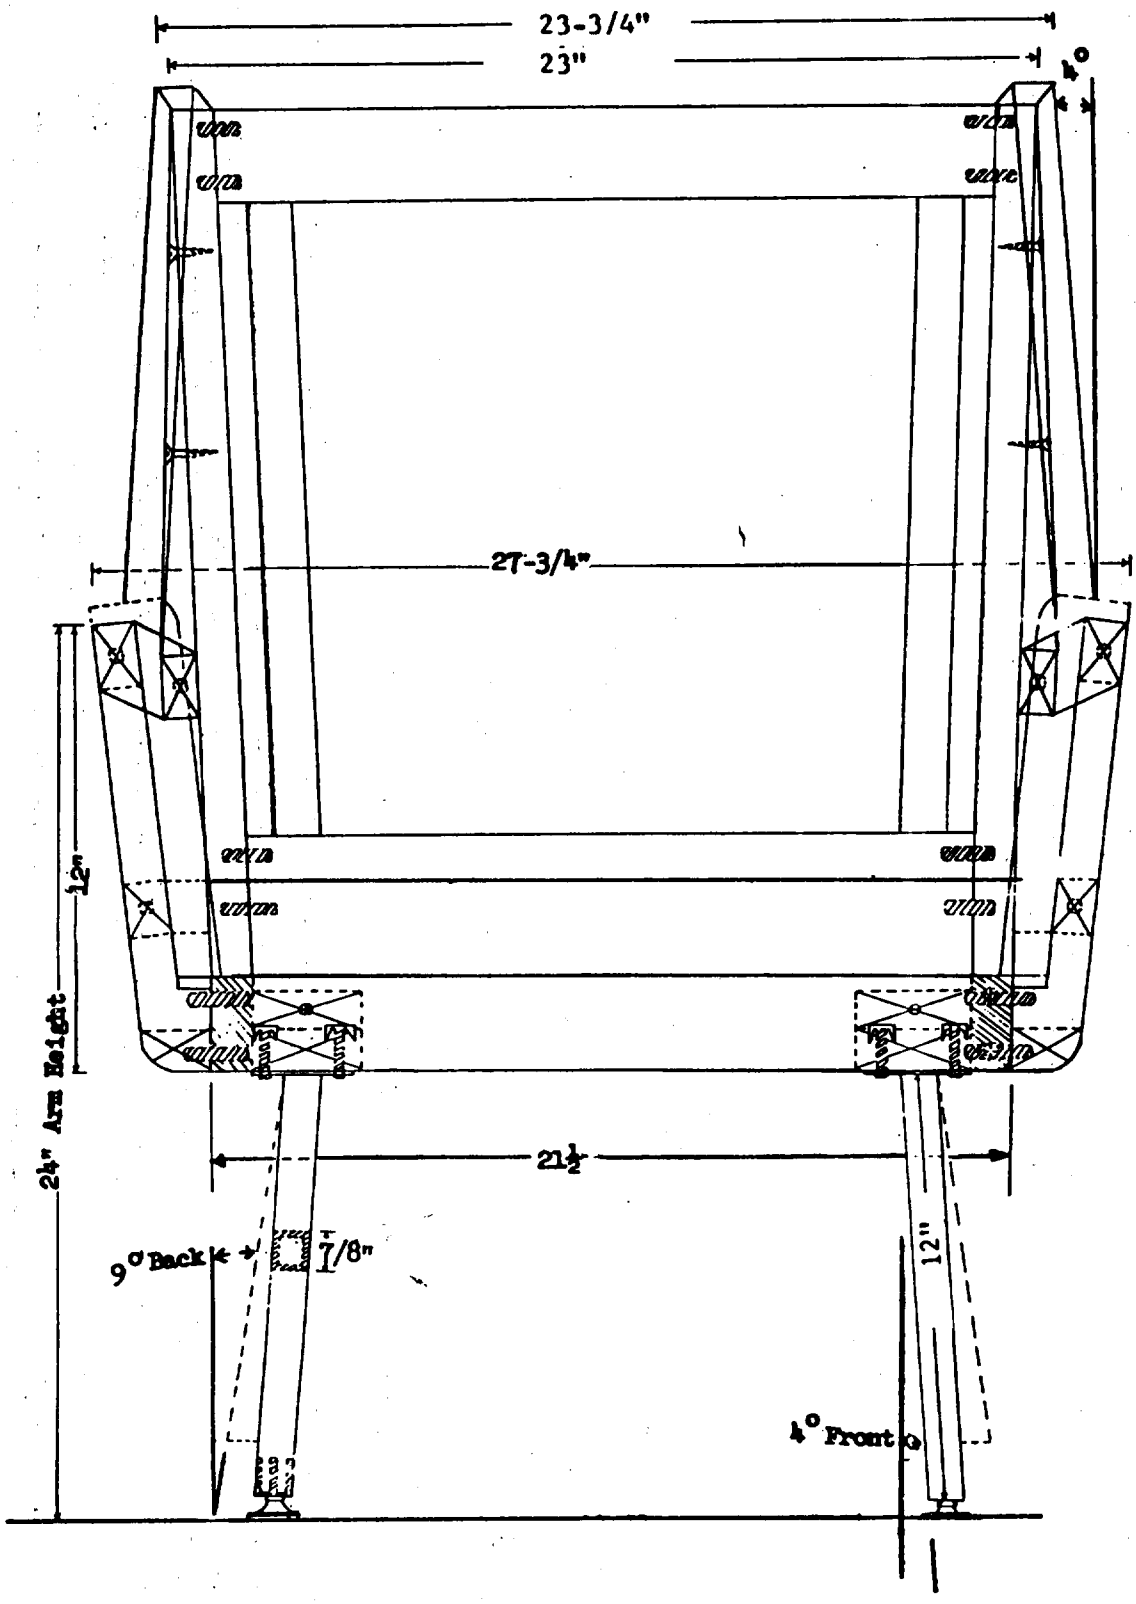


Figure 5. Type II, Style A High Back Straight Chair.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

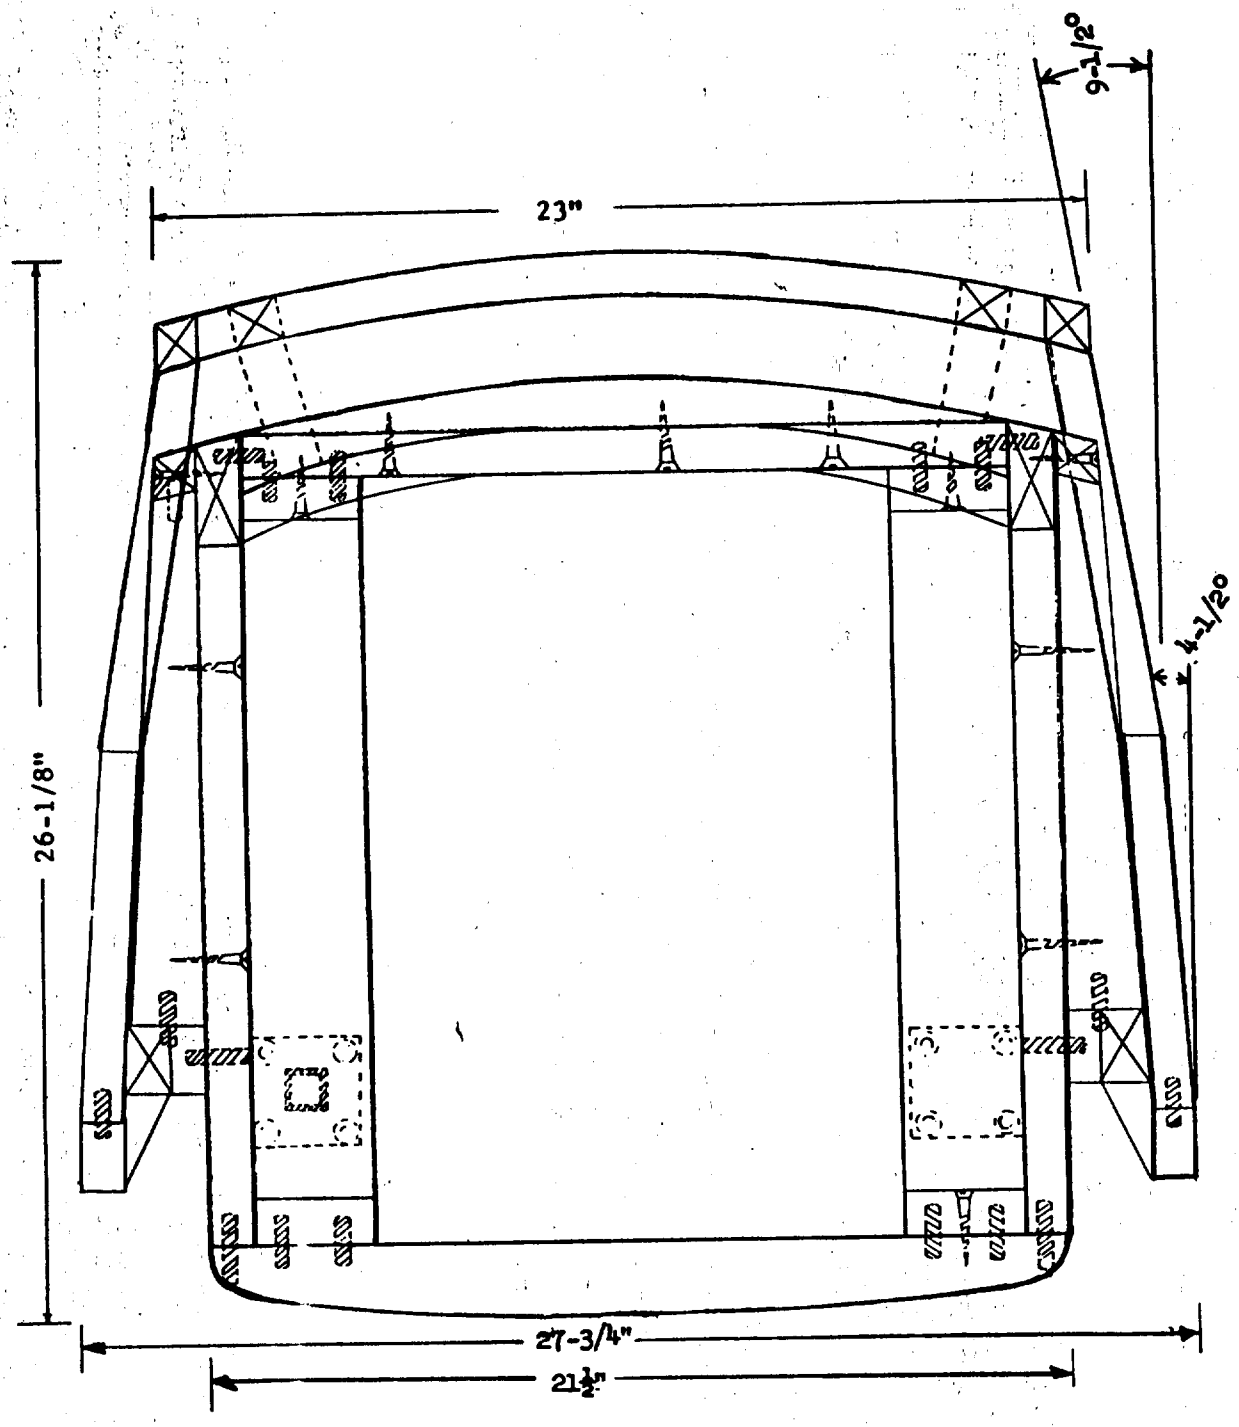


Figure 6. Type II, Style A High Back Straight Chair.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

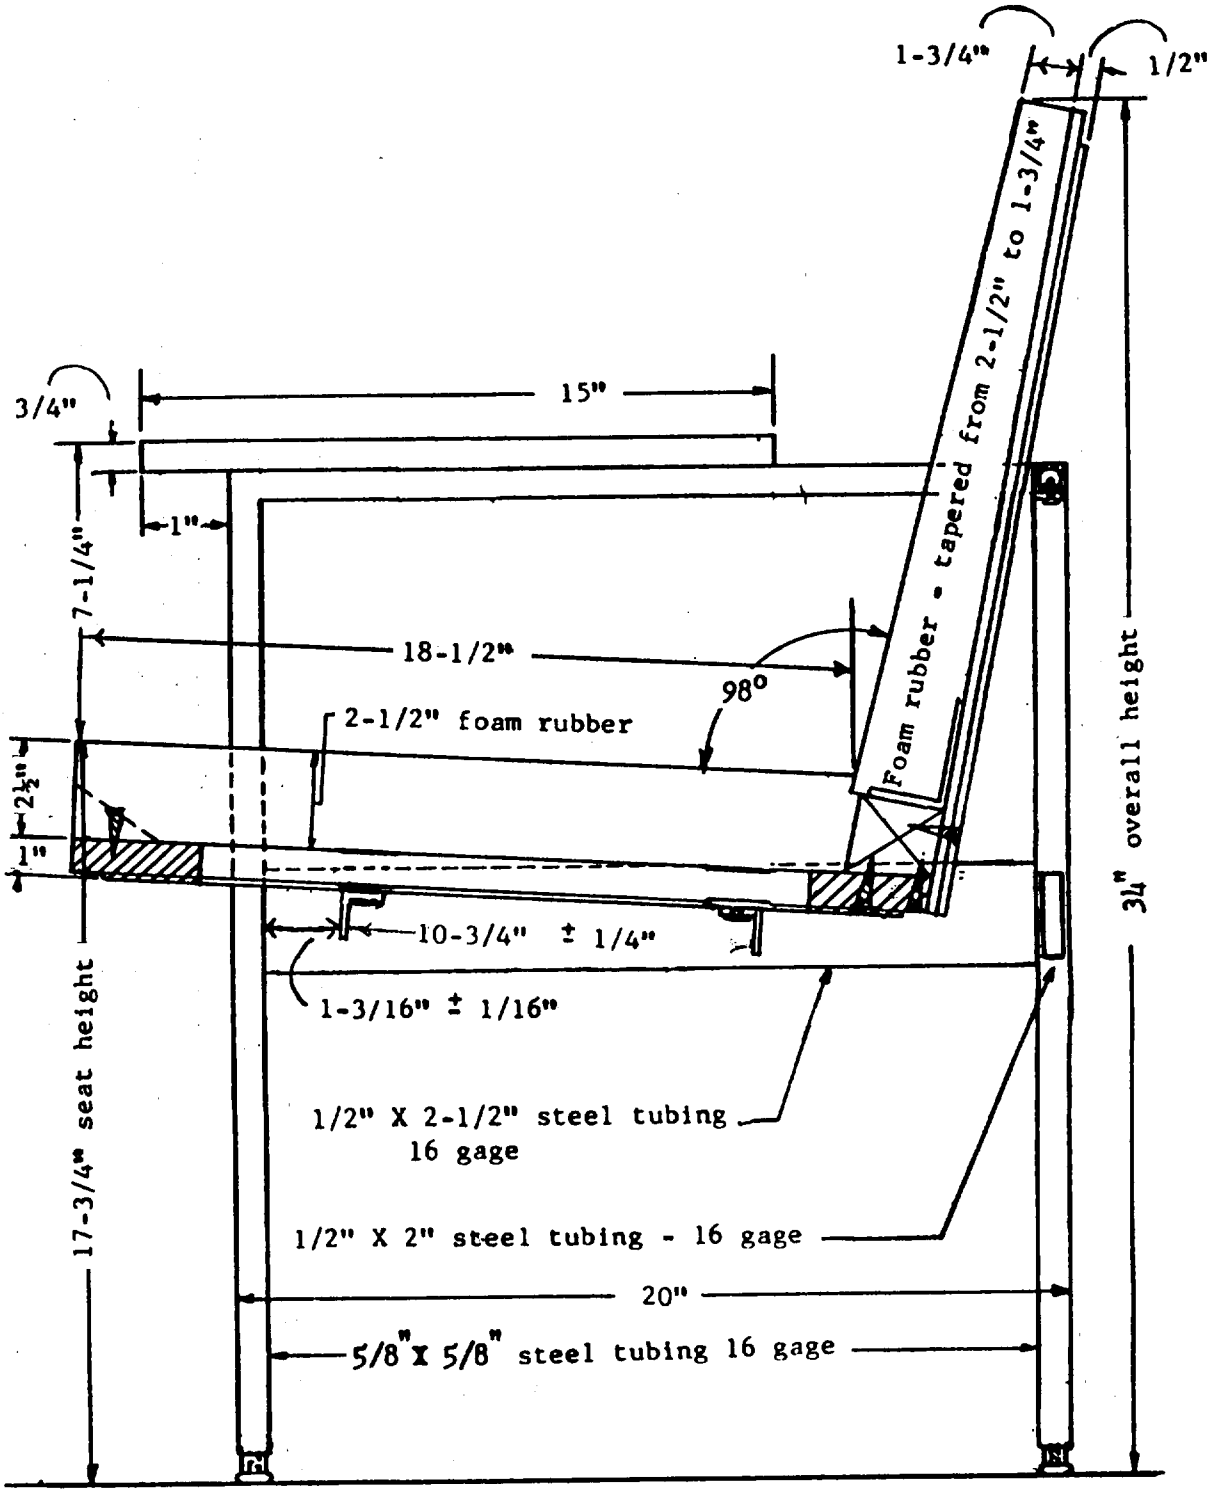


Figure 7. Type III, Style A Square Straight Chair.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

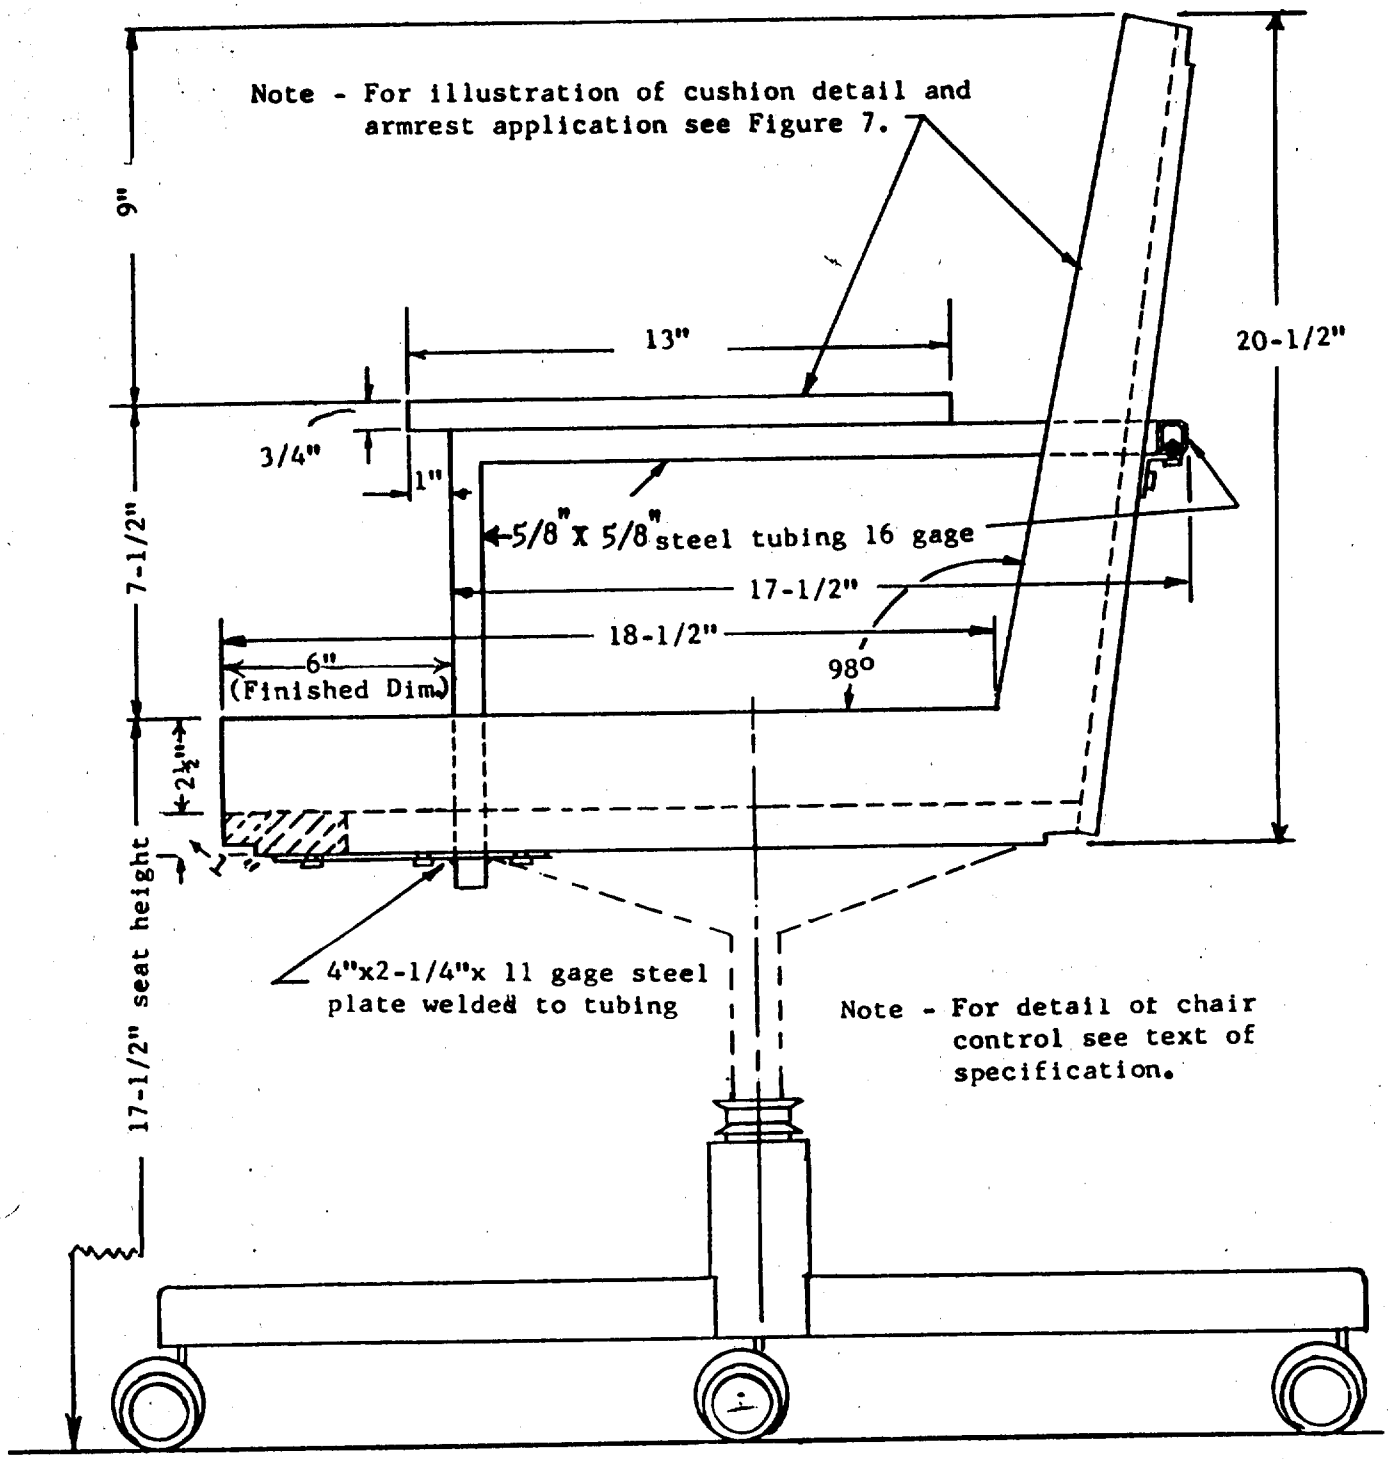


Figure 9. Type III, Style B Square Rotary Chair.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

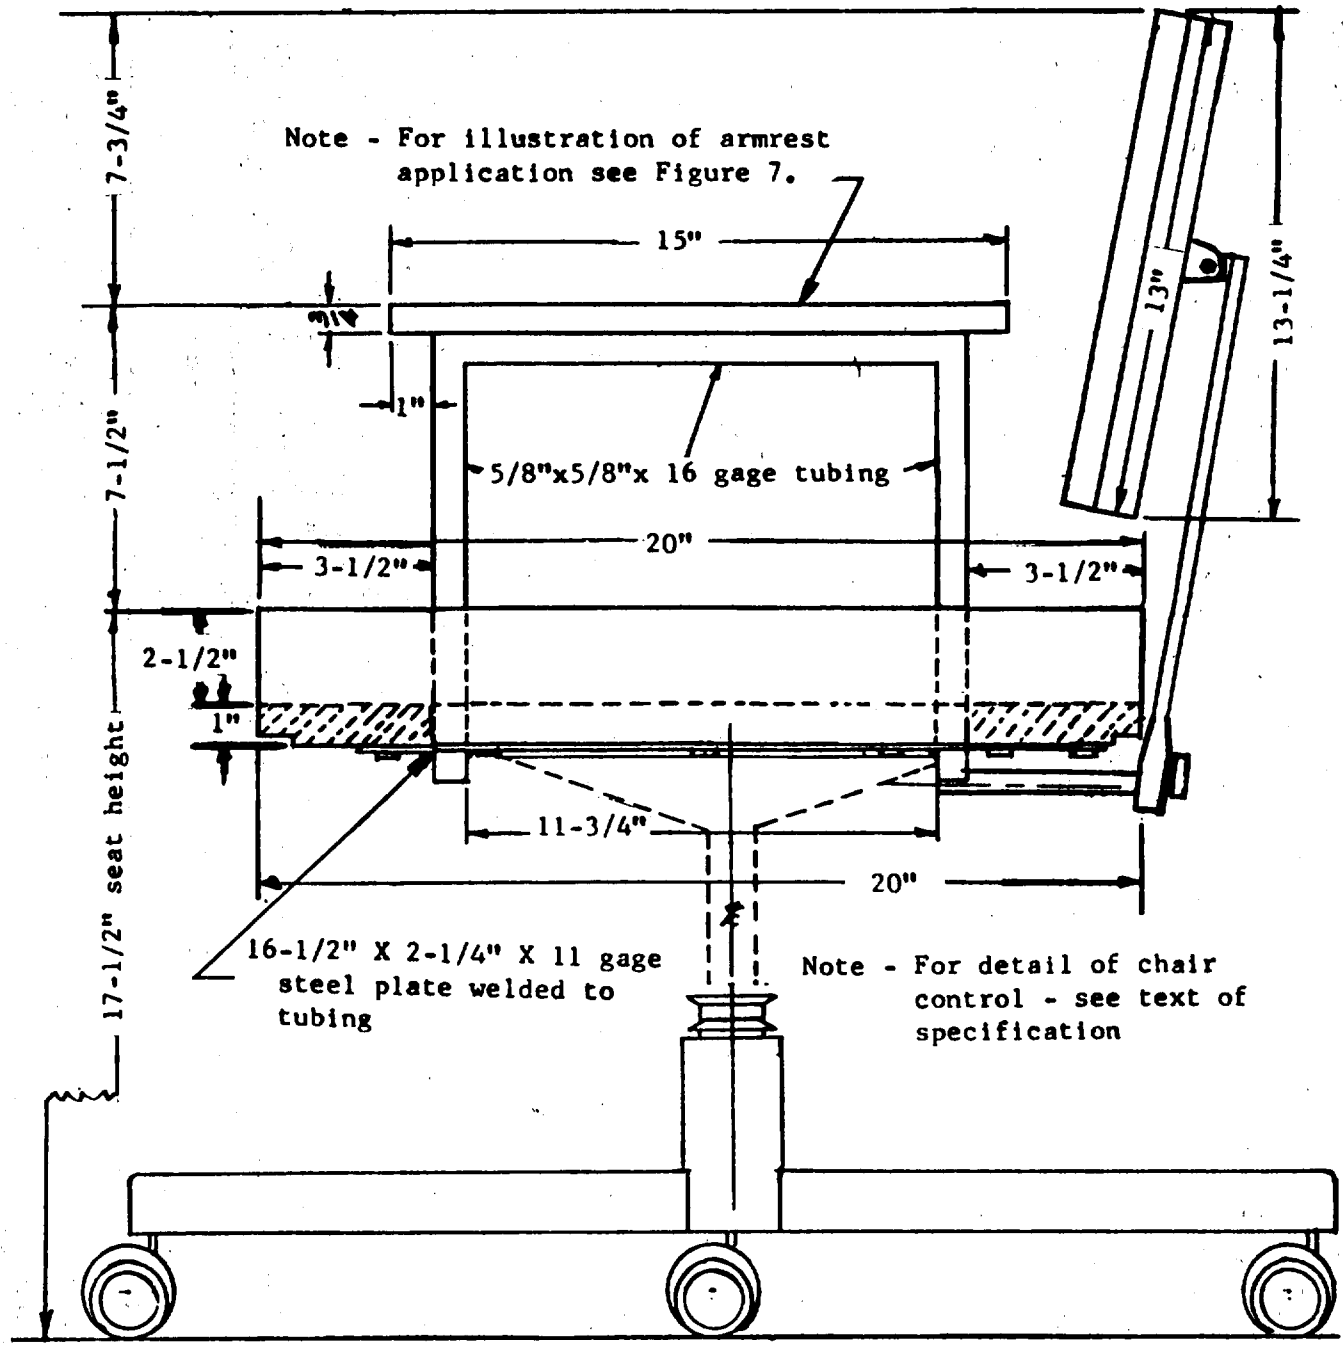


Figure 11. Type IV Executive Posture Chair.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

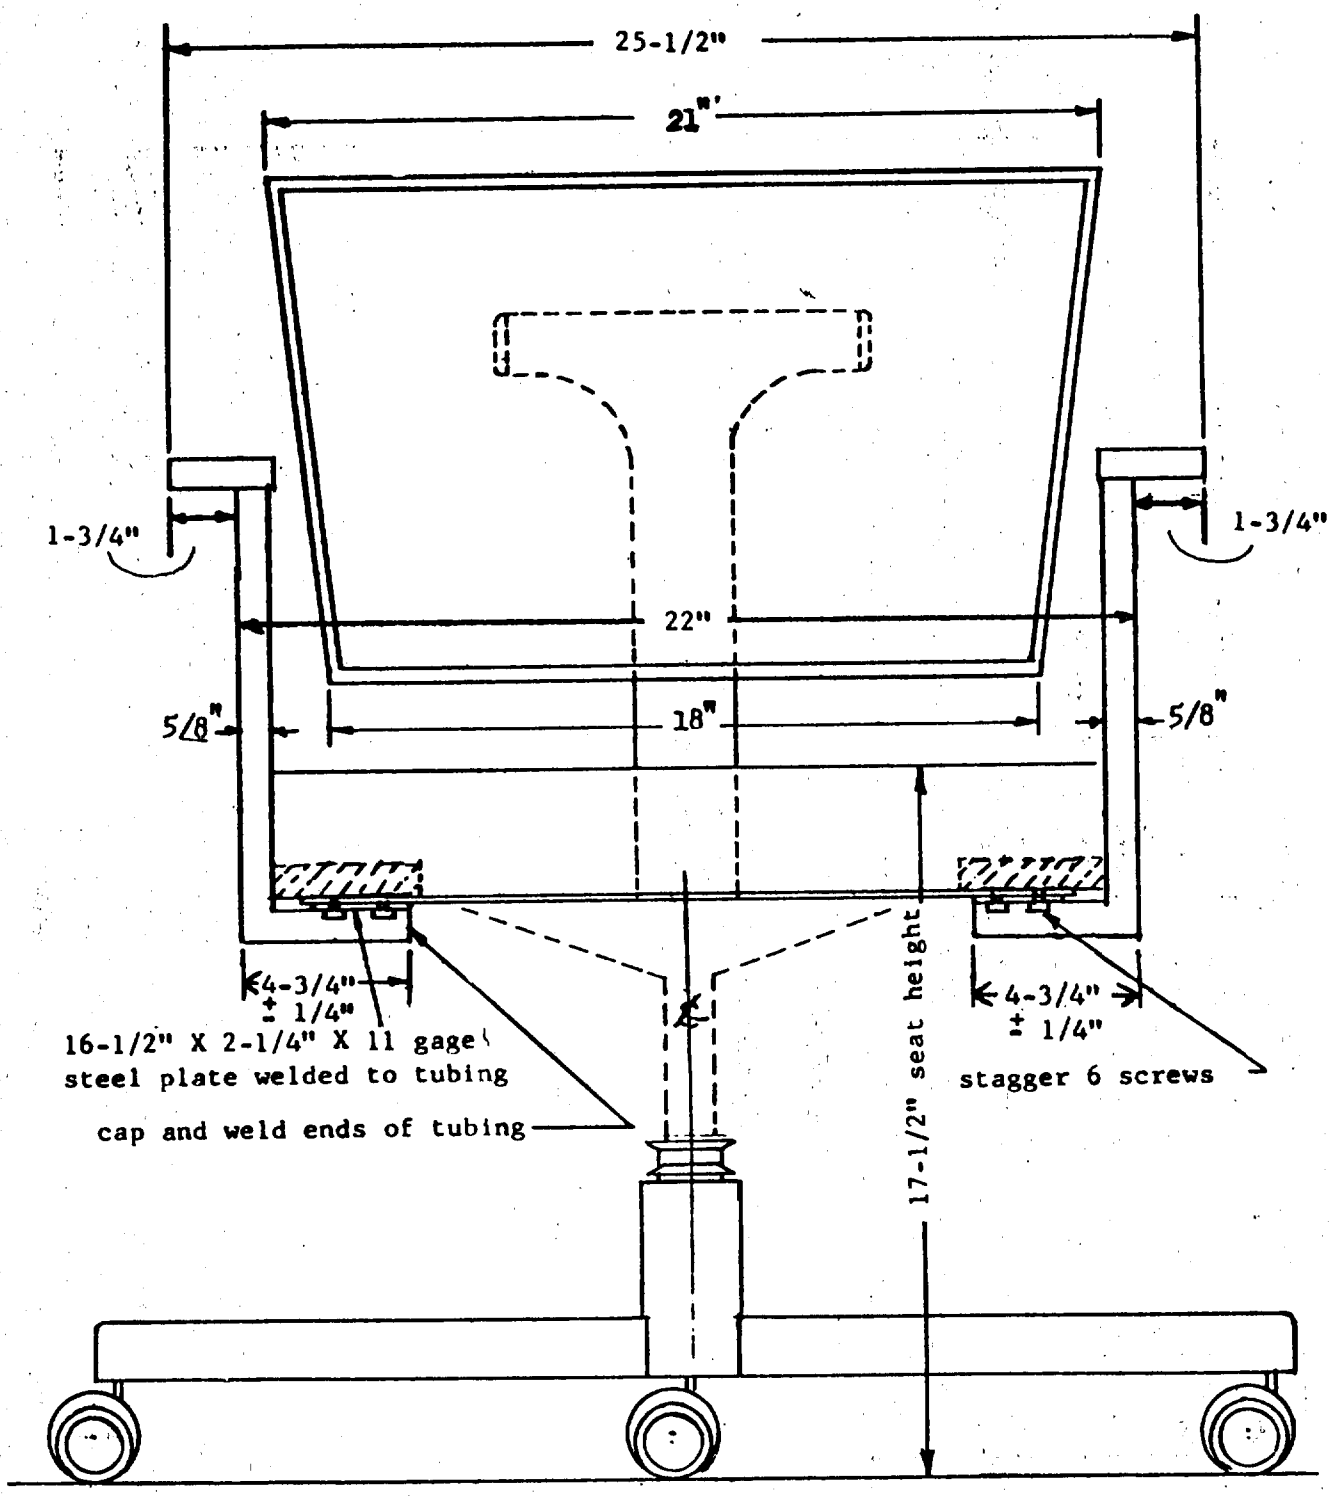


Figure 12. Type IV Executive Posture Chair.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

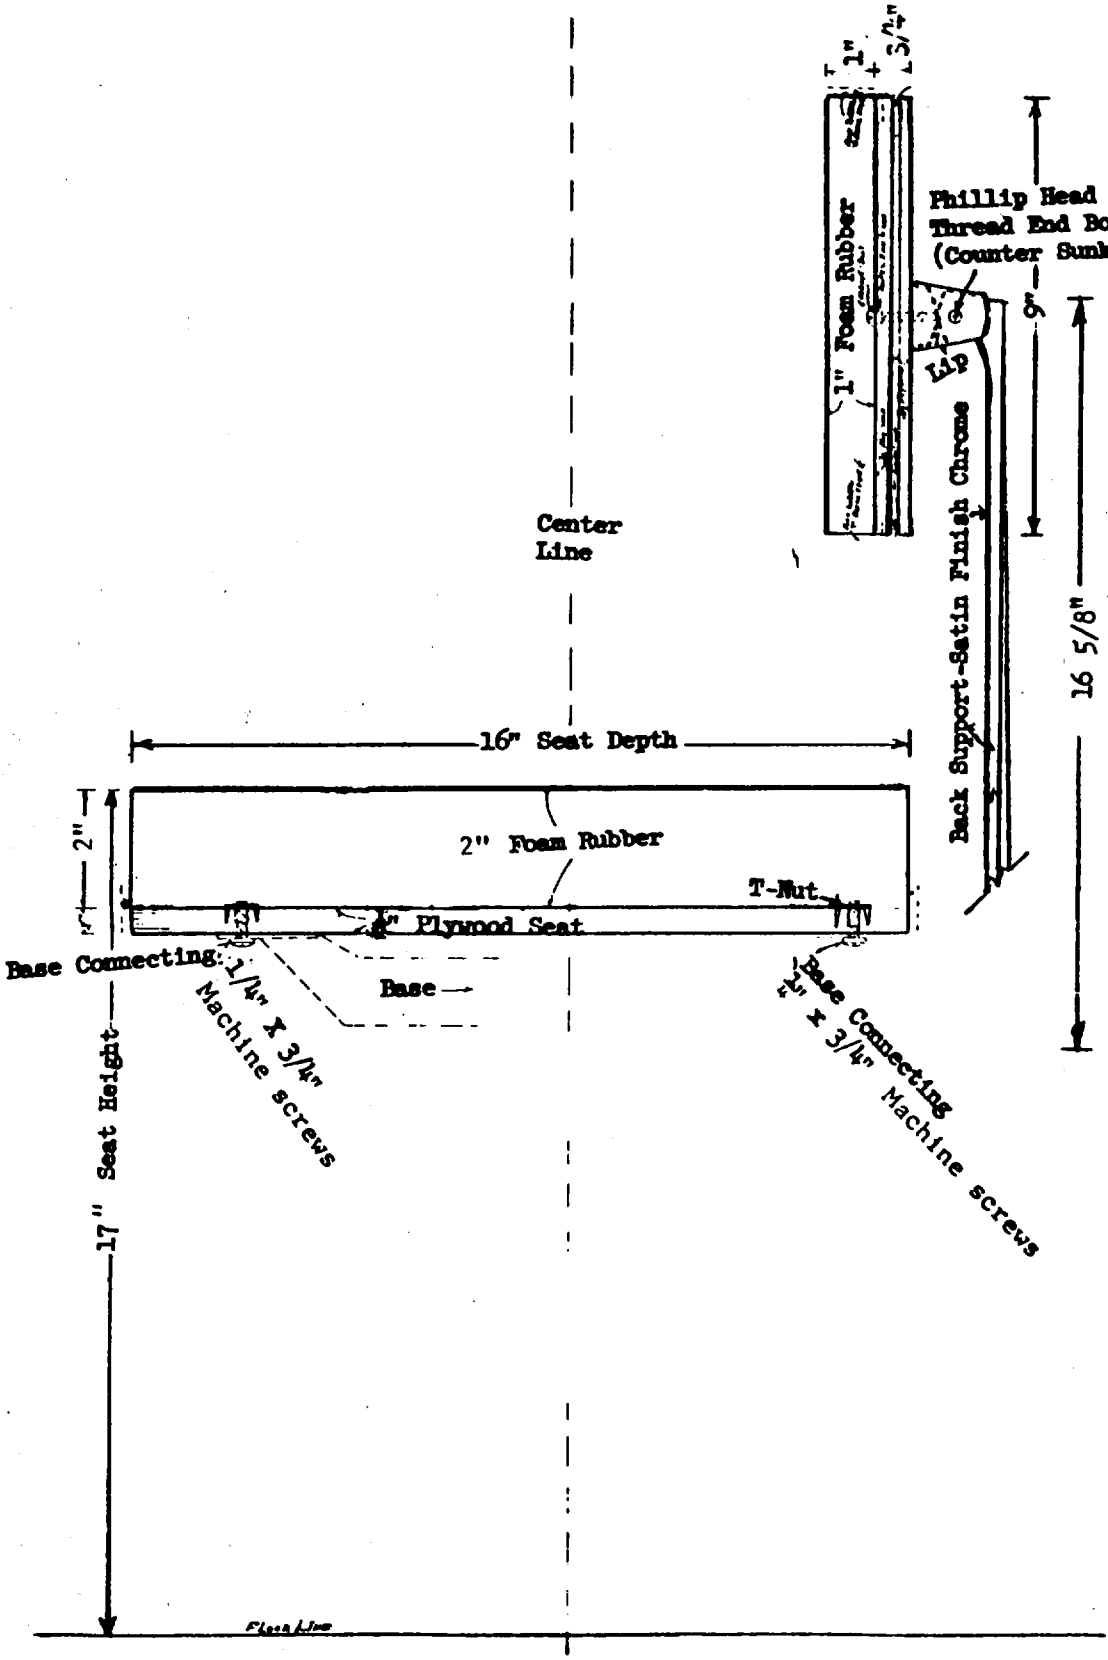


Figure 13. Type V Secretarial Chair.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

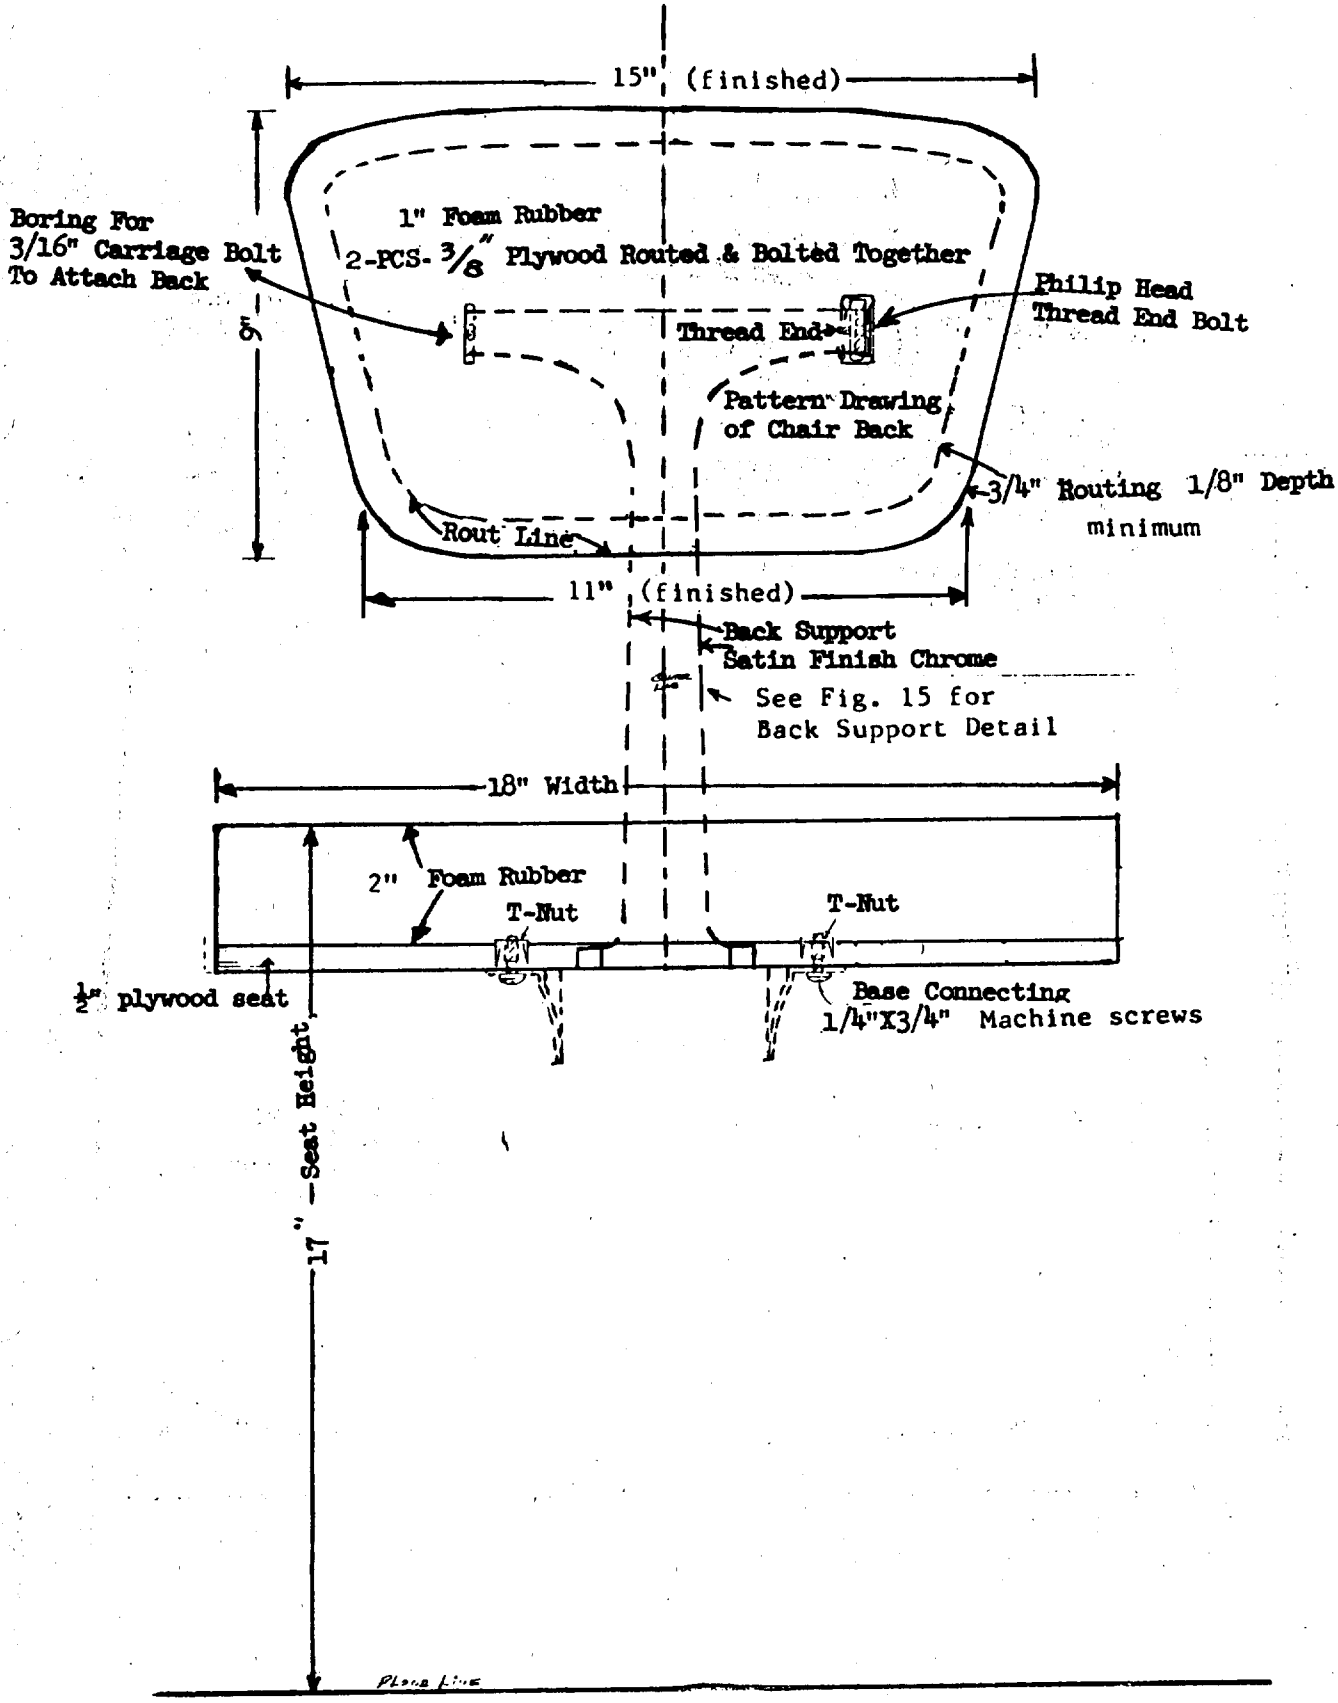


Figure 14. Type V Secretarial Chair.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

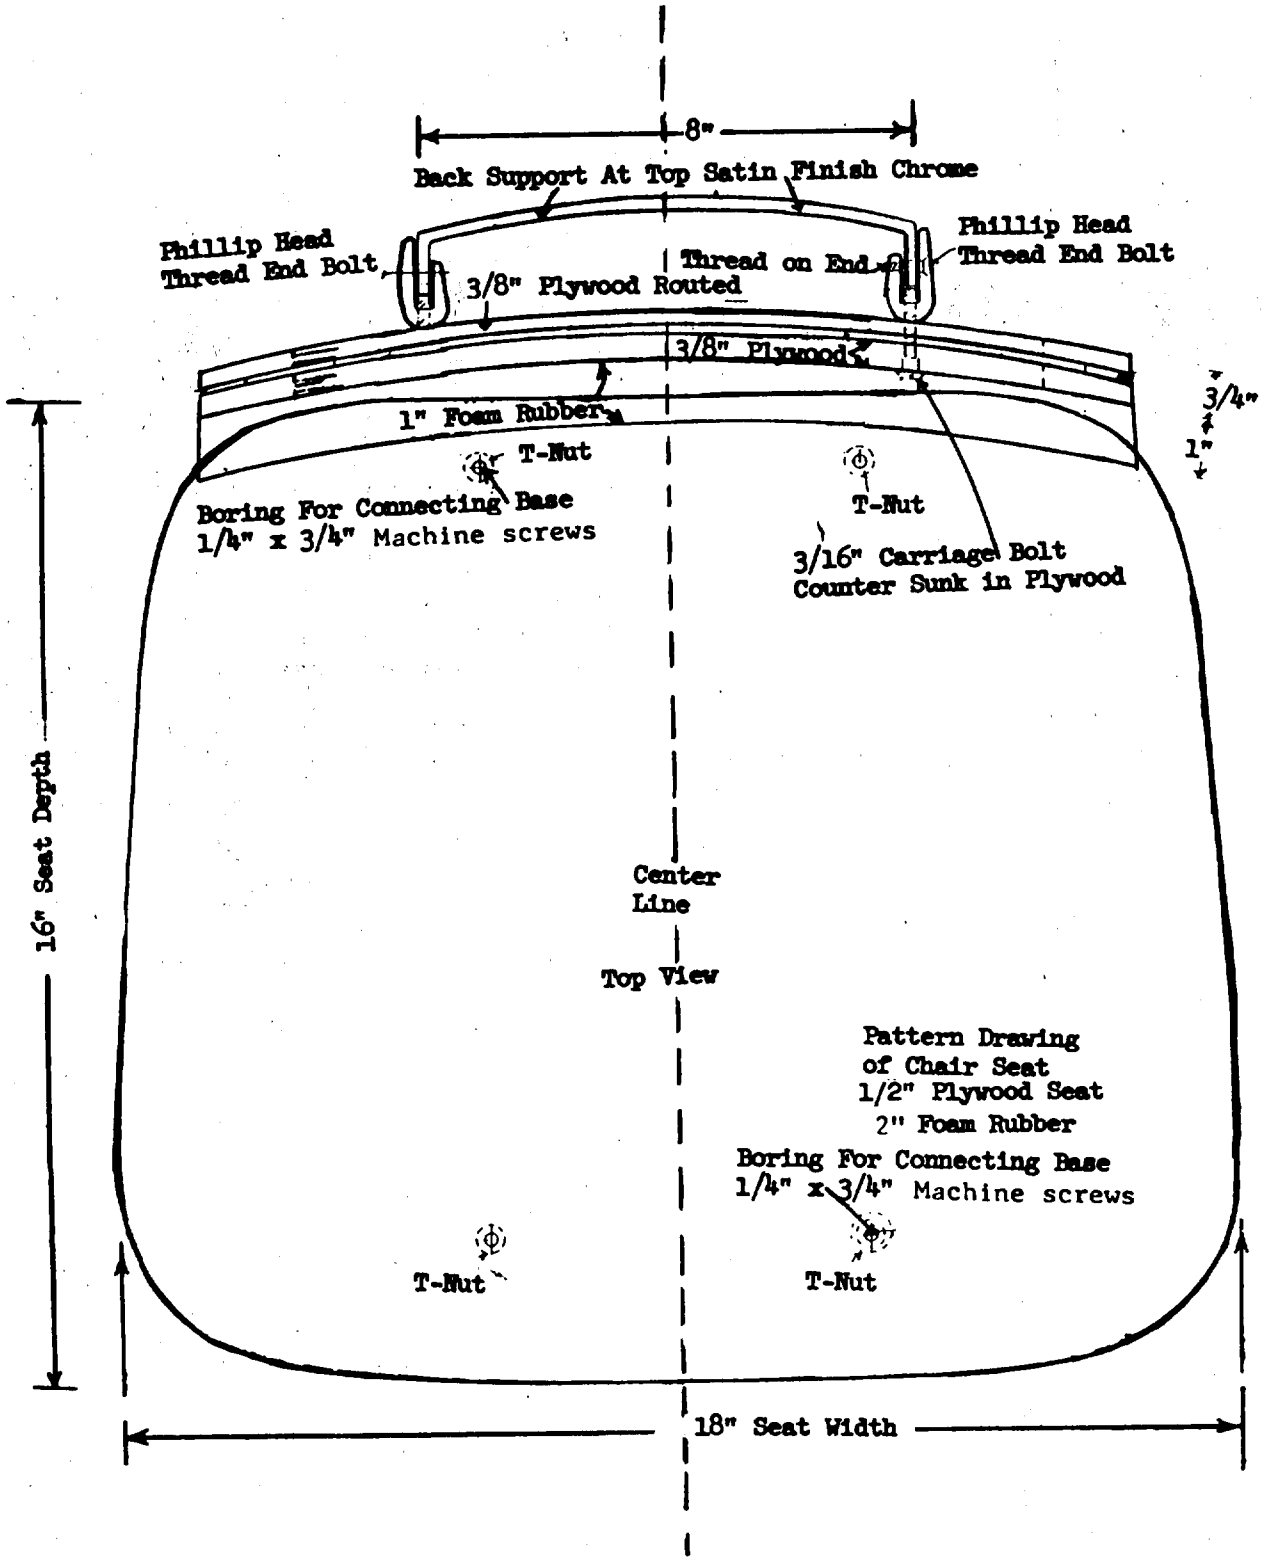


Figure 16. Type V Secretarial Chair.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

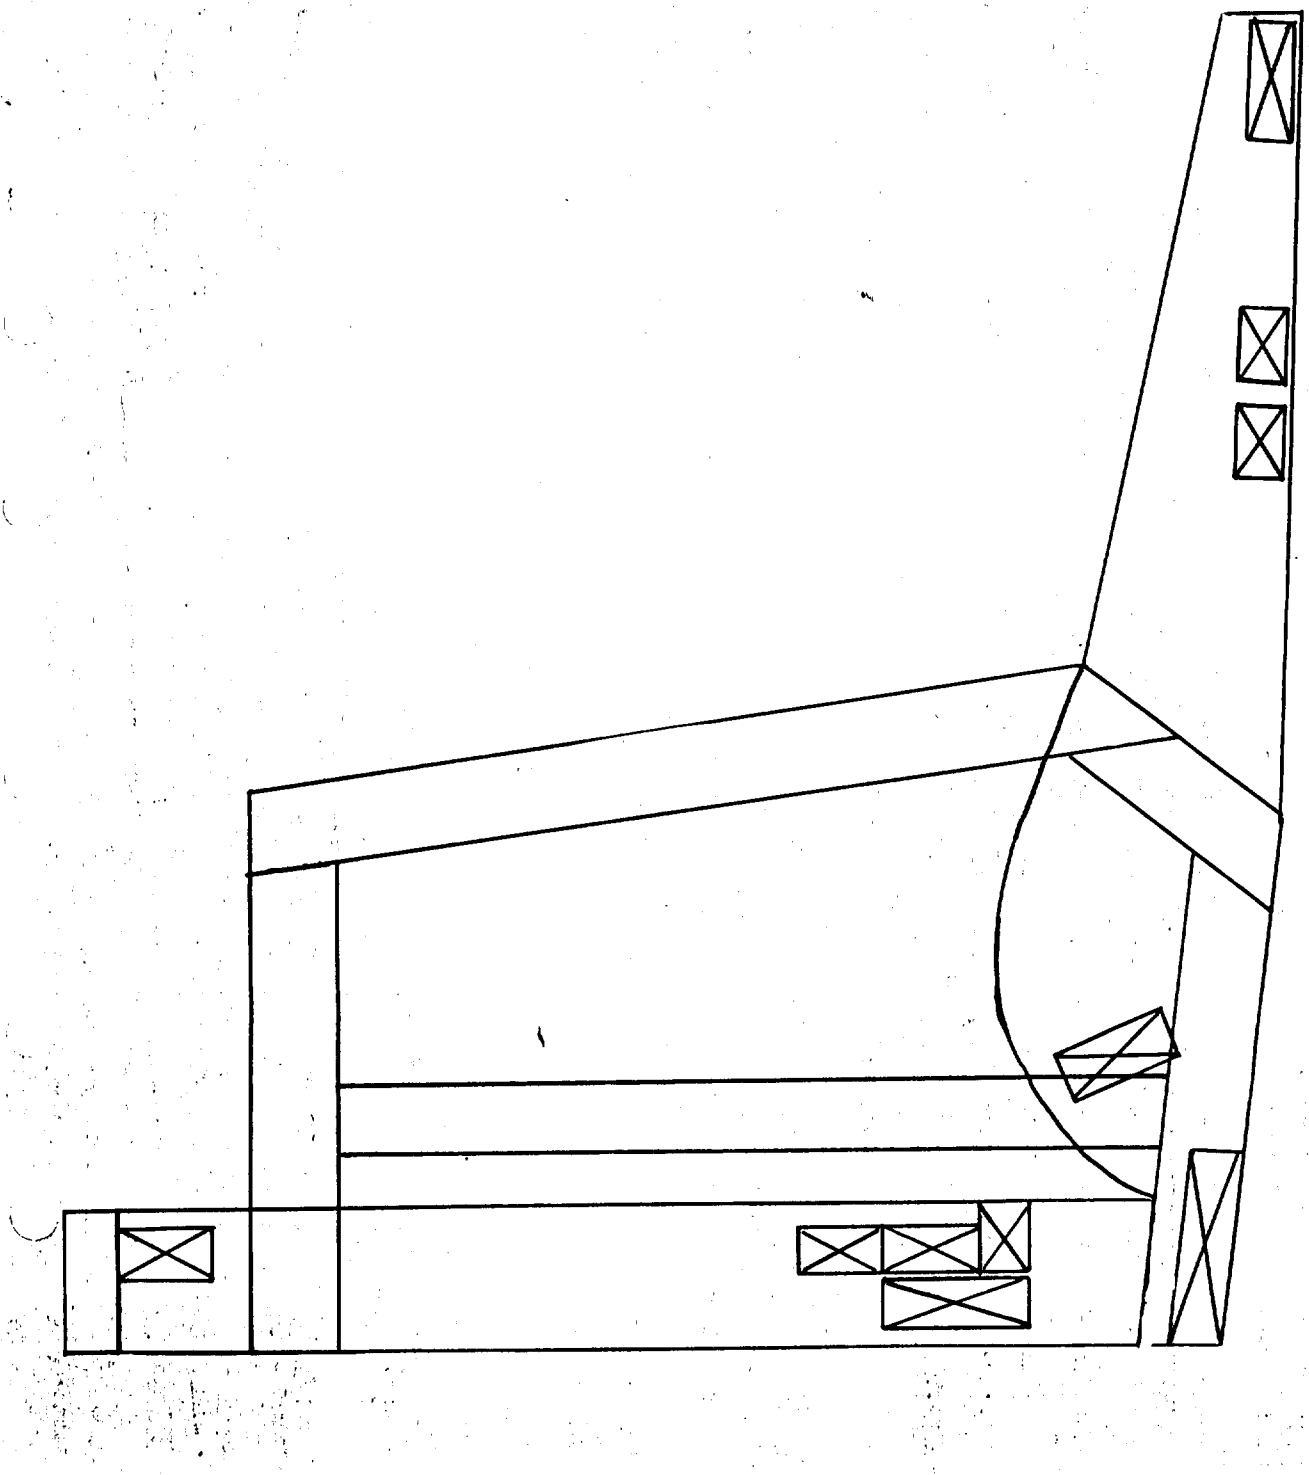


Figure 19. Type IV, Form 2, Posture Chair.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

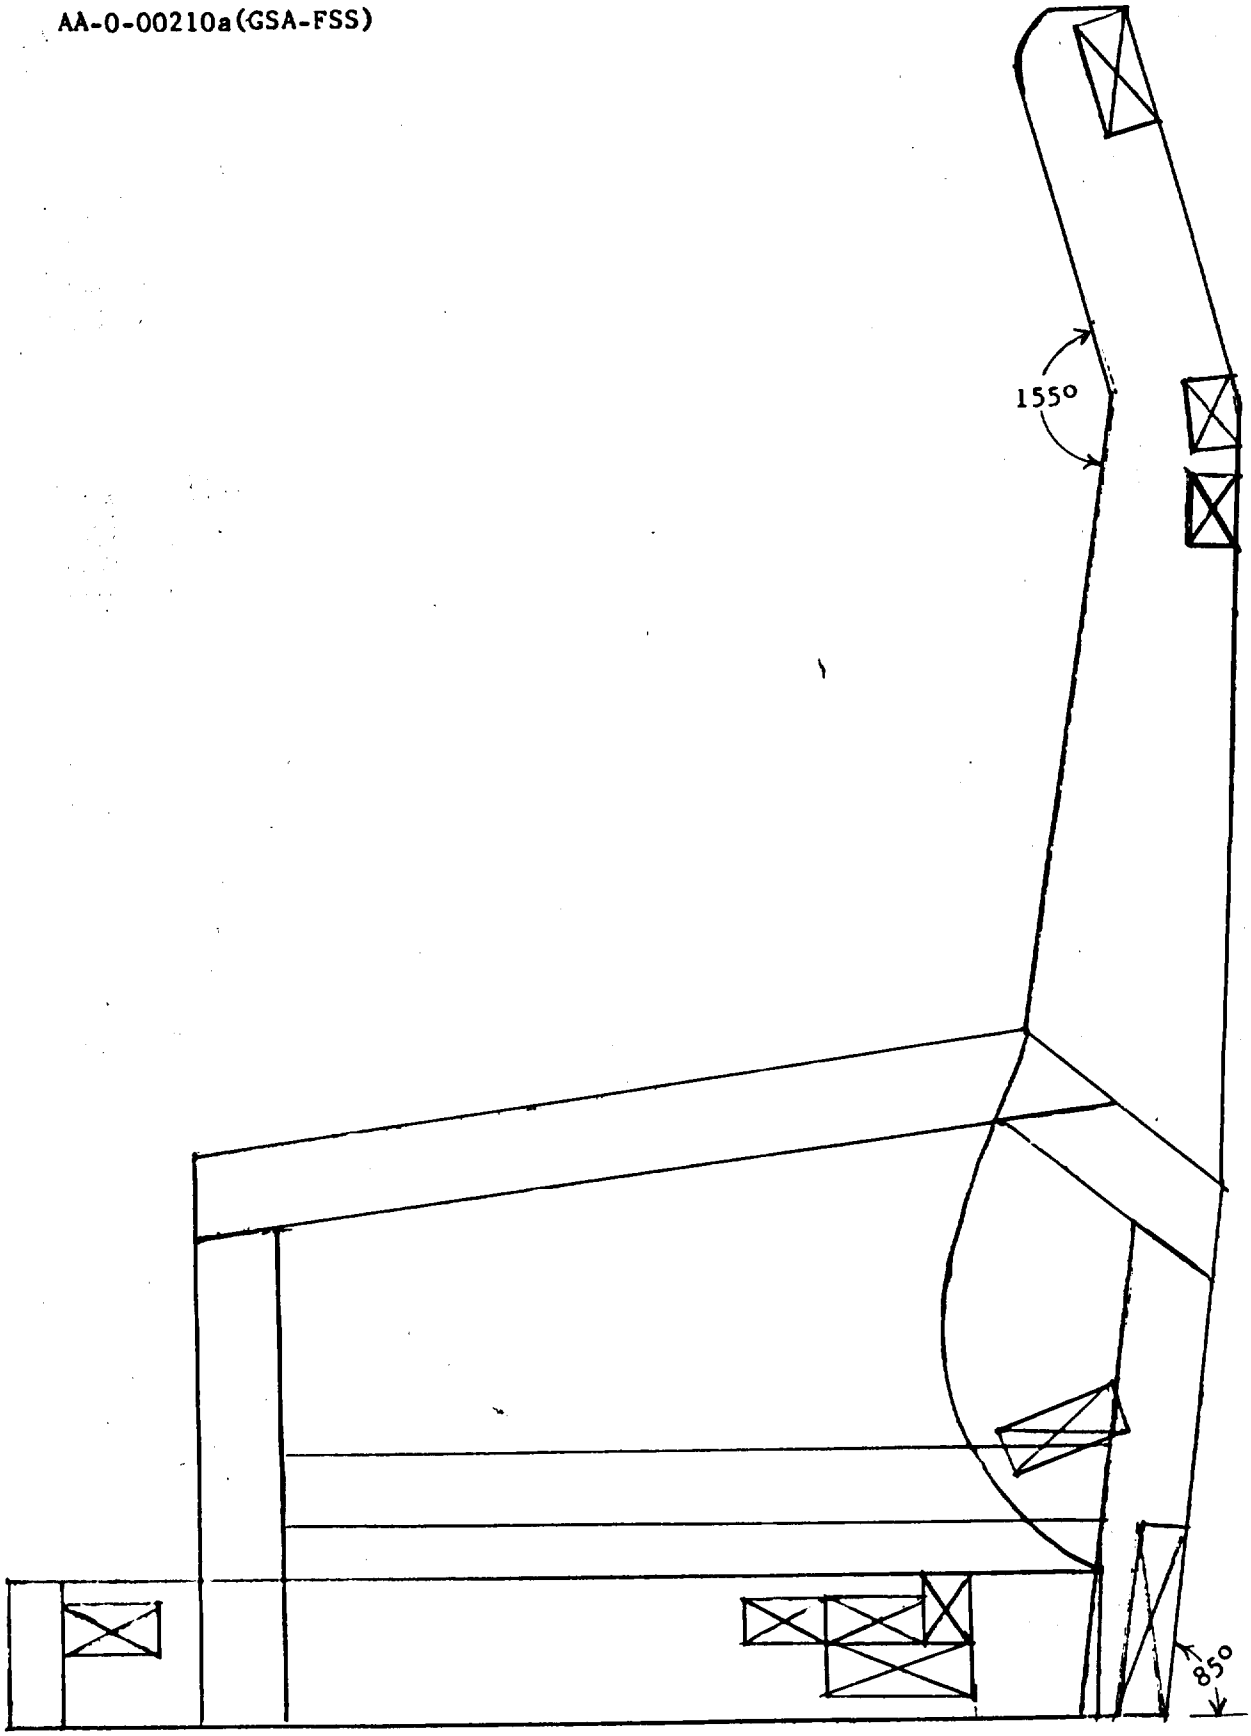


Figure 20. Type IV, Form 3, Posture Chair.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

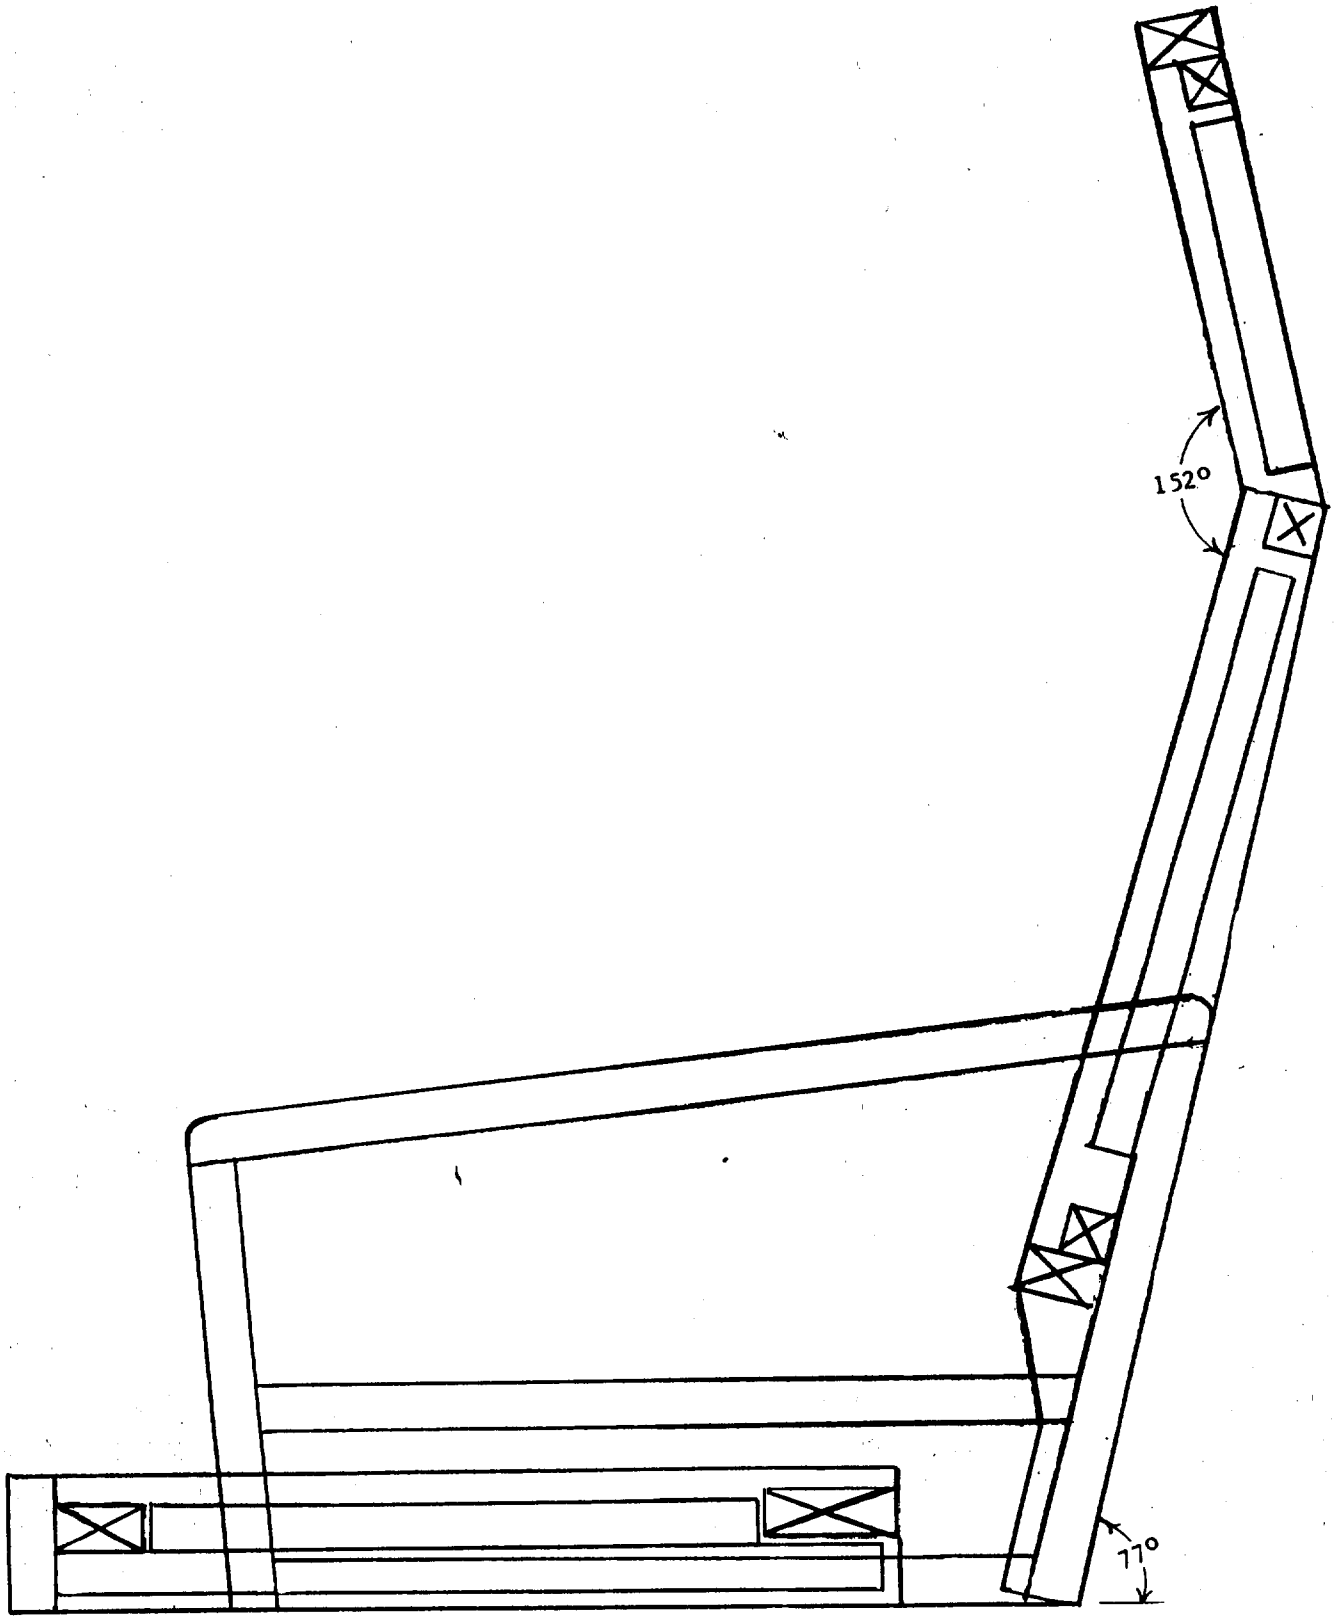


Figure 21. Type IV, Form 4, Posture Chair.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.