AA-0-00215(GSA-FSS)
AMENDMENT-8
September 28, 1976
SUPERSEDING
AMENDMENT-7
April 26, 1974

AMENDMENT

TO

INTERIM FEDERAL SPECIFICATION

OFFICE FURNITURE, EXECUTIVE, COMBINATION METAL AND WOOD:

DAVENPORT AND CHAIR, LOUNGE, EASY

This amendment was developed by the Federal Supply Service, General Services Administration, Washington, DC 20406, based upon currently available technical information. The General Services Administration has authorized the use of this amendment as a part of Interim Federal Specification AA-0-00215(GSA-FSS), dated April 27, 1964.

PAGE 1

Paragraph 2.1:

Under Federal Specifications:

Add "CCC-C-00540 - Cloth, Upholstery."
Delete "C-H-111 - Hair Curled."
Delete "FF-S-00109 - Screws, Wood, Cross recressed Head".
Add "CCC-A-680 - Artificial Leather (Cloth Coated), Vinyl Resin, Expanded Layer, (Upholstery)."
Delete "CCC-T-191 - Textile Test Methods".
Delete "MMM-A-100 - Adhesive, Animal Gelatine".
Delete "MMM-A-125 - Adhesive, Casein Type, Water and Mold Resistant".
Delete "MMM-A-188 - Adhesive, Urea-Resin Type (Liquid and Powder)".

PAGE 2

Under Federal Standards:

Delete "Fed. Std. No. 102 - Preservation, Packaging and Packing Levels".

Add "Fed. Test Method Std. No. 191 - Textile Test Methods".

Under Military Specifications:

Add "MIL-C-7769 - Cushioning Material, Uncompressed Bound Fiber for Packaging".

Under Military Standards:

Line 3: Delete "MIL-STD-130 - Identification Marking for U.S. Military Property".

Line 4: After "MIL-STD-171" delete remainder of line and substitute "Finishing of Metal and Wood Surfaces".

Under Commercial Standards:

Add "Product Standard PS 13-69 Uncored Slab Urethane Foam for Bedding and Furniture Cushioning."

Paragraph 2.2:

Below line 9, add the following: "ASTM D 905 - Standard Method of Test for Strength Properties of Adhesives in Shear By Compression Loading."

FSC 7110

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

"ASTM D-1564-71 Testing Slab Flexible Urethane Foam".

Delete from "Uniform Freight" etc. to "Illinois)."

PAGE 3

Paragraph 3.2.1, Table I, under column titled Kind of Adhesive, delete lines 1 through 7 and substitute "Any adhesive that will develop an average block shear strength of not less than 2,800 pounds per square inch (psi) when tested as specified in ASTM D 905 1/ 2/ 3/."

Below Table I, add the following footnotes:

"1/ The following modifications apply when testing casein-type adhesive. The test blocks shall be placed under pressure between 10 and 20 minutes after spreading the adhesive, the adhering pressure shall be 175 ± 25 pounds per square inch, and the test blocks shall be held under pressure for at least four hours.

2/ The following modifications apply when testing animal adhesive. The moisture content of the wood shall be from 6 to 9 percent. The joints shall be conditioned at a relative humidity of 40 ± 4 percent.

3/ Whenever a specimen fails at a load of less than 2,800 pounds per square inch and the failure occurs 50 percent or more in the wood, the specimen shall be disregarded in computing the average. In case the shearing strength of one or more specimens is 2,800 pounds per square inch or higher, the variation among individual specimens is 10 percent or more (based on the strongest joint) the test shall be run again, provided the average is less than the required 2,800 pounds per square inch."

Paragraph 3.2.2.1:

Line 2: Delete "one" and "solid".

Line 3: After "hackberry" add the following:

"Unexposed component parts shall be constructed of either one piece of wood or from full-length gluedup stock. There shall be no open joints in the completed component parts. Tests specified in 4.5.1 shall be performed daily on a minimum of 5 representative glued-up component parts. Glue joints shall show at least 85 percent wood failure."

PAGE 4

TABLE I - Change designation to TABLE Ia.

Paragraph 3.2.4.1, line 1: Delete "or FF-S-00109 (COM-NBS)".

Paragraph 3.2.4.4, line 8. Delete "lacquerd" and substitute "liquor".

After paragraph 3.2.5.3 add the following new paragraph:

3.2.5.4 Urethane Foam. The prime polyurethane foam shall not contain any filler material, be Grade USU 34 or Grade USU 27 as specified and shall conform to the requirement herein when tested as specified in the applicable sections of ASTM Method D1564-71.

Physical properties of polyurethane foam

	Requirement	
Property	Seat 3-5 inches thick	Back
25 percent Indentation	34 ± 3	27 ± 3
Indentation load ratio (65 percent/25 percent); min.	1.9	1.9
Original Compression set 22 hr./158 degrees F., 90 percent deflection, percent max.	15%	15%

Source: https://assist.dla.mil -- Downloaded: 20261O-26T11:39Z
Check the source to verify that this is the current version before use.

Steam Autoclave Test (condition B)		
Percent change in 25 percent comp. load deflect; percent max.	-20%	-20%
Comp. set 22 hrs./158 degrees F. 90 percent deflect; percent max.	20%	20%
Fatigue test (procedure A)		
25 percent indentation load ratio loss; percent max.	30%	30%
Thickness loss percent max.	5%	5%
Rebound Resilience prime polyurethane	45%	45%
Density, Pounds per cu./ft.	3.0 ± .3	2.0 ± .2

NOTE: Preceding properties are based upon standard 4 inch slab stock commercial tolerance allowed. (as specified in 3.3.2 of Product Standard PS 13-69)

PAGE 5

Paragraph 3.2.6.3 Cord, jute Welting. Delete entire paragraph and substitute the following:

"3.2.6.3 Weltless double-needle edge. The double-needle edge shall consist of single stitching of the boxing to the top and bottom panels of the cushions. The material shall be folded back from the single stitch seams. Then it shall be doubled stitched 3/8 inch apart equally spaced from the center seam for a neat appearance. The back of the seam is reinforced with a cotton double-needle tape ½ inch wide. The tape is attached during the double-needle stitching. Stitches shall be 5 to 7 per inch."

Paragraph 3.2.6.4 Cambric. Add at end of paragraph:

"Alternatively, a black spunbonded polyethylene sheet fabric weighing not less than 1.15 ounce per square yard or spunbonded polypropylene sheet fabric weighing not less than 2 ounces per square yard when tested as specified in Method 5041 of Fed. Test Method Std. No. 191 may be used.

Paragraph 3.2.6.5, delete entire paragraph.

Paragraph 3.2.6.7 Burlap. Add at end of paragraph:

"Alternatively, a spunbonded polyethylene sheet fabric weighing not less than 1.15 ounce per square yard or spunbonded polypropylene sheet fabric weighing not less than 2 ounces per square yard when tested as specified in Method 5041 of Fed. Test Method Std. No. 191 may be used.

Paragraph 3.2.6.9, delete entire paragraph and substitute the following:

"3.2.6.9 Nonwoven fabric and wadding. The nonwoven fabric and wadding shall consist of new materials with or without a binder. The thickness shall be either ¼ or ½ inch (approximately) as specified herein. The minimum weight shall be 1¼ or 1-3/4 ounces per square foot for the ¼ and ½ inch thick nonwoven fabric and wadding, respectively, when tested as specified in Method 5041 of Fed. Test Method Std. No. 191, except that the weight shall be reported in ounces per square foot to the nearest 0.1 ounce. The compression set shall be less than 10 percent of its measured thickness when tested as specified in 4.4.3.3 of MIL-C-7769."

Paragraph 3.2.6.10:

Line 1, delete "4" and substitute "3½".

Line 4, delete "22.5" and substitute "21.5".

Line 5, delete "CCC-T-191" and substitute "Fed. Test Method Std. No. 191."

Paragraph 3.2.6.11 Sheet Webbing. Add at end of paragraph:

"Alternatively, sheet webbing may be a plain woven fabric or 100% polypropylene weighing not less than 5.0 oz. per square yard, 16 ± 1 by 14.5 ± 1 yards per square inch, flat ribbon yarns with a breaking strength of not less than 250 pounds in either the warp or the filling when tested in accordance with method 5100 of Fed. Test Method Std. No."

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

Paragraph 3.2.6.12 Delete the entire paragraph and substitute the following:

"3.2.6.12 Velvet. The velvet shall conform to type IV of CCC-C-00540. The color shall harmonize with that of the upholstery cover."

Paragraph 3.2.6.13., line 5: Delete "CCC-T-191" and substitute "Fed. Test Method Std. No. 191."

Paragraph 3.2.6.14 line 3: Delete "as specified (see 6.2)" and substitute the following:

"Claret	-	FSS-X-00001	Gold Dust	-	FSS-X-00005
Elbony	-	FSS-X-00002	Yellow	-	FSS-X-00006
Aquamarine	-	FSS-X-00003	Pine Green	-	FSS-X-00007
Saddle	-	FSS-X-00004	Tangerine	-	FSS-X-00008. (see 6.2)."

Paragraph 3.2.6.15:

Line 4: Delete "of CCC-T-191" and substitute "5100 of Fed. Test Method Std. No. 191."

Line 7: Delete "as specified (see 6.2)" and substitute the following:

"Red Green	-	FSS-F-02001	Gold Brown	-	FSS-F-02005
Black	-	FSS-F-02002	Gold Blue	-	FSS-F-02006
Blue	-	FSS-F-02003	Olive and Blue Green	-	FSS-F-02007
Beige	-	FSS-F-02004	Brown, Orange, Blue	-	FSS-F-02008." (see 6.2)."

Line 8: Delete "Specification CCC-T-191" and substitute "Fed. Test Method Std. No. 191."

Paragraph 3.2.6.16, line 2: After "stop" add "or fabric material doubled over and doubled stitched through each end of the zipper tape may be used in lieu of the top and bottom staple stop."

Line 3: Delete "M" and substitute "L-M".

After paragraph 3.2.6.16, add the following new paragraph:

"3.2.6.17 Artificial leather. The artificial leather shall conform to class 2, treatments (a) 1 and (b) of CCC-A-680. The finish shall be that of simulated top grain leather and the colors shall be:

Red	-	FSS-V-02001	Tan	-	FSS-V-02005
Black	-	FSS-V-02002	Gold	-	FSS-V-02006
Blue	-	FSS-V-02003	Mint Green	-	FSS-V-02007
Saddle	-	FSS-V-02004	Tangerine	-	FSS-V-02008 (see 6.2)."

After paragraph 3.2.6.17, add the following new paragraph:

"3.2.6.18 Polyester fiberfill batting. Polyester fiberfill batting shall be composed of round filaments 25 to 40 denier and lightly crimped. It shall be needle punched and shall weigh not less than 3.0 ounces per square foot when tested as specified in Method 5041 of Fed. Test Method Std. No. 191, except that the weight shall be reported in ounces per square foot to the nearest 0.1 ounce."

Paragraph 3.2.7.1 Delete entire paragraph and substitute the following:

"3.2.7.1 Zinc plating. Zinc plating shall be in accordance with 5.1 (Inorganic finishes), finish number 1.9.2.1 of MIL-STD-171. The final finish shall be bright."

Paragraph 3.2.7.2: Delete entire paragraph and substitute the following:

"3.2.7.2 Chromium plating (satin). Chromium plating shall be in accordance with class 1, type II of QQ-C-320. The copper plus nickel undercoat on the steel base shall conform to class 1, type III (KS) of QQ-N-290. Alternatively, nickel only may be used for the undercoat in which case the minimum thickness shall be 0.0001 inch. Chromium plating with discolored streaks or not uniform in appearance will not be accepted."

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

Paragraph 3.2.8:

Line 4: Delete "one" and substitute "15/16".

Line 4: After "diameter" add "The minimum diameter of the threaded stem shall be 3/16 inch."

Paragraph 3.3, after "and 3." add the following new sentence "The upholstery shall be either all leather, artificial leather, or fabric, as specified (see 6.2)".

Paragraph 3.3.1, delete chair type II and davenport type I, size 1 and 2 heights "27½" and "30-3/4" and substitute "28-3/4 inches."

Paragraph 3.3.2:

Line 5: Delete "1½" and substitute "1-3/4".

Line 6: Delete "1½" and substitute "1-3/4"; delete "2½" in both places and substitute "3½" in both places.

Line 15: Delete "equally divided" and substitute "22½ inches with 20-1/8 inches for center space".

Last line: Delete "dowels" and substitute "screws".

PAGE 7

Paragraph 3.3.3.1: Line 2, delete "4" in both places and substitute "5" in both places.

At end of paragraph add "or sheet webbing as specified in 3.2.6.11. and the sheet webbing shall be secured to one side and end of frame with tacks or staples approximately two inches apart, then the loose ends pulled taut and tacked or stapled. Webbing ends to be folded over and tacked or stapled again all the way around with tacks or staples spaced approximately two inches apart.

Paragraph 3.3.3.2: Delete first, second and third sentences and substitute the following:

"Webbing, specified in 3.2.6.10, shall be interlaced, using not less than 5 strips lengthwise and 15 strips front to back for size 1 and not less than 5 strips lengthwise and 20 strips front to back for size 2. Strips shall be secured to bottom of seat frame as specified in 3.3.3.1, or sheet webbing as specified in 3.2.6.11. and shall be secured to bottom of seat frame as specified in 3.3.3.1."

Paragraph 3.3.4: Delete entire paragraph and substitute the following:

"3.3.4 Application of coil spring, padding and final upholstery cover. Coil springs shall be as specified in 3.2.3.2. The number and size of springs shall consist of those listed in Table Ia under coil spring dimensions. Each spring shall be secured to the strip or sheet webbing in four places with twine specified in 3.2.6.13. The twine shall be tied with knots at the start and finish as a minimum, and may be sewn (looped) in the other two positions. Alternatively, four Klinch-it or equal fasteners may be applied provided that no sharp points of the fasteners are left protruding through the webbing. The top of each spring shall be hand tied in eight places with twine specified in 3.2.6.13, securely tacked with 16-ounce, barbed tacks or by 7/8 inch, No. 13 spring-up nails, and tied to the frame. The end of the twine shall be twisted around the tack, and back over the twine, to form a loop to prevent the edge of the tack from cutting the twine. The loose end of the twine beyond the loop shall be further secured to the frame or to the spring. Burlap, specified in 3.2.6.7, shall be applied over the springs and securely tacked or stapled to the frame, with edges folded over and tacked or stapled again to the top edge of the frame. A layer of polyester fiberfill batting, specified in 3.2.6.18, shall be applied over the burlap and covered by a layer of burlap which shall be tacked or stapled, or a combination of both to the frame. The batting and layers of burlap shall be sewed together with thread, specified in 3.2.6.2, or 3-ply nylon tufting twine, using at least one tied stitch for each spring. A layer of cotton, specified in 3.2.6.8, shall be applied over the burlap. This shall be covered with muslin, specified in 3.2.6.6, and tacked or stapled to the frame. An edge of No. 2, "Flexroll" or equal rubber edging shall be tacked or stapled, or a combination of both, to the top edge of frame. A layer of foam rubber or urethane slab stock, specified in 3.2.5.1, ½ inch thick and 8 inches wide with a pull strip on the bottom edge shall be tacked or stapled, or a combination of both to inside of frame, brought over the edge roll with the rubber pulled down flush with the bottom edge of the front rail and the pull strip secured to the frame.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

Alternatively, the pull strip may be omitted and the foam rubber or urethane slab stock may be secured to the front rail by adhesive, specified in 3.2.1. Upholstering material, specified in 3.2.6.14, 3.2.6.15, or 3.2.6.17, shall be sewed to the velvet, specified in 3.2.6.12, so that upholstering material extends 4 inches back from front rail with a weltness double-neddle seam on the top edge of the edge roll. Alternatively, drill cloth or rep material may be used in lieu of velvet when fabric upholstering material is specified (see 6.2). The drill cloth or rep material shall weigh not less than 14 ounces per 3½ linear yards on a 30 inch width basis and the minimum breaking strength shall be 80 pounds in the warp direction and 48 pounds in the filling direction when tested as specified in Method 5100 of Fed. Test Method Std. 191. The cover shall be pulled over the slab of rubber and tacked or stapled, or combination of both, to the bottom edge of the rail. The deck cover shall be tacked to the top edge of seat frame."

Paragraph 3.3.4.1, delete entire paragraph and substitute the following:

"3.3.4.1 Application of sinuous springs to back frame, padding and upholstery cover. The sinuous back springs for the chair and sizes 1 and 2 davenports shall be as follows: The chair shall have 5 rows, the size 1 davenport shall have a minimum of 15 rows (5 rows per each section), and the size 2 davenports shall have a minimum of 20 rows (5 rows per each section). Sinuous springs, specified in 3.2.3.3, shall be attached to the frame by insulated or brass clips with 3 barbed cement-coated nails per clip (clip nails 7/8 inch number 14, barbed flat, CTSNK-13/16 head, diamond point) or two 7/8 inch staples in lieu of nails to attach the insulated clips to the frame. The clips shall be placed on 4 inch centers for the chair and the size 2 davenport (measured from the center nail) with the end clips located 3 inches from the end of the frame. (The end clips located 3 inches from the end of the frame.) The end clips on the size 1 davenport shall be located 2 inches from the end of the frame. The springs shall be joined together with two rows of 3-ply jute twine knotted twice around each spring and secured to each side of the frame. Burlap, specified in 3.2.6.7, shall be applied over the springs and securely tacked or stapled, or a combination of both, to the frame with the edges of the burlap folded over and tacked or stapled, or a combination of both against the frame. A layer of polyester fiberfill batting, specified in 3.2.6.18, shall be applied over the burlap and covered by a layer of burlap which shall be tacked or stapled, or a combination of both, to the frame. The batting and layers of burlap shall be sewed together with thread, specified in 3.2.6.2, or 3-ply nylon tufting twine, using at least one tied stitch to each row of springs. A layer of cotton, specified in 3.2.6.8, shall be applied over the burlap, covered with a layer of muslin, specified in 3.2.6.6, and tacked or stapled, or a combination of both to the frame. A layer of cotton felt, specified in 3.2.6.8, with muslin covering shall be applied across the top edge and down the side edge of the frame. As an alternate, a double width of ½ inch wadding, specified in 3.2.6.9, may be applied, folded over with the fold to the front edge of the piece, making a double layer. The wadding shall be cemented and random stapled to the top edge of the back. A single layer of ½ inch wadding, specified in 3.2.6.9, may be applied, cemented and random stapled to the side edge of the back frame. If the alternate method is used it will not be necessary to cover the top and side edges with muslin. Upholstery cover material, specified in 3.2.6.14, 3.2.6.15, or 3.2.6.17, shall be weltless double-neddle edge seamed on the top edge and on both sides of the face side, shall be tacked or stapled, or a combination of both, to the back top and down both edges of the frame. When leather, specified in 3.2.6.14 (see 6.2), is used for final upholstering material the following sewn seams will be permitted:

Type I, Size 1

Outside back	2 seams
Inside back	2 seams
Top back border	2 seams

Type I, Size 2

Outside back	1 seam
Inside back	1 seam
Top back border	1 seam

When leather is used for final upholstering material, skived seams formed by the use of adhesive may be used under the following conditions:

a. The number of such seams shall be kept to the minimum necessary of the pattern.

b. The skived seam shall be practically invisible, including color compatibility of adjoining pieces, when viewed from a distance of twelve feet.

c. The strength of the skived seams shall be such that they will withstand normal upholstering application without evidence of peeling or separation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

Paragraphs 3.3.5, 3.3.6, 3.3.7 and 3.3.8 delete entire paragraphs and substitute the following:

"3.3.5 Upholstered Arms. The arms of the davenport and easy chair shall be upholstered as follows: The inside arms shall be covered with sheet webbing specified in 3.2.6.11 tack or stapled, or a combination of both, doubled over and tacked or stapled again to the four inside edges of the arm frame. A layer of polyester fiberfill batting, specified in 3.2.6.18 shall be applied and covered with a layer of material specified in 3.2.6.7 which shall be tacked or stapled, or a combination of both to the frame. The polyester fiberfill batting and material cover shall be sewed together with thread specified in 3.2.6.2 using at least 6 tied stitches. A layer of cotton specified in 3.2.6.8, covered with a layer of muslin specified in 3.2.6.6 shall be tacked or stapled, or a combination of both to the top of the arm. The outside arm shall be covered with material 3.2.6.7, tacked or stapled or a combination of both to the frame, doubled over tacked or stapled, or a combination of both to the frame again. A layer of cotton and a layer of muslin shall be applied over the material and tacked, or stapled, or a combination of both to the frame. Foam rubber or urethane stock 2-3/4 inch by 3/4 inch shall be applied to the top of the arm and a slab 2-3/4 inch by 3/4 inch, to the face of the arm stump, with the adhesives specified in 3.2.1. Upholstery material final cover specified in 3.2.6.14, 3.2.6.15, or 3.2.6.17 as applicable with weltless double needle edges on top and face of arm stump of the inside and outside of the arm shall be pulled over the entire arm and tacked or stapled, or a combination of both to the bottom and back edge of the arm frame."

"3.3.6 Upholstered outside back. Material as specified in 3.2.6.7 shall be stretched tight over the back frame and tacked or stapled, or a combination of both. A layer of cotton or ½ inch thick nonwoven fabric and wadding, specified in 3.2.6.9 shall be applied on the material, covered with the muslin specified in 3.2.6.6 and tacked or stapled, or a combination of both to all four edges of the frame. The final upholstery cover (see 3.2.6.14, 3.2.6.15, or 3.2.6.17, as applicable) shall be applied across the top and down each side by means of metal tacking strip having tacks enclosed and not more than 1-3/8 inches apart, and shall be tacked to the underside of the base rail. Alternatively, cardboard tacking strip may be used in lieu of the metal tacking strip across the top only."

"3.3.7 Application of cambric. The entire underside of the unit shall be covered with the cambric or sheet fabric specified in 3.2.6.4 with the glazed surface out. Cambric or sheet fabric shall be attached by tacking or stapling to all four nails."

"3.3.8 Seat and back cushions. Cushions shall consist of foam rubber or urethane inserts conforming to 3.3.5.2, 3.2.5.3 or 3.2.5.4 enclosed in removable covers fabricated of the upholstery material specified in 3.2.6.14, 3.2.6.15 or 3.2.6.17 as applicable, in color and pattern matching that of the final cover on the davenport and easy chair. Seat cushions shall finish 4½ inches thick with a 3½ inch boxing. There shall be 1½ ounce per square foot of bonded polyester fiber bonded to the foam insert on the top and bottom surfaces. The entire cushion shall be bonded with dacron proof ticking. Back cushions shall finish 3½ inches thick with a 2½ inch boxing. There shall be one (1) ounce per square foot of bonded polyester fiber bonded to the foam insert on the top and bottom surfaces. The entire cushion shall be bonded with dacron proof ticking. A slide fastener conforming to 3.2.6.16 shall be sewn in the center of the boxing strip along the back cushion. The upholstery final cover material shall be arranged in an overlapping fold on either side of the slide fastener so as to hide the fastener track. Cushions shall be sewn with thread conforming to 3.2.6.1 and finished so as to present a carefully tailored appearance with weltless double-neddle edges. Fabric cushions shall be reversible. Leather or artificial leather covered seat cushions shall have an underside with a 4 inch facing of leather or artificial leather as applicable, and the remaining surface shall be velvet conforming to 3.2.6.12, not more than three pieces of upholstery cover material shall be used to form the boxing."

Paragraph 3.3.9:

Line 4, after "long." add "Each leg shall be tapped to receive a glide."

Line 5, delete "(including glides)" and substitute "(fully retracted glides)"

Line 6, delete "6" and substitute "6½".

Paragraph 3.3.10: Delete entire paragraph and substitute the following:

"3.3.10 Indentification marking. Each chair and davenport shall be permanently and legibly markedon an appropriate size white cloth label sewn in an inconspicuous place with the specification number, Federal Stock Number, contract number, date of manufacture, and the manufacturer's name or trade-mark, so that the source of supply may be readily determined."

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

PAGE 9

Section 4 delete "SAMPLING, INSPECTION, AND TEST PROCEDURES" and substitute "QUALITY ASSURANCE PROVISIONS".

Paragraphs 4.1 and 4.1.1 Delete in their entirety and substitute the following:

"4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified in the contract or order, the supplier may use his own or any other facilities suitable for the performance of the inspection requirements specified herein, unless disapproved by the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements."

PAGES 14 AND 15

After paragraph 4.4.3.2: Add the following new paragraph:

"4.5 Test method.

4.5.1 Edge-glued joint test. A chisel test on edge-glued joints shall be conducted as follows:

a. Place a sample component with an edge-glued joints end wise on a bench or other solid object.

b. Take a chisel, wider than the thickness of the member being tested, and carefully align it on the glue joint on the upper end of the member.

c. With the chisel being held firmly in a vertical position, strike it sharply with a mallet or hammer so as to split the member longitudinally. Care should be exercised to insure that the force of the blow is directed to the glue line. The resulting split should reveal a failure of the glue line of no greater than 15 percent of the area.

d. Inspect the glue joint area to determine the kind of failure and estimate the amount of wood failure.

PAGE 16

Paragraph 5.1, delete entire paragraph.

Paragraph 5.3.2, delete last sentence.

Paragraph 6.2, delete entire paragraph and substitute the following:

"6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, number, and date of this specification.
(b) Type and size required if applicable (see 1.2.1).
(c) When preproduction samples not required (see 3.1).
(d) Upholstery cover required (see 3.3).
(e) Color of leather upholstery when applicable (see 3.2.6.14).
(f) Color of fabric upholstery when applicable (see 3.2.6.15).
(g) Color of artificial leather upholstery when applicable (see 3.2.6.17).
(h) Level of packaging and packing required (see 5.1).
(i) Marking requirements (see 5.4).

PAGE 17

Paragraph 6.4, delete entire paragraph.

Delete figures 1,2, and 3 and substitute attached figures 1A, 2A, and 3A.

GSA FSS [illegible]

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:39Z
Check the source to verify that this is the current version before use.

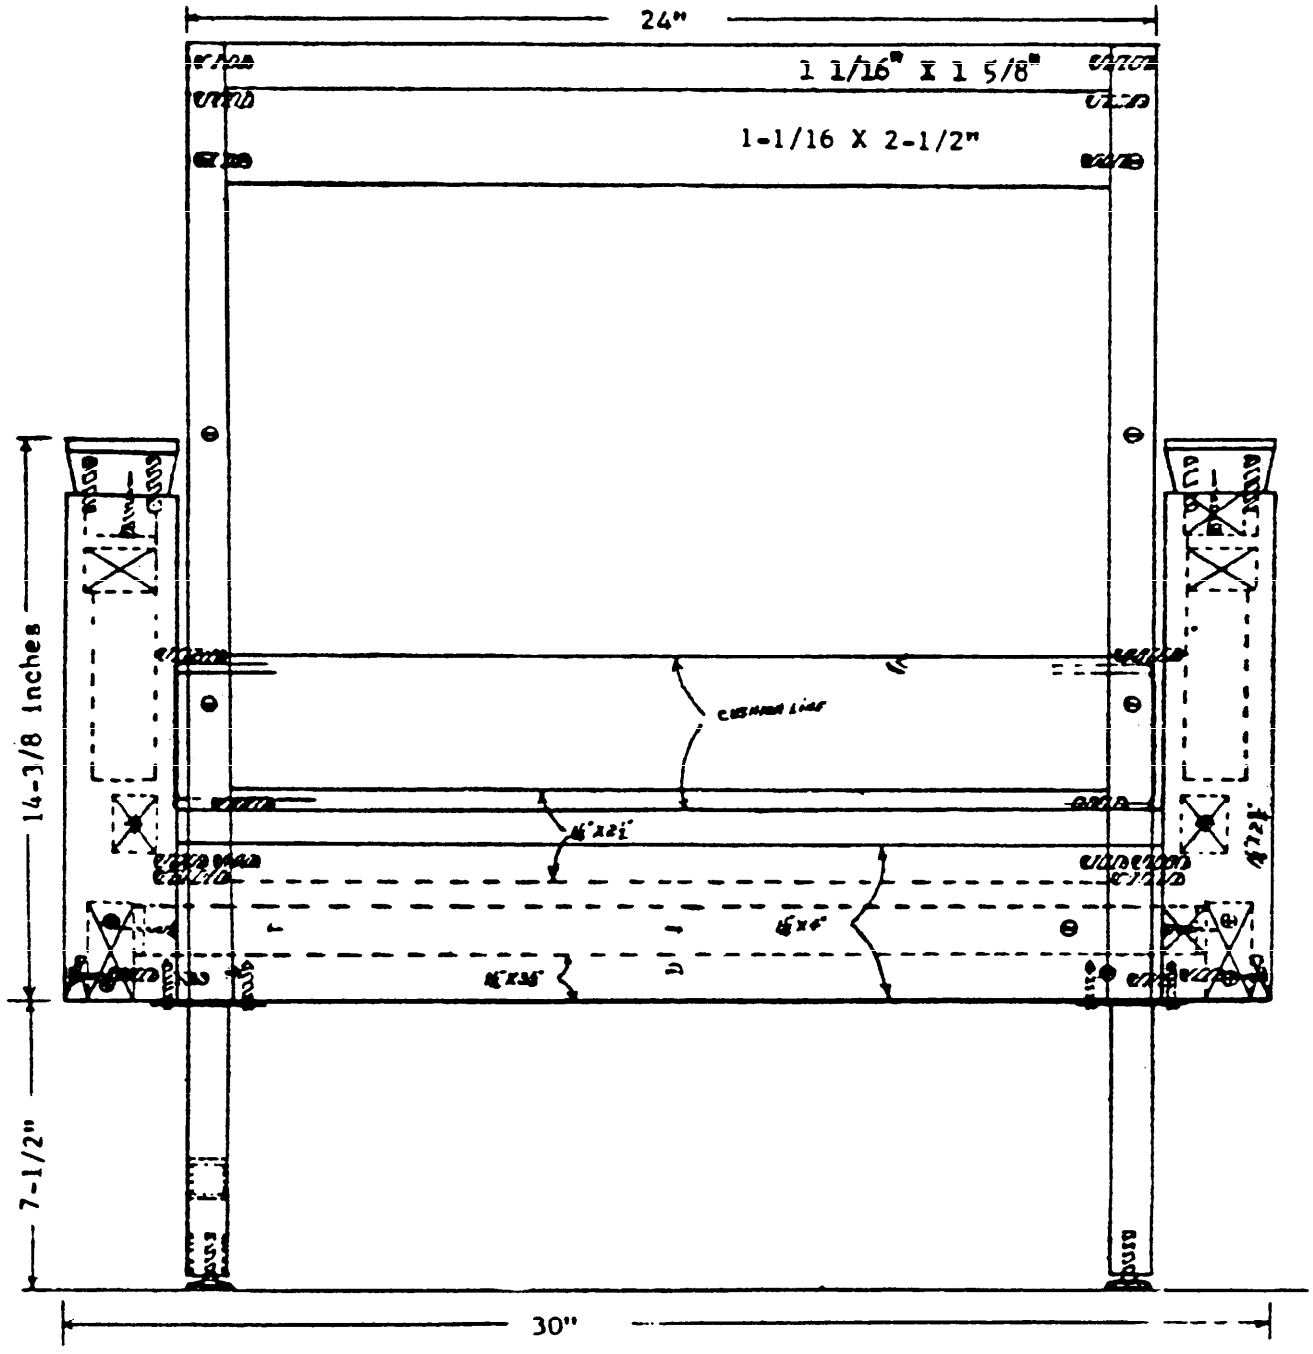


Figure 1A Davenport and Chair, Executive Office

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:39Z
Check the source to verify that this is the currentversion before use.

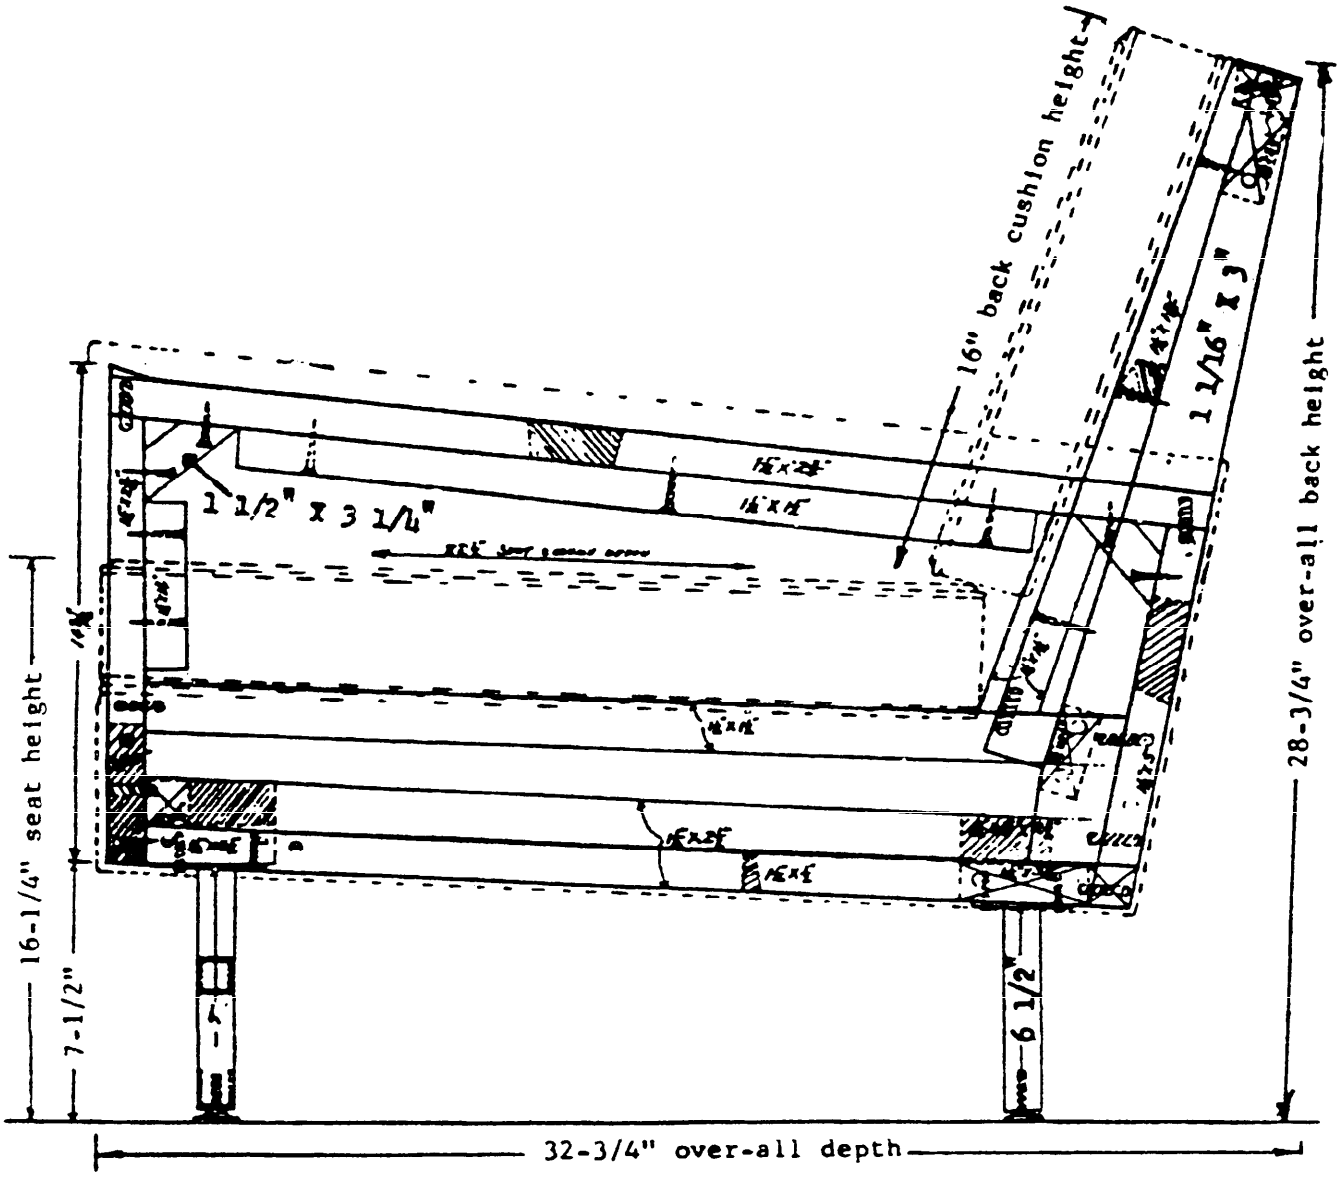


Figure 2A Davenport and Chair, Executive Office

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

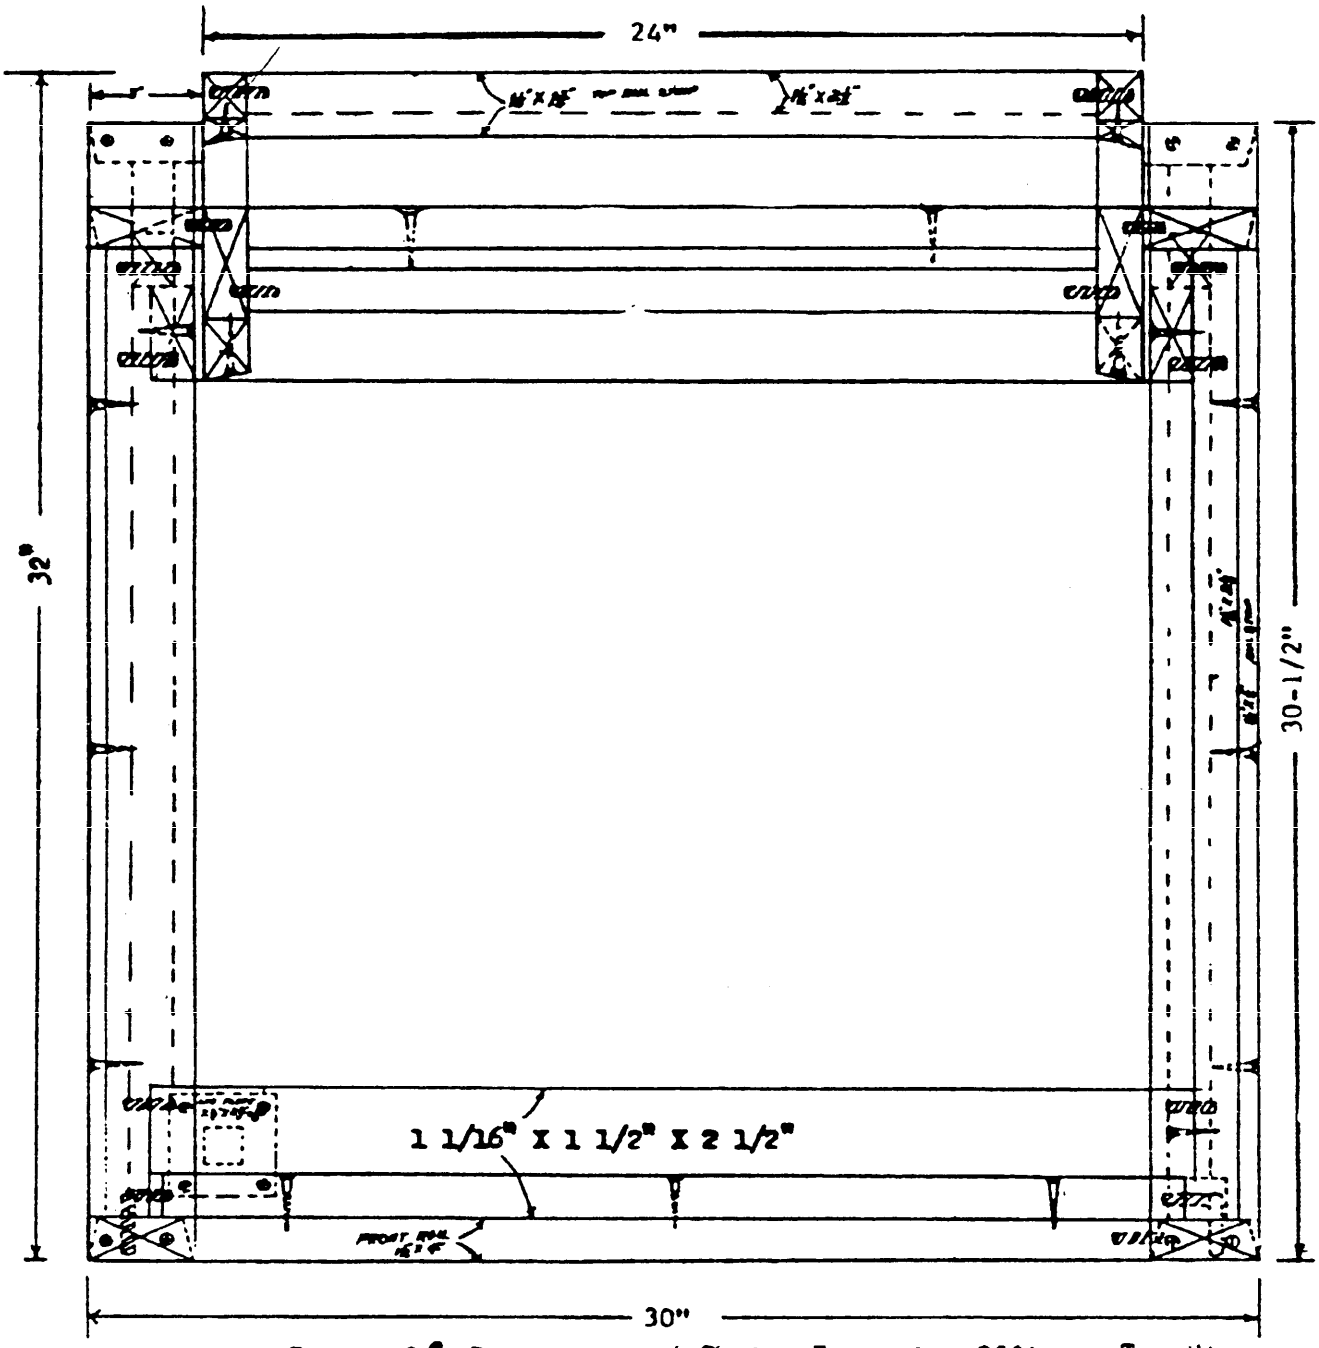


Figure 3A Davenport and Chair, Executive Office - Top View

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.