AA-O-00225(GSA-FSS)

April 27, 1964

SUPERSEDING (In part)
AA-O-00200a(GSA-FSS)
March 29, 1962

INTERIM FEDERAL SPECIFICATION

OFFICE FURNITURE, EXECUTIVE, COMBINATION METAL AND WOOD;

SETTEE, SECTIONAL UNIT (WITHOUT ARMS)

This Interim Federal Specification was developed by the Standardization Division, Federal Supply Service, General Services Administration, Washington, D. C., 20407, based upon currently available technical information. It is recommended that Federal agencies use it for procurement and forward recommendations for changes to the preparing activity at the address shown above.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification describes executive office settee, sectional unit (without arms) fabricated of metal and wood in modern design (see 6.1).

1.2 Classification.

1.2.1 Types and classes. The furniture shall be of a single type and two sizes as specified (see 6.2).

Type I.- Settee (without arms).

Size 1 - 28 inches wide
Size 2 - 48 inches wide

2. APPLICABLE SPECIFICATIONS, STANDARDS AND OTHER PUBLICATIONS

2.1. The following specifications and standards of the issue in effect on the date of the invitation for bids, form a part of this specification:

Federal Specifications:

FF-N-103 - Nails, Small and Tacks, Cut
FF-S-111 - Screws, Wood, Slotted Head
QQ-N-290 - Nickel Plating
QQ-C-320 - Chrome Plating (Electrodeposited)
QQ-S-633 - Steel Bars, Carbon, Cold Finished and Hot Rolled, (General Purpose)
KK-L-291 - Leather, Cattlehide, Upholstery
CCC-C-446 - Cloth, Cotton, Muslin, Bleached and Unbleached
CCC-C-467 - Cloth, Jute (or Kenop) Burlap
CCC-T-191 - Textile Test Methods
MMM-A-100 - Adhesive, Animal Gelatine
MMM-A-125 - Adhesive, Casein Type, Water and Mold Resistant
MMM-A-00130- Adhesive, Contact
MMM-A-186 - Adhesive, Urea-Resin Type (Liquid and Powder)
V-T-276 - Thread, Cotton
V-T-295 - Thread, Nylon

FSC 711

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

Federal Standards:

Fed. Std. No. 102 - Preservation, Packaging and Packing Levels
Fed. Std. No. 123 - Marking for Domestic Shipment
Fed. Std. No. 751 - Stitches, Seams, and Stitching.

(FOR INSTRUCTIONS ON OBTAINING FEDERAL SPECIFICATIONS AND STANDARDS SEE ADDENDUM)

Military Specifications:

MIL-R-5001 - Rubber; Latex Foam Sponge

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes
MIL-STD-129 - Marking for Shipment and Storage
MIL-STD-130 - Indentification Marking for U. S. Military Property
MIL-STD-171 - System for Preparation, Painting, and Finishing Metal and Wood Surfaces

(Copies of Military Specifications and Standards required by Contractors in connection with specific procurement functions should be obtained from the procuring agency or as directed by the contracting officer).

Commercial Standards:

CS-35-61 - Hardwood Plywood
SRA - 160 - Cotton and Cotton Linters Standards

(Copies may be obtained upon applicetion to the Superintendent of Documents, U. S. Government Printing Office, Washington, D. C. 20407).

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless otherwise indicated, the issue in effect on date of invitation for bids shall apply.

Rubber Manufacturers Association, Inc. Specification:

Buyers Specification Latex Foam.

(Copies may be obtained upon application to Rubber Manufacturers Association, Inc., 444 Madison Avenue, New York, New York).

American Society for Testing and Materials, Inc.:

ASTM Standard D 1055 - Specification and Methods of Test for Latex Foam Rubber.

(Copies may be obtained upon application to American Society for Testing and Materials, Inc. 1916 Race Street, Philadelphia 3, Pennsylvania).

Uniform Freight Classification Rules.

(Copies may be obtained upon application to the Uniform Freight Classification Committee, 202 Chicago Union Station, Chicago 6, Illinois).

3. REQUIREMENTS

3.1 Preproduction samples. Unless otherwise specified (see 6.2) before production is commenced, two samples of the finished items shall be submitted or made available to the contracting officer or his authorized representative for approval. The approval of the preproduction sample authorizes the commencement of production, but does not relieve the contractor of responsibility for compliance with all applicable provisions of this specification. One sample shall be of cut away construction consisting of frame with back and base spring construction including upholstery, and the other sample shall be completely assembled and upholstered.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

3.2 Materials. The materials used in the construction of the items covered by this specification shall be as follows:

3.2.1 Adhesives. Adhesives to be used and their permitted application shall be as shown in Table I.

TABLE I.- ADHESIVES

Application	Kind of Adhesive
All assembly joints, glue blocks, glued laminated stock or built-up stock	Any adhesive that will conform to or exceed the block shear test (2800 p.s.i. minimum average: 50 percent wood failure minimum average) requirements of the following: Animal, Fed. Spec. MMM-A-100, Grade J-2. Casein, Federal Spec. MMM-A-125 Urea-Resin, Fed. Spec. MMM-A-186.
All plywood gluing	Any adhesive that will conform to the test requirements of the Type II bond or better, as described in the Commercial Standard CS-35-61 for Hardwood Plywood.
Adhesion of foam rubber pieces	Adhesive shall conform to Interim Federal Specification MMM-A-00130.

3.2.2 Wood.

3.2.2.1 Varieties of wood. Wood used in the construction of the unexposed component shall be fabricated from any one of the following species of wood: Solid birch, Maple, Oak, Ash, Beech and Hackberry.

3.2.2.2 The wood used in the fabrication of all wood parts shall be dried without brashness, casehardening or honeycombing. Machine marks, wormholes, sound tight pin knots (providing no more than two knots occurring in any piece and which do not occur on an edge or at a point of interference with the construction), sapwood, and mineral streaks which will not affect serviceability or strength of the finished parts will be permitted.

3.2.2.3 Seasoning. Wood parts, including solid wood, plywood veneers and cores shall be uniformly kiln dried to a moisture content of from 6 to 10 percent dependent upon the manufacturers' best commercial practice, and in addition shall be held in properly controlled, warm, dry storage for a sufficient period of time to insure a uniform distribution of moisture among the individual pieces. After gluing, all lumber cores shall be permitted to cure out by one of the following methods to insure a uniform distribution of the glue joint moisture and the elimination of sunken joints, spring back and stresses, before planning and sanding for crossbanding:

(a) 7 days at 80°F. and 30% relative humidity.
(b) 4 days at 120°F. and 35% relative humidity.
(c) 24 hours at 160°F. and 44% relative humidity.
(d) 12 hours at 210°F. and 55% relative humidity.

3.2.2.4 Dowels. Dowels shall be of ash, hickory, maple, birch, beech or oak. All dowels shall be spirally and longitudinally grooved. Dowels shall be dried to a moisture content not exceeding 5 percent at the time of assembly. Dowels shall be 7/16 inch diameter and not less than 4 times the diameter in length.

3.2.3 Steel.

3.2.3.1 Steel. The steel legs and tubular frame members shall be fabricated of cold rolled, electric welded, [illegible] steel tubing with square or rectangular cross-section as specified in the applicable construction paragraphs herein.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

3.2.4 Hardware.

3.2.4.1 Screws. The screws shall be in accordance with FF-S-111 or FF-S-00109 (COM-NBS) in the required style and size.

3.2.4.2 Angles, clips and plates. Angles, clips and plates for reinforcing and attaching members shall be F.S. 1020 hot rolled steel. Steel shall conform to the chemical requirements in Table I of QQ-S-633.

3.2.4.3. Tacks and staples. The tacks and staples shall be of the commercial upholstery type. All tacks shall be of blued steel. Tacks for securing strip or sheet webbing shall be 12 ounce size. Tacks for securing burlap and cover material shall be 6-ounce size. Tacks for securing cambric and welting shall be 3-ounce size. Staples for securing burlap, cover, cambric and welting material shall be of wire size not less than 0.030 by 0.020 inch with legs 3/8 inch long. Staples when used for securing strip or sheet webbing to frame, shall be not less than 0.050 by 0.020 inch wire size with legs 1/2 inch long. All staples shall be of steel, copper lacquered or zinc coated.

3.2.5 Foam rubber. Foam rubber shall conform to the following specification for the applicable form:

3.2.5.1 Slab stock.- The foam slab stock shall be Type II, Class Medium, Grade C, conforming to MIL-R-5001, except that the compression resistance shall be measured by Method A in lieu of Method B as specified and the low-temperature requirements shall be waived. (Class Medium of MIL-R-5001 is designated as RU 35 of ASTM D 1055).

3.2.5.2. Pin-core foam rubber cushions. Cushions shall be of pin-core design, cored from both sides with cores approximately 3/16 inch in diameter. The foam rubber for construction of the cushions shall conform to Type I, Grade C, Medium density of MIL-R-5001. Edges of cushions cut from such material need not be banded with foam rubber unless specified.

3.2.6 Upholstery materials.

3.2.6.1 Sewing thread. Thread for machine seaming and stitching shall conform to the requirements of V-T-295. Unless otherwise specified (see 6-2) the color of the thread shall approximately match the color of material. The thread shall be type III, size F.

3.2.6.2 Tufting thread. Tufting thread used shall conform to the requirements of V-T-276. Unless otherwise specified (see 6.1). Tufting thread for stitching seat and back decks shall be neutral color type III E ticked No. 1, 6 6-ply.

3.2.6.3 Cord, jute welting. Welting cord used shall be made from 8 plies of jute yarn, twisted to form a cord having a diameter of 1/8 to 3/16 inches, a weight of 215 feet (minimum) to the pound, and a minimum breaking strength of 215 pounds, when tested as specified in Method No. 4102 of CCC-T-191.

3.2.6.4 Cambric. Cambric shall contain not less than 44 threads per inch in the warp and not less than 42 threads per inch in the filling. It shall weigh not less than 3.2 ounces per linear yard on a 36 inch width basis. The color shall be black and the face side of the fabric shall be glazed.

3.2.6.5 Muslin. Muslin shall be in accordance with CCC-C-446, Type I.

3.2.6.6 Burlap. Burlap shall be in accordance with CCC-C-467, Class 3.

3.2.6.7 Felt. Cotton felting shall be made of unbroken laminated sheets of garnetted felt. The cotton felting shall be at least equal in quality to felt made from a blend of 75% cotton linters not lower in grade and staple than the official cotton Linters, Standards of the United States in the Department of Agriculture Pamphlet SRA-100, "Cotton and Cotton Linter Standards", for Grade 4 and Staple 4, and 25% cotton not lower in grade and staple length than the official cotton Standards of the United States for Low Middling Spotted and 7/8 inch staple length. The felt shall weigh not less than 14 ounces to the yard, 27 inch width basis. The felt shall be clear and free from leaves and seeds.

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:39Z
Check the source to verify that this is the currentversion before use.

3.2.6.8 Non-woven fabric and wadding. The non-woven fabrics and wadding used shall consist of new, neutral fabrics consisting of approximately 40 percent cotton fiber and 60 percent cotton linters with a latex binder. The waddings shall be either light or heavy duty as specified herein. The light duty wadding shall weigh approximately 7.2 ounces per square yard and have a compression set of approximately 18.3 percent. The heavy duty wadding shall weigh approximately 14.4 ounces per square yard and have a compression set of approximately 17.6 percent.

3.2.6.9 Rubber webbing. The rubber webbing shall be 2-1/4 inches plus or minus 1/8 inch wide having a breaking strength of not less than 300 pounds and an elongation of not less than 35 percent when tested as specified in Method B of ASTM Test Method D751-52T, except that specimen and jaw widths shall be the same as the width of the webbing and specimen shall be placed in machine under one pound initial load.

3.2.6.10 Leather upholstery. Leather upholstery shall be in accordance with KK-L-291, Selection A, Type I, Finish A, except that the leather is dyed and unembossed. Colors shall be as specified (see 6.2).

3.2.6.11 Fabric upholstery. The fabric shall be 100 percent yarn dyed nylon in homespun weave with a thread count of 13 per inch in the warp and 12 per inch in the filling. The weight per linear yard (54 inch width basis) shall be a minimum of 21 ounces. The breaking strength shall be a minimum of 150 pounds when tested in accordance with Method of CCC-T-191. The reverse side shall be coated with a latex or acrylic compound to a minimum dry weight of 1-1/2 ounces. The fabric shall be treated chemically for spot resistance. The colors shall be as specified (see 6.2). The fabric shall show at least fair fastness to light after exposure for 60 hours in accordance with Method 5660 of Specification CCC-T-191.

3.2.7 Finish.

3.2.7.1 Zinc plating. Zinc plating shall be in accordance with MIL-STD-171(ORD), paragraph 5.1.1 (organic finishes) and of the kind shown in Table I, Finish 1.9 (zinc plating). The type and class shall be as shown in 1.9.2 and 1.9.2.1. The final finish shall be bright.

3.2.7.2 Chromium plating (satin). Chromium plating shall be in accordance with QQ-C-320, Class 1, Type II. The copper plus nickel undercoat on the steel base metal shall conform to Class 1, Type III (KS), on steel base metal.

3.2.8 Glides. Glides shall be of the machine screw type with a rubber cushion on the upper surface between the glide and the furniture leg. The lower face (in contact with the floor) of the glide as well as all the exposed surface below the rubber cushion shall be highly polished stainless steel and shall be not less than one inch in diameter. The rubber cushion shall be not less than 1/8 inch thick.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

3.3 Construction.

3.3.1 Design. The design shall be as shown in Figures 1, 2 and 3.

3.3.1.1 Dimensions.

Size 1.	Size 2.
Height - 31-3/4 inches	Height - 31-3/4 inches
Width - 28 inches	Width - 48 inches
Depth - 30-1/2 inches	Depth - 30-1/2 inches
Seating height - 17 inches	Seating height - 17 inches

3.3.2 Wood frame construction for seat and backs. Seat and back frame members shall be constructed rigidly of solid hardwood species specified in 3.2.2.1, with finished thickness of not less than 1-1/16 inches. Each frame members shall be carefully fitted, doweled and glued. Dowels shall be as specified in 3.2.2.4 and shall be 7/16 inch in diameter with the lengths not less than four times the diameter. There shall be not less than one dowel in members up to and including 1-1/4 inches wide. Two dowels shall be used in wider than 1-1/4 inches and not wider than 2-1/2 inches. Members greater than 2-1/2 inches in width shall have not less than three dowels. Boring for dowels shall be such that each dowel will be a snug fit with a plus tolerance not greater than 1/64 inch. Wood strips 1-1/16 inch thick by 1-3/4 inches wide with V slots, 1/8 inch by 1/2 inch, shall be glued and secured to side rails with at least one No. 10 woodscrew 1-3/4 inches long so placed that it will fit between each rubber webbing strip when the latter is applied. The corners of all seat frames shall be reinforced by diagonal corner braces to within 3/8 by 1/2 inch less than the width of the frame to which the brace is secured. The brace shall be accurately fitted, glued, and secured by not less than two No. 9 screws in each end set at right angles to the frame members and penetrating the frame not less than 3/4 of an inch. Frames over 36 inches shall have at least one cross stretcher each for the seat and back.

3.3.4 Application of webbing for seat frame.- Webbing specified in 3.2.6.9 shall be interlaced with 5 strips front to back, and 5 strips side to side. The webbing shall be secured to the base frame with metal clips attached to the webbing and inserted into V slots in the base frame.

3.3.4.1 Application of inside back webbing.- Webbing specified in 3.2.6.9 shall be interlaced with 5 strips top to bottom, and 4 strips side to side, secured with not less than three staples as specified in 3.2.4.3.

3.3.5 Seat and back deck padding.- The seat and back shall have a layer of muslin as specified in 3.2.6.5 over interlaced rubber webbing stretched tightly and tacked or stapled to the frame. A 1 inch slab stock foam rubber shall be applied on top of webbing with a mulin cover secured to thek frame.

3.3.6 Upholstering

3.3.6.1 Upholstery covering.- All units shall nave a leather or fabric upholstery covering in accordance with 3.2.6.10 or 3.2.6.11 as applicable.

3.3.6.2 Seat cushion.- There shall be a top cover with welts on all four sides and on the bottom edge of the boxing. The cover shall be applied over 3-1/2 inch pincore double banding slab stock, first banding boxing as thick as the cushion, and the second banding narrow enough to allow for the buildup of the four thickness of fabric or leather cover made by the top panel of the cushion, the welt and the border. The cushion shall be attached to frame using 2 inch wide 125 cardboard to align the seat roll. A 1/2 inch edgerope shall be secured over cardboard to allow a snug fit between the frame and attached seat cushion, 025 cardboard shall be applied over edgerope and edge of frame. Then 4-1/2 inch by 3/16 inch slabstock foam rubber shall be applied over cardboard and edge of seat frame.

3.3.6.3 Back cushion.- The cover with attached 3 inch pincore cushion shall be applied to the frame in the same manner as the seat cushion.

Care should be taken that seat and back cushion welts shall be attached firmly to the foam rubber in such a manner as to allow the welts to ride straight and erectly on the edges of the rubber inserts at all times.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:39Z
Check the source to verify that this is the currentversion before use.

3.3.6.4 Outside back. A welt cord shall be tacked or stapled to the top and side edges. Burlap as specified in 3.2.6.6, shall be applied outside of the top rail, to both back posts and to the face of the base rail. A layer of cotton shall be placed over burlap. Next a cover of muslin shall be stretched tight and tacked or stapled to the frame. The final cover shall be secured by means of a metal tacking strip having tacks enclosed and not more than 1-3/8 inches apart. The bottom side of the outside back shall be tacked to the bottom side of the base rail.

3.3.6.5 Cambric seat bottom. The bottom of all seat frames shall be covered with the cambric specified in 3.2.6.4 with the glazed side down. Cambric shall be attached by tacking or stapling to all four rails.

3.3.7 Metal base frame. Each settee shall be furnished with a metal base consisting of legs 1 inch square fabricated of the steel specified in 3.2. The rails and stretchers shall be of 7/8 inch by 1-1/4 inch rectangular, 16 gauge. A 1 inch square by 1/8 inch thick cold rolled steel angle shall be welded to the rails and the stretchers. A minimum of 5 points of fastening by welding shall be provided across the depth and width of the frame in the 28 inch wide model. Across the width of the 48 inch wide unit, a minimum of 8 point of spot, gas or arc welding shall be employed for attaching the steel angle to the rails. The 1 inch square legs shall be continuously fusion welded to the tubular rails along the intersection of the joint of the rails and inside corner of the leg. In addition the leg shall be continuously fusion welded to the lower (7/8 inch wide) ends of the rails. The upper flange of the angle shall be provided with 3 screw holes along the width and 4 along the depth to provide a means of attachment. The exposed joints of the juncture of the face ends of rails and inside faces of legs may be either continuously fusion welded or brazed. All steel components exposed to view in normal use of this item shall be chrome plated and satin finished as specified in 3.2.7.2. Each leg shall be tapped to receive glides specified in 3.2.6 and having a threaded stem not less than 3/16 inch.

3.3.8 Identification marking. Unless otherwise specified the following information shall be stenciled or printed on the cambric under cover of each item with white ink, in a plain and legible manner with the Federal Stock Number, specification number, Contractor's name or trademark, the contract and year of manufacture shall be in conformance with the requirements of MIL-STD-130.

3.3.9 Workmanship. The furniture covered by this specification shall be manufactured with the care and skill consistent with superior items of executive furniture. The construction assembly and final finishing shall conform to the level of quality established herein.

4. SAMPLING, INSPECTION, AND TEST PROCEDURES

4.1. General quality assurance provision.

4.1.1 Contractor inspection. The supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own or any other inspection facilities and services acceptable to the Government. Inspection records of the examination and tests shall be kept complete and available to the Government as specified in the contract or order. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to insure supplies and service conform to prescribed requirements.

4.1.2 Contractor quality assurance system. The contractor shall provide and maintain an effective quality assurance system acceptable to the Government covering the items under this specification. Results of all examinations and tests performed under quality assurance system shall be made available to the Government. A current written description of the system shall be submitted to the contracting officer prior to initiation of production. The written description will be considered acceptable when, as a minimum, it provides the quality assurance required by this specification and other documents referenced herein. The contractor will not be restricted to the inspection station or to the method of inspection listed provided that an equivalent control is included in the approved quality assurance procedure. In cases of dispute as to whether certain procedures of the system provide equal assurance, the comparable procedure of the detail specification will be used. The contractor shall notify the Government of and obtain approval for any change to the written procedure that affects the degree of assurance required by this specification or other documents referenced herein.

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:39Z
Check the source to verify that this is the current version before use.

4.1.3 Government verification. All quality assurance operations performed by the contractor shall be subject to Government verification at unscheduled intervals. Verification will consist of surveillance of the operation to determine whether the practices, methods, and procedures of the written inspection plan are being properly applied, and Government product inspection to measure quality of product offered for acceptance. Deviation from the prescribed or agreed-upon procedures, or instances of poor practices which might affect the quality of the product will be immediately called to the attention of the contractor. Failure of the contractor to promptly correct the deficiencies discovered shall be cause for suspension of acceptance until corrections have been made or until conformance of product to prescribed criteria has been demonstrated. To avoid interference with operations, the contractor shall designate a responsible official or officials to whom the Government inspector will report such instances.

4.2 Inspection. Furniture units shall be inspected to determine compliance with this specification, as to workmanship materials, design, details of construction, hardware, finish, marking and packing. Inspection may be made at the factory by a representative of the Government at any time during the process of manufacture, or at the point of delivery.

4.3 Preproduction sample inspection. Examination shall be made of the completely fabricated item for all provisions of this specification applicable to end product examination.

4.4 Sampling for inspection and acceptance. Sampling and inspection shall be performed in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated hereinafter.

4.4.1 Inspection of materials and components. In accordance with 4.1 above, the supplier is responsible for insuring that materials and components used were manufactured, tested and inspected in accordance with the specified requirements of referenced subsidiary specifications and standards to the extent specified herein.

4.4.2 Intermediate inspection. The defects found during this inspection which covers frames and webbing shall be classified in accordance with Tables III and IV.

4.4.2.1 Examination of frames for visual characteristics. The sample unit for these examinations shall be a settee frame assembly, as applicable. Examination of frames for defects in material, construction, and workmanship

TABLE III.- Intermediate defects - wood

Examine	Defect	Classification Major	Minor
Wood material	Species of wood in any wood component not as specified.		X
	Decay over 1/4 square inch in area in any component.	X	
	Decay up to and including 1/4 square inch in area in more than one component.		X
	Bark pocket over 1 inch long.		X
	Bark or wane over 1 square inch in area.		X
	Split, shake, or check over 2 inches in length.	X	
	Split, shake, or check up to and including 2 inches in length which may affect serviceability.		X
	Loosened grain, torn grain or chip-out which may affect serviceability.		X
	Area over 4 square inches not smoothly surfaced.		X

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:39Z
Check the source to verify that this is the currentversion before use.

TABLE III. - Intermediate defects - wood (cont'd)

Examine	Defect	Classification Major	Minor
Wood material (cont'd)	Honeycomb	X	
	Decayed or loose knot over 1 inch average diameter.	X	
	Decayed or loose knot up to and including 1 inch average diameter.		X
	Sound tight knot on edge of piece of wood or at a construction point.	X	
	Sound tight knot over 3/4 inch average diameter.		X
	More than two sound tight knots in one piece of wood.		X
	Glue line opening in edge glued or built-up stock over 1 inch in length.		X
	Sapwood or mineral streak which may affect serviceability or strength.		X
	More than two wormholes in component that will be unexposed after upholstery attachment.		X
	Wormhole in surface that will be exposed to view after upholstery attachment.		X
	Undersirable wood defect filled in with plastic wood or other filling compound.		X
Construction and workmanship	Wood component missing.	X	
	Loose or unsound joint.	X	
	Joint open more than 1/32 inch or 60 percent around its perimeter.		
	Evidence that glue at joint or block has not been applied where required.		X
	Frame not constructed as specified	X	

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:39Z
Check the source to verify that this is the current version before use.

TABLE III.- Intermediate Defects - Wood (cont'd)

Examine	Defect	Classification Major	Minor
Construction and workmanship (cont'd)	Evidence that joint is not type specified.		X
	Frame out of square, i.e., sprung.	X	
	Two or more screws missing	X	
	Screw missing where required		X
	More than one screw loose or not driven in all the way.		X
	Screw point protrudes from the wood surface.		X
	Corner block or glue block not accurately fitted into place.		X
Construction and workmanship of wood frame	Wood member improperly positioned or not positioned as specified.	X	
	Wood member warped, cupped, or twisted out of specified shape.	X	
	Shape or contour of wood member not as specified.	X	
	Wood not full length piece where required.	X	
	Dowel missing.	X	
	Evidence that the diameter of dowel is less than specified.	X	

4.4.2.1.1 Examination of the wood frame for dimensions. Any dimensions that are not within the specified tolerance shall be classified as defects.

4.4.2.1.2 Examination of applied rubber webbing for visual characteristics. - The sample unit for this examination shall be one settee of each size. Examination for defects in material, construction and workmanship shall be made in accordance with Table IV.

TABLE IV. - Webbing defects

Examine	Defect	Classification Major	Minor
Webbing material	Webbing not as specified	X	
Construction and Workmanship	Webbing strips not number specified	X	
	Webbing strips not properly interwoven	X	
	Webbing strips not properly tensioned	X	
	Webbing strips with metal clips attached not inserted securely into V slots.		X
	Webbing strips not stapled to back frame as specified.	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

4.4.2.1.3 Examination of foam rubber cushions. The sample unit for this examination shall be one cushion. Sample unit shall be examined for defects in accordance with the following:

Examine	Defect	Classification Major	Minor
Cushion Workmanship	Internal voids perceptible to sight or touch through incut surfaces.	X	
	Presence of unrepaired surface voids 1/8 inch or greater in depth and 1/2 inch or larger in width on top or bottom.	X	
Cut edges to be banded	Unrepaired voids greater than one inch in width and 1/2 inch in depth on cut edges (to be banded).	X	
Vertical surfaces (not banded)	Unrepaired exposed voids greater than one inch in width and exceeding 1/4 inch in depth.	X	
Horizontal cut surfaces	Unrepaired voids greater than 3/4 inch in width and more than 1/8 inch in depth or greater than 1/2 inch in width and more than 1/4 inch in depth.	X	

4.4.2.2 Inspection levels and AQL's. The inspection levels and acceptable quality levels (AQL's) expressed in defects per hundred units shall be as follows:

For examination in	Inspection level	AQL's Major	Total
4.4.2.1	II	2.5	6.5
4.4.2.1.1	S-2	(one class)	4.0
4.4.2.1.2	S-4	2.5	6.5
4.4.2.1.2.1	S-2	(one class)	4.0
4.4.2.1.3	S-4	2.5	2.5

4.4.3 Inspection of the end item.

4.4.3.1 Visual examination. The defects found during examination shall be classified in accordance with 4.4.3.1.1, 4.4.3.1.1.1, and 4.4.3.2.

4.4.3.1.1 Examination for visual characteristics. The sample unit for this examination shall be one settee of each size. Examination shall be made for defects in material, construction, finish, and workmanship in accordance with Table V.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

TABLE V. - End item defects

Examine	Defect	Classification Major	Minor
Upholstery material	Color of material not as specified.	X	
	Torn, cut, or contains hole.	X	
	Misweave, i.e., multiple float or other fabric damage affecting serviceability.	X	
	Material has objectionable odor.		X
	Cambric not glazed on exposed side.		X
	Spotted, stained or dirty.		X
	Shade variations or faded, affecting appearance.		X
Upholstery Workmanship	Seam open over 2 inches in length	X	
	Seam open up to and including 2 inches in length.		X
	Seam uneven or not neatly accomplished affecting appearance.		X
	Seam in wrong location.		X
	Needle chews		X
	Skipped stitches or run-offs.		X
	Raw edge noticeable at seam.		X
	Tucking of material at corner or fold not neatly accomplished affecting appearance.		X
	Color or upholstery thread does not match color of upholstery fabric as specified.		X
	Width of casing of cushion not as specified.		X
	Covering wrinkled or puckered at seam to an extent adversely affecting appearance.		X
	Material pieced where a continuous piece of material is required.		X
	Cambric not neatly attached.		X
	Welt missing where required.	X	
	Welt loose along edges affecting serviceability		X
	Welt not straight.		X
	General design or styling not as specified or not as on approved sample.	X	
	Contour of cushion, or back not in accordance with drawing.	X	
	Evidence of omission of padding.		X
	Furrow, lump, or bulge affecting appearance.		X
	Any tack or other protuberance that can be felt through the upholstery.		X

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

Table V. - End item defects (cont'd)

Examine	Defects	Classification Major	Minor
Construction and Workmanship of metal parts	Weld or braze missing where required.	X	
	Weld or braze broken, not fused or burned through.	X	
	Weld or braze incomplete where continuity is required or undercut.		X
	Flush or spatter not removed.	X	
	Weld or braze not ground smooth or not neatly accomplished.	X	
	Contains hole where not required, does not have one where required.		X
	More than one screw missing.	X	
	Screw broken off.		X
	Fin, burr or sharp edge.	X	
	Finish not satin chrome.	X	
	Finish not uniform.		X
	Legs uneven (end item rocks more than 1/16 inch on flat surface.	X	
	Shape or angle of leg not as specified.	X	
	Glide missing.		X
	Glide not type or material specified.		X
	Glide wrong size.		X

4.4.3.1.1.1 Examination of the settee for dimensions. Any dimensions that are not within the specified tolerance shall be classified as defects.

4.4.3.2 Inspection levels and AQL's.- Inspection levels and AQL's shall be as follows:

For examination in	Inspection level	AQL's Major	Total
4.4.3.1.1 4.4.3.1.1.1	II S-2	2.5 (one class)	6.5 4.0

5. PREPARATION FOR DELIVERY

5.1 Levels of packaging and packing.- Levels of packaging and packing protection are defined in Federal Standard No. 112 (for Civilian agencies).

5.2 Packaging. Furniture units shall be packaged in accordance with Level A, Level B, or Level C, as specified in the contract or order. (See 6.2).

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:39Z
Check the source to verify that this is the currentversion before use.

FIGURE 1. - [illegible]

5.2.1 Level A. Furniture units shall be packaged as specified in the invitation for bids.

5.2.2 Level B. Furniture units shall be packaged as specified in the invitation for bids.

5.2.3 Level C. Furniture units shall be packaged in accordance with the manufacturer's commercial practice.

5.3 Packaging. Furniture units; packaged Level A, B, or C, shall be packed for level A, B, or C, as specified in the invitation for bids (see 6.).

5.3.1 Level A & B. Furniture units shall be packed as specified in the invitation for bids.

5.3.2 Level C. Furniture units shall be packed in containers of the type, size, and kind commonly used for the purpose, in a manner that insure acceptance by common carrier and safe delivery at destination. Shipping containers shall comply with the Uniform Freight Classification Rules or regulations of other carriers as applicable to the mode of transportation.

5.4 Marking

5.4.1 Civil agencies.- In addition to any special marking required by the contract or purchase order, marking of shipping containers shall be in accordance with Federal Standard No. 123.

5.4.2 Military agencies. In addition to any special marking required by the contract or purchase order, marking of shipping containers shall be in accordance with MIL-STD-129.

6. NOTES

6.1 Intended use. The combination metal and wood executive units covered by this specification are designed for use in executive offices of the Federal Government and are correlated with other furniture items within the group. The following Interim Federal Specifications cover the order items:

AA-O-00210 - Office Furniture, Executive, Combination Metal and Wood, Chairs, Rotary, Chairs, Straight.
AA-O-00215 - Office Furniture, Executive,Combination Metal and Wood, Davenport, Chair, Easy.

AA-O-00219 - Office Furniture, Executive, Combination Metal and Wood Credenza.

AA-O-00220 - Office Furniture, Executive, Combination Metal and Wood, Desk, Desk Attachment.

AA-O-00222 - Office Furniture, Executive, Combination Metal and Wood, Bookcase, Cabinet, Telephone.
AA-O-00245 - Office Furniture, Executive, Combination Metal and Wood Tables.

6.2 Ordering data: Purchasers should exercise any desired options offered herein and should s specify the following:

(a) Title, number and date of this Specification.
(b) Type and Size required if applicable.
(c) When preproduction samples not required (see 3.1).
(d) Color of Leather upholstery when applicable (see 3.2.6.10).
(e) Color of Fabric upholstery when applicable (see 3.2.6.11).
(f) Level of packaging and packing required (see 5.1).
(g) Marking requirements (see 5.4).

6.3 Special Notice. - See Addendum.

6.4 Transportation Description

6.4.1 Transportation description and minimum weights applicable to this commodity are:

Rail:
Settee, wood and metal combined, upholstered.
Carload minimum weights: In cars 40 feet 9 inches or less in length, inside measurements: 10,000, 12,000, 15,000, 18,000, 22,000 and 30,000 pounds.
In cars exceeding 40 feet 9 inches, inside measurement: 16,000, 18,000, 21000, 24,000 30,000, and 40,000 pounds.

Motor:
Settee, wood and metal combined, upholstered.
Truckload minimum weights: 10,000, 12,000, 15,000, 18,000, 22,000, and 30,000 pounds, subject to Rule 115, National Motor Freight Classification.

C 64-15366

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:39Z
Check the source to verify that this is the currentversion before use.

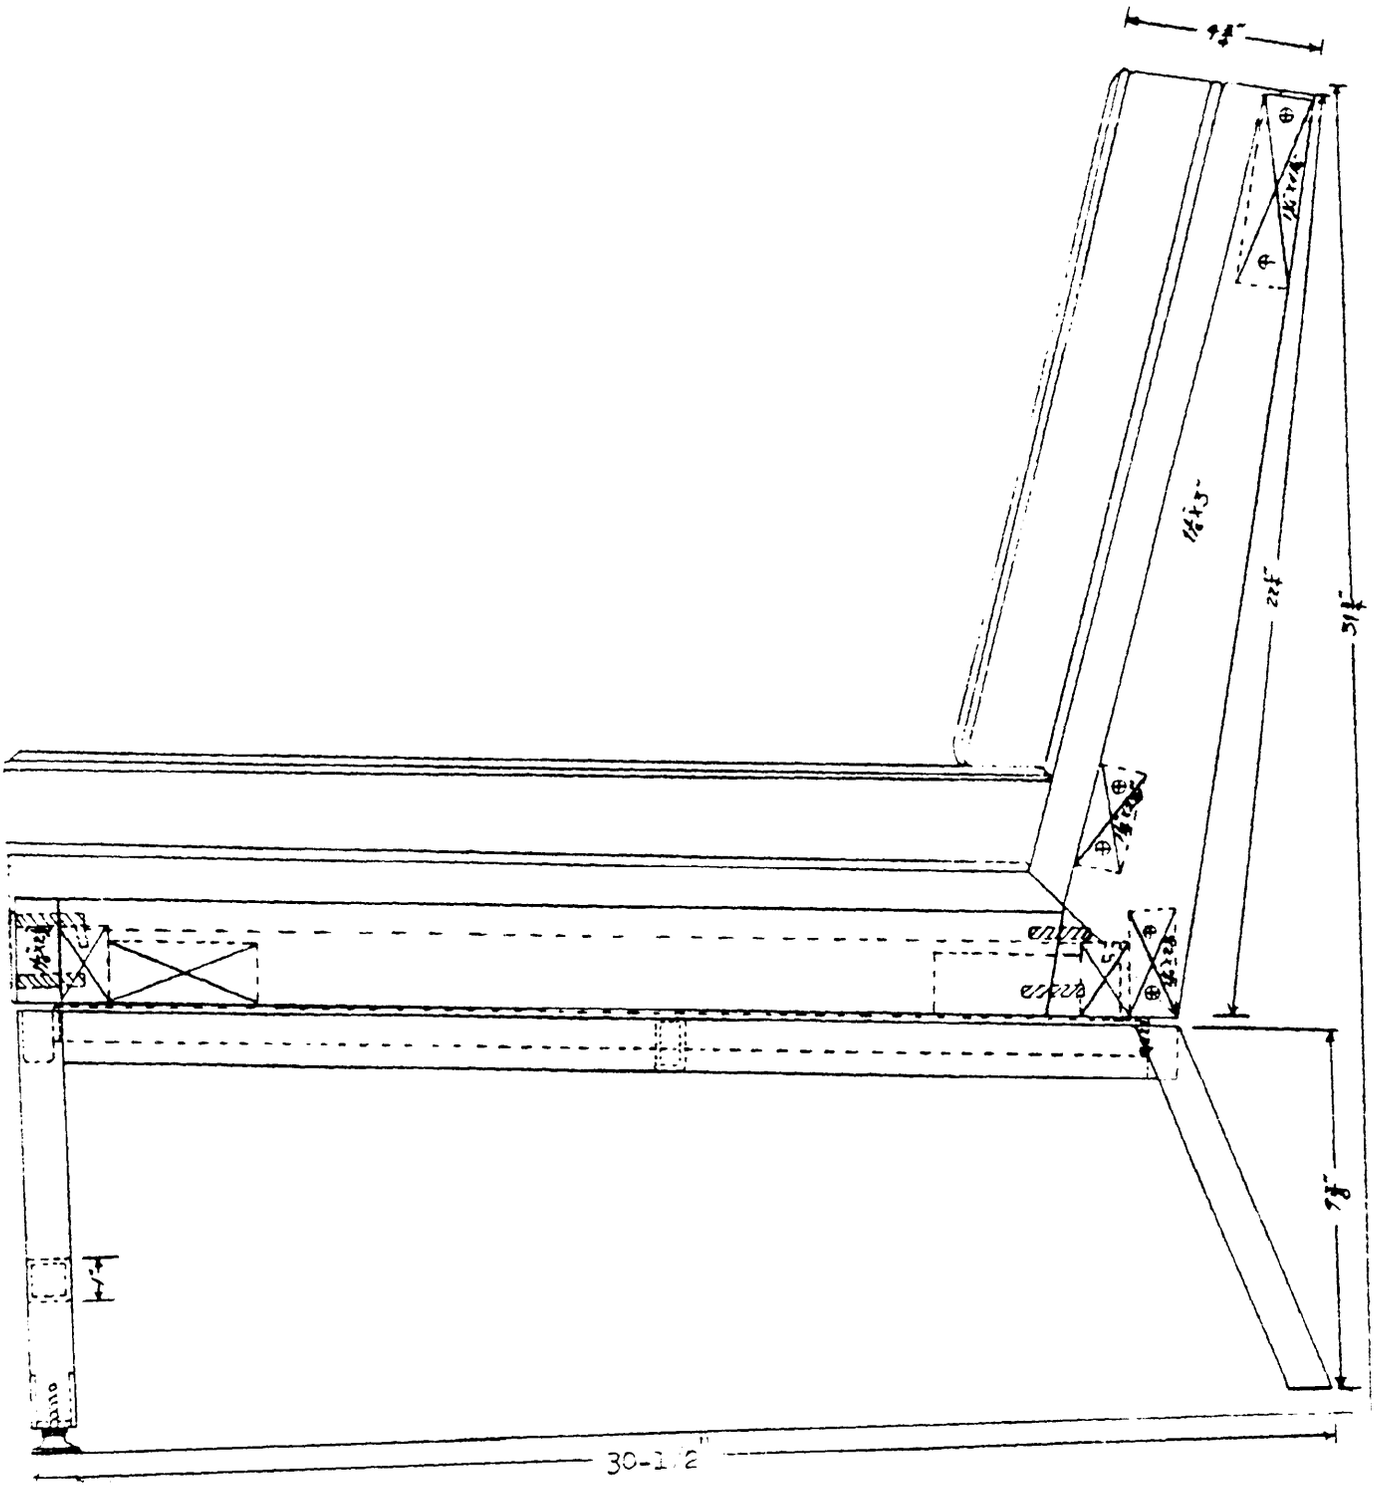


FIGURE 1. SETTEE SECTIONAL, EXECUTIVE OFFICE - SIDE VIEW

Source: https://assist.dla.mil -- Downloaded: 202640-26T11:39Z
Check the source to verify that this is the current version before use.

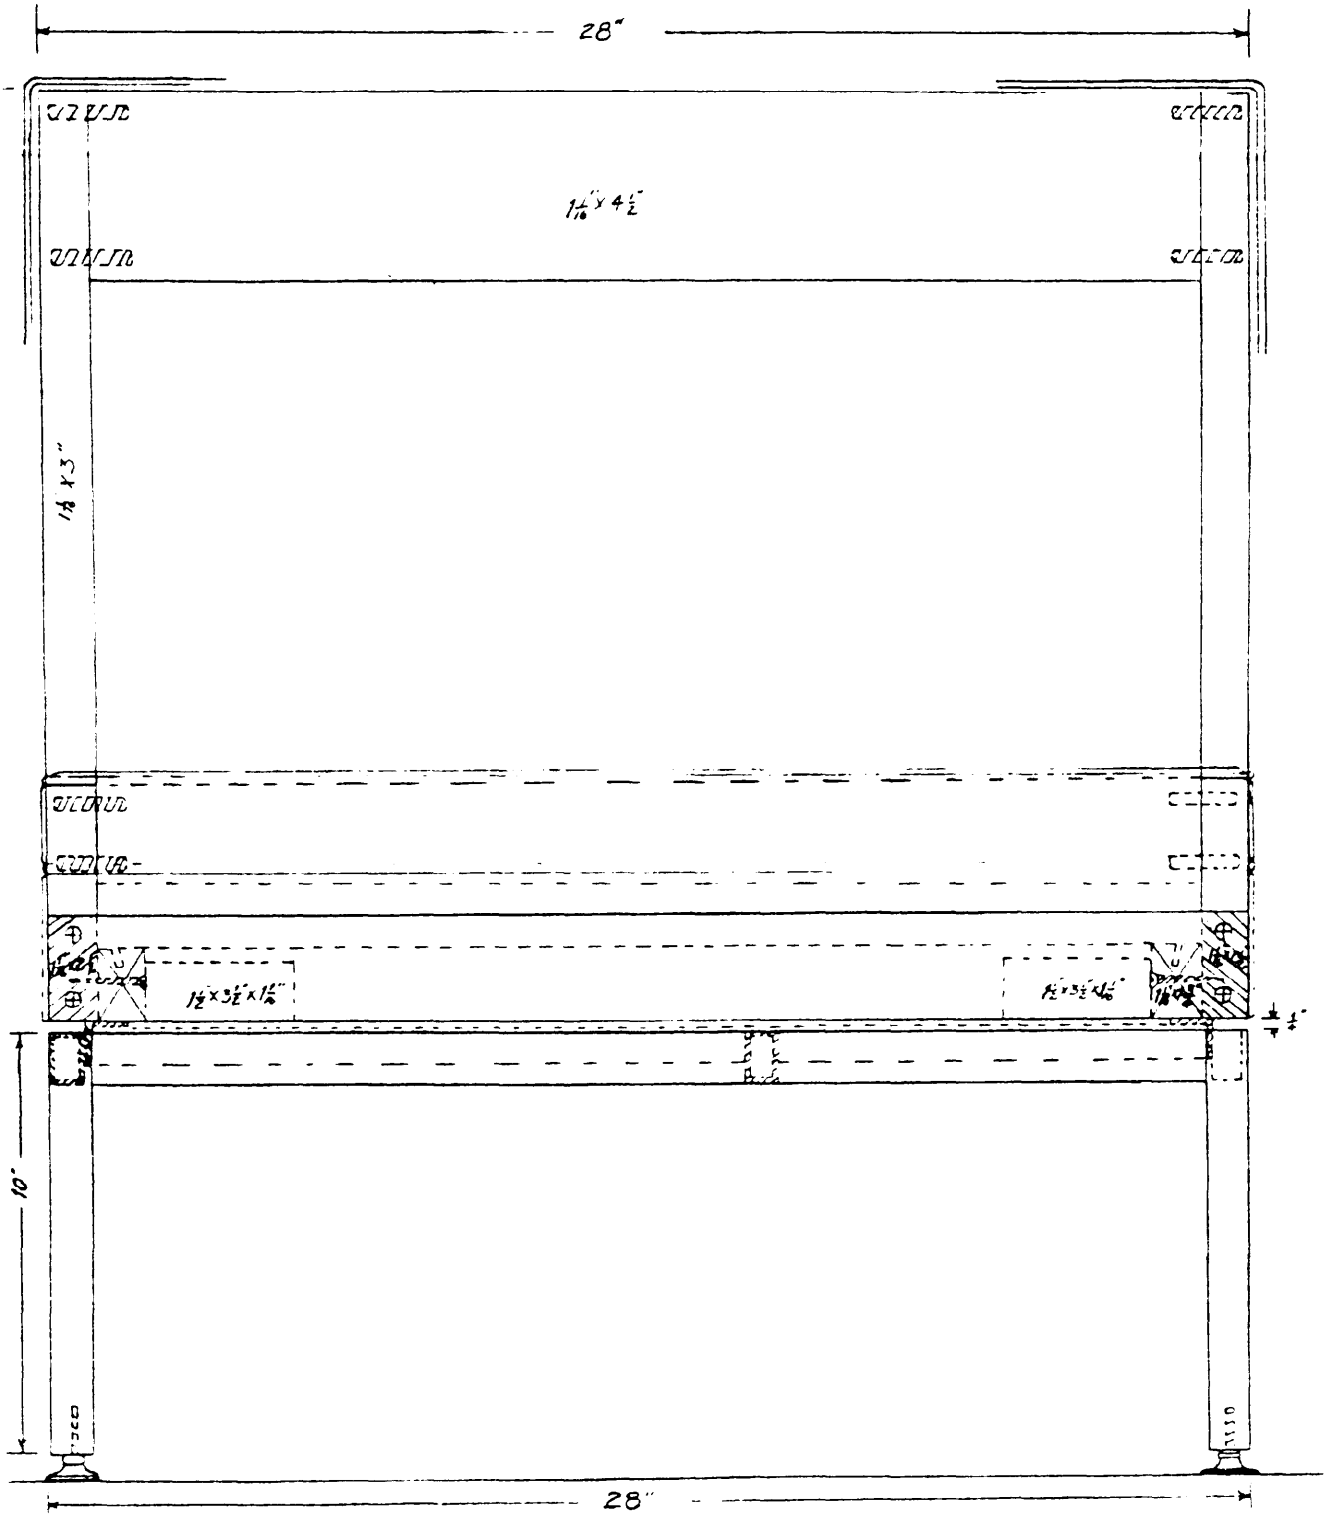


FIGURE 2. SETTEE SECTIONAL, EXECUTIVE OFFICE – FRONT VIEW

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:39Z
Check the source to verify that this is the current version before use.

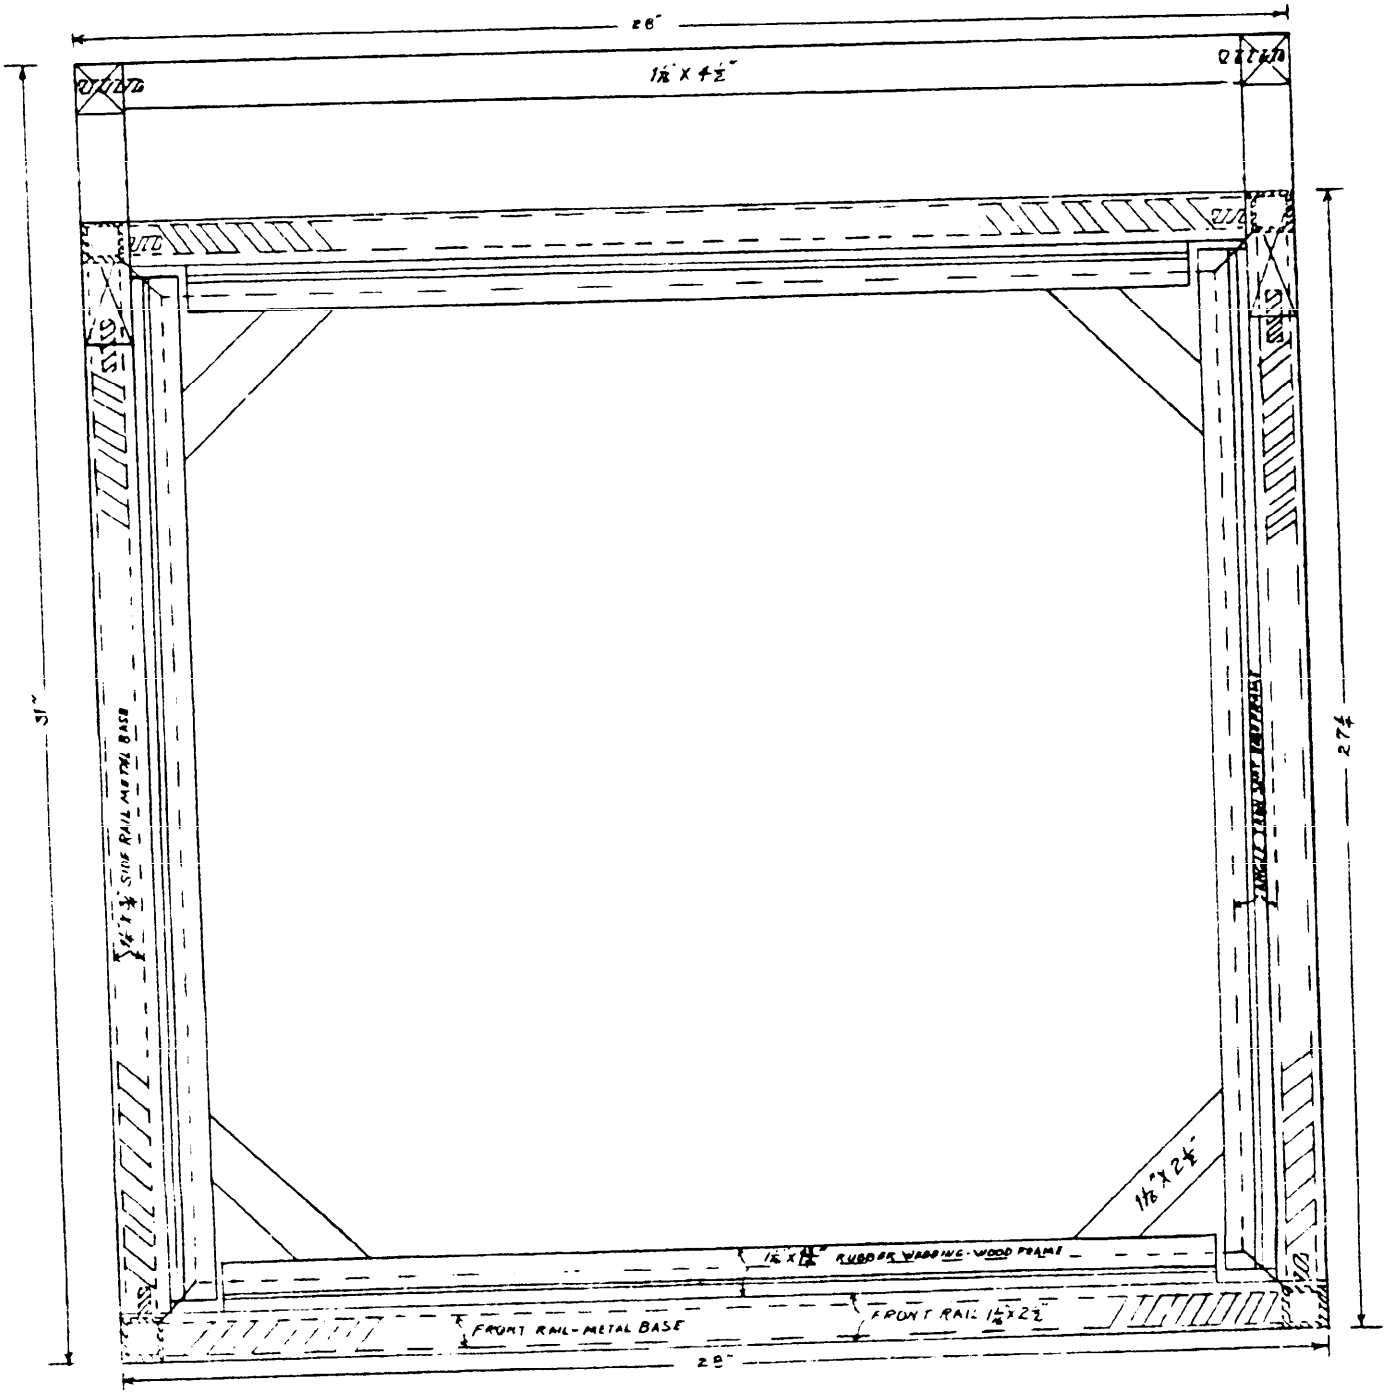


FIGURE 3 SETTEE SECTIONAL, EXECUTIVE OFFICE - TOP VIEW

17/18

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.

INSTRUCTIONS ON OBTAINING COPIES OF FEDERAL SPECIFICATIONS AND STANDARDS

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications, Standards and Handbooks and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington 25, D. C.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge at the General Services Administration Regional Offices in Boston, New York, Washington, D. C., Atlanta, Chicago, Kansas City, Mo., Dallas, Denver, San Francisco, and Auburn, Wash.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications, Standards and Handbooks from established distribution points in their agencies.)

NOTICE

When Government drawings, specifications, or other data are used for any purpose other than in connection with a definitely related Government procurement operation, the United States Government thereby incurs no responsibility nor any obligation whatsoever; and the fact that the Government may have formulated, furnished, or in any way supplied the said drawings, specifications, or other data is not to be regarded by implication or otherwise as in any manner licensing the holder or any other person or corporation, or conveying any rights or permission to manufacture, use, or sell any patented invention that may in any way be related thereto.

WASH DC 62-13090

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:39Z
Check the source to verify that this is the current version before use.