AA-R-0020B(GSA-FSS)
January 7, 1972
~~INTERIM~~ REVISION OF
Fed. Spec AA-R-20A
July 1, 1959

# INTERIM FEDERAL SPECIFICATION

## RACK, DISPLAY, BOOK, (WOOD)

This Interim Federal Specification was developed by the Standardization Division, Federal Supply Service, General Services Administration, Washington, D. C., 20406, based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above.

The General Services Administration has authorized the use of this Interim Federal Specification as a valid exception to Federal Specification AA-R-20a, dated July 1, 1959.

## 1. SCOPE

1.1 Scope. This specification covers one type of book display rack fabricated of wood for general office use.

## 2 APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on the date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

Federal Specifications:

FF-S-111 - Screw, Wood.
TT-L-57 - Lacquer, Rubbing, Clear, (For Wood Furniture).
PPP-B-636 - Box, Fiberboard.
PPP-C-843 - Cushioning Material, Cellulosic.

Federal Standards:

Fed. Std. No. 123 - Marking for Domestic Shipment (Civil Agencies).

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U. S. Government Printing Office, Washington, D. C. 20402.

(Single copies of this specification and other Federal Specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, DC, Atlanta, Chicago, Kansas City, MO, Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, WA.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies).

FSC 7110

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:38Z
Check the source to verify that this is the current version before use.

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply.

National Motor Freight Traffic Association, Incorporated, Agent:

National Motor Freight Classification.

(Application for copies should be addressed to the American Trucking Association Inc., Tariff Order Section, 1616 P Street, N.W., Washington, D.C. 20036.)

Uniform Classification Committee, Agent

Uniform Freight Classification.

(Application for copies should be addressed to the Uniform Classification Committee, Room 202 Union Station, 516 W. Jackson Blvd., Chicago, IL 60606.)

American Society for Testing and Materials (ASTM) Standard

ASTM D 905 - Standard Method of Test for Strength Properties of Adhesives in Shear by Compression Loading

(Copies may be obtained upon application to American Society for Testing and Materials, 1916 Race Street, Philadelphia, Pennsylvania 19103).

3 REQUIREMENTS

3.1 Preproduction sample. Unless otherwise specified (see 6.2), before production is commenced, a sample of the finished item and each component part conforming to the requirements of this specification shall be offered for approval of the contracting officer or his authorized representative. Approval of the preproduction sample authorizes the commencement of production, but does not relieve the contractor of responsibility from compliance with all other applicable provisions of this specification.

3.2 Materials. The materials used in construction of the rack shall be of the kind and quality specified herein.

3.2.1 Adhesives. The adhesives to be used shall be any adhesive that will develop an average block shear strength of not less than 2,800 pounds per square inch when tested as specified in 4.3.1.1.

3.2.2 Solid wood

3.2.2.1 Varieties. The varieties of wood used in the construction of the book display rack shall be one of the following species: beech, birch, cherry, maple, pecan, walnut, hickory and mahogany (American and African only).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:38Z
Check the source to verify that this is the current version before use.

3.2.2.2 Characteristics. The solid wood used for component parts shall be bright, well sanded and free from brashness, discolorations, worm holes, honeycomb, splits, shake and other defects which will affect its serviceability or strength. A few small burls, pin-knots averaging not more than two per square foot, mineral streaks a maximum of 1/16 inch by 4 inches, or 1/8 inch by 2 inches in area and averaging not more than one per square foot, will be permitted.

3.2.2.3 Seasoning. All wood parts shall be uniformly kiln dried to a moisture content of 5 to 8 percent and shall be stored in properly controlled atmosphere to assure uniform distribution of moisture among the individual pieces. After edge-gluing, built-up panels shall be permitted to cure sufficiently to insure uniform distribution of glue joint moisture and elimination of sunken joints, spring back and stresses that impair serviceability or finished appearance.

3.2.3 Finishing materials.

3.2.3.1 Filler. The filler shall be compatible with the finish system and shall not cause failure to finish panels in tests specified in 4.3.1.1.

3.2.3.2 Stain. The stain shall consist of an organic dye in an organic solvent and shall not cause failure to finish panels in ultraviolet resistance test specified in 4.3.1.1.

3.2.3.3 Lacquer. The lacquer shall conform to the applicable requirements of type I or type II of TT-L-57 when tested as specified in 4.3.1.1.

3.2.4 Hardware.

3.2.4.1 Glides. Glides shall be of the rubber cushioned nail type. The lower face (in contact with floor) of the glides as well as all exposed surface below the rubber cushion shall be highly polished stainless steel or brown high impact plastic (nylon, phenolic or styrene) and shall be not less than 1-1/16 inches in diameter. The rubber cushion shall be a minimum of 1/8 inch thick. The shank shall be 7/8 inch long, minimum, 0.050 inch thick and serrated.

3.2.4.2 Screws. The screws used in assembly shall be in accordance with FF-S-111 in the size and type specified.

3.3 Construction.

3.3.1 Design. The design of the book display rack shall be as shown in Figures 1 and 2. The book display rack shall provide two areas for accommodating books. The overall dimensions of the book rack shall be 22 inches wide by 12 inches deep by 30 inches high, excluding glides.

3.3.2 Tolerances. The following tolerances will be permitted, except where otherwise specified herein.

3.3.2.1 Overall tolerances for book display rack:

(a) Height - plus 1/4 inch minus 1/8 inch.
(b) Depth - plus 1/4 inch minus 1/8 inch.
(c) Width - plus 1/4 inch minus 1/8 inch.

3.3.2.2 Component part tolerances:

(a) Dimension of any solid wood part (width and thickness) - plus 1/16 inch minus 1/32 inch.

3.3.3 Joinery. Unless otherwise specified herein, all joints shall be tenoned and grooved and shall be accurately milled and fitted. Adhesives, specified in 3.2.1, shall be applied to the joint and the joint shall be held under pressure until the adhesive has properly set. Nails or brads shall not be used for holding the joint while adhesive is setting. Starved or insufficiently glued joints will not be acceptable.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:38Z
Check the source to verify that this is the current version before use.

3 3.4 Details of construction. The principal component parts of the book display racks shall be end panels, trough members and base reinforcement strips

The end panels and trough members shall be made of full length strips of solid wood, specified in 3.2.2, not greater than 6 inches or less than 2 inches wide, except that one edge strip may be not less than 1 inch wide. The solid wood strips shall be carefully selected for similar grain and color and shall be edge joined with continuous tongue and groove construction. Alternatively, matched square edge joints may be used for the end panels. The thickness of the end panels and trough members shall be 13/16 inch, minimum.

The trough members shall be joined together by tongue and groove and shall be tenoned on the ends to fit the mortises on the end panels All pieces shall be securely glued using adhesives, specified in 3.2.1.

The base reinforcement strip shall be of one piece of solid wood, specified in 3.2 2, and shall be 3/4 inch thick by 2 inches wide, minimum. A base reinforcement strip shall be securely glued to the bottom inside face of each end panel. In addition, it shall be secured by countersunk screws (No. 10 size, minimum), specified in 3.2.4.2. The screws shall be positioned as shown in Figure 2.

All exposed corners and edges shall be eased with the exception of the top corners of the end panels and the top edge of the base reinforcement strips which shall be rounded to a radius of approximately 1/2 inch.

The grain pattern of all component parts shall run the long direction of the part.

3 3 5 Method of finishing wood surfaces. The wood surfaces shall be finished as specified herein and the finished surfaces shall comply with the requirements of 3.5.

3.3.5.1 Exposed wood surfaces. All wood surfaces normally exposed to view shall be finish sanded smooth and all corners and edges eased, thoroughly cleaned, and finished as follows

1. Sap stain to equalize color
2. Apply selected colorant to produce color specified Stain, specified in 3 2 3 2, and colorant shall conform to tests specified in 4.3 1 1
3. Wash coat with adhesive sealer Sealer shall withstand toughness and adhesion test specified in 4 3.1 1 without whitening or cracking.
4. Scuff sand, using sandpaper grit of fineness needed to produce proper surface
5. Fill to degree necessary to match standard reference panel The filler, specified in 3.2.3.1, shall conform to the test specified in 4.3.1.1.
6. Seal with adhesive type sealer. Sealer shall withstand toughness and adhesion test specified in 4.3.1.1 without whitening or cracking
7. Sand, using sandpaper grit of fineness needed to produce proper surface.
8. Shade to tie-in color variation, if necessary. Shading shall conform to the test specified in 4.3 1.1.
9. Top coat with lacquer (2 coats) The lacquer, specified in 3.2.3.3, and finish shall be of a quality to meet the requirements specified in 4 3.1 1.

NOTE Operation number 8 may be performed where shown or after operation number 5.

The natural grain of the wood shall not be clouded by the finishing materials. Bleaching agents or materials shall not be used. The application of materials, drying time, sanding, cleaning and rubbing shall be controlled to produce items of smooth, uniform exposed surfaces without blisters, pits, wrinkles, runs, tackiness or more than a trace of orange peel.

3.3 5.2 Unexposed surfaces. The bottom edge of the end panels and base reinforcement strip shall be machined smooth and cleaned and stained a uniform walnut color. A coat of adhesive sealer shall be applied.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:38Z
Check the source to verify that this is the current version before use.

3.5 Color and appearance of finish. The color and appearance of the finish of exposed wood surfaces shall be walnut and shall conform to the standard reference panel adopted by Federal Supply Service, General Services Administration for color, appearance, and gloss (see 6.3).

3.6 Identification marking. Each book display rack shall be permanently and legibly marked in an inconspicuous place with the specification number, Federal Stock Number, contract number, date of manufacture and the manufacturer's name or trade-mark, so that the source of supply may be readily determined.

3.7 Workmanship. The methods of construction, finishing, and assembly and the finished appearance of the book display rack shall be in strict accordance with the requirements of this specification. Where specific requirements are not given, good commercial practice of the contract furniture industry shall be used. Book display racks shall conform to the level of quality established herein.

4. QUALITY ASSURANCE PROVISIONS

4.1 General quality assurance provisions.

4.1.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.1.2 Government verification. All quality assurance operations performed by the contractor shall be subject to Government verification at unscheduled intervals. Verification shall consist of surveillance of the operations to determine whether the practices, methods, and procedures of the written inspection plan are being properly applied, and Government product inspection, to measure quality of product offered for acceptance. Deviation from the prescribed or agreed-upon procedures, or instances of poor practices that might have an effect on the quality of the product will be immediately called to the attention of the contractor. Failure of the contractor to promptly correct the deficiencies discovered shall be cause for suspension of acceptance until the correction has been made or until conformance of product to prescribed criteria has been demonstrated To avoid interference with operations, the contractor shall designate a responsible official, or officials, to whom the Government inspector will report such instances

4.2 Preproduction sample inspection. Examination and testing shall be made on the completely fabricated item for all provisions of this specification

4.3 Sampling for inspection and acceptance. Sampling and inspection shall be performed in accordance with the provisions set forth in MIL-STD-105, except where otherwise indicated hereinafter.

4.3.1 Inspection of materials and components. In accordance with 4.1, the supplier is responsible for insuring that materials and components used were manufactured, tested, and inspected in accordance with the requirements of referenced subsidiary specifications and standards to the extent specified, or if none, in accordance with this specification.

4.3.1.1 Testing of components. In addition to the quality assurance testing provision of the subsidiary specification, testing of the components shall be performed in accordance with table I for the characteristics shown therein. The values specified in section 3 of this specification apply to the average determinations made on a sample unit for test purposes as specified in the applicable test method. When the sample size for components covered by the subsidiary specifications is not specified, the sample size for each characteristic shall be in accordance with inspection level S-2 of MIL-STD-105 except that for lot sizes of 501 (units of products' and over the sample size shall be 5 The lot shall be unacceptable if one or more sample units fail to meet any of the requirements specified



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:38Z
Check the source to verify that this is the current version before use.

TABLE I. Instructions for testing components and materials

| omponent | Characteristic | Requirement Reference | Test Method | Sample Unit |
|---|---|---|---|---|
| dhesive | Block shear test | 3 2.1 | AST'1 D 905 1/ 2/ 3/ | 1/2 pint |
| ood Finish ystem (Stain, sealer, filler, and lacquer) 4/ | Spot test - alcohol | 3 2.3 and 3 3.5 | 4.3 3 3 and 4.3 3.3 1 of TT-L-57 | |
| | Print resistance | 3.2.3 and 3.3.5 | 4 3 3 4, 4.3.3.4.1, 4.3 3.4.2, and 4.3.3.4 3 of TT-L-57 | |
| | Cold check resistance | 3.2.3 and 3 3.5 | 4.3.3.5, 4.3.3.5.1, 4.3.3.5.2, and 4.3 3 5.3 of TT-L-57 | 1/2 pint of each |
| | Boiling water | 3.2 3 and 3.3 5 | 4.3 3.6 of TT-L-57 | |
| | Ultra-Violet resistance | 3.2.3 and 3.3.5 | 4.3.3.7 of TT-L-57 | |
| | Toughness and adhesion | 3.2.3 and 3.3.5 | 4.4.1 herein | |

/ The following modifications apply when testing casein-type adhesive The test blocks shall be placed under pressure between 10 and 20 minutes after spreading the adhesive, the adhering pressure shall be 175 ± 25 pounds per square inch, and the test blocks shall be held under pressure for at least four hours.
/ The following modifications apply when testing animal adhesive. The moisture content of the wood shall be from 6 to 9 percent. The joints shall be conditioned at a relative humidity of 40 ± 4 percent.
/ Whenever a specimen fails at a load of less than 2,800 pounds per square inch and the failure occurs 50 percent or more in the wood, the specimen shall be disregarded in computing the average. In case the shearing strength of one or more specimens is 2,800 pounds per square inch or higher, the variation among individual specimens is 10 percent or more (based on the strongest joint) the test shall be run again, provided the average is less than the required 2,800 pounds per square inch.
/ The test shall be made on completely finished wood panels of the same wood used in production. The finish shall be in accordance with procedures used in producing furniture.

4.3 2 End item inspection.

4 3 2.1 Visual examination of the end item. The lot size shall be expressed in nits of completed end item. The inspection level for purposes of determining the ample size shall be level I of MIL-STD-105. The unit product shall be one completed nd item. The defects found during the examinations shall be classified in accordance ith table II. The acceptable quality level (AQL) shall be 4.0 for major defects and .5 for total defects (major and minor combined) per hundred units.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:38Z
Check the source to verify that this is the current version before use.

TABLE II. Classification of End Item Defects

| Examine | Defect | Classification Major | Minor |
|---|---|---|---|
| Finish and appearance of exposed wood parts visible in normal use position | Does not match standard reference panel with respect to color. | X | |
| | Discoloration (bleeding) over 1 square inch | | X |
| | Spotted, affecting appearance | | X |
| | Light or dark colored areas, affecting appearance | X | |
| | Area of no film<br>over 1 square inch in area | X | |
| | less than 1 square inch in area | | X |
| | Glue stain or glue line clearly showing, affecting appearance. | | X |
| | Excess glue not removed. | | X |
| | Finish peeling, flaking, blistered, cracked, checked or wrinkled | X | |
| | Finish cut or rubbed through to wood. | | X |
| | Open grain Finishing material not filling pores. | | X |
| | Orange peel, affecting appearance. | | X |
| | Damage or scratch, less than 1 inch long or 1 inch square | | X |
| | Damage or scratch, over 1 inch square or 1 inch long | X | |
| | Finish tacky, i.e., not completely dry | | X |
| | Rough or gritty surface or foreign matter imbedded in finish | | X |
| | Light colored edge not touched up | | X |
| | Burn-in or repairs not neatly accomplished | | X |
| | Unstained (white) wood visible when item is in normal use position. | | X |
| Quality of solid wood of exposed surfaces | Species of wood not as specified | X | |
| | Components not fabricated of one piece solid wood where required | | |
| | More than 1 species of wood used for exposed wood components of any one item | | X |
| | Direction of grain not as specified | | X |
| | Check or split over 1 inch in length | X | |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:38Z
Check the source to verify that this is the current version before use.

TABLE II Classification of End Item Defects (Continued)

| amine | Defect | Classification Major | Minor |
|---|---|---|---|
| ality of solid od on exposed faces (cont'd) | Wood warped, affecting appearance or serviceability | | X |
| | Loosened grain or shake on exposed surface. | | X |
| | Honeycomb | | X |
| | Loose or unsound knot. | | X |
| | Hole on exterior surface, affecting appearance. | X | |
| | Wave of uneven sanding. | | X |
| | Machine mark on exposed surface, affecting appearance. | | X |
| | Any mineral streak on exposed surface over 1/16 inch by 4 inches or 1/8 inch by 2 inches | | X |
| | Any manufacturing defect or defect native to the wood filled in with plastic wood or other filler material. | | X |
| | Solid wood strips more than 6 inches wide. | X | |
| | Solid wood strips less than 2 inches wide, except for one edge | X | |
| nstruction and rkmanship | General design or styling not as specified or not as on approved preproduction sample | X | |
| | Component missing | X | |
| | Component in wrong location. | | X |
| | Component not glued as specified | | X |
| | Component not size and shape specified | | X |
| | Component not assembled as specified | | X |
| | Component out of alignment or out of square affecting serviceability | X | |
| | Component loose or insecurely fastened where rigidity is required. | | X |
| | Poor fit of component part | | X |
| | Exposed corners and edges not eased when required | | X |
| | Joinery not as specified. | X | |
| | Any loose or unsound glued joint | | X |
| | Glue joint open - exposed part<br>1/16 inch or less<br>Over 1/16 inch | | X |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:38Z
Check the source to verify that this is the current version before use.

TABLE II. Classification of End Item Defects (Continued)

| Examine | Defect | Classification Major | Classification Minor |
|---|---|---|---|
| Construction and workmanship (cont'd) | Screws broken off | | X |
| | More than 1 screw missing | | X |
| | More than 1 screw not drawn up tightly | | X |
| | Screws not countersunk when required | | X |
| | Screw point visibly bulging wood. | | X |
| | Improper spacing of screws. | | X |
| | Base uneven (without glides); i e , end item rocks more than 1/16 inch when placed on flat surface. | | X |
| | Glide missing | | X |
| | Glide not as specified | | X |
| | Glide improperly positioned. | | X |
| | Glide not secured properly. | | X |
| Identification marking | Text incomplete. | | X |
| | Missing, incorrect or illegible. | | X |
| | Marking in wrong location. | | X |

4.3.2.3 Dimensional examination. The lot size shall be expressed in units of completed book display rack. The inspection level shall be S-2 of MIL-STD-105. The unit of product shall be one completed book display rack. Any external overall dimensions that are not within the specified tolerance shall be classified as a defect The acceptable quality level (AQL) shall be 4.0 defects per hundred units.

4.3 3 Inspection of preparation for delivery requirements. An examination shall be made to determine that packaging, packing, and marking requirements of section 5 of this specification are complied with. Defects shall be scored in accordance with table III The sample unit shall be one shipping container, fully packed, selected just prior to the closing operation. Closed shipping containers shall be examined for closure defects. The lot size shall be expressed in number of shipping containers The inspection level shall be S-2 of MIL-STD-105 and the acceptable quality level (AQL) shall be 4.0 defects per hundred units.

TABLE III. Preparation for delivery defects

| Examine | Defect |
|---|---|
| Marking (exterior and interior). | Incorrect; incomplete; illegible; omitted, of improper size, location, sequence, or method of application. |
| Materials | Any nonconforming component, component missing, damaged, or otherwise defective. |
| Workmanship | Inadequate application of components. such as incomplete closure of container, loose or inadequate sealing, strapping or stapling, bulged or distorted containers. |



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:38Z
Check the source to verify that this is the current version before use.

4 4 Test method. The following test method shall be used where referenced in his specification

4.4.1 Toughness and adhesion test. The toughness and adhesion test shall be ade by using Organic Coating Adhesion Tester, U S Testing Company, Model Number 901, in accordance with instructions for using, as provided for by the manufacturer f the tester (see 6 4) The panel shall be marred both parallel and perpendicular o the grain The resulting indentation shall be examined for whitening or cracking

5 PREPARATION FOR DELIVERY

5 1 Packaging. Packaging shall be level A or C as specified (see 6.2).

5 1.1 Level A Each rack shall be individually wrapped in cellulosic cushioning aterial conforming to PPP-C-843. The cushioning material shall be secured in place ith pressure sensitive adhesive tape.

5.1.2 Level C The racks shall be individually packaged in accordance with the anufacturers standard practice providing that this will insure protection for the rack uring shipment and provide for safe delivery to its destination.

5 2 Packing Packing shall be level A, B or C as specified (see 6.2).

5.2.1 Level A. Each rack packaged as specified in 5.1.1 shall be packed in a lose-fitting box conforming to PPP-B-636, class weather resistant, grade V3c or 3s. Each box shall be provided with a single sheet of fiberboard of the same uality as the box, at the bottom to prevent puncturing of the box by the feet of he rack. Close, seal and strap the boxes in accordance with method II of the ppendix to PPP-B-636.

5 2 2 Level B Each rack packaged as specified in 5.1 1 shall be packed in a lose-fitting box conforming to PPP-B-636, class-domestic, grade 275. Each box hall be provided with a single sheet of fiberboard of the same quality as the box, t the bottom to prevent puncturing of the box by the feet of the rack. Close and eal the boxes in accordance with method II of the appendix to PPP-B-636.

5.2.3 Level C. Each rack packaged as specified in 5.1.2 shall be packed in a ontainer that will assure carrier acceptance and safe arrival at destination in ompliance with the Uniform Freight Classification rules and the National Motor reight Classification rules.

5 3 Marking Marking shall be in accordance with 5.3 1 or 5 3.2 as specified see 6.2).

5.3.1 Civil agencies In addition to any special markings required by the ontract or order, all marking shall be in accordance with Fed. Std. No. 123.

5.3.2 Military agencies. In addition to any special marking required by the ontract or order, all marking shall be in accordance with MIL-STD-129.

5 3.3 Special marking In addition to the marking required by 5.3.1 or 5 3 2, he following should be marked on a minimum of 2 faces of the box in characters a inimum of 2 inches high

FURNITURE

FRAGILE-HANDLE WITH CARE

6 NOTES

6 1 Intended use The book display racks covered by this specification are ntended for general office use



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:38Z
Check the source to verify that this is the current version before use.

6.2 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents:

(a) Title, number and date of this specification.
(b) When preproduction sample is not required (see 3.1).
(c) Selection of applicable level of packaging required (see 5.1).
(d) Selection of applicable level of packing required (see 5.2).
(e) Marking requirements (see 5.3).

6.3 Standard sample. Sample panels of the standard color for walnut finish are obtainable, without charge, from General Services Administration, Federal Supply Service, Washington, D. C. 20406.

6.4 Organic Coating Adhesion Tester. Information about the Organic Coating Adhesion Tester, Model No. 1001, may be obtained from U. S. Testing Company, Inc 1415 Park Avenue, Hoboken, New Jersey.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:38Z
Check the source to verify that this is the current version before use.

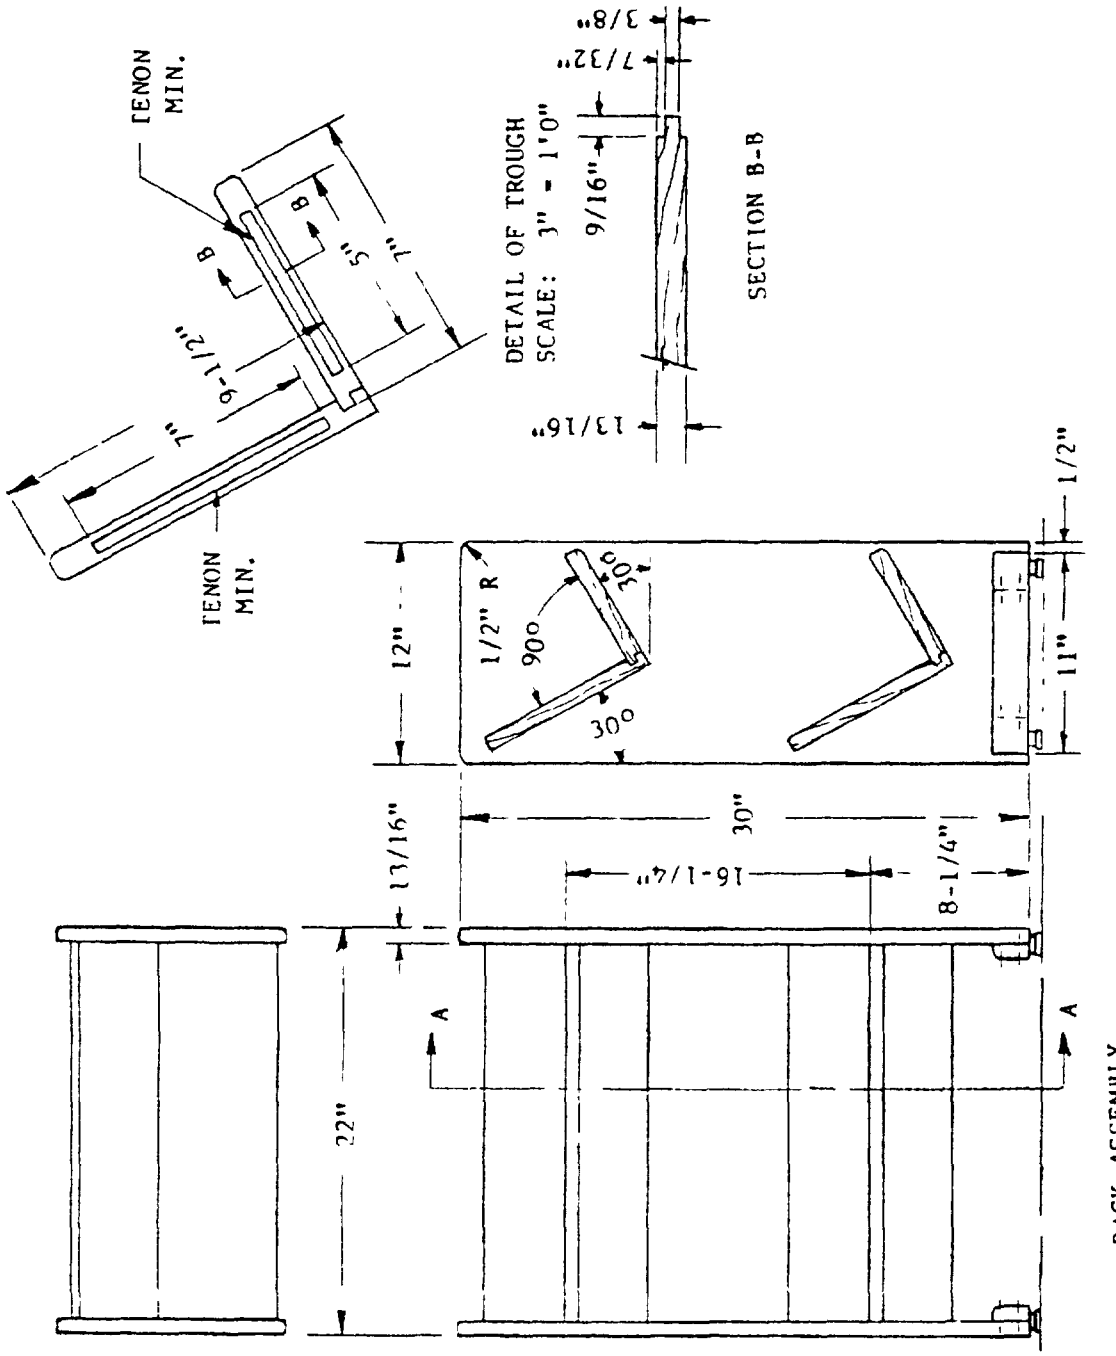



FIGURE 1. Book Display Rack.



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:38Z
Check the source to verify that this is the current version before use.

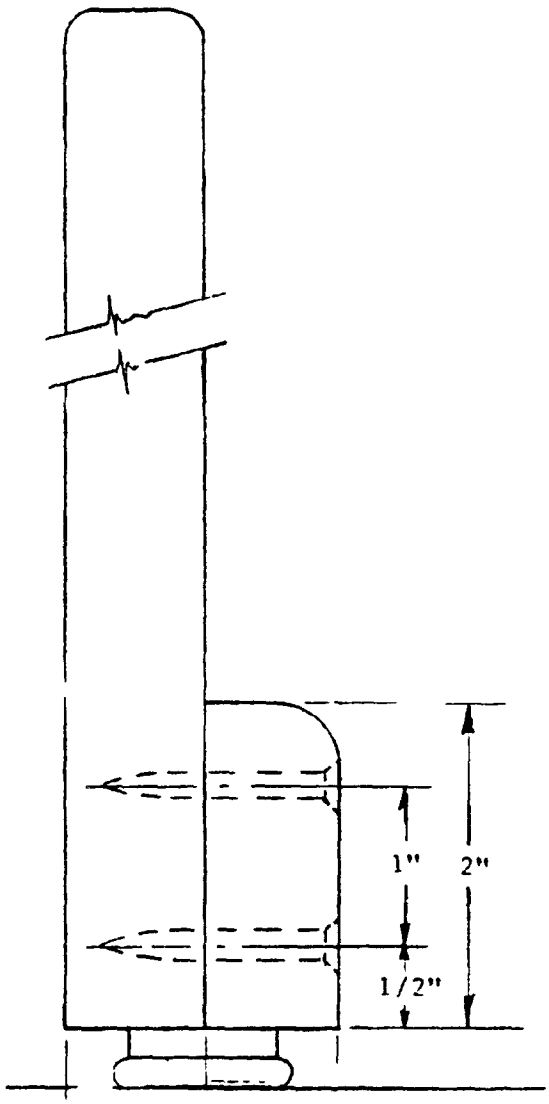



FIGURE 2. Details of Base Reinforcement



Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:38Z
Check the source to verify that this is the current version before use.