AA-R-0040C(GSA-FSS)
May 31, 1974
SUPERSEDING
Int. Fed. Spec. AA-R-0040B(GSA-FSS)
January 20, 1970 and
INTERIM REVISION OF
Fed. Spec. AA-R-40
April 23, 1957

INTERIM FEDERAL SPECIFICATION

RACKS, WEARING APPAREL, STEEL

This Interim Federal Specification was developed by the General Services Administration, Federal Supply Service, Washington, D. C. 20406, based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above.

The General Services Administration has authorized the use of this Interim Federal Specification as a valid exception to Federal Specification AA-R-40 dated April 23, 1957.

1. SCOPE AND CLASSIFICATION

1.1 Scope. This specification covers steel wearing apparel racks of one type and two sizes as follows:

Size 1 - Capacity: 6 hangers, 6 hats, 4 umbrellas

Size 2 - Capacity: 12 hangers, 12 hats, 8 umbrellas

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issues in effect on the date of invitation for bids or request for proposal, form a part of this specification to the extent specified herein.

Federal Specifications:

RR-H-001102	-	Hangers, Coat.
TT-C-490	-	Cleaning Methods and Pretreatment of Ferrous Surfaces for Organic Coatings.
PPP-B-601	-	Boxes, Wood, Cleated-Plywood.
PPP-B-621	-	Boxes, Wood, Nailed and Lock-Corner.
PPP-B-636	-	Box, Fiberboard.
PPP-B-640	-	Boxes, Fiberboard, Corrugated, Triple-Wall.
PPP-F-320	-	Fiberboard, Corrugated and Solid, Sheet Stock, (Container Grade), and Cut Shapes.

Federal Standards:

Fed. Std. No. 123	-	Marking for Domestic Shipment (Civil Agencies).
Fed. Std. No. 187	-	Identification of Pressed Bends, Forms, Seams, and Joints (Sheet Metal).
Fed. Std. No. 595	-	Colors.

FSC 7195

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:38Z
Check the source to verify that this is the current version before use.

(Activities outside the Federal Government may obtain copies of Federal Specifications, Standards, and Handbooks as outlined under General Information in the Index of Federal Specifications and Standards and at the prices indicated in the Index. The Index, which includes cumulative monthly supplements as issued, is for sale on a subscription basis by the Superintendent of Documents, U.S. Government Printing Office, Washington, D. C. 20402.

(Single copies of this specification and other product specifications required by activities outside the Federal Government for bidding purposes are available without charge from Business Service Centers at the General Services Administration Regional Offices in Boston, New York, Washington, D. C., Atlanta, Chicago, Kansas City, MO., Fort Worth, Denver, San Francisco, Los Angeles, and Seattle, Washington.

(Federal Government activities may obtain copies of Federal Specifications, Standards, and Handbooks and the Index of Federal Specifications and Standards from established distribution points in their agencies.)

Military Specification:

MIL-W-12332 - Welding, Resistance, Spot, Seam and Projection, for Fabricating Assemblies of Low Carbon Steel.

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.
MIL-STD-129 - Marking for Shipment and Storage.
MIL-STD-130 - Identification Marking of U.S. Military Property.

(Copies of Military Specifications and Standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications. The following documents form a part of this specification to the extent specified herein. Unless a specific issue is identified, the issue in effect on date of invitation for bids or request for proposal shall apply.

American Iron and Steel Institute, Publication:

Steel Products Manual, Carbon Steel Sheets.

(Application for copies should be addressed to the American Iron and Steel Institute, 150 East Forty-Second Street, New York, NY 10017.)

National Motor Freight Traffic Association, Incorporated, Agent:

National Motor Freight Classification.

(Application for copies should be addressed to the American Trucking Association, Inc., Tariff Order Section, 1616 P Street, N.W., Washington, D. C. 20036).

Uniform Classification Committee, Agent:

Uniform Freight Classification.

(Application for copies should be addressed to the Uniform Classification Committee, Room 1106, 222 South Riverside Plaza, Chicago. IL 60606.)

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:38Z
Check the source to verify that this is the current version before use.

3. REQUIREMENTS

3.1 Preproduction sample. Unless otherwise specified (see 6.1), before production is commenced, a sample of the finished commodity and each component part shall be submitted or made ready for the contracting officer or his authorized representatives to examine and test to determine compliance with this specification. Approval of the preproduction sample authorizes commencement of production, but does not relieve the contractor of responsibility from compliance with all other applicable provisions of this specification.

3.1.1 Drawings and list of materials. The manufacturer shall furnish to the contracting officer within 10 days after the acceptance of each preproduction sample, two (2) complete sets of construction and assembly drawings, two (2) complete sets of packing and packaging drawings and two (2) complete lists of materials for the end item. These drawings and material lists shall be used by the Government in acceptance inspections of the products offered. All drawings and material lists shall be kept in strict confidence by the Government and shall be returned to the manufacturer after the completion of the contract.

3.1.2 Changes in construction or drawings. Once a preproduction sample has been accepted under this specification by the Government, no subsequent changes of any kind shall be made in the construction, assembly, packing and packaging or in the list of materials without the prior written consent from the contracting officer.

3.2 Material.

3.2.1 Steel sheets and tubing. The steel used shall be commercial quality, cold rolled with a stretcher leveled standard of flatness as defined in the Steel Products Manual. It shall be smooth, free of rust, scale, pits, scratches, laps, crimps and buckles affecting strength and appearance. All steel tubing shall be seamless or continuously seam welded. The gage numbers are the manufacturer's standard gage for steel sheets as given in the Steel Products Manual. The decimal equivalents shown for steel thicknesses are subject to the standard tolerances or ordering limits. The sheets for parts to be formed shall withstand the bend test in 4.5.3.

3.2.2 Steel wire. Steel wire, when used for suspension of hangers, shall be in accordance with the wire specified for the wood hangers covered by RR-H-001102.

3.2.3 Wood. Wood for hangers shall be in accordance with the wood requirements of RR-H-001102.

3.2.4 Plastic. Plastic, when used for hanger bodies or suspension stems of hangers shall be molded or extruded. It shall have physical property values at least equal to those of Tenite Polyallomer Formulation 5021A and comply with the tests in Section 4 for the finished item.

3.2.5 Fastening devices. Bolts, nuts, screws and other fastening accessories shall have a protective electrodeposited coating of zinc, chromium or cadmium.

3.2.6 Feet. The feet shall be one of the following:

a. Replaceable vacuum cup cushions constructed of rubber or non-marking vinyl, not less than 1 inch high by 2 inches in diameter.

b. Rubber or non-marking vinyl pads a minimum of 1/2 inch thick by 2-1/4 inches square.

c. Not less than 18 gage (0.0478 inch) stainless steel formed to provide a floor contact surface of not less than 2 inches by 2 inches.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:38Z
Check the source to verify that this is the current version before use.

3.2.7 Finishing material.

3.2.7.1 Primer. The primer, when used, shall be compatible with the finishing enamel used.

3.2.7.2 Enamel. Enamel for the finishing shall be the baking type and shall be the manufacturer's standard product (see 3.4.3) except the color shall be as specified in 3.2.7.2.1.

3.2.7.2.1 Finishing enamel color. The color(s) of the finishing enamel shall be as specified, (see 6.1). Selection of color(s) shall be from Fed. Std. No. 595 colors listed below (see 6.2).

Gold - No. 20260		Navy - No. 25051	
Sand - No. 20372		Blue - No. 25183	
Red - No. 21302		Brown - No. 26120	
Yellow - No. 23785		Black - No. 27040	
Olive - No. 24098		Parchment - No. 27769	
Gray - No. 26134			

3.3 Construction.

3.3.1 Design. The wearing apparel racks shall be designed generally as shown in Figure 1 which illustrates acceptable designs. Alternate designs not conflicting with the requirements of this specification will be acceptable provided they do not impair the utility of the racks. Except as permitted herein, the racks shall be constructed entirely of steel. They shall be the knock-down type and shall be capable of standing close to the wall. All shelf and hanger spaces shall be equally accessible. The racks shall consist of the following components: Posts, base assembly, umbrella holders and top assembly.

3.3.2 Spot welding. Spot welds shall not be closer to the edge of either adjoining member than one-half the greatest dimension of the spot weld, nor shall they be centered closer together than twice the greatest dimension. Squeeze time, weld time and hold time shall be controlled to produce uniform welds that will meet the test specified in 4.5.4. Spot welds shall be centered not more than 6 inches apart.

3.3.3 Fabricating terms. All bends, forms seams and joints of sheet metal specified herein shall be as identified in Federal Standard No. 187.

3.3.4 Assembly. The base assembly and shelves shall be attached to the posts by bolts. Alternatively, welding will be permitted to secure the base assembly to the posts provided there will be no resultant increased size or change in the configuration of the shipping container. The balance of the rack shall be assembled by either (1) bolts, nuts and lockwashers (2) welding (3) riveting (4) snap lock, or a combination thereof. The assembled racks shall meet the load supporting test specified in 4.5.1.1 or 4.5.1.2 as applicable.

3.3.5 Posts. Posts shall be of tubular steel as specified in 3.2.1, not less than 1-1/2 inches square and with minimum steel thickness of 18 gage (0.0478 inch). The posts shall be constructed of not more than three sections and joined in assembly by means of tight fitting inner sleeves.

The unassembled post sections, including the sleeve, shall be of equal length, plus or minus 1/4 inch. The joints shall be tight, flush, and without gaps or deformation of tubular members and shall be free of sharp edges, burrs, and other cutting or tearing hazards. The sleeve and the joining of the sections to each other shall conform to one of the following:

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:38Z
Check the source to verify that this is the current version before use.

(a) The sleeve shall be applied. It shall be evenly divided at the joint. Its wall thickness and length shall be sufficient to provide a true alignment when subjected to the load tests of 4.5.1.1 or 4.5.1.2 as applicable. The sections shall be joined together by spotwelding and sheet metal screws as illustrated in Figure 2. A minimum of two spotwelds shall be applied on each of two sides of the member. The lead holes in the post member and sleeve shall be of the diameter required to accommodate the size of the metal screws provided.

(b) The sleeve shall be formed as an integral part of a post section, with full length embossings on all four sides. The length of the sleeve shall be not less than 5-1/2 inches and shall be of greater length if necessary to provide a true alignment when subjected to the load tests of 4.5.1.1 or 4.5.1.2 as applicable. The sections shall be joined together by one or more sheet metal screws at each joint. The lead holes in the post member and the sleeve shall be of the diameter required to accommodate the size of the sheet metal screws provided.

3.3.6 Base Assembly.

3.3.6.1 Size 1. The horizontal base members shall be not less than 18 gage (0.0478 inch) steel. The spread of the rear member(s) shall be not less than 29-3/4 inches overall and the front member shall be not less than 14 inches long as measured from the face of the post. Suitable gusset braces, or the equivalent, to support the post vertically and, in addition, similar bracing to add rigidity to the assembled horizontal base members shall be provided. The bracing may be either visible or concealed. One foot as specified in 3.2.6 shall be attached within 1/2 inch (measured from outside edge) of the end of each of the extended horizontal base members.

3.3.6.2 Size 2. The horizontal base members shall be not less than 18 gage (0.0478 inch). Two members shall be not less than 14 inches long as measured from the face of the posts and shall be connected to provide an overall width of at least 48 inches, (see Figure 1), or shall be attached to a rear base member at least 48 inches wide. If attached to a rear base member, the overall distance between the two front members shall be at least 26-1/2 inches. Visible or concealed bracing, as required, to support the posts vertically, to add rigidity to the assembled base members, and to meet the load supporting test specified in 4.5.1.2 shall be provided. One foot as specified in 3.2.6 shall be attached within 1/2 inch, (measured from outside edge), of the end of each extended horizontal base member.

3.3.7 Umbrella holder. The umbrella holder shall be constructed of not less than 24 gage, (0.0239 inch), steel and shall be provided with a grille top, and a rust-resistant, leak-proof pan which can be easily removed without spilling the contents. The holder shall have space for four umbrellas, and shall be attached to the base. It shall be located so that umbrellas placed within it will not interfere with clothes hanging on the rack. The Size 2 rack shall have two holders attached to the base.

3.3.8 Top assembly. The top assembly shall consist of three shelves, shelf supporting members and a hanger bar, all of which shall be centered over the base. Their overall widths shall not exceed the overall width of the base. The shelves shall be not less than 20 gage (0.0359 inch) steel, not less than 10-1/2 inches or more than 12 inches deep and shall be an open work type. Clearance between shelves shall be not less than 6 inches. The bottom edge of shelf front and sides, (i.e. lower edges of flange at front and sides), shall be appropriately formed to prevent personal injury due to sharp surfaces when articles are being placed on the shelves or removed therefrom. The hanger bar shall be not less than 16 gage (0.0598 inch) steel, not less than 2 inches high and shall have a flange, fold or hem along its entire width. All exposed corners shall be rounded and all sharp edges ground smooth. The hanger bar shall be approximately 60 inches above the floor. The hanger bar of Size 1 racks shall hold six coat hangers in six receptacles spaced on minimum 4-inch centers, except for the center receptacles where spacing shall be on minimum 5-inch centers to permit clothing to clear the umbrella rack. The

Source: https://assist.dla.mil -- Downloaded: 202610-26T11:38Z
Check the source to verify that this is the current version before use.

hanger bar of Size 2 racks shall hold twelve coat hangers in twelve receptacles spaced on minimum 4 inch centers. The two end receptacles on both Size 1 and Size 2 racks shall be not less than one inch from the ends of the bar. All receptacles shall be shaped to accept the suspension hook or stem of the hangers furnished. The hangers shall not become disengaged from the receptacle when subjected to the test specified in 4.5.1.3.

3.3.9 Hangers. Six wood or metal hangers or, alternatively, six heavy duty plastic hangers with metal suspension hooks shall be furnished with each Size 1 rack and 12 wood or metal hangers or plastic hangers with metal suspension hooks shall be furnished with each Size 2 rack.

3.3.9.1 Wood hangers. The wood used for hangers shall be as specified in 3.2.3. The hangers shall be shaped to fit the contour of coats and shall have a spread of 16 to 17-1/2 inches. The height of the hangers, exclusive of hook, shall be the approximate dimension shown for Type I hangers of RR-H-001102 and the dimensions of the wood components shall be the minimum shown therein. The 3/8 inch diameter rod, which shall be a component, shall be doweled into the side piece. The wood shall be smoothly sanded. Clear varnish or clear lacquer shall be applied to the wood surfaces. When suspension is a hook, it shall be of wire which shall meet the requirements of 3.2.2. Ball or similar type suspensions shall be wire of the same size, quality and finish as specified in 3.2, or shall be of plastic as specified in 3.2.4. The perimeter of the plastic stem at any point along its entire length shall be at least 1 inch. Its thickness shall be not less than 1/16 inch. The wood hanger shall meet the test specified in 4.5.1.3.

3.3.9.2 Metal hangers. The metal hangers shall be of die formed sheet steel. They shall be of the same general design and size as specified for wood hangers and shall be fitted with suspension stems or hooks as specified therefore. The shoulders shall be not less than 5/8 inch wide and the horizontal bar not less than 1/2 inch wide. The components shall be semi-elliptical or half round, being well rounded where contacts are made with garments. The hangers shall be without sharp edges that might cut fingers or snag garments and shall be enameled the same as other sheet steel parts. The metal hanger shall meet the test specified in 4.5.1.3.

3.3.9.3 Plastic hangers with metal hooks. The hanger body shall be rigidly reinforced plastic shaped to fit the contour of coats and shall have a spread at the cross bar of not less than 16 nor more than 17-1/2 inches. The height of the hangers, exclusive of the hook, shall be the approximate dimension shown for the Type I hangers in RR-H-001102. A plastic rod shall join the two sides of the hanger and may be a separate component or an integral part of the hanger body. The metal suspension hook shall be not less than 0.135 + 0.002 inch diameter (10 gage) cold drawn low carbon steel with a silver bright galvanized finish and with a temper of hard galvanized wire. The upper end of the hook shall be looped back. The color of the plastic shall be a neutral color and shall be incorporated in the hanger body at the time of molding and shall be colorfast. The plastic hanger shall meet the test specified in 4.5.1.3.

3.4 Pretreatment and finishing of metal.

3.4.1 Pretreatment. All exterior and interior unplated ferrous metal surfaces shall be treated for painting in accordance with any method of TT-C-490.

3.4.2 Priming. Unless Type I or Type II of TT-C-490 is used, all exterior and interior surfaces treated as specified in 3.4.1 shall be coated with primer as specified in 3.2.7.1.

3.4.3 Enameling. All primed surfaces shall be coated with the enamel specified in 3.2.7.2 and baked in accordance with the enamel supplier's directions. Total dry organic finish thickness on any surface shall be not less than 0.3 mil. Primer may be omitted from any surface prepared for painting in accordance with Type I or Type II of TT-C-490. The finish shall level out to produce smooth, uniform exposed surfaces without runs, wrinkles, grit, areas of thin film or no film and separation of color. Finish panels shall withstand the tests specified in 4.5.2.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:38Z
Check the source to verify that this is the current version before use.

3.5 Identification marking. Each rack shall be permanently and legibly marked in an inconspicuous place with the specification number, Federal Stock Number, contract number, month and year of manufacture and the manufacturer's name or trade mark, so that the source of supply can be readily determined. When specified (see 6.1) identification marking shall be in accordance with MIL-STD-130.

3.6 Workmanship. The craftsmanship exercised while performing the various operations of manufacture of racks and all accessories shall be of a degree that will eliminate the possibility of damage to clothing or of personal injury because of burrs and sharp edges, will assure that the occurrence of defects will not exceed the acceptable quality level specified herein; and will produce a finished commodity that is satisfactory in function, serviceability and appearance.

4. QUALITY ASSURANCE PROVISIONS

4.1 Responsibility for inspection. Unless otherwise specified in the contract or purchase order, the supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own facilities or any commercial laboratory acceptable to the Government. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure that supplies and services conform to prescribed requirements.

4.2 Preproduction sample inspection. Examination and testing of the preproduction sample shall be made on a completely fabricated item for all provisions of this specification applicable to end product examination and tests before regular production is started.

4.3 Sampling for inspection and acceptance. Sampling for inspection and acceptance shall be performed in accordance with MIL-STD-105, except where otherwise specified herein.

4.3.1 Component and material inspection. In accordance with 4.1 above, the supplier is responsible for insuring that components and materials used are manufactured, tested and inspected in accordance with the specified requirements of referenced subsidiary specifications and standards, or if none, in accordance with this specification.

4.3.2 Inspection of end item. The lot shall be all racks of the same size and all hangers therefor offered for inspection at one time. The sample unit shall be one completely assembled rack or one rack ready for assembly as applicable.

4.3.2.1 Visual examination, assembled rack. The assembled racks shall be examined for defects as specified in Table I.

TABLE I. Classification of defects

Examine	Defect	Classification Major	Classification Minor
Enamel finish	Poor adhesion, i.e. blistered, peeling; tacky (not dry to touch), color separation, stains, not smooth and uniform, runs, sags, foreign matter in coating, area of thin coating or abrasion.		X
	Thickness not as specified.		X
	Wrong color.		X
	Scratch through to base metal, bare spots, rust under coating.	X	

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:38Z
Check the source to verify that this is the current version before use.

TABLE I. Classification of defects (continued)

Examine	Defect	Classification Major	Classification Minor
Metallic coating	Wrong kind.	X	
	Poor adhesion, i.e. blistered, peeling, flaky, stained or discolored.		X
Workmanship and construction	Any part missing except bolts, nuts, lockwashers and rivets.	X	
	Malformed or mislocated parts affecting serviceability; broken, punctured or cracked parts; sharp edge or projection that may cause injury or damage apparel.	X	
	Malformed, mislocated, damaged, buckled or warped parts affecting appearance; any dent on exposed surface affecting appearance.		X
	Components not of gage specified.	X	
	Incorrect formation or design of component preventing it from adequately performing its proper function.	X	
Sheet metal formation	No formation when one is specified.	X	
	Not formation specified.		X
Bolts, nuts, lockwashers and rivets	Not metal plated; thread stripped on more than one bolt; more than one bolt, nut, lockwasher or rivet missing.	X	
	Threads stripped on one bolt; one bolt, nut, lockwasher or rivet missing.		X
Welds	Missing, not kind specified, not required number or not sound (broken, cracked, burnt through, poor adhesion, etc.)	X	
	Slight undercut, slag, scale or flux not removed.		X
Identification marking	Missing, not permanent, or is illegible, incomplete or incorrect.		X

4.3.2.2 Examination during assembly. Racks unassembled for shipment shall be selected from each inspection lot, assembled and examined for the defects specified in Table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:38Z
Check the source to verify that this is the current version before use.

TABLE II. Examination during assembly

Examine	Defect
Assembly	Requires tools other than screwdriver, pliers or wrench for assembly.
	Requires unusual force to assemble.
	Any component requiring modification to complete assembly.

4.3.2.3 Dimensional examination. Inspection will be made of racks and hangers for compliance with overall dimensions specified. Any dimension not within the tolerance specified will be classified as a defect.

4.3.3 Examination of preparation for delivery. An examination shall be made to determine that packaging, packing and marking as required by Section 5 of this specification are complied with. Defects shall be scored as specified in Table III. The sample unit shall be one shipping container fully prepared for delivery except it need not be sealed. The lot size shall be the number of containers in the inspection lot.

TABLE III. Preparation for delivery defects

Examine	Defect
Markings (exterior and interior container)	Missing; incorrect; illegible; of improper size, location, sequence or method of application.
Materials	Component missing, damaged or otherwise defective.
Workmanship	Inadequate application of components such as incomplete closure of container flaps, overwrap, strapping, sealing and cushioning inadequate, improper or missing closures improperly affixed; components improperly secured; inadequate stapling, bulging or distortion of containers.
Contents (exterior and interior containers)	Number per container is more or less than required.

4.4 Inspection levels and AQL's. The inspection levels and acceptable quality levels (AQL's) expressed in defects per hundred units shall be as follows:

For examination in	Inspection levels	AQL's Major	AQL's Total
Table I	II	4.0	10.0
Table II	S-2		4.0
4.3.2.3	S-2		4.0
Table III	S-2		4.0

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:38Z
Check the source to verify that this is the current version before use.

4.5 Tests.

4.5.1 Tests for performance and design characteristics. Except as specified herein, tests for performance and design characteristics shall be performed on completely assembled racks or completely assembled hangers as applicable, using inspection level S-1 for selection of the number of items to be tested from any lot. Failure of any rack or any hanger to pass the test shall be cause for rejection of the lot represented by the samples under test. Frequency of testing shall be at the discretion of the Government.

4.5.1.1 Load supporting test for size 1 racks. A test sample of a size 1 rack shall be placed in a free standing position on a level floor surface close to a wall, and the distance between the highest component of the rack and the wall measured. Sixty pounds divided into six 10-pound weights shall be suspended from each of the six hanger positions along the hanger bar and the distance between the highest component of the rack and the wall remeasured. The difference in measurements shall be not greater than 3/4 inch. Upon completion of this test the weights shall be removed and the rack secured to a level surface A total of thirty pounds shall be suspended from the end position of the hanger bar. There shall be no permanent or temporary displacement of any component from its position or shape exceeding 1/8 inch. This test shall be repeated with the thirty pound weight suspended from the opposite end position of the hanger bar. Load tests shall be conducted without sheet metal screws inserted into sleeve at joint of post sections. While subjected to the load tests, the assembled post sections shall maintain a true alignment.

4.5.1.2 Load supporting test for size 2 racks. A test sample of a size 2 rack shall be tested as specified in 4.4.2 except that one hundred and twenty pounds shall be divided into twelve 10-pound weights and suspended from each of the twelve hanger positions along the hanger bar. In lieu of thirty pounds, sixty pounds shall be suspended at the end positions of the hanger bar.

4.5.1.3 Load support and design characteristics test of hanger and hanger receptacle. The hanger undergoing testing shall be suspended from its receptacle on the hanger bar with a weight load of at least 30 pounds. The hanger bar need not be assembled to the rack. One half of the load shall be on each side of the stem and be sustained by the shoulder of the hanger within six inches of the stem. The loaded hanger shall remain in the receptacle for at least five minutes and then removed. Any of the following shall constitute failure of the test.

(a) The failure of the suspension stem or hook to remain firmly fixed to the shoulder of the hanger. No slippage will be permitted. (Distortion of the hook shall not be considered failure, however, the hanger shall not drop from its receptacle within the five minute period).

(b) A cut or other deformation in the plastic which is longer than 20 percent of the total diameter of the ball (or similar formation).

(c) A deformed receptacle.

4.5.2 Finishing tests. A 20 gage steel panel shall be prepared in accordance with 3.4 and subjected to the tests specified in 4.5.2.1, 4.5.2.2 and 4.5.2.3.

4.5.2.1 Hardness test. The dried film shall withstand the firm stroke of a 2H pencil held at a 45 degree angle and pushed across film surface, without evidence of marring when viewed at an oblique angle in a strong light.

4.5.2.2 Flexibility test. The dried film shall show no evidence of cracking or flaking under seven power magnification after a finished panel has been bent through 180 degrees over a 1/8 inch mandrel.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:38Z
Check the source to verify that this is the current version before use.

4.5.2.3 Adhesion test. The dried film shall not be removed from the panel when the latter has been scored with a razor blade through the film to the base metal in such a manner as to produce a grid of 1/8 inch squares, and a one inch wide piece of cellophane tape, Scotch Brand No. 600, is applied firmly to the grid surface and then quickly pulled from the surface.

4.5.3 Bend test for steel sheets. The steel sheets for parts to be formed shall withstand a 180 degree bend at room temperature with and across the grain without showing any cracks or fractures on the outside of the bend.

4.5.4 Spot welds. Spot welds shall meet the peel test of MIL-W-12332 and button diameter shall be as specified therein.

5. PREPARATION FOR DELIVERY

5.1 Packaging. Packaging shall be level A, B or C as specified (see 6.1).

5.1.1 Level A.

5.1.1.1 Six hanger style racks. Each unit shall be knocked down. The post shall be disassembled and each section protected with a fiberboard tube or panel folder secured with tape. The assembly hardware shall be packaged in a draw-string type cloth bag and wrapped together with drip pan and hangers in corrugated fiberboard, squared up and secured with pressure-sensitive tape. The finished surfaces of the base component and shelving, shall be protected from abrasion at all points of contact with the container and other components with nonmarring cushioning material not less than 1/4 inch in thickness. The material shall be secured with pressure-sensitive tape. The base, hardware, drip pans, hangers and posts shall be packaged together in a close-fitting box conforming to PPP-B-636, Type CF, class weather-resistant, variety SW, grade W5c, style OSC or FOL with end opening. Fiberboard blocking and bracing shall be provided with the fiberboard conforming to the requirements of PPP-F-320, Type CF, class domestic, variety SW, grade 200. The box shall be waterproof sealed with tape in accordance with the appendix to the box specification.

5.1.1.2 Twelve hanger style racks. Each unit shall be knocked down. The post shall be disassembled and each section protected with a fiberboard tube or panel folder secured with tape. The assembly hardware shall be packaged in a draw-string type cloth bag. The hangers, drip pan and braces shall be wrapped in corrugated fiberboard and secured with pressure sensitive tape. The shelves shall be individually wrapped or interleaved with corrugated fiberboard. The front and sides of the base, post and arms of the uprights shall be protected from abrasion at all points of contact with the container and other components with nonmarring cushioning material not less than 1/4 inch in thickness. The material shall be secured with pressure-sensitive tape. All components of the rack shall be packaged together in a close-fitting box conforming to PPP-B-636, Type CF, class weather-resistant, variety SW, grade W5c, style CSC or FOL with end opening. Fiberboard blocking and bracing shall be provided with the fiberboard conforming to the requirements of PPP-F-320, Type CF, class domestic, variety SW, grade 200. The box shall be waterproof sealed with tape in accordance with the appendix to the box specification.

5.1.2 Level B. The racks shall be packaged as specified in 5.1.1 except that the box shall be class domestic with a bursting strength of 275 p.s.i. The box shall be closed in accordance with the appendix to the box specification. Alternatively, the racks may be packaged in a close-fitting box conforming to PPP-B-636, style RSC, provided, that top and bottom fiberboard pads are utilized. The pads shall be in size, equal to the length and width of the inside dimensions of the box, with minus 1/2 inch tolerance. Closure shall be in accordance with method 1 of the appendix to the box specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:38Z
Check the source to verify that this is the current version before use.

5.1.3 Level C. The racks shall be packaged knocked-down in accordance with the manufacturer's standard practice, provided that this will insure protection for the rack during shipment and provide for safe delivery to its destination.

5.2 Packing. Packing shall be level A, B, or C as specified (see 6.1).

5.2.1 Level A. Racks of like description shall be packed in a close-fitting box conforming to PPP-B-601, overseas type; PPP-B-621, class 2 or PPP-B-640, class 2, Style A. The box shall be closed and strapped in accordance with the appendix to the applicable box specification. The gross weight shall not exceed 200 pounds.

5.2.2 Level B. Racks packaged as specified in 5.1.2 shall require no additional packing.

5.2.3 Level C. Racks packaged as specified in 5.1.3 shall be packed in containers that will assure carrier acceptance and safe arrival at destination in compliance with the National Motor Freight Classification rules and the Uniform Freight Classification rules.

5.3 Marking. Marking shall be in accordance with 5.3.1 or 5.3.2 as specified (see 6.1).

5.3.1 Civil agencies. In addition to the special markings required by 5.3.3, each shipping container shall be marked in accordance with Fed. Std. No. 123.

5.3.2 Military agencies. In addition to the special markings required by 5.3.3, each shipping container shall be marked in accordance with MIL-STD-129.

5.3.3 Special marking. To facilitate color identification, the front and one end of each shipping container shall have an area approximately 3 inches wide by the depth of the box painted to match the color of the wearing apparel rack contained therein. Alternatively, color panels of the size specified herein shall be applied to the containers. The adhesive used shall be of such quality as to assure that the color panels will not loosen or become detached during shipment and storage.

6. NOTES

6.1 Ordering data. Purchasers should select the preferred options permitted herein and include the following information in procurement documents.

(a) Title, number and date of this specification.
(b) Size of rack required (see 1.1).
(c) When preproduction sample requirement is waived (see 3.1).
(d) When special identification marking is required (see 3.5).
(e) Level of packaging and packing required (see 5.1 and 5.2).
(f) Color(s) required (see 3.2.7.2.1).
(g) If civil or military marking of shipping containers is required (see 5.3).

6.2 Color panels. Color panels of color(s) specified can be obtained from the Regional Business Service Centers, Federal Supply Service, General Services Administration.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:38Z
Check the source to verify that this is the current version before use.

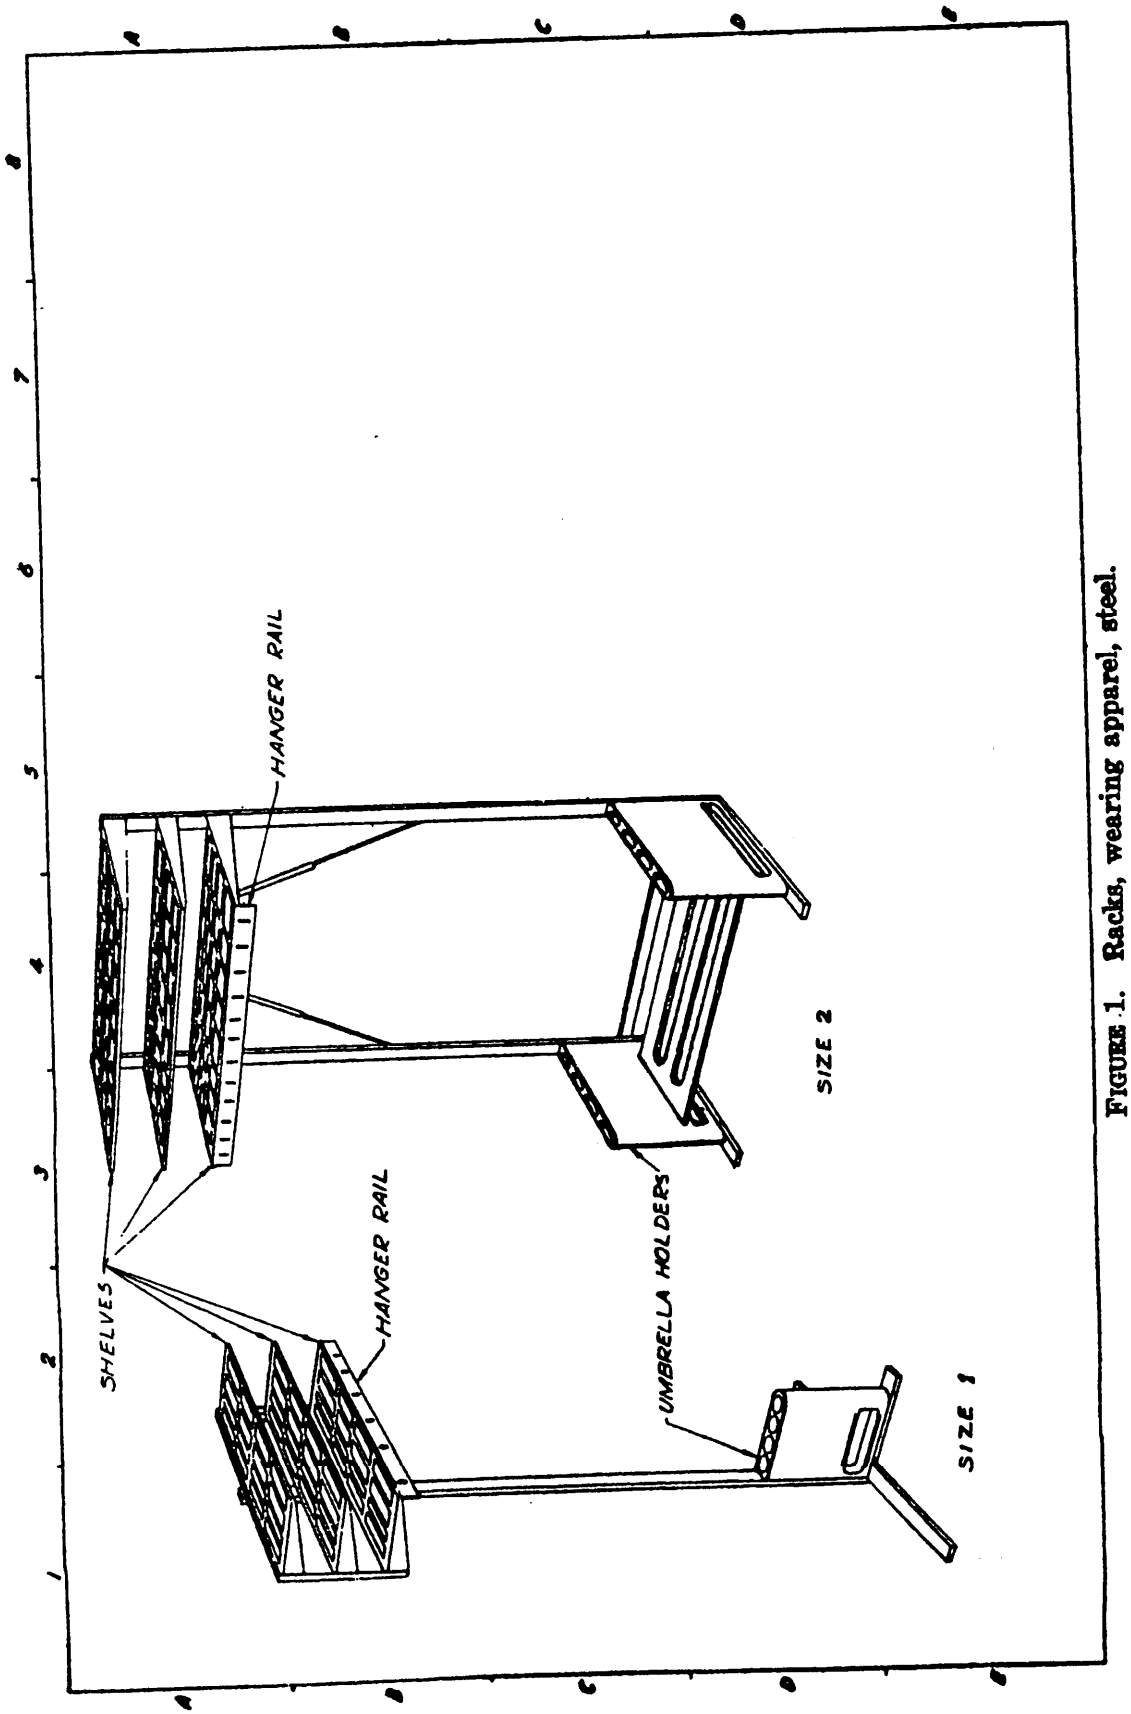


FIGURE 1. Racks, wearing apparel, steel.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:38Z
Check the source to verify that this is the current version before use.

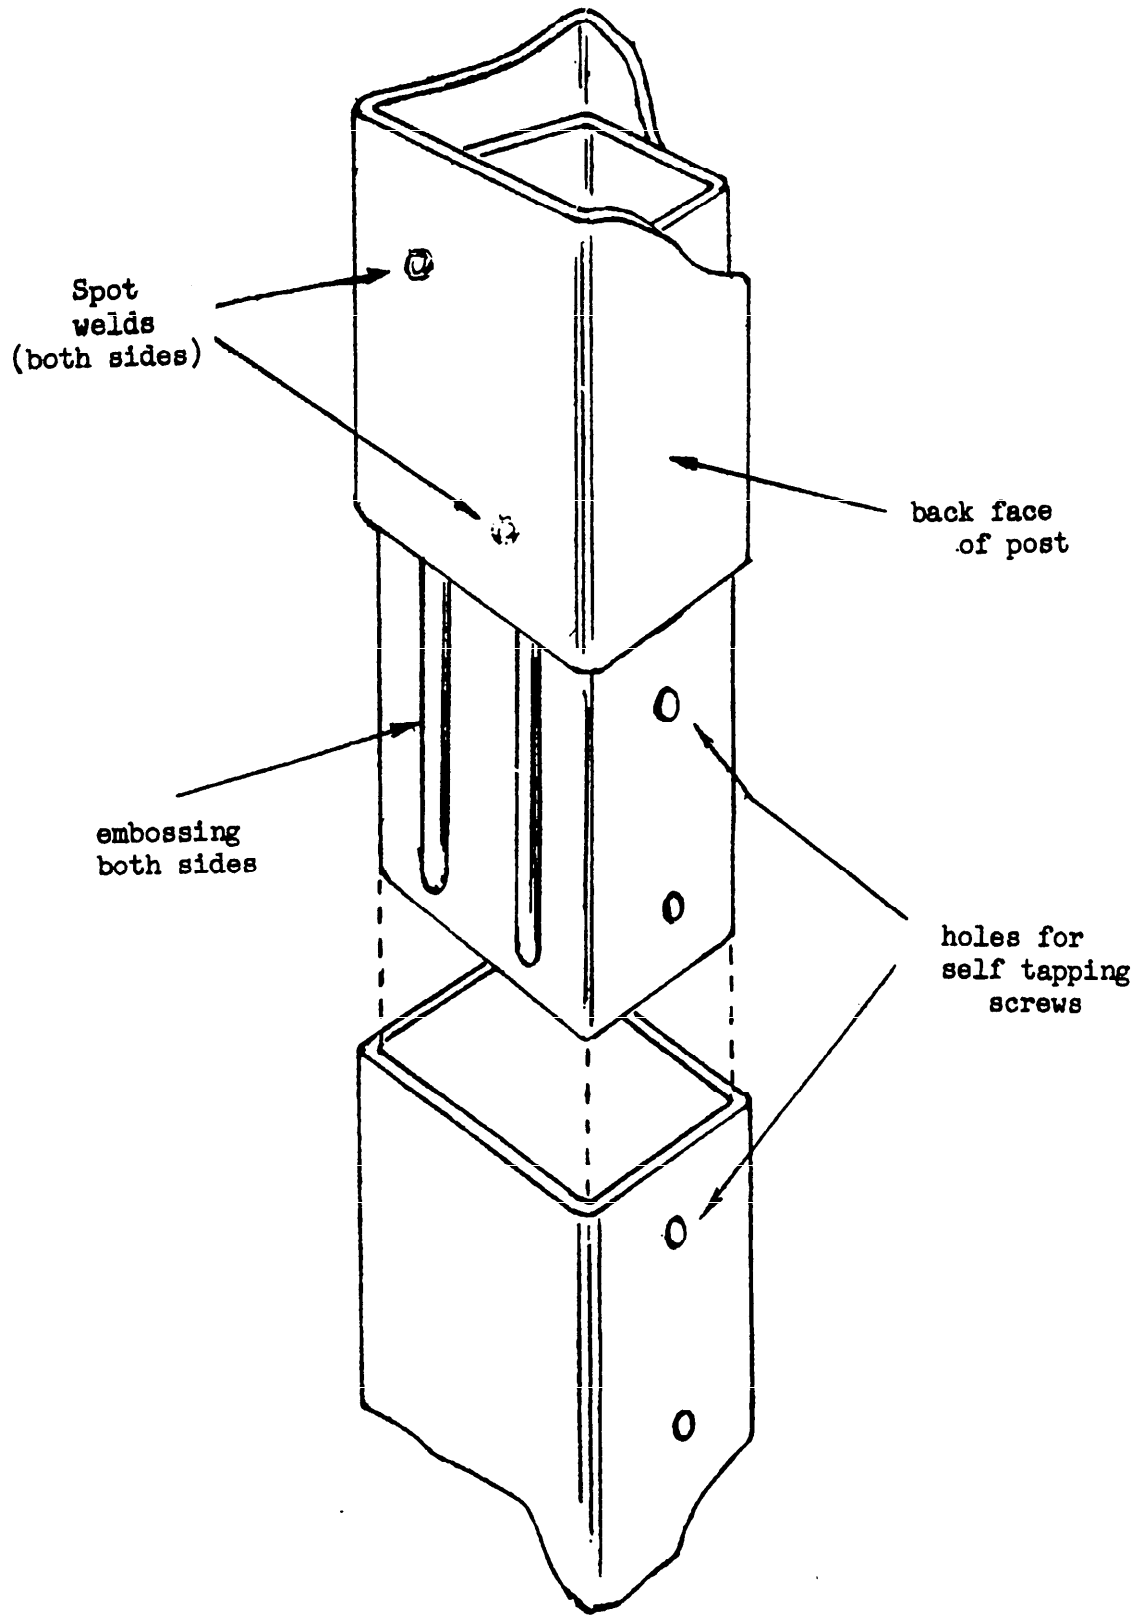


FIGURE 2. DETAIL - POST ASSEMBLY

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:38Z
Check the source to verify that this is the current version before use.