AA-T-00115(GSA-FSS)
March 27, 1963

INTERIM FEDERAL SPECIFICATION

TABLE, WRITING, DOUBLE, WITH STATIONARY RACK

This Interim Federal Specification was developed by the Standardization Division, Federal Supply Service, General Services Administration, Washington 25, D. C., based upon currently available technical information. It is recommended that Federal agencies use it in procurement and forward recommendations for changes to the preparing activity at the address shown above.

1. SCOPE AND CLASSIFICATION

1.1 Scope.- This specification covers requirements for materials and their assembly into sturdily constructed double writing tables of one type.

(All dimensions are overall and are minimum).

Width 42 inches, Depth 30 inches, Height 29 inches.

2. APPLICABLE DOCUMENTS

2.1 The following documents of the issue in effect on date of invitation for bids form a part of this specification to the extent specified herein:

Federal Specifications:

L-P-508	-	Plastic Sheet, Laminated, Decorative and Nondecorative.
MMM-A-100	-	Adhesive, Animal Gelatin.
MMM-A-125	-	Adhesive, Casein-Type, Water-and Mold-Resistant.
MMM-A-188	-	Adhesive, Urea-Resin-Type (Liquid and Powder).
PPP-B-576	-	Box, Wood, Cleated, Veneer, Paper Overlaid.
PPP-B-591	-	Boxes, Fiberboard, Wood-Cleated.
PPP-B-601	-	Boxes, Wood, Cleated-Plywood.
PPP-B-621	-	Boxes, Wood, Nailed and Lock-Corner.
PPP-B-636	-	Box, Fiberboard
PPP-C-843	-	Cushioning Material, Cellulosic.
PPP-E-911	-	Excelsior, Wood, Fabricated Pads and Bulk Form

FOR INSTRUCTIONS ON OBTAINING COPIES OF FEDERAL SPECIFICATIONS AND STANDARDS, SEE LAST PAGE.

FSC 7105

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:38Z
Check the source to verify that this is the current version before use.

Military Specifications:

MIL-L-10547 - Liners, Case Waterproof.

Military Standards:

MIL-STD-105 - Sampling Procedures and Tables for Inspection by Attributes.

MIL-STD-129 - Marking for Shipment and Storage.

(Copies of specifications and standards required by contractors in connection with specific procurement functions should be obtained from the procuring activity or as directed by the contracting officer.)

2.2 Other publications.- The following publication of the issue in effect on date of invitation for bids, forms a part of this specification.

Department of Commerce

CS 35-61 Hardwood Plywood.

(Copies of Department of Commerce publications are available from the Department of Commerce, Washington D. C.)

3. REQUIREMENTS

3.1 Preproduction sample. Unless otherwise specified (see 6.1), and as soon as practicable after award of the contract or order and prior to submission of any complete units for final acceptance, the supplier shall furnish a preproduction sample for inspection to determine conformance to this specification. Approval of the preproduction sample by the activity concerned shall not relieve the supplier of his obligation to supply furniture conforming to this specification. No changes or deviations from the approved preproduction sample will be acceptable without prior written approval from the contracting officer.

3.2 Identical items. All units of the same classification furnished under any specific contract shall be physically and mechanically identical. This requirement includes parts, assemblies, components, and accessories. No deviations will be acceptable without prior written approval.

3.3 Design. The design shown on Figure 1 is not restrictive to the details shown, however, the items shown represent the typical design required. Alternate design offered shall be similar.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:38Z
Check the source to verify that this is the current version before use.

3.4 Materials. Materials, construction, and finish shall be in accordance with requirements specified herein. Any material not definitely specified shall be the best of its kind new and unused and shall be free from all defects and imperfections that might adversely affect the serviceability and appearance of the finished product.

3.4.1 Adhesives.

3.4.1.1 Animal. Animal glue shall conform to Type I, Grade J-1 or better, or Type II of MMM-A-100.

3.4.1.2 Casein. Casein glue shall conform to Type II of MMM-A-125.

3.4.1.3 Urea formaldehyde. Urea formaldehyde resin adhesive shall conform to MMM-A-188.

3.4.2 Hardware.

(a) Ferrules shall be of brass or gold anodized aluminum.

(b) Glides shall be of the self-leveling type, with floor contact surface of stainless steel or linear type high density polyethylene.

3.4.3 Steel tube. All steel tube for metal frame members shall be of round section of minimum 18 gage. Round section tubular steel with heavier gauge wall thickness is acceptable.

3.4.4. Laminated plastic surfacing. Plastic surfacing shall conform to the requirements of L-P-508, Style D, Type I, Grade HP, Class 1, Finish A. The plastic sheet shall be 0.062 inches thick with a plus or minus tolerance of 0.005 inches. Color shall be as specified (see 6.1).

3.4.5 Wood. Wood parts, including solid wood and plywood veneers, shall be of the kind of wood listed in Table I and of quality as herein specified. It is to be noted that the wide range of species indicated is not to be construed as all such species being acceptable, but rather species that will conform to a uniform finish color or tone.

3.4.5.1 Plywood. Plywood construction shall be equivalent to Commercial Standard CS 35-61 Type II bond, either 5 ply veneer or 3 ply lumber core plywood, grade 1 face veneer, grade 2 or better back veneer and clear grade lumber core.

3.4.5.2 Seasoning. All wood shall be uniformly kiln-dried to a moisture content of 5 to 8 percent and cured in controlled warm storage for a sufficient period of time to insure a uniform distribution of moisture among the individual pieces. After gluing, built-up solid panels, parts and posts shall be permitted to cure or condition to insure uniform distribution of glue joint moisture and eliminate sunken joints, spring back and built-up stresses that may impair serviceability or appearance of the finished item.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:38Z
Check the source to verify that this is the current version before use.

3.4.5.3 Solid exterior parts. All such parts shall be free of defects that may impair appearance or serviceability, except as follows:

(a) Sound tight knots of not more than 1/4 inch in average diameter, provided they are not grouped.

(b) Figure grain or discoloration, provided wood is such that it will permit a uniform color when finished.

3.4.5.4 Solid interior parts. Wood shall be free from defects that may impair appearance or serviceability, except as follows:

(a) Sound tight knots of not over 1/2 inch in average diameter, provided they are not grouped.

(b) Surface checks that are almost invisible.

(c) Gum or pitch pockets not over 1/8 inch wide and 2 inches long.

3.5 Construction.

3.5.1 Tables. Tables shall be built to conform to the approved design and this specification (see Figure 1).

3.5.1.1 Top construction. Tables tops shall consist of the following:

(a) A laminated plastic surfacing sheet conforming to 3.4.4.

(b) A plywood panel conforming to 3.4.5.1. The panel shall be at least 1-1/8 inches thick.

(c) A minimum 0.060 inch nominal thickness backing sheet.

(d) Laminated plastic self-edging in accordance with 3.5.1.1.1.

The laminated plastic sheet shall be bonded to the surface of panels, and the backing sheet to the underside of panels, in accordance with the plastic manufacturer's instructions. Completed top shall be at least 1-3/16 inches thick.

3.5.1.1.1. Top self-edging. Self-edging shall completely cover exposed top panel edges and backing sheet without voids or crevices, and shall be finished by beveling the joints formed by the top surfacing and edging. Minimum width of edging shall be 1-5/8 inches. Where the thickness of top panel and plastic sheets is less than width of edging required, self-edging shall be fully supported by solid wood back-up strips secured to underside of tops.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:38Z
Check the source to verify that this is the current version before use.

TABLE I - VARIETIES OF WOOD

EXPOSED PARTS	UNEXPOSED PARTS	
VENEER PANEL FACE OR SOLID PARTS	VENEER PANEL FACE	SOLID PARTS
Beech	Ash	Ash
Birch	Beech	Beech
Cherry	Birch	Birch
Elm	Cherry	Cherry
Hackberry	Elm	Elm
Hickory	Hackberry	Gum
Mahogany	Hickory	Maple
Maple	Holly	Oak
Oak	Magnolia	Poplar
Pecan	Mahogany	Sycamore
	Maple	
Walnut	Oak Pean Sweet Gum Sycamore Walnut Yellow Poplar	

3.5.1.2 Single tube leg construction. Legs shall be of round steel tube conforming to 3.4.3. Legs shall be of 1-1/2 inch minimum outside diameter, 1-3/4 inches maximum outside diameter, swaged or tapered to a smaller diameter as design requires and fitted with ferrules and glides conforming to 3.4.2.

3.5.1.2.1 Leg assembly. Legs shall be assembled to tops by one of the following methods:

(a) Steel plates shall be accurately alined at each corner of underside of table top and secured with a minimum of 4 self-tapping Type A sheet metal screws. Holes shall be drilled through each plate, and internally threaded for attachment of leg plates with machine screws. The top of each leg shall be accurately alined and securely welded to a steel plate with holes to receive machine screws for attaching to plate at underside of top.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:38Z
Check the source to verify that this is the current version before use.

(b) A die formed steel clamp type leg collar bracket shall be accurately alined at each corner and secured to underside of table top with a minimum of 4 self-tapping Type A sheet metal screws. Leg bracket clamp shall be so designed as to allow for leg height adjustment, and shall secure top of leg to underside of table by a minimum clamp length of 1-1/2 inches linear dimension. Clamp shall enclose approximately 80 percent of the leg perimeter.

(c) A steel plate shall be accurately alined and securely welded to the top of each leg and secured to the underside of top with a minimum of six self-tapping Type A sheet metal screws.

3.5.1.3 Fastenings for assembly. If table offered is of the knocked-down type, all wood screws, sheet metal screws, machine screws and other fastenings required for proper assembly shall be packaged with each item, together with complete assembly instructions.

3.5.1.4 Stationary divider. The stationary divider (see figure 1) shall extend a minimum of 29 inches, over-all, across the depth of the table top. Plywood shall be not less than 13/16 inch thick, with the 4 inch high side and end members joined by means of tongue and groove or a butt joint. When a butt joint is employed, the inside corners shall be reinforced by 4 corner brackets. The inside face of the ends shall be dadoed at the center to receive the 6 inch high sub-divider. The ends of the sub-divider shall be rounded to a 1 inch radius. The outer faces of the two side and two end members shall be surfaced in plastic laminate specified in 3.4.4. The sub-divider shall be surfaced in plastic laminate specified in 3.4.4 on both faces and exposed edge. The entire assembly shall be secured (from underside of table) by a minimum of 10 screws.

3.5.2 Gluing. Glue shall be applied to joint surfaces in an adequate and uniform manner as recommended by the glue manufacturer. Assembly periods, clamping or pressing time shall be in accordance with the glue manufacturer's instructions. The kinds and types of adhesives for the fabrication of components and assembly of items shall be as shown in Table II.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:38Z
Check the source to verify that this is the current version before use.

TABLE II. GLUING

Kind of glue	Permitted use
Animal type:	
MMM-A-100, type I, Grade J-1 or better or type II	Assembly joints Lumber core Glue blocks
Casein type:	
MMM-A-125, type II.	Assembly joints Lumber core Glue blocks
Resin type:	
MMM-A-188	Plywood Edge Joining Edge banding Laminated thermosetting sheets Laminated construction

3.6 Finish (metal).

3.6.1 Unexposed parts. Unexposed parts shall be zinc plated, cadmium plated, or similarly treated for corrosion resistance.

3.6.2 Exposed parts. Exposed metal parts shall have bronze finish.

3.6.2.1 Bronze finish.

3.6.2.1.1 Preparation for bronze finish. Metal shall be prepared for finishing by one of the following methods:

(a) For electroplated finish. Metal shall be prepared by the following steps: (1) cleaning with a cathodic cleaner, (2) and an anodic cleaner, followed by (3) a rinse, after which the work shall be (4) acid dipped, and (5) rinsed again prior to plating.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:38Z
Check the source to verify that this is the current version before use.

(b) For electrostatically applied finish. Metal shall be prepared for finishing by suitable buffing of the tubing, and a minimum four step phosphatizing process. When prime strip is used, buffing is not required if no visible defects are evident.

3.6.2.1.2 Application of bronze finish. Prepared surfaces shall receive bronze finish, accomplished by one of the following methods:

(a) Prepared surface shall have an electroplated bronze finish with a baked-on clear organic coating of phenolic synthetic resin.

(b) Prepared surface shall receive a minimum of two coats of metallic pigmented bronze alkyd or epon phenolic coating, electrostatically applied, and thoroughly baked hard.

3.7 Finish (wood).

3.7.1 Color of finish. Exposed wood parts shall be finished to match the laminated plastic surfacing.

3.7.2 Application of finish. All wood parts exposed to view shall be thoroughly cleaned and sanded smooth with all corners and edges softened. These parts shall be finished as listed below. The application of finishing materials, drying time, cleaning and rubbing shall be controlled to produce items with a smooth uniform surface, without blisters, runs, wrinkles, etc. All unexposed parts shall be machined smooth and clean. These unexposed parts shall have at least one coat of lacquer sealer.

3.7.2.1 Pigmented lacquer toner finish (transparent).

Lacquer toner shall be applied so as not to cloud or obscure the wood grain to any considerable degree.

Minimum steps for achieving finish shall be as follows:

(a) Application of lacquer toner sufficient to provide the desired effect.

(b) 1 coat of clear stain, if required by finish.

(c) 1 coat of lacquer sealer.

(d) 1 filler coat.

(e) 2 coats of clear lacquer.

3.8 Workmanship. Workmanship shall be of the highest quality throughout.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:38Z
Check the source to verify that this is the current version before use.

4. QUALITY ASSURANCE PROVISIONS

4.1 The supplier is responsible for the performance of all inspection requirements as specified herein. Except as otherwise specified, the supplier may utilize his own or any other inspection facilities and services acceptable to the Government. Inspection records of the examination and tests shall be kept complete and available to the Government as specified in the contract or order. The Government reserves the right to perform any of the inspections set forth in the specification where such inspections are deemed necessary to assure supplies and services conform to prescribed requirements.

4.2 Preproduction inspection. The preproduction sample shall be examined as specified in 4.3.3.1.

4.3 Production inspection.

4.3.1 Lot. All tables offered for delivery at one time shall be considered a lot for purpose of inspection.

4.3.2 Sampling. Sampling for examination shall be in accordance with MIL-STD-105. The AQL shall be 2.5 percent defective for major defects and 6.5 percent defective for minor defects.

4.3.3 Examination. Samples selected in accordance with 4.3.2 shall be examined for the defects listed in 4.3.1.1 in accordance with MIL-STD-105. Any sample having one or more of the defects listed shall be considered a defective unit.

4.3.3.1 Classification of defects.

Categories	Defects
Major:	
101	Tables not size specified.
102	Components missing.
103	Materials not as specified.
104	Design not as specified.
105	Construction not as specified.
106	Finish not as specified.
107	Tables not rigid without undue sway or wobble.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:38Z
Check the source to verify that this is the current version before use.

Categories	Defects
Major:	
108	Split or fracture completely through tubular metal or any sharp edge or protrusion that could cause injury or tear clothing.
109	Surface of tubular metal cracked or contains burrs or rough edges.
110	Tubular metal buckled or distorted or bent out of shape affecting serviceability or appearance when in use position.
111	More than one nut, bolt, or screw missing.
112	Glides missing or broken.
113	Poor fit of component parts (except nuts, bolts, and screws).
114	Plastic surfacing and edging chipped, scratched, dented, or contains ripples.
115	Joints between plastic surfacing and plastic edging not tight, smooth or beveled.
116	Wood finish not matching laminated plastic.
117	Finish missing completely.
118	Areas of no finish.
Minor:	
201	Plastic surfacing and edging not color or pattern specified.
202	Nut, bolt, or screw missing, split or cracked, threads stripped, or more than one fastener loose or not drawn up tight.
203	Bolt or screw head broken off or evidence that fastener is not of type or size specified.
204	Screws in wrong location or spacing not as s specified.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:38Z
Check the source to verify that this is the current version before use.

Continued

Categories	Defects
205	Metal finish not color specified.
206	Finish discolored, scratched, wrinkled, rippled, or peeled, or any sag or run affecting appearance.
207	Finish rough (dirt or other foreign matter embedded in finish).
208	Assembly instructions not provided for knocked-down units.

4.4 Inspection of preparation for delivery. The packaging, packing, and marking of the furniture shall be inspected to determine compliance with the requirements of Section 5 of this specification.

5. PREPARATION FOR DELIVERY

For civil agency procurement the definitions and applications of levels of packaging and packing shall be in accordance with Fed. Std. No. 102.

5.1 Packing. Packing shall be level A, B or C as specified (see 6.2).

5.1.1 Level A. Each table shall be packed in a box conforming to PPP-B-636, class 2, V3c, style optional. The legs and divider shall be removed and the screws, washers and bolts placed in a cotton draw string bag and the bag secured to the table top. The legs, divider and table top shall be individually wrapped in kraft paper having a minimum basic weight of 40 pounds (24 X 36-500) and the wrapping secured in place with tape or twine. The wrapped components of the table shall be cushioned in the box with cellulosic material conforming to PPP-C-843, type II, class B or with interior built up fiberboard pads, so applied as to prevent marring and puncturing of surfaces. The cushioning material shall be secured fastened in place with tape or twine. The packed box shall be waterproof sealed with tape and reinforced with bands of filament tape in accordance with the appendix to the box specification.

5.1.2 Level B. Each table shall be disassembled, wrapped, cushioned and packed as specified in 5.1.1 except that the box shall be Type I, class 1 and waterproof sealing with tape shall not be required. Sealing closure and strapping shall be in accordance with the appendix to the box specification.

5.1.3 Level C. Each table shall be packed to insure carrier acceptance and safe delivery to destination in a container complying with the rules and regulations applicable to the mode of transportation.

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:38Z
Check the source to verify that this is the current version before use.

5.2 Marking

5.2.1 Civil agencies. In addition to any special markings required by the contract or order the packages and shipping containers shall be marked in accordance with Fed. Std. No.123.

5.2.2 Military activities. In addition to any special markings required by the contract or order the packages and shipping containers shall be marked in accordance with the MIL-STD-129.

6. NOTES

6.1 Ordering data. Procurement documents should specify the following:

(a) Title, number, and date of this specification.

(b) Quantity required.

(c) If preproduction sample is not required (see 3.1).

(d) Pattern and color of laminated plastic surfacing required (see 3.4.4).

(e) Color of tubular frame members.

(f) Level of packaging and level of packing required (see 5.1 and 5.2).

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:38Z
Check the source to verify that this is the current version before use.

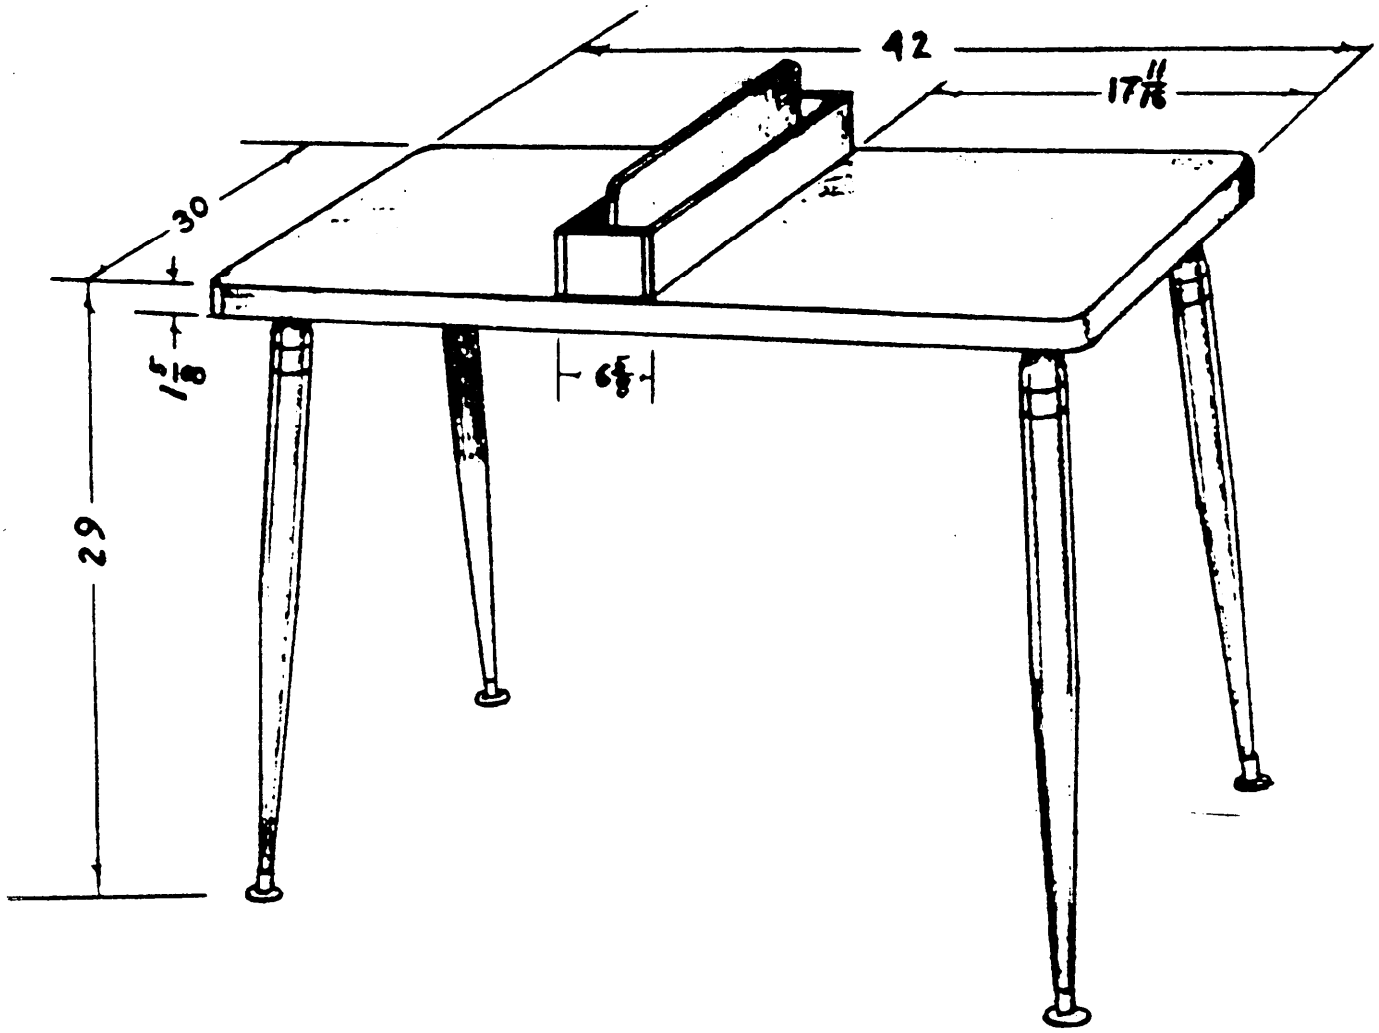


Fig. 1

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:38Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 119-R004

INSTRUCTIONS

This sheet is to be filled out by personnel either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity *(as indicated on reverse hereof)*.

SPECIFICATION

ORGANIZATION *(Of submitter)* | CITY AND STATE

CONTRACT NO. | QUANTITY OF ITEMS PROCURED | DOLLAR AMOUNT
$

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES.

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO IF "YES", IN WHAT WAY?

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity)* | DATE

DD FORM 1 APR 63 1426 REPLACES NAVSHIPS FORM 4863, WHICH IS OBSOLETE PLATE NO. 15419

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:38Z
Check the source to verify that this is the current version before use.

FOLD

DEPARTMENT OF THE NAVY

POSTAGE AND FEES PAID
NAVY DEPARTMENT

OFFICIAL BUSINESS

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-26T11:38Z
Check the source to verify that this is the current version before use.