MILITARY SPECIFICATION SHEET

PIN-RIVET, THREADED, TYPE V (100° FLUSH MS24694 TENSION HEAD, CLASS 4
(A-286 HIGH TEMPERATURE ALLOY, 95-115 KSI Fsu AND 160 KSI Ftu)

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the pin-rivet, threaded described herein shall consist of this document and the issue in effect of MIL-P-87988.

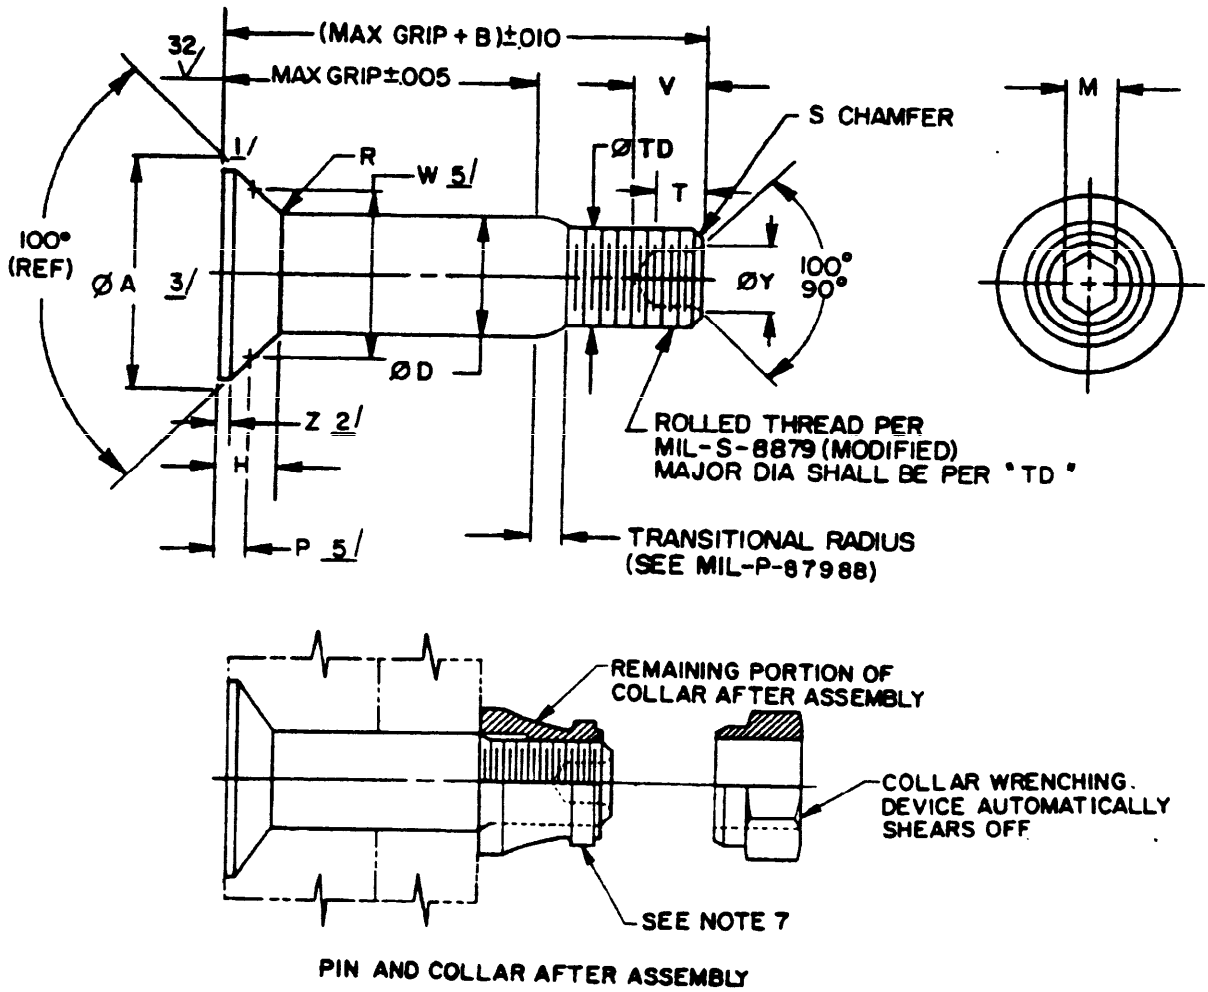


FIGURE 1. PIN-RIVET, THREADED, TYPE V (100° FLUSH MS24694 TENSION HEAD), CLASS 4 (A-286 HIGH TEMPERATURE ALLOY, 95-115 KSI Ftu AND 160 KSI Ftu)

DISTRIBUTION STATEMENT A. Approved for public release; distribution unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:28Z
Check the source to verify that this is the current version before use.

NOTES:

1. Dimensions in inches to be met after application of final coating or surface finish, unless otherwise specified.
1/ 2. Head edge out of roundness shall not exceed "F".
3. Concentricity: conical surface of head to "D" diameter within .005 FIM.
4. "H" dimensioned from maximum "D" diameter.
4/ 5. Evidence of broken edge across points.
2/ 6. Curved or flat edge manufacturer's option.
7. While this part is designed to be used in interference fit applications (because it has a transitional radius) it can also be used in noninterference or clearance applications. It is similar to HL49. "HL" is a registered trademark of Hi-Shear Corporation.
3/ 8. Concavity of head surface shall not exceed .001. Convexity of head surface shall not exceed .003 for -5, -6 and -8; .004 for -10 and -12; .006 for -14 and above (not including head marking identification).
9. Hole preparation in accordance with NAS618. (Information only)
5/ 10. All head dimensions shall comply with requirements of TABLE I of this slash sheet and TABLE X of procurement specification.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:28Z
Check the source to verify that this is the current version before use.

TABLE I. DASH NUMBERS AND DIMENSIONS

DIA NO.	NOM SIZE	THREAD (MODIFIED)	ØA	B REF	ØD WITHOUT SOLID FILM LUBE	ØD WITH SOLID FILM LUBE	ØTD	1/ F	H	R RAD	2/ Z MAX	S CHAMFER REF	SOCKET M HEX	SOCKET T DEPTH	SOCKET V MAX DRILL DEPTH	SOCKET ØY	DOUBLE SHEAR POUNDS MIN	TENSION POUNDS MIN
5	5/32	.1640-32 UNJC-3A	.3304 .3256	.312	.1635 .1630	.1635 .1625	.1595 .1570	.004	.0700 .0680	.025 .015	.015	.031 x 45°	.0801 .0791	.100 .080	.140	4/	4,010	2,180
6	3/16	.1900-32 UNJF-3A	.3813 .3765	.325	.1895 .1890	.1895 .1885	.1840 .1810	.005	.0805 .0785	.030 .020	.015	.031 x 45°	.0806 .0791	.100 .080	.145	.119 .104	5,380	3,180
8	1/4	.2500-28 UNJF-3A	.5066 .5018	.395	.2495 .2490	.2495 .2485	.2440 .2410	.006	.1079 .1059	.030 .020	.015	.031 x 45°	.0967 .0947	.110 .090	.160	.142 .122	9,300	5,820
10	5/16	.3125-24 UNJF-3A	.6335 .6287	.500	.3120 .3115	.3120 .3110	.3060 .3020	.007	.1349 .1329	.040 .030	.015	.047 x 45°	.1295 .1270	.130 .110	.200	.180 .160	14,600	9,200
12	3/8	.3750-24 UNJF-3A	.7604 .7556	.545	.3745 .3740	.3745 .3735	.3680 .3640	.008	.1619 .1599	.040 .030	.015	.047 x 45°	.1617 .1582	.160 .140	.239	.217 .197	21,000	14,000
14	7/16	.4375-20 UNJF-3A	.8884 .8812	.635	.4370 .4365	.4370 .4360	.4310 .4260	.009	.1894 .1864	.050 .040	.022	.047 x 45°	.1930 .1895	.190 .170	.278	.253 .233	28,600	18,900
16	1/2	.5000-20 UNJF-3A	1.0139 1.0068	.685	.4995 .4990	.4995 .4985	.4930 .4880	.010	.2158 .2128	.050 .040	.022	.047 X 45°	.2242 .2207	.220 .200	.323	.289 .269	37,300	25,600
18	9/16	.5625-18 UNJF-3A	1.1408 1.1337	.770	.5615 .5610	.5615 .5605	.5550 .5500	.010	.2430 .2400	.050 .040	.025	.063 X 45°	.2555 .2520	.260 .240	.371	.326 .306	47,200	32,400

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:28Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Material. A-286 high temperature alloy (UNS S66286) in accordance with AMS 5737 or AMS 5731.

2. Protective coating and surface treatment

   All pins shall be passivated in accordance with QQ-P-35.

   Lubricant:
   B - Solid film lubricant in accordance with MIL-L-46010 Type I.
   C - Cetyl alcohol lubricant in accordance with MIL-L-87132 Type I, Grade B.

3. Heat treatment. 160,000 psi tensile minimum (95,000 psi shear minimum) at 70° in accordance with MIL-H-6875.

4. Surface texture. Unless otherwise specified, all surfaces shall have a 125 microinch finish.


5. Part number. The part number consists of the letter "M", the basic number of this specification sheet, followed by a lubricant code letter, the first number indicats nominal diameters in thirty-seconds of an inch taken from TABLE I, the grip dash number indicates maximum grip length in sixteenths of an inch taken from TABLE II.

   Example: M87988/16B8-8

   - Grip dash number
   - First number
   - Lubricant
   - Specification sheet number

   M87988/16B8-8 indicates: Pin-Rivet, Threaded, Type V, (100° Flush MS24694 Tension Head), Class 4 (A-286 High Temperature Alloy, 95-115 KSI Fsu and 160 KSI Ftu); passivated, solid film lubricant; 8/32 nominal diameter; 8/16 maximum grip length.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:28Z
Check the source to verify that this is the current version before use.

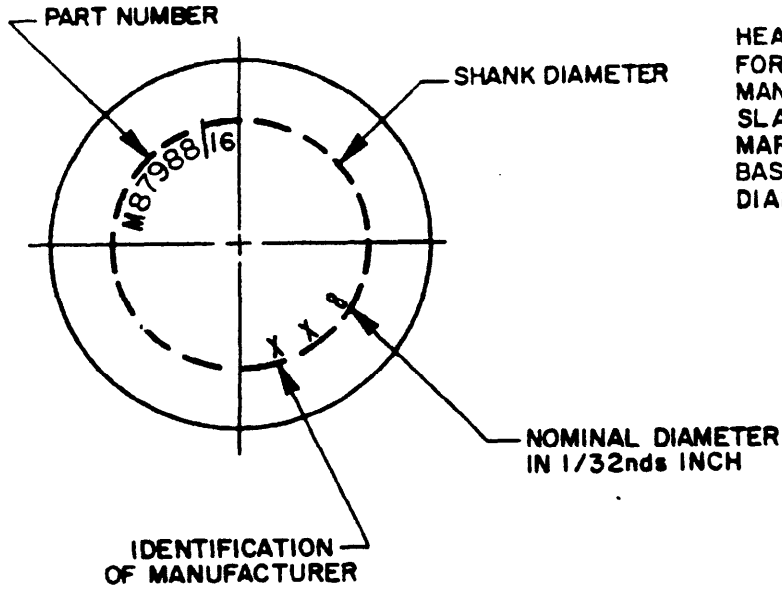

HEAD MARKING SHALL BE .010 MAXIMUM DEEP. FOR DASH 5,6 AND 8 SIZES ONLY, MARK MANUFACTURER IDENTIFICATION AND M PLUS SLASH SHEET (M16). FOR DASH 10 AND ABOVE, MARK MANUFACTURER IDENTIFICATION PLUS BASIC PART NUMBER (M87988/16-) AND DIAMETER.

TABLE II. GRIP AND LENGTH DIMENSIONS

GRIP DASH NO.	MAX GRIP ±.005	LENGTH ±.010 a/							
		DIAMETER DASH NUMBER AND THREAD SIZE							
		5 .1640-32	6 .1900-32	8 .2500-28	10 .3125-24	12 .3750-24	14 .4375-20	16 .5000-20	18 .5625-18
1	.062	.375							
2	.125	.437	.450	.520	.625	.670	.760	.810	
3	.188	.500	.513	.583	.688	.733	.823	.873	.958
4	.250	.562	.575	.645	.750	.795	.885	.935	1.020
5	.312	.625	.638	.708	.813	.858	.948	.998	1.082
6	.375	.687	.700	.770	.875	.920	1.010	1.060	1.145
7	.438	.750	.763	.833	.938	.984	1.073	1.123	1.218
8	.500	.812	.825	.895	1.000	1.045	1.135	1.185	1.270
9	.562	.875	.888	.958	1.063	1.108	1.198	1.248	1.332
10	.625	.937	.950	1.020	1.125	1.170	1.260	1.310	1.385
11	.688	1.000	1.013	1.083	1.188	1.233	1.323	1.373	1.450
12	.750	1.062	1.075	1.145	1.250	1.295	1.385	1.435	1.520
13	.812	1.125	1.138	1.208	1.313	1.358	1.448	1.498	1.582
14	.875	1.187	1.200	1.270	1.375	1.420	1.510	1.560	1.645
15	.938	1.250	1.263	1.333	1.438	1.483	1.573	1.623	1.708
16	1.000	1.312	1.325	1.395	1.500	1.545	1.635	1.685	1.770
17	1.062	1.375	1.388	1.458	1.563	1.608	1.698	1.748	1.832
18	1.125	1.437	1.450	1.520	1.625	1.670	1.760	1.810	1.895
19	1.188	1.500	1.513	1.583	1.688	1.733	1.823	1.873	1.958
20	1.250	1.562	1.575	1.645	1.750	1.795	1.885	1.935	2.020
21	1.312	1.625	1.638	1.708	1.813	1.858	1.948	1.998	2.082
22	1.375	1.687	1.700	1.770	1.875	1.920	2.010	2.060	2.145
23	1.438	1.750	1.763	1.833	1.938	1.983	2.073	2.123	2.208
24	1.500	1.812	1.825	1.895	2.000	2.045	2.135	2.185	2.270
25	1.562	1.875	1.888	1.958	2.063	2.108	2.198	2.248	2.332
26	1.625	1.937	1.950	2.020	2.125	2.170	2.260	2.310	2.395
27	1.688	2.000	2.013	2.083	2.188	2.233	2.323	2.373	2.458
28	1.750	2.062	2.075	2.145	2.250	2.295	2.385	2.435	2.520
29	1.812	2.125	2.138	2.208	2.313	2.358	2.448	2.498	2.582
30	1.875	2.187	2.200	2.270	2.375	2.420	2.510	2.560	2.645
31	1.938	2.250	2.263	2.333	2.438	2.483	2.573	2.623	2.708
32	2.000	2.312	2.325	2.395	2.500	2.545	2.635	2.685	2.770

a/ Nominal length equals maximum grip plus "B". See FIGURE 1.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:28Z
Check the source to verify that this is the current version before use.

Custodians:
Army - AV
Navy - AS
Air Force - 99

Review activities:
Army - GL
DLA - IS
NSA - NS

User activities:

Preparing activity:
Air Force - 82

Agent:
DLA - IS

(Project 5320-0557)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:28Z
Check the source to verify that this is the current version before use.