MILITARY SPECIFICATION SHEET

PIN-RIVET, THREADED, TYPE V (100° FLUSH MS24694 TENSION HEAD), CLASS 6 (PH13-8 Mo CORROSION RESISTANT STEEL, 125 KSI Fsu AND 220 KSI Ftu)

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the pin-rivet, threaded described herein shall consist of this document and the issue in effect of MIL-P-87988.

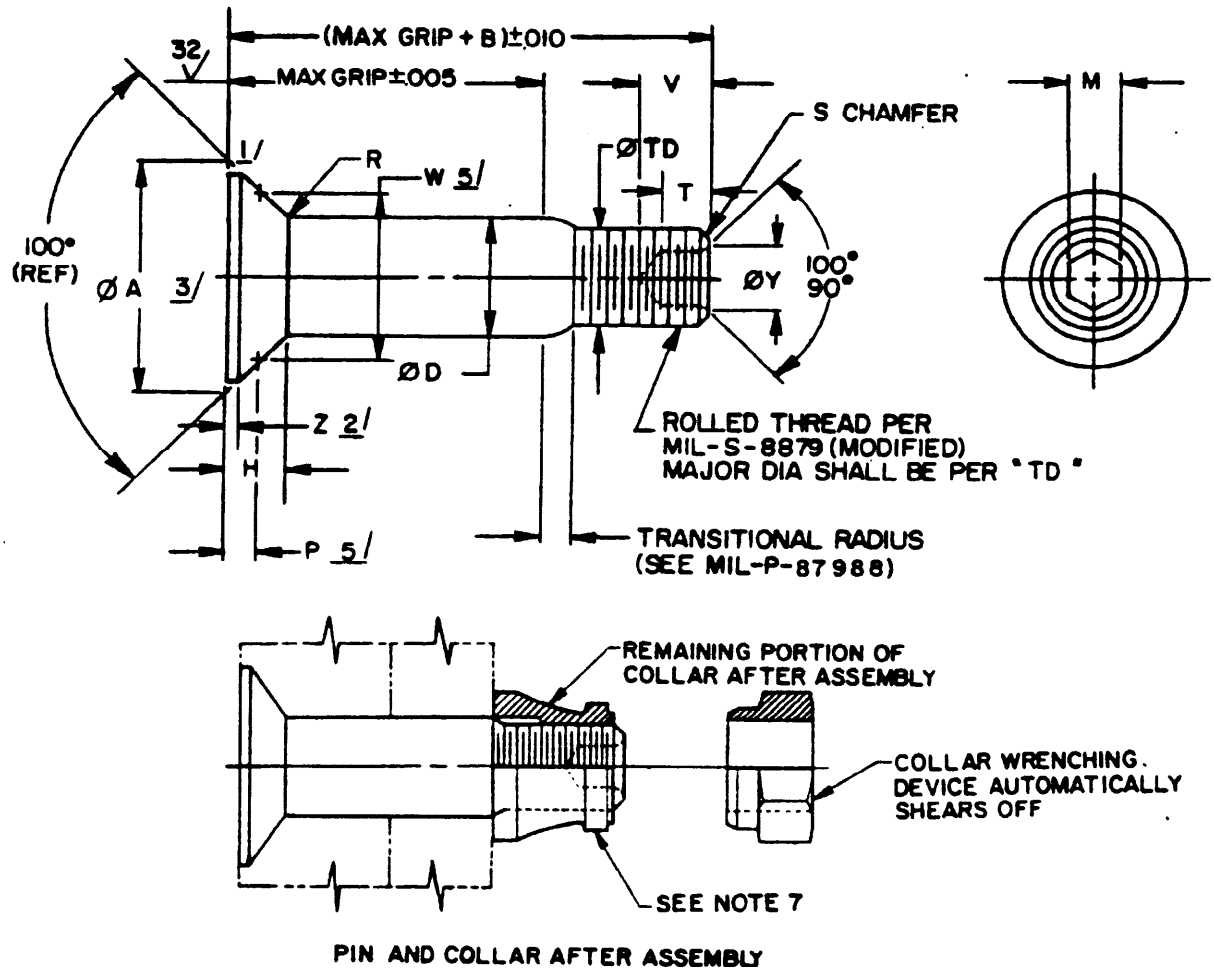


FIGURE 1. PIN-RIVET, THREADED, TYPE V (100° FLUSH MS24694 TENSION HEAD), CLASS 6 (PH13-8 Mo CORROSION RESISTANT STEEL, 125 KSI Fsu AND 220 KSI Ftu)

DISTRIBUTION STATEMENT A. Approved for public release; distribution unlimited.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:29Z
Check the source to verify that this is the current version before use.

NOTES:

1. Dimensions in inches to be met after application of final coating or surface finish, unless otherwise specified.
1/ 2. Head edge out of roundness shall not exceed "F".
3. Concentricity: conical surface of head to "D" diameter within .005 FIM.
4. "H" dimensioned from maximum "D" diameter.
2/ 5. Curved or flat edge manufacturer's option.
6. While this part is designed to be used in interference fit applications (because it has a transitional radius) it can also be used in noninterference or clearance applications. It is similar to HL647. "HL" is a registered trademark of Hi-Shear Corporation.
4/ 7. Evidence of broken edge across points.
8. Hole preparation in accordance with NAS618. (Information only)
5/ 9. All head dimensions shall comply with requirements of TABLE I of this slash sheet and TABLE X of procurement specification.
3/ 10. Concavity of head surface shall not exceed .001. Convexity of head surface shall not exceed .003 for -5, -6, and -8; .004 for -10 and 12; .006 for -14 and above. (not including head marking identification).

Source: https://assist.dla.mil -- Downloaded: 202610-23T12:29Z
Check the source to verify that this is the currentversion before use.

TABLE I. DASH NUMBERS AND DIMENSIONS

DIA NO.	NOM SIZE	THREAD (MODIFIED)	ØA	B REF	ØD WITHOUT SOLID FILM LUBE	ØD WITH SOLID FILM LUBE	ØTD	1/ P	H	R RAD	2/ Z MAX	S CHAMFER REF	SOCKET N HEX	SOCKET T DEPTH	SOCKET V MAX DRILL DEPTH	SOCKET ØY	DOUBLE SHEAR POUNDS MIN	TENSION POUNDS MIN
5	5/32	.1640-32 UNJC-3A	.3304 .3256	.312	.1635 .1630	.1635 .1625	.1595 .1570	.004	.0700 .0680	.025 .015	.010	.031 x 45°	.0801 .0791	.100 .080	.140	4/	5,280	2,940
6	3/16	.1900-32 UNJF-3A	.3813 .3765	.325	.1895 .1890	.1895 .1885	.1840 .1810	.005	.0805 .0785	.030 .020	.015	.031 x 45°	.0806 .0791	.100 .080	.145	.119 .104	7,060	4,350
8	1/4	.2500-28 UNJF-3A	.5066 .5018	.395	.2495 .2490	.2495 .2485	.2440 .2410	.006	.1080 .1060	.030 .020	.015	.031 x 45°	.0967 .0947	.110 .090	.160	.142 .122	12,260	7,750
10	5/16	.3125-24 UNJF-3A	.6335 .6287	.500	.3120 .3115	.3120 .3110	.3060 .3020	.007	.1350 .1330	.040 .030	.015	.047 x 45°	.1295 .1270	.130 .110	.200	.180 .160	19,160	12,300
12	3/8	.3750-24 UNJF-3A	.7604 .7556	.545	.3745 .3740	.3745 .3735	.3680 .3640	.008	.1620 .1600	.040 .030	.015	.047 x 45°	.1617 .1582	.160 .140	.239	.217 .197	27,600	19,100
14	7/16	.4375-20 UNJF-3A	.8884 .8812	.635	.4370 .4365	.4370 .4360	.4310 .4260	.009	.1895 .1865	.050 .040	.022	.047 x 45°	.1930 .1895	.190 .170	.278	.253 .233	37,500	25,800
16	1/2	.5000-20 UNJF-3A	1.0139 1.0068	.685	.4995 .4990	.4995 .4985	.4930 .4880	.010	.2160 .2130	.050 .040	.022	.047 x 45°	.2242 .2207	.220 .200	.323	.289 .269	49,100	34,300
18	9/16	.5625-18 UNJF-3A	1.1408 1.1337	.770	.5615 .5610	.5615 .5605	.5550 .5500	.010	.2430 .2400	.050 .040	.025	.063 x 45°	.2555 .2520	.260 .240	.371	.326 .306	62,100	43,500

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:29Z
Check the source to verify that this is the current version before use.

REQUIREMENTS:

1. Material. PH13-8Mo stainless steel (UNS S13800) in accordance with AMS 5629.

2. Protective coating and surface treatment

   All pins shall be passivated in accordance with QQ-P-35.


   Lubricant:
   B - Solid film lubricant in accordance with MIL-L-46010 Type I.
   C - Cetyl alcohol lubricant in accordance with MIL-L-87132 Type I, Grade B.

3. Heat treatment. 125,000 psi shear minimum in accordance with MIL-H-6875.

4. Surface texture. Unless otherwise specified, all surfaces shall have a 125 microinch finish.


5. Part number. The part number consists of the letter "M", the basic number of this specification sheet, followed by a lubricant code letter, the first number indicates nominal diameters in thirty-seconds of an inch taken from TABLE I, the grip dash number indicates maximum grip length in sixteenths of an inch taken from TABLE II.

   Example: M87988/24B8-8

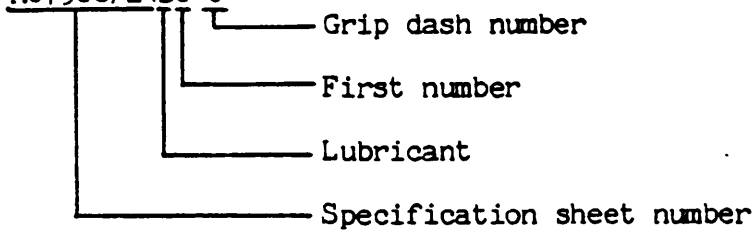

M87988/24B8-8 indicates: Pin-Rivet, Threaded, Type V (100° Flush MS24694 Tension Head), Class 6 (PH13-8 Mo Corrosion Resistant Steel, 125 KSI Fsu and 220 KSI Ftu); passivated, solid film lubricant; 8/32 nominal diameter; 8/16 maximum grip length.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:29Z
Check the source to verify that this is the current version before use.

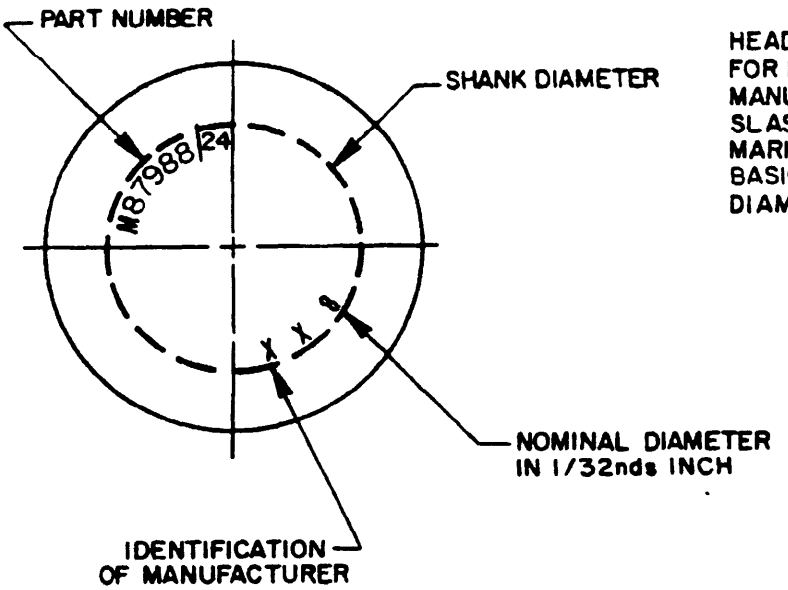

HEAD MARKING SHALL BE .010 MAXIMUM DEEP. FOR DASH 5,6 AND 8 SIZES ONLY, MARK MANUFACTURER IDENTIFICATION AND M PLUS SLASH SHEET (M24). FOR DASH 10 AND ABOVE, MARK MANUFACTURER IDENTIFICATION PLUS BASIC PART NUMBER (M87988/24-) AND DIAMETER.

TABLE II. GRIP AND LENGTH DIMENSIONS

GRIP DASH NO.	MAX GRIP ±.005	LENGTH ±.010 a/							
		DIAMETER DASH NUMBER AND THREAD SIZE							
		5 .1640-32	6 .1900-32	8 .2500-28	10 .3125-24	12 .3750-24	14 .4375-20	16 .5000-20	18 .5625-18
1	.062	.375							
2	.125	.437	.450	.520	.625	.670	.760	.810	
3	.188	.500	.513	.583	.688	.733	.823	.873	.958
4	.250	.562	.575	.645	.750	.795	.885	.935	1.020
5	.312	.625	.638	.708	.813	.858	.948	.998	1.082
6	.375	.687	.700	.770	.875	.920	1.010	1.060	1.145
7	.438	.750	.763	.883	.938	.984	1.073	1.123	1.218
8	.500	.812	.825	.895	1.000	1.045	1.135	1.185	1.270
9	.562	.875	.888	.958	1.063	1.108	1.198	1.248	1.332
10	.625	.937	.950	1.020	1.125	1.170	1.260	1.310	1.385
11	.688	1.000	1.013	1.083	1.188	1.233	1.323	1.373	1.450
12	.750	1.062	1.075	1.145	1.250	1.295	1.385	1.435	1.520
13	.812	1.125	1.138	1.208	1.313	1.358	1.448	1.498	1.582
14	.875	1.187	1.200	1.270	1.375	1.420	1.510	1.560	1.645
15	.938	1.250	1.263	1.333	1.438	1.483	1.573	1.623	1.708
16	1.000	1.312	1.325	1.395	1.500	1.545	1.635	1.685	1.770
17	1.062	1.375	1.388	1.458	1.563	1.608	1.698	1.748	1.832
18	1.125	1.437	1.450	1.520	1.625	1.670	1.760	1.810	1.895
19	1.188	1.500	1.513	1.583	1.688	1.733	1.823	1.873	1.958
20	1.250	1.562	1.575	1.645	1.750	1.795	1.885	1.935	2.020
21	1.312	1.625	1.638	1.708	1.813	1.858	1.948	1.998	2.082
22	1.375	1.687	1.700	1.770	1.875	1.920	2.010	2.060	2.145
23	1.438	1.750	1.763	1.833	1.938	1.983	2.073	2.123	2.208
24	1.500	1.812	1.825	1.895	2.000	2.045	2.135	2.185	2.270
25	1.562	1.875	1.888	1.958	2.063	2.108	2.198	2.248	2.332
26	1.625	1.937	1.950	2.020	2.125	2.170	2.260	2.310	2.395
27	1.688	2.000	2.013	2.083	2.188	2.233	2.323	2.373	2.458
28	1.750	2.062	2.075	2.145	2.250	2.295	2.385	2.435	2.520
29	1.812	2.125	2.138	2.208	2.313	2.358	2.448	2.498	2.582
30	1.875	2.187	2.200	2.270	2.375	2.420	2.510	2.560	2.645
31	1.938	2.250	2.263	2.333	2.438	2.483	2.573	2.623	2.708
32	2.000	2.312	2.325	2.395	2.500	2.545	2.635	2.685	2.770

a/ Nominal length equals maximum grip plus "B". See FIGURE 1.

Source: https://assist.dla.mil -- Downloaded: 202610-23T12:29Z
Check the source to verify that this is the current version before use.

Custodians:
Army - AV
Navy - AS
Air Force - 99

Review activities:
Army - GL
DLA - IS
NSA - NS

User activities:

Preparing activity:
Air Force - 82

Agent:
DLA - IS

(Project 5320-0565)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T12:29Z
Check the source to verify that this is the current version before use.