
FED. SUP CLASS
6240

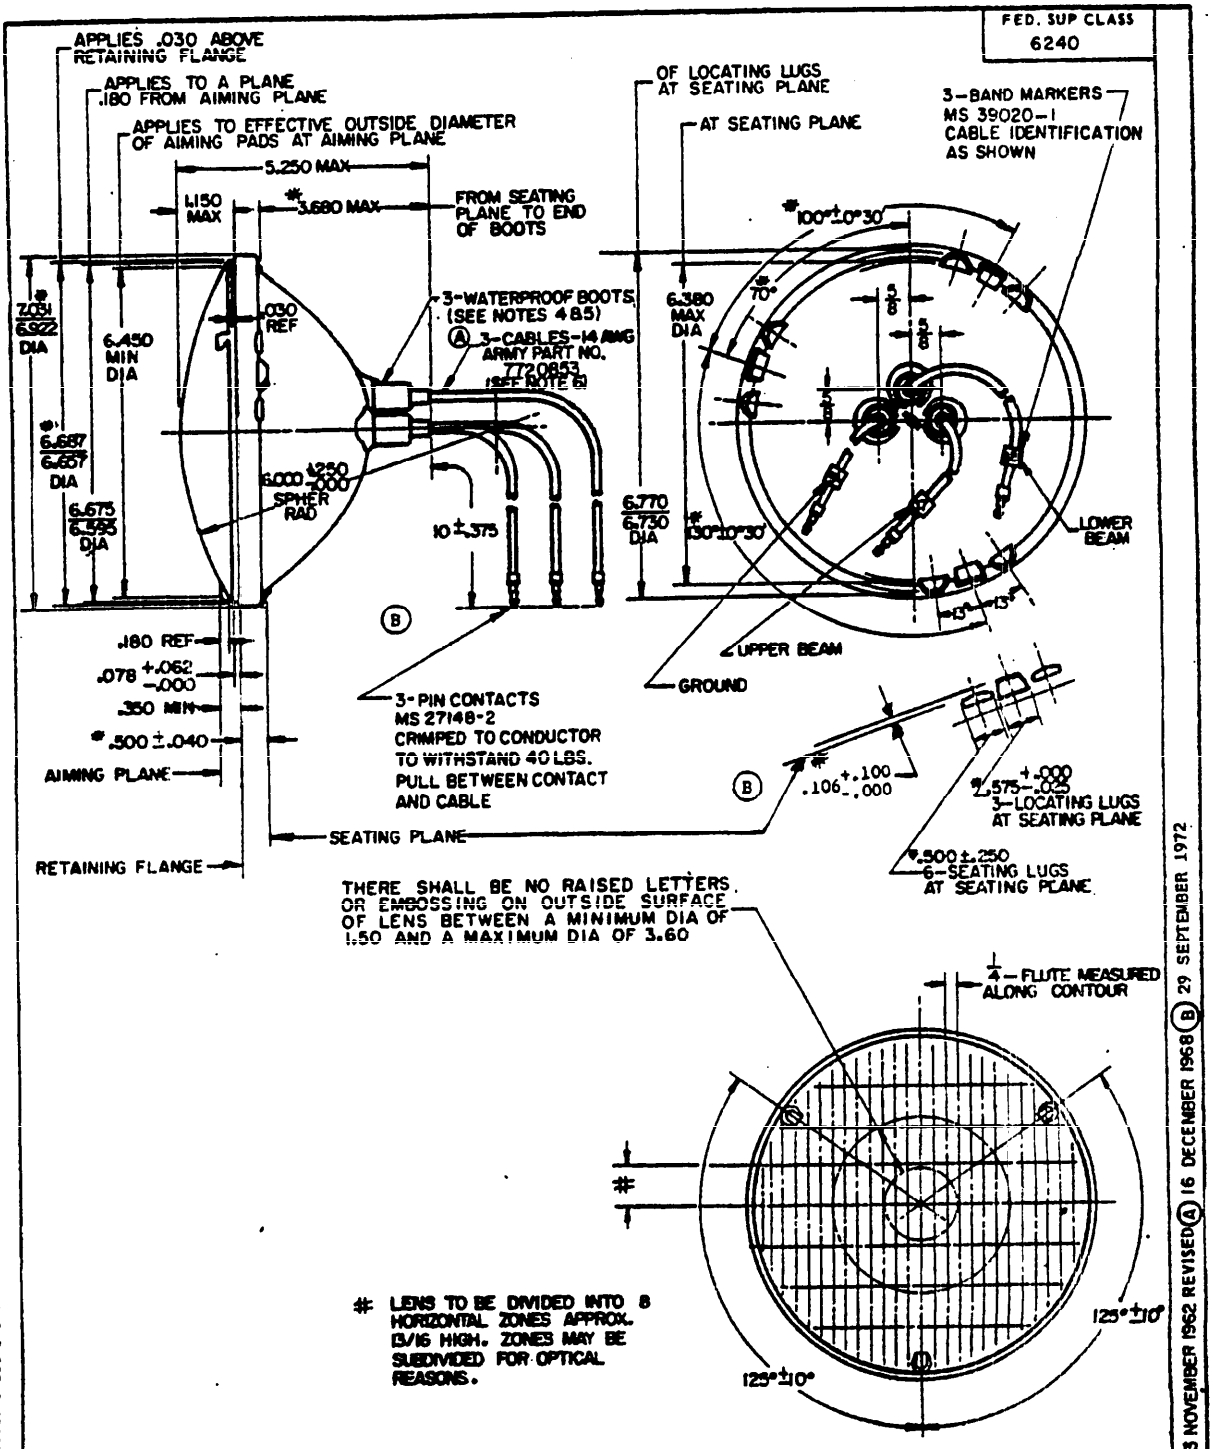

LENS TO BE DIVIDED INTO 8 HORIZONTAL ZONES APPROX. 13/16 HIGH. ZONES MAY BE SUBDIVIDED FOR OPTICAL REASONS.

Ⓑ FOR CHANGES SEE SHEETS 1 AND 3

ARMY MS PART NO.	ARMY FORMER PART NO.	RATED VOLTS	RATED WATTS	DESIGN VOLTS	DESIGN AMPS	FILAMENT TYPE	RATED AVG. LAB LIFE	DESCRIPTION
MS 18008-4963	7998618	24	80/60	28/28	2.86/2.14	CC6/CC6	400/400 HRS	CLEAR GLASS LENS, PRISMATIC—60W FILAMENT SHIELD

APPROVED 23 NOVEMBER 1962 REVISED Ⓐ 16 DECEMBER 1968 Ⓑ 29 SEPTEMBER 1972

USER ACTIVITY: NAVY-YD

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. ARMY-AT Other Cust NAVY-SH AF-82

INTERNATIONAL INT. ABCA NATO

TITLE
LAMP, INCANDESCENT—SEALED BEAM, PAR 56, HEADLAMP, 3 CABLE TYPE

MILITARY STANDARD
MS 18008
SHEET 1 OF 3

PROCUREMENT SPECIFICATION W-L-50

SUPERSEDES:


DD FORM 672-1 (Commissioned)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.


Source: https://assist.dla.mil -- Downloaded: 202610-23T14:12Z
Check the source to verify that this is the current version before use.

PHOTOMETRIC TEST POINTS

SEE TABLE I FOR TEST POINT VALUES

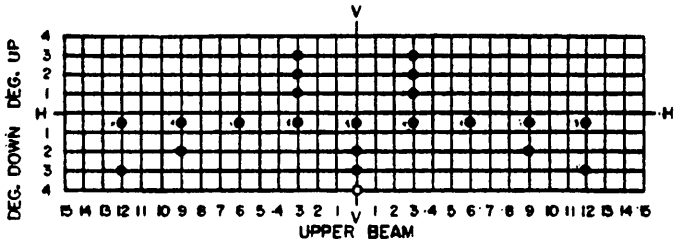

UPPER BEAM

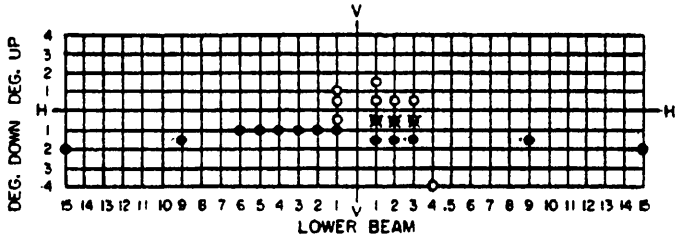

LOWER BEAM

○—MAXIMUM CANDLEPOWER POINT
●—MINIMUM CANDLEPOWER POINT
✱—MAX & MIN CANDLEPOWER POINT

TABLE I
PHOTOMETRIC TEST POINT VALUES
MEASURED 60 FEET FROM LAMP

UPPER BEAM		
POSITION	C.P. MAX	C.P. MIN
3U---3R & 3L	——	500
2U—3R & 3L	——	1000
1U---3R & 3L	——	2000
1/2D—V	——	20000
1/2D—3R & 3L	——	10000
1/2 D—6R & 6L	——	3250
1/2 D—9R & 9L	——	1500
1/2 D—12R & 12L	——	750
2D—V	——	5000
2D—9R & 9L	——	1500
3D—V	——	2500
3D—12R & 12L	——	750
4D—V	7500	——
MAXIMUM	37500	——

LOWER BEAM		
POSITION	C.P. MAX	C.P. MIN
1—1/2U—1R TO RIGHT	1000	——
1U---1L TO LEFT	500	——
1/2 U—1R TO 3R	2000	——
1/2 U—1L TO LEFT	800	——
1/2 D—1R TO RIGHT	10000	——
1/2 D—1R, 2R OR 3R	10000	2000
1/2 D—1L TO LEFT	2000	——
1D—1L TO 6L	——	750
1—1/2D—1R, 2R OR 3R	——	4000
1—1/2D—9R & 9L	——	750
2D—15R & 15L	——	500
4D—4R	12500	——
10—90 U@	125	——

@—FROM NORMALLY EXPOSED SURFACE OF LENS

APPROVED 23 NOVEMBER 1962 REVISED (B) FOR CHANGES SEE SHEETS 1 AND 3

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

PREPARING ACTIVITY	INTERNATIONAL INT.	TITLE	MILITARY STANDARD
ARMY-AT Other Cust NAVY-SH AF-82	ABCA NATO	LAMP, INCANDESCENT — SEALED BEAM, PAR 56, HEADLAMP, 3 CABLE TYPE	MS 18008
PROVISIONAL SPECIFICATION W-L-50	SUPERSEDES		SHEET 2 OF 3

DD FORM 672-1 (Continued)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:12Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
6240

NOTES:

1. TYPE IV (MILITARY VEHICLE) OF PROCUREMENT SPECIFICATION.
2. WITH AIMING PLANE NORMAL TO THE PHOTOMETER AXIS, THE BEAM SHALL MEET SPECIFICATIONS IN TABLE I. TOLERANCES OF ±1/4 DEGREE PERMISSIBLE AT ANY POSITION SHOWN IN TABLE I.
3. MS DASH NUMBER CORRELATES WITH LAMP INDUSTRY TRADE NUMBER.
4. (B) BOOT MATERIAL, RUBBER GRADE SC 615 $A_1B_1C_1F_2K_2L$ IN ACCORDANCE WITH MIL-R-3065 AND MIL-STD-417 OR ASTM SC 615 $A_1C_1K_2$.
5. WHEN INSTALLED, BOOTS MUST MEET WATERPROOFNESS REQUIREMENTS OF MIL-E-13856, TYPE II, CLASS 2.
6. CABLES SHALL BE SOLDERED IN ACCORDANCE WITH REQUIREMENT 5 OF MIL-STD-454 USING ROSIN CORE SOLDER CONFORMING TO SN 50 OR SN 60 OF QQ-S-571.
7. IN ACCORDANCE WITH UNIFORM VEHICLE CODE AND STATE HIGHWAY REGULATIONS, THE MOUNTING HEIGHT OF HEADLAMPS SHALL BE NO LESS THAN 24 OR MORE THAN 54 INCHES FROM THE HORIZONAL CENTERLINE OF THE LAMP TO THE NORMAL GROUND LEVEL.
8. DIMENSIONS ARE IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES ARE ±1/32 ON FRACTIONS, ±.010 ON DECIMALS, ±1° ON ANGLES.
9. FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN.
10. THIS STANDARD IS NOT INTENDED TO LIMIT CONSTRUCTION TO FEATURES OTHER THAN AS SHOWN HEREON BY DIMENSIONS, NOTATIONS, AND REFERENCED DOCUMENTS.
11. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.
12. MARKING SHALL CONSIST OF THE MS DASH NUMBER, VOLTAGE RATING AND MANUFACTURER'S IDENTIFICATION IN ACCORDANCE WITH MIL-STD 130.

CERTAIN PROVISIONS OF THIS STANDARD, IDENTIFIED BY AN ASTERISK (*) ARE THE SUBJECT OF INTERNATIONAL STANDARDIZATION AGREEMENT ABCA QSTAG-208,NATO STANAG 4005. WHEN REVISION, OR CANCELLATION OF THIS MILITARY STANDARD IS PROPOSED WHICH WILL AFFECT OR VIOLATE THE INTERNATIONAL AGREEMENT CONCERNED, THE PREPARING ACTIVITY WILL TAKE APPROPRIATE RECONCILIATION ACTION THROUGH INTERNATIONAL STANDARDIZATION CHANNELS, INCLUDING DEPARTMENTAL STANDARDIZATION OFFICES, IF REQUIRED.

APPROVED 23 NOVEMBER 1962 REVISED (B) FOR CHANGES SEE SHEETS 1 AND 3

This military standard is mandatory for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A	INTERNATIONAL INT.	TITLE	MILITARY STANDARD
ARMY-AT Other Cust NAVY-SH AF-82	ABCA NATO	LAMP, INCANDESCENT — SEALED BEAM, PAR 56, HEADLAMP, 3 CABLE TYPE	MS 18008
PROCUREMENT SPECIFICATION W-L-50	SUPERSEDES		SHEET 3 OF 3

DD FORM 1 SEP 61 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 202640-23T14:12Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:12Z
Check the source to verify that this is the current version before use.

SPECIFICATION ANALYSIS SHEET

Form Approved
Budget Bureau No. 22-R255

INSTRUCTIONS: This sheet is to be filled out by personnel, either Government or contractor, involved in the use of the specification in procurement of products for ultimate use by the Department of Defense. This sheet is provided for obtaining information on the use of this specification which will insure that suitable products can be procured with a minimum amount of delay and at the least cost. Comments and the return of this form will be appreciated. Fold on lines on reverse side, staple in corner, and send to preparing activity. Comments and suggestions submitted on this form do not constitute or imply authorization to waive any portion of the referenced document(s) or serve to amend contractual requirements.

SPECIFICATION

MS18008, Revision "B"

ORGANIZATION

CITY AND STATE

CONTRACT NUMBER

MATERIAL PROCURED UNDER A

☐ DIRECT GOVERNMENT CONTRACT ☐ SUBCONTRACT

1. HAS ANY PART OF THE SPECIFICATION CREATED PROBLEMS OR REQUIRED INTERPRETATION IN PROCUREMENT USE?

A. GIVE PARAGRAPH NUMBER AND WORDING.

B. RECOMMENDATIONS FOR CORRECTING THE DEFICIENCIES

2. COMMENTS ON ANY SPECIFICATION REQUIREMENT CONSIDERED TOO RIGID

3. IS THE SPECIFICATION RESTRICTIVE?

☐ YES ☐ NO *(If "yes", in what way?)*

4. REMARKS *(Attach any pertinent data which may be of use in improving this specification. If there are additional papers, attach to form and place both in an envelope addressed to preparing activity)*

SUBMITTED BY *(Printed or typed name and activity - Optional)*

DATE

DD FORM 1 JAN 66 1426

REPLACES EDITION OF 1 OCT 64 WHICH MAY BE USED.

Source: https://assist.dla.mil -- Downloaded: 202610-23T14:12Z
Check the source to verify that this is the current version before use.

FOLD

POSTAGE AND FEES PAID
DEFENSE SUPPLY AGENCY

DOD-314

DEFENSE SUPPLY AGENCY
OFFICIAL BUSINESS

Commanding General
U.S. Army Tank-Automotive Command
ATTN: AMSTA-RSEM
Warren, Michigan 48090

FOLD

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:12Z
Check the source to verify that this is the current version before use.