INCH-POUND


MS20604K
8 DECEMBER 1995
SUPERSEDING
MS20604J
28 DECEMBER 1992

MILITARY SPECIFICATION SHEET

RIVET, BLIND, NONSTRUCTURAL, UNIVERSAL HEAD, CLASS 1

THIS SPECIFICATION IS APPROVED FOR USE BY ALL DEPARTMENTS AND AGENCIES OF THE DEPARTMENT OF DEFENSE

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING DOCUMENT LISTED IN THAT ISSUE OF THE DEPARTMENT OF DEFENSE INDEX OF SPECIFICATIONS AND STANDARDS (DODISS) SPECIFIED IN THE SOLICITATION MIL-R-8814

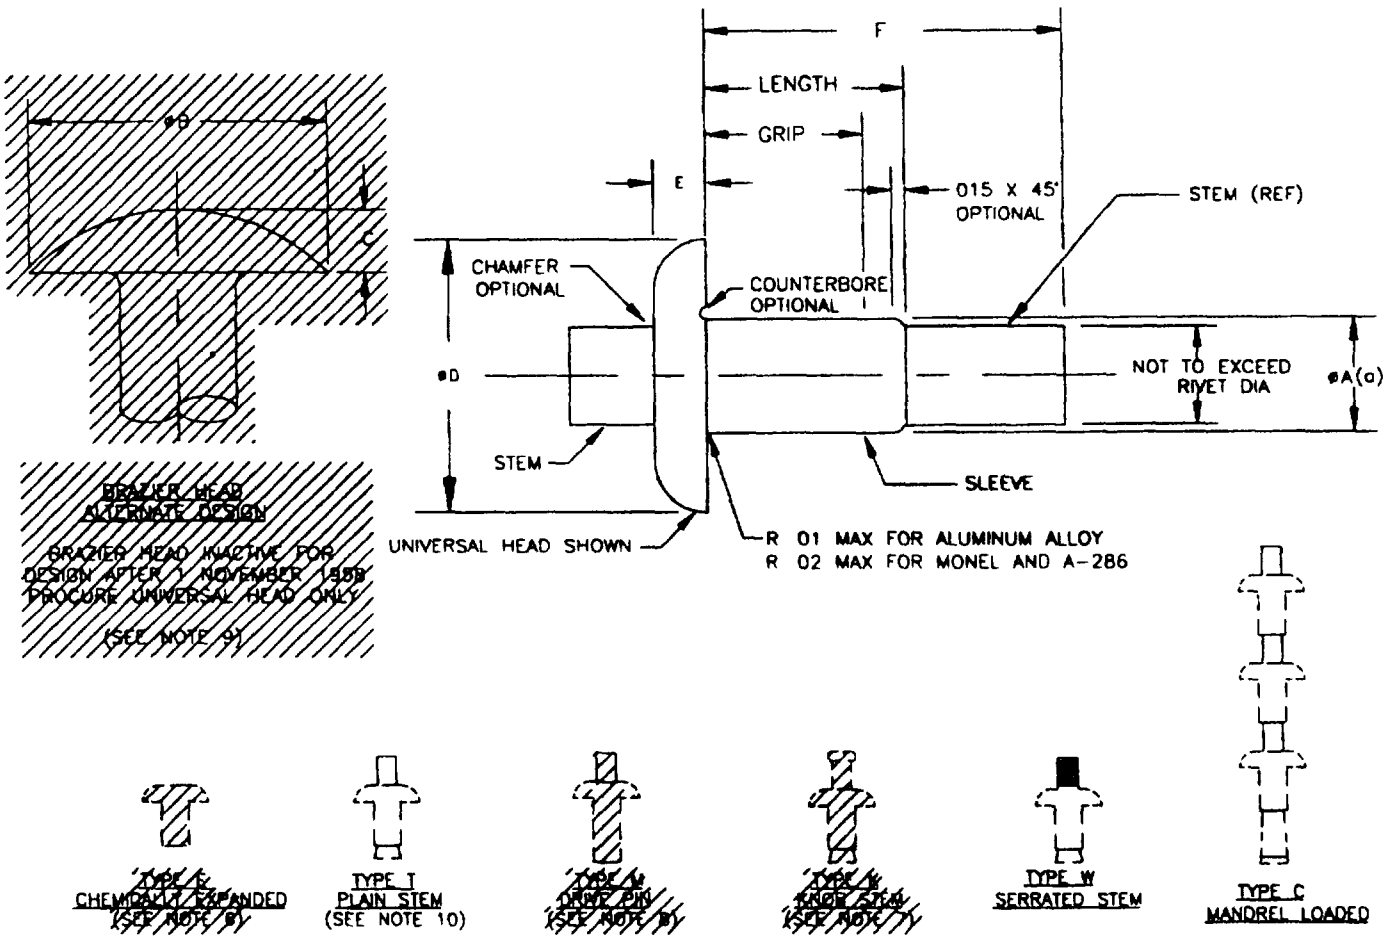

RIVET IDENTIFICATION CODE

(a) .001 SHANK DIAMETER INCREASE PERMISSIBLE WITHIN .100 INCH OF BASE OF HEAD

(K) ENTIRE SPECIFICATION REVISED

DISTRIBUTION STATEMENT A APPROVED FOR PUBLIC RELEASE; DISTRIBUTION IS UNLIMITED.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:23Z
Check the source to verify that this is the current version before use.

REQUIREMENTS

1 MATERIAL AND FINISH AS FOLLOWS

COMPONENT	MATERIAL	FINISH AND LUBRICATION
SLEEVE	CARBON STEEL, C1008 (UNS G10080), C1012 (UNS G10120), C1018 (UNS G10180), PER ASTM A510	CADMIUM PLATE PER QQ-P-416 TYPE II, CLASS 2
STEM	CARBON STEEL PER ASTM A510	CADMIUM PLATE PER QQ-P-416 TYPE II, CLASS 2
SLEEVE	A286 CRES PER AMS 5731	PASSIVATE PER QQ-P-35 AND LUBRICATE PER MIL-L-46010, TYPE I
STEM	305 CRES PER ASTM A493	PASSIVATE PER QQ-P-35
SLEEVE	A286 CRES PER AMS 5731	CADMIUM PLATE PER QQ-P-416 TYPE II, CLASS 2
STEM	305 CRES PER ASTM A493	PASSIVATE PER QQ-P-35
SLEEVE	5056 AL ALLOY PER QQ-A-430	ANODIZE PER MIL-A-8625 TYPE II, CLASS 1 OR CHEMICAL SURFACE TREATMENT PER MIL-C-5541, CLASS 1A
STEM	CARBON STEEL PER ASTM A510	AS REQUIRED FOR CORROSION PROTECTION
SLEEVE	2117 AL ALLOY PER QQ-A-430	ANODIZE PER MIL-8625 TYPE I, CLASS 1 OR CHEMICAL SURFACE TREATMENT PER MIL-C-5541, CLASS 1A
STEM	CARBON STEEL PER ASTM A510	AS REQUIRED FOR CORROSION PROTECTION
SLEEVE	MONEL PER QQ-N-281, CLASS A	CADMIUM PLATE PER QQ-P-416 TYPE II, CLASS 2
STEM	CARBON STEEL PER ASTM S545	AS REQUIRED FOR CORROSION PROTECTION (SEE NOTE 13)
SLEEVE	MONEL PER QQ-N-281, CLASS A	SILVER PLATE PER QQ-S-365
STEM	CARBON STEEL PER ASTM A510	AS REQUIRED FOR CORROSION PROTECTION
SLEEVE	MONEL PER QQ-N-281, CLASS A	WWM CARBO WAX
STEM	CARBON STEEL PER ASTM A510	AS REQUIRED FOR CORROSION PROTECTION
SLEEVE	MONEL PER QQ-N-281, CLASS A	DRY FILM LUBE PER MIL-L-46010, TYPE I
STEM	CARBON STEEL PER ASTM A510	AS REQUIRED FOR CORROSION PROTECTION

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:23Z
Check the source to verify that this is the current version before use.

NOTES

1 DIMENSIONS IN INCHES

2 FOR LIMITATIONS FOR DESIGN USAGE, USE STANDARD MS33557

3 FOR STRUCTURAL BLIND RIVETS, USE STANDARDS MS20600, MS20601

4 COLOR 5056 ALUMINUM ALLOY RIVETS SHALL BE SUITABLY IDENTIFIED BY AN ORANGE COLOR SIMILAR TO FEDERAL STD NO 595, COLOR NO 32246

5 EXAMPLE PART NUMBERS

MS20604 S 4 W 2 = CARBON STEEL (C1008, C1012, C1018), 125 DIA WITH 063 TO 125 GRIP RANGE, SERRATED STEM

- 2 — INDICATES GRIP RANGE 062 INCH INCREMENTS
- W — 'W' INDICATES SERRATED STEM RIVET
  'C' INDICATES MANDREL LOADED RIVET (SEE NOTE 12)
  'T' INDICATES PLAIN STEM RIVET (SEE NOTE 10)
  ~~'E' INDICATES CHEMICALLY EXPANDED RIVET (SEE NOTE 6)~~
  ~~'H' INDICATES DRIVE PIN RIVET (SEE NOTE 8)~~
  ~~'K' INDICATES KNOB STEM RIVET (SEE NOTE 7)~~
- 4 — INDICATES RIVET SLEEVE DIA IN 0312 INCH INCREMENTS
- S — 'B' INDICATES 5056 ALUMINUM ALLOY (SEE NOTE 12)
  'AD' INDICATES 2117 ALUMINUM ALLOY
  'S' INDICATES CARBON STEEL (C1008, C1012, C1018)
  'R' INDICATES CRES RIVET WITH PASSIVATED STEM AND PASSIVATED SLEEVE WITH DRY FILM LUBE
  'H' INDICATES CRES RIVET WITH PASSIVATED STEM AND PLATED SLEEVE
  'FL' INDICATES MONEL RIVET WITH DRY FILM LUBE
  'CA' INDICATES MONEL RIVET WITH WWM CARBO WAX
  'ML' INDICATES MONEL RIVET WITH SILVER PLATE
  'MP' INDICATES MONEL RIVET WITH CADMIUM PLATE (SEE NOTE 13)
  'M' INDICATES MONEL RIVET WITH NO FINISH (SEE NOTE 11)
- MS20604 — BASIC MS NUMBER

6 CHEMICALLY EXPANDED RIVETS (TYPE E) CANCELLED AFTER 1 MARCH 1983 NO SUPERSEDING DOCUMENT

7 KNOB STEM RIVETS (TYPE K) CANCELLED AFTER 3 MARCH 1969 USE SERRATED STEM (TYPE W)

8 DRIVE PIN RIVETS (TYPE H) CANCELLED AFTER 3 MARCH 1969. USE MS24662

9 BRAZIER HEAD CANCELLED AFTER 3 MARCH 1969, USE UNIVERSAL HEAD

10 PLAIN STEM RIVETS (TYPE T) ARE INACTIVE FOR NEW DESIGN AFTER 1 NOVEMBER 1986 USE SERRATED STEM (TYPE W)

11 MONEL RIVETS WITH NO FINISH ARE INACTIVE FOR NEW DESIGN AFTER 3 MARCH 1969

12 MANDREL LOADED ALUMINUM ALLOY 5056 RIVETS INACTIVE FOR NEW DESIGN AFTER 3 MARCH 1969

13 CADMIUM PLATED MONEL RIVETS ARE INACTIVE FOR DESIGN AFTER 24 JULY 1969

14 INTERCHANGEABILITY RELATIONSHIP MS20604 RIVETS CAN REPLACE THE CANCELLED MS20606 RIVETS IDENTIFIED BY THE SAME DASH NUMBERS. THE CANCELLED MS20606 PARTS CANNOT REPLACE THE MS20604 RIVETS AND SHOULD BE USED UNTIL EXISTING STOCK IS DEPLETED. USE ONLY THE SUPERSEDING MS PARTS OF THE SAME DASH NUMBERS FOR DESIGN AND REPLACEMENT

15 IN THE EVENT OF A CONFLICT BETWEEN THE TEXT OF THIS DOCUMENT AND THE REFERENCES CITED HEREIN, THE TEXT OF THIS DOCUMENT SHALL TAKE PRECEDENCE.

16 UNLESS OTHERWISE SPECIFIED, ISSUES OF REFERENCED DOCUMENTS ARE THOSE IN EFFECT AT THE TIME OF SOLICITATION

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:23Z
Check the source to verify that this is the current version before use.

NICKEL – COPPER ALLOY (MONEL)
CADMIUM PLATED TYPE MP

(INACTIVE FOR NEW DESIGN, SEE NOTE 13)

⌀A	UNIVERSAL HEAD	
+ 003 – 002 MONEL	⌀D	E + 010 – 000
094	187 ± .009	.040
125	250 ± 012	054
156	.312 ± 016	.067
187	375 ± 019	080
250	500 ± 035	107

MANDREL LOADED	PLAIN STEM	SERRATED STEM	GRIP RANGE		LENGTH MAX	F MAX
SUFFIX CODE	SUFFIX CODE	SUFFIX CODE	MIN	MAX		
⌀ 094, NOMINAL						
3C1	3T1	3W1	015	062	140	.281
3C2	3T2	3W2	063	.125	203	.281
3C3	3T3	3W3	126	187	.265	.343
3C4	3T4	3W4	188	250	328	405
⌀ 125, NOMINAL						
4C1	4T1	4W1	.015	.062	170	.256
4C2	4T2	4W2	063	125	232	.318
4C3	4T3	4W3	126	187	.295	.381
4C4	4T4	4W4	188	.250	357	.443
4C5	4T5	4W5	251	312	420	.506
5C6	4T6	4W6	318	375	482	.568
4C7	4T7	4W7	.376	.437	544	.630
4C8	4T8	4W8	438	500	607	693
⌀ 156, NOMINAL						
5C2	5T2	5W2	015	125	274	.440
5C4	5T4	5W4	126	.250	.399	.560
5C6	5T6	5W6	251	375	524	.690
5C8	5T8	5W8	376	.500	679	.810
⌀ 187, NOMINAL						
6C2	6T2	6W2	015	125	.301	480
6C4	6T4	6W4	126	250	426	600
6C6	6T6	6W6	251	.375	.551	720
6C8	6T8	6W8	376	.500	706	.840
6C10	6T10	6W10	501	.625	801	.970
6C12	6T12	6W12	.626	750	.926	1 100
6C14	6T14	6W14	.751	.875	1.051	1.220
⌀.250, NOMINAL						
8C2	8T2	8W2	.015	125	342	.520
8C4	8T4	8W4	126	250	447	.650
8C6	8T6	8W6	.251	375	.572	770
8C8	8T8	8W8	376	.500	697	890
8C10	8T10	8W10	501	625	822	1 020
8C12	8T12	8W12	.626	750	947	1 150
8C14	8T14	8W14	751	875	1 072	1.270
8C16	8T16	8W16	876	1 000	1 195	1 400

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:23Z
Check the source to verify that this is the current version before use.

ALUMINUM ALLOY - 2117 TYPE AD

(SEE NOTES 6, AND 10)

⌀A	UNIVERSAL HEAD	
+ 003 ALUMINUM - 001 ALLOY	⌀D	E +.010 - 000
094	187 ± 009	040
125	250 ± 012	054
156	312 ± 016	067
187	375 ± 019	080
.250	500 ± 035	107

MANDREL LOADED	PLAIN STEM	SERRATED STEM	GRIP RANGE		LENGTH MAX	F MAX
SUFFIX CODE	SUFFIX CODE	SUFFIX CODE	MIN	MAX		
⌀ 094, NOMINAL						
3C1	3T1	3W1	015	062	140	281
3C2	3T2	3W2	063	125	203	281
3C3	3T3	3W3	126	187	265	343
3C4	3T4	3W4	188	250	328	405
⌀ 125, NOMINAL						
4C1	4T1	4W1	.015	.062	170	.256
4C2	4T2	4W2	063	125	232	.318
4C3	4T3	4W3	126	187	.295	.381
4C4	4T4	4W4	.188	.250	357	443
4C5	4T5	4W5	251	.312	420	506
5C6	4T6	4W6	.318	375	482	568
4C7	4T7	4W7	376	437	.544	630
4C8	4T8	4W8	438	500	607	.693
⌀ 156, NOMINAL						
5C2	5T2	5W2	015	125	274	440
5C4	5T4	5W4	126	.250	399	.560
5C6	5T6	5W6	251	375	524	690
5C8	5T8	5W8	376	500	679	.810
⌀ 187, NOMINAL						
6C2	6T2	6W2	.015	125	.301	.480
6C4	6T4	6W4	126	.250	426	600
6C6	6T6	6W6	251	375	.551	720
6C8	6T8	6W8	376	500	706	840
6C10	6T10	6W10	.501	625	.801	.970
6C12	6T12	6W12	.626	.750	.926	1 100
6C14	6T14	6W14	.751	875	1 051	1 220
⌀.250, NOMINAL						
8C2	8T2	8W2	015	.125	.342	520
8C4	8T4	8W4	.126	.250	447	.650
8C6	8T6	8W6	251	.375	.572	770
8C8	8T8	8W8	376	500	697	890
8C10	8T10	8W10	501	625	.822	1 020
8C12	8T12	8W12	626	750	947	1 158
8C14	8T14	8W14	751	875	1 072	1 270
8C16	8T16	8W16	876	1 000	1.195	1 400

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:23Z
Check the source to verify that this is the current version before use.

ALUMINUM ALLOY – 5056 TYPE B

(SEE NOTES 6, 10, AND 12)

ØA	UNIVERSAL HEAD	
+ 003 ALUMINUM – 001 ALLOY	ØD	E + 010 – 000
094	187 ± 009	040
125	250 ± 012	054
156	312 ± 016	067
187	375 ± 019	080
250	500 ± 035	107

MANDREL LOADED	PLAIN STEM	SERRATED STEM	GRIP RANGE		LENGTH MAX	F MAX
SUFFIX CODE	SUFFIX CODE	SUFFIX CODE	MIN	MAX		
Ø 094, NOMINAL						
3C1	3T1	3W1	015	062	140	281
3C2	3T2	3W2	063	125	203	281
3C3	3T3	3W3	126	187	265	343
3C4	3T4	3W4	188	250	328	405
Ø 125, NOMINAL						
4C1	4T1	4W1	.015	.062	.170	256
4C2	4T2	4W2	063	125	.232	.318
4C3	4T3	4W3	.126	187	295	381
4C4	4T4	4W4	.188	250	357	443
4C5	4T5	4W5	.251	.312	420	.506
5C6	4T6	4W6	318	375	482	568
4C7	4T7	4W7	376	437	544	630
4C8	4T8	4W8	438	.500	607	693
Ø 156, NOMINAL						
5C2	5T2	5W2	015	125	274	440
5C4	5T4	5W4	126	.250	.399	.560
5C6	5T6	5W6	251	375	.524	690
5C8	5T8	5W8	376	500	.679	.810
Ø 187, NOMINAL						
6C2	6T2	6W2	015	125	301	480
6C4	6T4	6W4	126	250	426	.600
6C6	6T6	6W6	251	375	551	720
6C8	6T8	6W8	376	500	706	840
6C10	6T10	6W10	501	625	801	.970
6C12	6T12	6W12	.626	750	926	1 100
6C14	6T14	6W14	.751	.875	1.051	1.220
Ø.250, NOMINAL						
8C2	8T2	8W2	015	125	.342	.520
8C4	8T4	8W4	126	.250	447	.650
8C6	8T6	8W6	.251	375	.572	.770
8C8	8T8	8W8	376	500	697	890
8C10	8T10	8W10	501	625	822	1 020
8C12	8T12	8W12	626	750	947	1 158
8C14	8T14	8W14	751	875	1 072	1 270
8C16	8T16	8W16	876	1 000	1 195	1 400

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:23Z
Check the source to verify that this is the current version before use.

NICKEL – COPPER ALLOY (MONEL) TYPE FL, CA, ML, M

(SEE NOTES 6, 10, AND 11)

ØA	UNIVERSAL HEAD	
+ 003 – 002	ØD	E + 010 –.000
094	187 ± 009	.040
125	250 ± 012	054
156	312 ±.016	067
187	375 ± 019	.080
250	.500 ± 035	107

MANDREL LOADED	PLAIN STEM	SERRATED STEM	GRIP RANGE		LENGTH MAX	F MAX
SUFFIX CODE	SUFFIX CODE	SUFFIX CODE	MIN	MAX		
Ø 094, NOMINAL						
3C1	3T1	3W1	.015	.062	140	.281
3C2	3T2	3W2	.063	125	203	.281
3C3	3T3	3W3	126	187	265	343
3C4	3T4	3W4	.188	250	328	405
Ø.125, NOMINAL						
4C1	4T1	4W1	015	062	170	256
4C2	4T2	4W2	.063	125	232	318
4C3	4T3	4W3	126	187	.295	381
4C4	4T4	4W4	188	250	357	443
4C5	4T5	4W5	.251	312	420	.506
5C6	4T6	4W6	318	375	482	.568
4C7	4T7	4W7	376	437	544	630
4C8	4T8	4W8	.438	.500	607	693
Ø 156, NOMINAL						
5C2	5T2	5W2	015	125	.274	440
5C4	5T4	5W4	.126	250	399	560
5C6	5T6	5W6	.251	.375	524	690
5C8	5T8	5W8	.376	500	679	810
Ø 187, NOMINAL						
6C2	6T2	6W2	015	125	301	480
6C4	6T4	6W4	126	250	426	600
6C6	6T6	6W6	.251	375	551	720
6C8	6T8	6W8	376	500	706	840
6C10	6T10	6W10	501	625	.801	.970
6C12	6T12	6W12	.626	750	.926	1 100
6C14	6T14	6W14	.751	.875	1.051	1 220
Ø.250, NOMINAL						
8C2	8T2	8W2	015	125	.342	520
8C4	8T4	8W4	126	.250	.447	.650
8C6	8T6	8W6	.251	.375	.572	.770
8C8	8T8	8W8	376	500	697	890
8C10	8T10	8W10	.501	625	822	1 020
8C12	8T12	8W12	626	750	.947	1.158
8C14	8T14	8W14	751	875	1 072	1 270
8C16	8T16	8W16	876	1 000	1 195	1 400

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:23Z
Check the source to verify that this is the current version before use.

STEEL – C1008, C1012, C1018 TYPE S

⌀A	UNIVERSAL HEAD	
+ 003 – 002 STEEL	⌀D	E + 010 – 000
094	187 ± 009	040
125	250 ± 012	054
156	312 ± 016	067
187	375 ± 019	080
250	500 ± 035	107

⌀ 094, NOMINAL					
MANDREL LOADED	SERRATED STEM	GRIP RANGE		LENGTH MAX	F MAX
SUFFIX CODE	SUFFIX CODE	MIN	MAX		
3C1 3C2	3W1 3W2	UP TO 063	062 125	140 203	218 281
3C3 3C4	3W3 3W4	126 188	187 250	265 328	343 405
3C5 3C6	3W5 3W6	250 313	312 375	390 453	468 .530
3C7 3C8	3W7 3W8	376 438	437 500	.515 578	.592 655
3C9 3C10	3W9 3W10	.501 563	.562 625	640 705	718 780
3C11 3C12	3W11 3W12	626 688	687 750	765 828	843 905

⌀ 125, NOMINAL					
MANDREL LOADED	SERRATED STEM	GRIP RANGE		LENGTH MAX	F MAX
SUFFIX CODE	SUFFIX CODE	MIN	MAX		
4C1 4C2	4W1 4W2	UP TO 063	.062 125	170 232	.256 318
4C3 4C4	4W3 4W4	126 188	187 250	295 357	381 443
4C5 4C6	4W5 4W6	250 313	.312 375	420 482	506 .568
4C7	4W7	376	437	544	630

⌀.156, NOMINAL					
MANDREL LOADED	SERRATED STEM	GRIP RANGE		LENGTH MAX	F MAX
SUFFIX CODE	SUFFIX CODE	MIN	MAX		
5C2	5W2	063	125	254	352
5C3 5C4	5W3 5W4	126 188	.187 250	.317 379	.425 477
5C5 5C6	5W5 5W6	.250 .313	.312 375	441 504	.539 601
5C7 5C8	5W7 5W8	376 438	437 500	567 629	665 727

⌀.187 NOMINAL					
MANDREL LOADED	SERRATED STEM	GRIP RANGE		LENGTH MAX	F MAX
SUFFIX CODE	SUFFIX CODE	MIN	MAX		
6C3 6C4	6W3 6W4	.126 188	.187 .250	.340 .402	440 .502
6C5 6C6	6W5 6W6	250 .313	312 375	465 .527	.565 .627
6C7 6C8	6W7 6W8	.376 .438	.437 500	.590 .652	.690 752
6C9 6C10	6W9 6W10	.501 .563	562 .625	715 777	.815 .877
6C11 6C12	6W11 6W12	626 688	687 750	.840 .902	940 1 002

⌀.250 NOMINAL					
MANDREL LOADED	SERRATED STEM	GRIP RANGE		LENGTH MAX	F MAX
SUFFIX CODE	SUFFIX CODE	MIN	MAX		
8C3 8C4	8W3 8W4	126 188	187 250	.385 447	.506 568
8C5 6C6	8W5 8W6	250 313	312 375	510 572	631 693
8C7 8C8	8W7 8W8	376 438	437 500	635 697	756 818
8C9 8C10	8W9 6W10	501 563	562 625	760 822	881 943
8C11 8C12	8W11 8W12	626 688	687 750	885 947	1 005 1 068

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:23Z
Check the source to verify that this is the current version before use.

CRES A286 - SLEEVE
CRES 305 - STEM TYPE H

SLEEVE - CADMIUM PLATE PER QQ-P-416
STEM - PASSIVATED PER QQ-P-35

ø A	UNIVERSAL HEAD	
+ 003 - 002 STEEL	ø D	E + 010 - 000
094	187 ± 009	040
125	250 ± 012	054
156	312 ± 016	067
187	375 ± 019	080
250	.500 ± .035	107

ø 094, NOMINAL					
MANDREL LOADED	SERRATED STEM	GRIP RANGE		LENGTH MAX	F MAX
SUFFIX CODE	SUFFIX CODE	MIN	MAX		
3C1 3C2	3W1 3W2	UP TO .063	062 125	140 203	218 281
3C3 3C4	3W3 3W4	126 188	187 250	.265 328	343 405
3C5 3C6	3W5 3W6	250 313	312 375	390 453	468 530
3C7 3C8	3W7 3W8	376 438	437 .500	515 578	592 655
3C9 3C10	3W9 3W10	501 563	562 625	.640 705	718 780
3C11 3C12	3W11 3W12	.626 688	687 750	765 828	843 905

ø .125, NOMINAL					
MANDREL LOADED	SERRATED STEM	GRIP RANGE		LENGTH MAX	F MAX
SUFFIX CODE	SUFFIX CODE	MIN	MAX		
4C1 4C2	4W1 4W2	UP TO 063	062 125	170 232	256 318
4C3 4C4	4W3 4W4	126 188	187 250	295 357	381 443
4C5 4C6	4W5 4W6	250 313	.312 375	420 482	506 .568
4C7	4W7	376	437	544	630

ø 156, NOMINAL					
MANDREL LOADED	SERRATED STEM	GRIP RANGE		LENGTH MAX	F MAX
SUFFIX CODE	SUFFIX CODE	MIN	MAX		
5C2	5W2	.063	.125	254	352
5C3 5C4	5W3 5W4	126 188	187 .250	317 379	.425 477
5C5 5C6	5W5 5W6	250 .313	312 375	441 .504	.539 601
5C7 5C8	5W7 5W8	376 438	437 .500	567 629	665 727

ø 187 NOMINAL					
MANDREL LOADED	SERRATED STEM	GRIP RANGE		LENGTH MAX	F MAX
SUFFIX CODE	SUFFIX CODE	MIN	MAX		
6C3 6C4	6W3 6W4	126 188	187 250	340 402	440 .502
6C5 6C6	6W5 6W6	250 .313	312 375	465 527	565 .627
6C7 6C8	6W7 6W8	.376 438	.437 .500	590 .652	690 .752
6C9 6C10	6W9 6W10	.501 .563	.562 .625	.715 .777	.815 .877
6C11 6C12	6W11 6W12	626 688	687 750	.840 .902	.940 1.002

ø .250 NOMINAL					
MANDREL LOADED	SERRATED STEM	GRIP RANGE		LENGTH MAX	F MAX
SUFFIX CODE	SUFFIX CODE	MIN	MAX		
8C3 8C4	8W3 8W4	126 188	187 250	385 447	.506 568
8C5 6C6	8W5 8W6	250 313	312 375	510 572	631 693
8C7 8C8	8W7 8W8	376 438	437 500	635 697	756 818
8C9 8C10	8W9 6W10	501 563	562 625	760 822	881 943
8C11 8C12	8W11 8W12	626 688	687 750	885 947	1 005 1 068

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:23Z
Check the source to verify that this is the current version before use.

CRES A286 - SLEEVE
CRES 305 - STEM TYPE R

SLEEVE AND STEM - PASSIVATED PER QQ-P-35

⌀A	UNIVERSAL HEAD	
+ 003 - 002 STEEL	⌀D	E + 010 - 000
094 125 156 187 250	187 ± 009 250 ± 012 312 ± 016 375 ± 019 500 ± 035	040 054 067 080 107

⌀.094, NOMINAL					
MANDREL LOADED	SERRATED STEM	GRIP RANGE		LENGTH MAX	F MAX
SUFFIX CODE	SUFFIX CODE	MIN	MAX		
3C1 3C2	3W1 3W2	UP TO 063	062 125	140 203	218 281
3C3 3C4	3W3 3W4	126 188	187 250	265 328	343 405
3C5 3C6	3W5 3W6	250 313	.312 375	390 453	468 530
3C7 3C8	3W7 3W8	376 438	437 .500	515 .578	592 .655
3C9 3C10	3W9 3W10	501 563	.562 625	.640 705	.718 780
3C11 3C12	3W11 3W12	626 688	687 750	765 .828	843 905

⌀.125, NOMINAL					
MANDREL LOADED	SERRATED STEM	GRIP RANGE		LENGTH MAX	F MAX
SUFFIX CODE	SUFFIX CODE	MIN	MAX		
4C1 4C2	4W1 4W2	UP TO 063	062 125	.170 232	.256 318
4C3 4C4	4W3 4W4	126 188	187 250	295 357	381 443
4C5 4C6	4W5 4W6	250 .313	312 .375	420 482	506 568
4C7	4W7	376	437	.544	630

⌀.156, NOMINAL					
MANDREL LOADED	SERRATED STEM	GRIP RANGE		LENGTH MAX	F MAX
SUFFIX CODE	SUFFIX CODE	MIN	MAX		
5C2	5W2	.063	.125	.254	352
5C3 5C4	5W3 5W4	126 188	.187 .250	.317 .379	.425 .477
5C5 5C6	5W5 5W6	.250 313	.312 375	.441 .504	539 601
5C7 5C8	5W7 5W8	376 438	437 500	567 629	665 727

⌀.187 NOMINAL					
MANDREL LOADED	SERRATED STEM	GRIP RANGE		LENGTH MAX	F MAX
SUFFIX CODE	SUFFIX CODE	MIN	MAX		
6C3 6C4	6W3 6W4	126 .188	187 .250	340 402	.440 .502
6C5 6C6	6W5 6W6	250 313	312 375	465 527	565 627
6C7 6C8	6W7 6W8	.376 438	437 500	.590 652	.690 .752
6C9 6C10	6W9 6W10	501 563	562 625	.715 .777	.815 .877
6C11 6C12	6W11 6W12	.626 .688	687 .750	.840 .902	.940 1 002

⌀.250 NOMINAL					
MANDREL LOADED	SERRATED STEM	GRIP RANGE		LENGTH MAX	F MAX
SUFFIX CODE	SUFFIX CODE	MIN	MAX		
8C3 8C4	8W3 8W4	126 188	187 250	385 447	.506 568
8C5 6C6	8W5 8W6	250 313	312 375	510 572	631 693
8C7 8C8	8W7 8W8	376 438	437 500	635 697	756 818
8C9 8C10	8W9 6W10	501 563	562 625	760 822	881 943
8C11 8C12	8W11 8W12	626 688	687 750	885 947	1 005 1 068

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:23Z
Check the source to verify that this is the current version before use.

MILITARY INTERESTS

CUSTODIANS

ARMY – AR
NAVY – AS
AIR FORCE – 99

REVIEWER:

ARMY – AV, ME
NAVY – SH
AIR FORCE – 82
NATIONAL SECURITY AGENCY – NS

PREPARING ACTIVITY

DLA–IS

(PROJECT 5320–0833)

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:23Z
Check the source to verify that this is the current version before use.