


FED SUP CLASS
5340

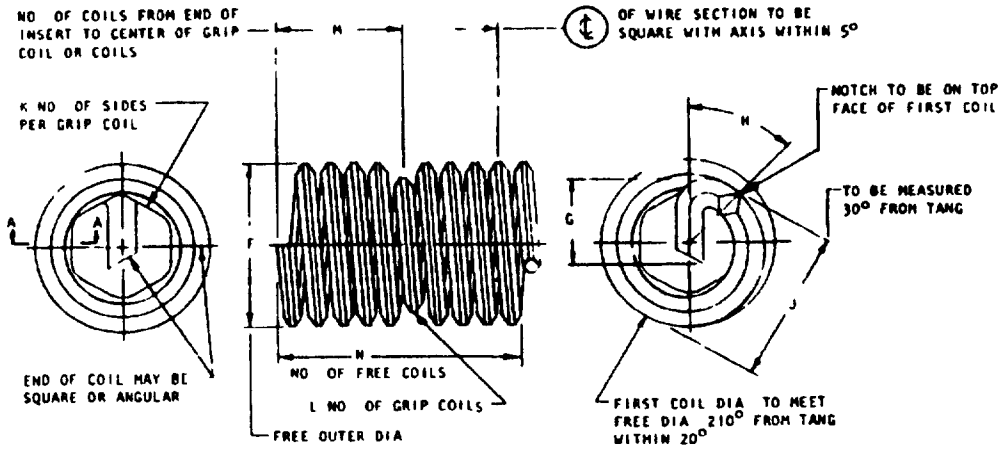

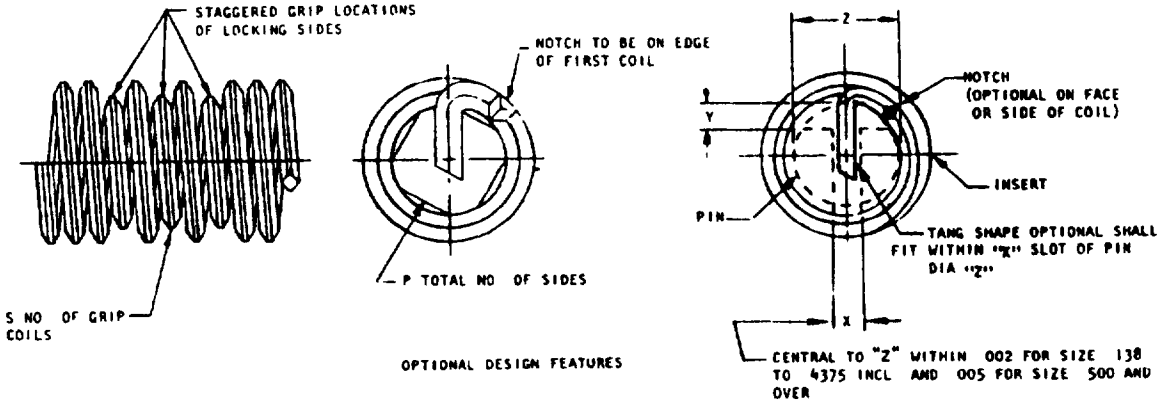

OPTIONAL DESIGN FEATURES

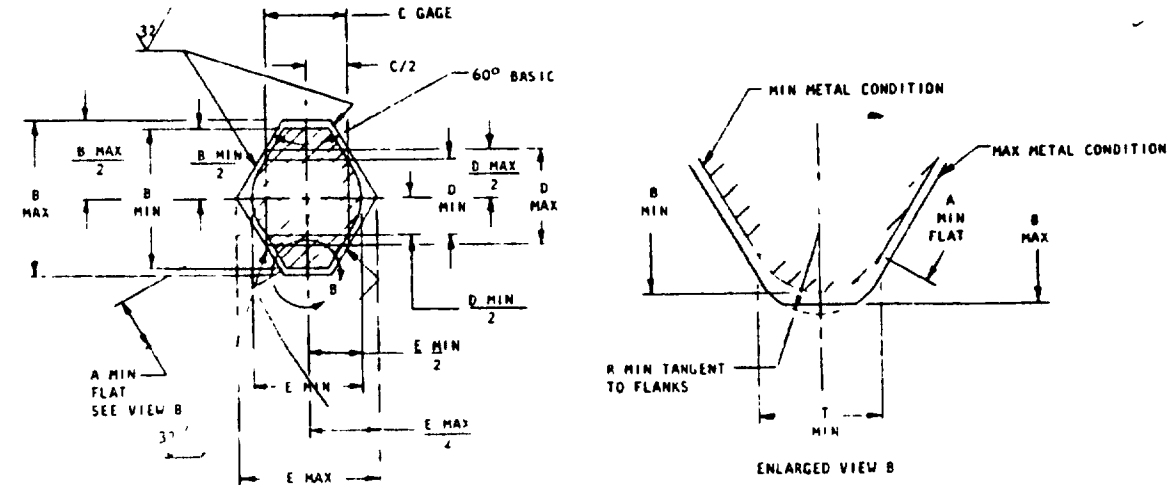

SECT A-A

(E) FOR CHANGES SEE SHEETS 4 AND 5

APPROVED 17 Jul 61 REVISED (A) 12 Jun 66 (B) 20 Jun 66 (C) 28 Jun 71 (D) 20 Nov 72 (E) 21 Feb 78

User Activities: Army - AS, OS; Navy -; Air Force -; DLA -

Review Activities: Army - MI, AR, EL; Navy -; Air Force - 99; DLA - IS

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable.

P.A. USAF - 11 Other Cust Army - AV	TITLE INSERT SCREW THREAD COARSE AND FINE SCREW LOCKING HELICAL COIL CRES	MILITARY STANDARD MS21209
PROCUREMENT SPECIFICATION MIL I 8846	SUPERSEDES	SHEET 1 OF 5

DD FORM 1 SEP 65 672-1 (Coordinated)

EDITION OF 1 SEP 57 MAY BE USED

FSC 5340

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:28Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5340

COARSE THREAD SERIES

1 DIAMETER NOMINAL LENGTH					
NOMINAL THREAD SIZE	DASH NO	LENGTH (REF)	WEIGHT LBS/100	M +1 COIL	N +1/4 COIL
086-56	C0210	086	0051	1 500	3 00
099-48	C0310	099	0077	1 4375	2 875
112-40	C0410	112	0121	1 375	2 750
125-40	C0510	125	0154	1 625	3 250
138-32	C0610	138	0243	1 375	2 750
164-32	C0810	164	0355	1 750	3 500
190-24	C1-10	190	0573	1 4375	2 875
216-24	C2-10	216	077	1 750	3 500
250-20	C4-10	250	145	1 6875	3 375
3125-18	C5-10	3125	232	2 000	4 000
375-16	C6-10	375	391	2 1875	4 375
4375-14	C7-10	4375	667	2 250	4 500
500-13	C8-10	500	794	2 4375	4 875
5625-12	C9-10	5625	1 235	2 5625	5 125
625-11	C1010	625	1 515	2 6250	5 250
750-10	C1210	750	2 778	2 9375	5 875
875-9	C1410	875	4 545	3 125	6 250
1 000-8	C1610	1 000	5 882	3 1875	6 375
1 125-7	C1810	1 125	8 392	3 0625	6 125
1 250-7	C2010	1 250	10 487	3 500	7 000
1 375-6	C2210	1 375	14 505	3 250	6 500
1 500-6	C2410	1 500	17 563	3 625	7 250

1 5 DIAMETER NOMINAL LENGTH				
DASH NO	LENGTH (REF)	WEIGHT LBS/100	M +1 COIL	N +1/4 COIL
C0215	129	0084	2 625	5 250
C0315	148	0125	2 500	5 000
C0415	168	0196	2 375	4 750
C0515	188	0250	2 750	5 500
C0615	207	0384	2 375	4 750
C0815	246	0556	3 000	6 000
C1-15	285	0899	2 500	5 000
C2-15	324	119	3 000	6 000
C4-15	375	196	2 875	5 750
C5-15	469	369	3 3125	6 625
C6-15	562	625	3 625	7 250
C7-15	656	943	3 6875	7 375
C8-15	750	1 316	3 9375	7 875
C9-15	844	1 961	4 125	8 250
C1015	938	2 439	4 250	8 500
C1215	1 125	4 000	4 6875	9 375
C1415	1 312	6 250	5 000	10 000
C1615	1 500	9 091	5 0625	10 125
C1815	1 688	12 928	4 9375	9 875
C2015	1 875	16 070	5 625	11 250
C2215	2 062	22 264	5 250	10 500
C2415	2 250	26 915	5 750	11 500

2 DIAMETER NOMINAL LENGTH					
NOMINAL THREAD SIZE	DASH NO	LENGTH (REF)	WEIGHT LBS/100	M +1 COIL	N +1/4 COIL
086-56	C0220	172	0117	3 6875	7 375
099-48	C0320	198	0174	3 625	7 250
112-40	C0420	224	0272	3 375	6 750
125-40	C0520	250	0345	3 875	7 750
138-32	C0620	276	0525	3 4375	6 875
164-32	C0820	328	0776	4 1875	8 375
190-24	C1-20	380	1330	3 5625	7 125
216-24	C2-20	432	172	4 1875	8 375
250-20	C4-20	500	308	4 000	8 000
3125-18	C5-20	625	510	4 625	9 250
375-16	C6-20	750	867	5 000	10 000
4375-14	C7-20	875	1 250	5 125	10 250
500-13	C8-20	1 000	1 852	5 500	11 000
5625-12	C9-20	1 125	2 632	5 750	11 500
625-11	C1020	1 250	3 448	5 875	11 750
750-10	C1220	1 500	5 263	6 500	13 000
875-9	C1420	1 750	8 333	6 875	13 750
1 000-8	C1620	2 000	12 500	7 000	14 000
1 125-7	C1820	2 250	17 464	6 8125	13 625
1 250-7	C2020	2 500	21 653	7 6875	15 375
1 375-6	C2220	2 750	30 122	7 1875	14 375
1 500-6	C2420	3 000	36 268	7 9375	15 875

2 5 DIAMETER NOMINAL LENGTH				
DASH NO	LENGTH (REF)	WEIGHT LBS/100	M +1 COIL	N +1/4 COIL
C0225	215	015	5 9375	9 625
C0325	248	0224	5 750	9 375
C0425	280	0348	5 500	8 875
C0525	312	044	6 125	10 000
C0625	345	.0666	5 4375	8 875
C0825	410	1008	6 5625	10 750
C1-25	475	172	5 6875	9 250
C2-25	540	208	6 4375	10 625
C4-25	625	385	6 375	10 375
C5-25	781	658	7 250	11 875
C6-25	938	1 064	7 875	12 875
C7-25	1 094	1 667	8 000	13 125
C8-25	1 250	2 273	8 625	14 125
C9-25	1 406	3 226	9 000	14 750
C1025	1 562	4 348	9 125	15 000
C1225	1 875	6 667	10 000	16 500
C1425	2 188	10 000	10 625	17 500
C1625	2 500	14 286	10 750	17 750
C1825	2 812	22 000	10 6875	17 500
C2025	3 125	27 236	11 8125	19 500
C2225	3 438	37 981	11 1875	18 375
C2425	3 750	45 620	12 1875	20 125

3 DIAMETER NOMINAL LENGTH					
NOMINAL THREAD SIZE	DASH NO	LENGTH (REF)	WEIGHT LBS/100	M +1 COIL	N +1/4 COIL
086-56	C0230	258	.0183	8 1875	11 875
099-48	C0330	297	.0271	7 875	11 500
112-40	C0430	336	.0423	7 500	10 875
125-40	C0530	375	0536	8 375	12 250
138-32	C0630	414	0807	7 4375	10 750
164-32	C0830	492	125	9 0625	13 250
190-24	C1-30	570	219	7 8125	11 375
216-24	C2-30	648	279	8 9375	13 125
250-20	C4-30	750	490	8 750	12 750
3125-18	C5-30	938	806	10 000	14 625
375-16	C6-30	1 125	1 316	10 875	15 750
4375-14	C7-30	1 312	2 000	11 000	16 125
500-13	C8-30	1 500	2 857	11 625	17 125
5625-12	C9-30	1 688	4 000	12 125	17 875
675-11	C1030	1 875	5 263	12 500	18 375
750-10	C1230	2 250	8 333	13 625	20 125
875-9	C1430	2 625	12 500	14 375	21 250
1 000-8	C1630	3 000	16 670	14 625	21 625
1 125-7	C1830	3 375	26 536	14 4375	21 250
1 250-7	C2030	3 750	32 819	16 0625	23 750
1 375-6	C2230	4 125	45 839	15 0625	22 250
1 500-6	C2430	4 500	54 972	16 5625	24 500

APPROVED 17 JUL 61 REVISED (E) 21 Feb 78

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable

Review Activities: Army - MI, AR, EL Navy - Air Force - 99 DLA - IS

User Activities: Army - AS, 03 Navy - Air Force - DLA -

P.A. USAF - 11 Other Cust Army - AV	TITLE INSERT SCREW THREAD COILS AND FREE RUNNING NUTS HELICAL COIL CRES	MILITARY STANDARD MS21209
PROCUREMENT SPECIFICATION MIL-I-8846	SUPERSEDES	SHEET 2 OF 4

DD FORM 1 SEP 61 672-1 (Coordinated)

EDITION OF 1 SEP 57 MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 202640-23T14:28Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5340

FINE THREAD SERIES

1 DIAMETER NOMINAL LENGTH					
NOMINAL THREAD SIZE	DASH NO	LENGTH (REF)	WEIGHT LBS/100	M +1 COIL	N +1/4 COIL
099-56	F0310	099	0051	1 6875	3 375
112-48	F0410	112	0099	1 6875	3 375
138-40	F0610	138	020	1 750	3 500
164-36	F0810	164	0325	1 9375	3 875
190-32	F1-10	190	0474	2 0625	4 125
250-28	F4-10	250	109	2 500	5 000
3125-24	F5-10	312	180	2 750	5 500
375-24	F6-10	375	259	3 4375	6 875
4375-20	F7-10	438	459	3 3125	6 625
500-20	F8-10	500	595	3 9375	7 875
5625-18	F9-10	562	826	4 000	8 000
625-18	F1010	625	1 010	4 500	9 000
750-16	F1210	750	1 695	4 875	9 750
875-14	F1410	875	2 564	4 9375	9 875
1 000-12	F1610	1 000	3 875	4 8125	9 625
1 125-12	F1810	1 125	4 917	5 5625	11 125
1 250-12	F2010	1 250	6 254	6 250	12 500
1 375-12	F2210	1 375	7 359	6 875	13 750
1 500-12	F2410	1 500	8 799	7 625	15 250

1 5 DIAMETER NOMINAL LENGTH					
DASH NO	LENGTH (REF)	WEIGHT LBS/100	M +1 COIL	N +1/4 COIL
F0315	148	0084	2 8125	5 625
F0415	168	0160	2 8125	5 625
F0615	207	0304	3 000	6 000
F0815	246	0502	3 250	6 500
F1-15	.285	0784	3 4375	6 875
F4-15	375	155	4 125	8 250
F5-15	469	284	4 4375	8 875
F6-15	562	420	5 500	11 000
F7-15	656	699	5 3125	10 625
F8-15	750	909	6 1875	12 375
F9-15	844	1 266	6 250	12 500
F1015	938	1 562	7 0625	14 125
F1215	1 125	2 564	7 5625	15 125
F1415	1 312	4 000	7 750	15 500
F1615	1 500	6 063	7 500	15 000
F1815	1 688	7 572	8 625	17 250
F2015	1 875	9 502	9 6875	19 375
F2215	2 062	11 276	10 6875	21 375
F2415	2 250	13 850	11 750	23 500

2 DIAMETER NOMINAL LENGTH					
NOMINAL THREAD SIZE	DASH NO	LENGTH (REF)	WEIGHT LBS/100	M +1 COIL	N +1/4 COIL
099-56	F0320	198	0117	4 000	8 000
112-48	F0420	224	0222	3 9375	7 875
138-40	F0620	276	0408	4 1875	8 375
164-36	F0820	328	0680	4 5625	9 125
190-32	F1-20	380	112	4 750	9 500
250-28	F4-20	500	212	5 6875	11 375
3125-24	F5-20	625	397	6 125	12 250
375-24	F6-20	750	553	7 500	15 000
4375-20	F7-20	875	917	7 3125	14 625
500-20	F8-20	1 000	1 234	8 4375	16 875
5625-18	F9-20	1 125	1 695	8 5625	17 125
625-18	F1020	1 250	2 083	9 625	19 250
750-16	F1220	1 500	3 448	10 3125	20 625
875-14	F1420	1 750	5 263	10 5625	21 125
1 000-12	F1620	2.000	8 188	10 250	20 500
1 125-12	F1820	2 250	10 227	11 6875	23 375
1 250-12	F2020	2 500	12 750	13 125	26 250
1 375-12	F2220	2 750	15 194	14 4375	28 875
1 500-12	F2420	3 000	15 591	15 8125	31 625

2 5 DIAMETER NOMINAL LENGTH					
DASH NO	LENGTH (REF)	WEIGHT LBS/100	M +1 COIL	N +1/4 COIL
F0325	248	0192	6 375	10 375
F0425	280	0285	6 3125	10 250
F0625	345	0512	6 5625	10 750
F0825	410	0857	7 0625	11 625
F1-25	475	140	7 500	12 000
F4-25	625	276	8 8125	14 500
F5-25	781	490	9 500	15 625
F6-25	938	709	11 625	19 125
F7-25	1 094	1 250	11 1875	18 500
F8-25	1 250	1 563	12 9375	21 375
F9-25	1 406	2 128	13 1875	21 750
F1025	1 562	2 632	14 625	24 250
F1225	1 875	4 348	15 6875	26 000
F1425	2 188	6 667	16 0625	26 625
F1625	2 500	10 406	15 750	26 000
F1825	2 812	12 882	17 8125	29 500
F2025	3 125	15 998	19 875	33 000
F2225	3 438	19 111	22 0625	36 500
F2425	3 750	23 352	24 0625	39 875

3 DIAMETER NOMINAL LENGTH					
NOMINAL THREAD SIZE	DASH NO	LENGTH (REF)	WEIGHT LBS/100	M +1 COIL	N +1/4 COIL
099-56	F0330	297	0234	8 625	12 625
112-48	F0430	336	0346	8 5625	12 500
138-40	F0630	414	0616	9 0625	13 250
164-36	F0830	492	1034	9 6875	14 250
190-32	F1-30	570	170	10 125	14 875
250-28	F4-30	750	338	11 9375	17 625
3125-24	F5-30	938	602	12 875	19 000
375-24	F6-30	1 125	862	15 625	23 125
4375-20	F7-30	1 312	1 493	15 1875	22 500
500-20	F8-30	1 500	1 857	17 4375	25 875
5625-18	F9-30	1 688	2 564	17 6875	26 250
625-18	F1030	1 875	3 030	19 750	29 375
750-16	F1230	2 250	5 263	21 1875	31 500
875-14	F1430	2 625	7 692	21 6875	32 250
1 000-12	F1630	3 000	12 815	21 250	31 500
1 125-12	F1830	3 375	15 536	24 0625	35 750
1 250-12	F2030	3 750	19 246	26 750	39 875
375-12	F2230	4 125	23 028	29 5625	44 000
1 500-12	F2430	4 500	28 203	32 3125	45 125

Army - AS, OS
Navy -
Air Force -
DLA -

User Activities

Army - MI, AR, EL
Navy -
Air Force - 99
DLA - IS

Review Activities

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable

APPROVED 17 Jul 61 REVISED (E) 21 Feb 78

P A USAF - 11 Other Cust Army - AV	TITLE INSERT SCREW THREAD, COARSE AND FINE SCREW DOCKING HELICAL COIL LINES	MILITARY STANDARD MS 21209
PROCUREMENT SPECIFICATION MIL-I-8846	SUPERSEDES	SHEET 3 OF

DD FORM 1 SEP 63 672-1 (Coordinated)

EDITION OF 1 SEP 63 MAY BE USED

Source: https://assist.dla.mil -- Downloaded: 202610-23T14:28Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5340

INSERT DIMENSIONS COARSE THREAD

NOMINAL THREAD SIZE	A MIN	B MIN	B MAX	C GAGE	D MIN	D MAX	E MIN	E MAX	F MIN	F MAX
086-56	.0027	0163	0193	00893	0112	0116	0126	0156	110	119
099-48	0043	0196	0226	01042	01313	01353	0152	0182	128	137
112-40	0068	0241	0271	0125	01584	01624	0189	0219	144	159
125-40	0068	.0241	0271	0125	01584	01624	0189	0219	158	173
138-32	0076	.0295	0338	01563	01985	02030	0233	0273	178	193
164-32	0076	0295	0338	01563	01985	02030	0233	0273	205	220
190-24	0120	.0410	0449	02083	.02656	.02706	0305	0365	244	259
216-24	0120	0410	0449	02083	02656	02706	0305	0365	270	285
250-20	0164	050	0540	02500	03198	03248	0378	0438	310	330
3125-18	0176	056	060	02778	03558	03608	0416	0486	380	400
375-16	0215	0636	0677	03125	04009	04059	0477	0547	452	472
4375-14	0267	0730	0770	03571	04589	04639	0545	0625	526	551
500-13	0273	0758	.0829	03846	04946	04996	0593	0673	597	622
5625-12	0334	0861	.0900	04167	05363	05413	0649	0729	669	694
625-11	0351	0909	0980	04545	05855	05905	0715	0795	742	767
750-10	0402	1007	1079	05000	06445	06495	0795	0875	881	906
875-9	0466	1124	1199	05556	07167	07217	0892	0972	1 022	1 052
1 000-8	0544	1264	1350	06250	08069	08119	1004	1094	1 166	1 196
1 125-7	0645	1451	1546	07143	09229	09279	1160	1250	1 315	1 355
1 250-7	0645	1451	1546	07143	09229	09279	1160	1250	1 443	1 483
1 375-6	0775	1695	1799	08333	10775	10825	1368	1458	1 598	1 643
1 500-6	.0775	1695	1799	08333	10775	10825	1368	1458	1 727	1 772

NOMINAL THREAD SIZE	G MIN	G MAX	H MIN	H MAX	J MIN	J MAX	K	L	P	S +1/4 COIL	R MIN	T MIN
086-56	067	085	75°	150°	103	111	4	1	3	1 50	0032	0056
099-48	070	090	75°	150°	128	137	4	1	3	1 50	0038	0065
112-40	070	105	25°	100°	144	159	4	1	3	1 75	0045	0078
125-40	078	108	25°	100°	158	173	4	1	3	1 62	0045	0078
138-32	091	135	25°	100°	178	193	4	1	3	1 75	0056	0098
164-32	117	152	20°	100°	205	220	4	1	3	1 75	0056	0098
190-24	138	183	20°	90°	244	259	4	1	3	1 75	0075	0130
216-24	.154	189	20°	90°	270	285	4	1	—	—	0075	0130
250-20	187	238	20°	80°	310	330	5	1	4	2 50	0090	0156
3125-18	227	291	20°	80°	380	400	5	1	3	2 75	0100	0174
375-16	271	354	20°	80°	452	472	6	1	3	2 75	0113	0195
4375-14	318	416	20°	80°	526	551	6	1	4	1 75	0129	0223
500-13	349	463	20°	80°	597	622	6	1	4	1 75	0139	0240
5625-12	401	521	20°	80°	656	676	6	1	4	1 75	0150	0260
625-11	428	572	20°	80°	727	747	6	1	5	2 25	0164	0284
750-10	453	635	60°	120°	840	885	6	1	5	2 25	0180	0312
875-9	566	734	60°	120°	991	1 026	6	1	6	3 33	0200	0347
1 000-8	526	781	60°	120°	1 115	1 170	6	1	6	3 33	0226	0391
1 125-7	557	843	60°	120°	1 260	1 315	6	1	6	3 33	0258	0446
1 250-7	679	937	60°	120°	1 366	1 416	6	1	6	3 33	0258	0446
1 375-6	689	1 093	60°	120°	1 545	1 598	7	1	6	3 33	0301	0521
1 500-6	.811	1 187	60°	120°	1 676	1 727	7	1	6	3 33	0301	0521

(E)

COARSE THREAD NOMINAL THREAD SIZE	X +.001 -.000	Y +.001 -.000	Z +.000 -.001
086-56	-	-	-
099-48	-	-	-
112-40	-	-	-
125-40	-	-	-
138-32	045	020	101
164-32	045	020	127
190-24	061	020	142
216-24	064	025	168
250-20	073	028	193
3125-18	082	034	250
375-16	093	039	302
4375-14	112	056	355
500-13	125	076	411
5625-12	142	086	468
625-11	156	114	521
750-10	186	117	625
875-9	186	156	750
1 000-8	250	156	844
1 125-7	-	-	-
1 250-7	-	-	-
1 375-6	-	-	-
1 500-6	-	-	-

FINE THREAD NOMINAL THREAD SIZE	X +.001 -.000	Y +.001 .000	Z +.000 -.001
099-56	-	-	-
112-48	-	-	-
138-40	-	-	-
164-36	-	-	-
190-32	052	020	.153
250-28	060	020	.208
3125-24	.070	.024	.265
375-24	070	024	328
4375-20	088	046	380
500-20	090	046	422
5625-18	100	066	.500
625-18	100	089	563
750-16	109	087	679
875-14	125	135	.794
1 000-12	-	-	-
1 125-12	-	-	-
1 250-12	-	-	-
1 375-12	-	-	-
1 500-12	-	-	-

Review Activities: Army - MI, AR, EL; Navy -; Air Force - 99; DLA - IS

User Activities: Army - AS, OS; Navy -; Air Force -; DLA -

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new design applications and for repetitive use shall be made from this document, when applicable

APPROVED 17 Jul 61 REVISED (E) 21 Feb 78

P.A. USAF - 11
Other Cust
Army - AV

TITLE
INSERT SCREW THREAD COARSE AND FINE SCREW LOCKING HELICAL COIL CRES

MILITARY STANDARD
MS21209

PROCUREMENT SPECIFICATION
MIL-I-8846

SUPERSEDES

SHEET 4 OF

DD FORM 672-1

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

Source: https://assist.dla.mil -- Downloaded: 202610-23T14:28Z
Check the source to verify that this is the current version before use.

FED SUP CLASS
5340

INSERT DIMENSIONS FINE THREAD

NOMINAL THREAD SIZE	A MIN	B MIN	B MAX	GAGE	D MIN	D MAX	E MIN	E MAX	F MIN	F MAX
.099-56	0027	0163	0193	00893	.0112	.0116	0126	0156	.131	146
112-48	0043	0196	0226	01042	01313	01353	0152	0182	147	162
138-40	0068	0241	0271	01250	01584	01624	0189	0219	173	193
164-36	0059	0261	0301	01389	01764	01804	0203	0243	204	224
190-32	0076	0295	0338	01563	01985	02030	0233	0273	236	256
250-28	0085	0347	0387	01786	02270	02320	0253	0313	306	326
3125-24	0120	0410	0449	02083	02656	02706	0305	0365	380	400
375-24	0120	0410	0449	02083	02656	02706	0305	0365	448	468
4375-20	0164	500	0540	02500	03198	03248	0378	0438	524	549
500-20	0164	500	0540	02500	03198	03248	0378	0438	592	617
5625-18	0176	0560	0600	02778	03558	03608	0416	0486	666	691
625-18	0176	0560	0600	02778	03558	03608	0416	0486	733	758
750-16	0215	0636	0677	03125	04009	04059	0477	0547	876	901
875-14	0267	0730	0770	03571	04589	04639	0545	0625	1 021	1 051
1 000-12	0334	0861	0900	04167	05363	05413	0649	0729	1 169	1 199
1 125-12	0334	0861	0900	04167	05363	05413	0649	0729	1 304	1 334
1 250-12	0334	0861	0900	04167	05363	05413	0649	0729	1 439	1 469
1 375-12	0334	0861	0900	04167	05363	05413	0649	0729	1 575	1 610
1 500-12	0334	0861	0900	04167	05363	05413	0649	0729	1 710	1 745

NOMINAL THREAD SIZE	G MIN	G MAX	H MIN	H MAX	J MIN	J MAX	K	L	P	S +1/4 COIL	R MIN	T MIN
.099-56	072	090	75°	150°	131	146	4	1	—	—	.0032	0056
112-48	060	095	75°	150°	147	162	4	1	4	2 33	.0038	.0065
138-40	100	130	25°	100°	173	193	4	1	4	2 33	.0045	0078
164-36	117	147	20°	100°	204	224	4	1	4	2 33	.0050	0087
190-32	131	182	15°	90°	236	256	5	1	4	1 75	0056	0098
250-28	178	244	15°	75°	306	326	5	1	6	4 0	0064	0112
3125-24	209	291	15°	75°	380	400	6	2	9	5 25	0075	0130
375-24	240	353	15°	75°	448	468	6	2	10	5 25	0075	0130
4375-20	287	416	15°	75°	524	549	6	2	8	4 0	0090	0156
500-20	318	479	15°	75°	592	617	6	2	10	5 25	0090	0156
5625-18	354	541	15°	75°	666	691	6	2	10	5 25	.0100	0174
625-18	386	588	15°	75°	733	758	6	2	10	5 25	0100	0174
750-16	464	557	15°	75°	876	901	7	2	12	6 25	0113	0195
875-14	495	604	15°	75°	1 021	1 051	8	2	12	6 25	0129	0223
1 000-12	526	728	15°	75°	1 169	1 199	8	2	14	7 5	0150	0260
1 125-12	557	819	10°	70°	1 304	1 334	8	2	14	7 5	.0150	0260
1 250-12	679	941	10°	70°	1 344	1 374	8	2	14	7 5	0150	0260
1 375-12	689	1 001	10°	70°	1 469	1 504	10	2	14	7 5	0150	0260
1 500-12	811	1 123	10°	70°	1 594	1 629	11	2	14	7 5	0150	0260

NOMINAL LENGTH — NOMINAL LENGTH EQUALS MINIMUM THROUGH HOLE LENGTH WITHOUT COUNTERSINK AND WITH INSERT LOCATED 1/4 TO 1/2 THREAD PITCH BELOW TOP SURFACE

(E) FREE COILS — THE NUMBER OF FREE COILS OF THE INSERT ARE COUNTED 90° FROM TANG FOR ALL SIZES

MATERIAL — STEEL, CORROSION RESISTANT, SEE PROCUREMENT SPECIFICATION

THREAD — INSERT, WHEN ASSEMBLED IN BASIC TAPPED HOLE AS SPECIFIED ON STANDARD MS33537, SHALL PRODUCE A FINISHED THREAD MEETING THE REQUIREMENTS OF HANDBOOK H-28 AND SHALL ACCEPT EXTERNAL THREADED PARTS WHICH ARE THREADED TO MIL-S-7742 OR MIL-S-8879

SURFACE ROUGHNESS: ANSI B46 1-1962

DIMENSIONS IN INCHES, APPLY BEFORE PLATING UNLESS OTHERWISE SPECIFIED, TOLERANCES LINEAR DIMENSIONS ± 010 ANGULAR DIMENSIONS ± 5°

COLOR IDENTIFICATION (a) BARE INSERTS - DYED RED
(b) DRY FILM LUBRICATED - DARK GREY
(c) CADMIUM PLATED - OLIVE DRAB

LUBRICANT DRY FILM LUBRICANT SHALL BE IN ACCORDANCE WITH MIL-L-8937

PLATING CADMIUM PLATING SHALL BE IN ACCORDANCE WITH QQ-P-416, TYPE II, EXCEPT THE THICKNESS SHALL BE A MAXIMUM OF 0 00

ADD THE LETTER "L" AFTER THE PART NUMBER TO DESIGNATE A DRY FILM LUBRICANT COATED INSERT

ADD THE LETTER "P" AFTER THE PART NUMBER TO DESIGNATE A CADMIUM PLATED INSERT

THE MS PART NUMBER CONSISTS OF THE BASIC MS NUMBER PLUS THE DASH NUMBER

EXAMPLE OF PART NUMBER MS21209C0415 = A SCREW LOCKING HELICAL COIL INSERT (MS21209), COARSE THREAD (C), NUMBER 4 THREAD DIAMETER (04), 1 5 DIA NOMINAL LENGTH (15)
MS21209F4-20L = A SCREW LOCKING HELICAL COIL INSERT (MS21209), FINE THREAD (F), 0 0250-28 THREAD DIAMETER (4), WITH A DRY FILM LUBRICANT (L)
MS21209F1225P = A SCREW LOCKING HELICAL COIL INSERT (MS21209), FINE THREAD (F), 0 0750-16 THREAD DIAMETER (12), 2 5 DIAMETER NOMINAL LENGTH (25), WITH CADMIUM PLATING (P)

THIS STANDARD TAKES PRECEDENCE OVER DOCUMENTS REFERENCED HEREIN
REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID

(E) APPROVED 17 Jul 61 REVISED 21 Feb 70

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document, when applicable

User Activities: Army - AS, OS; Navy -; Air Force -; DLA -

Review Activities: Army - MI, AR, EL; Navy -; Air Force - 99; DLA - IS

P A USAF - 11 Other Cust Army - Av	INTERNATIONAL INTEREST	TITLE / INSERT, SCREW THREAD, COARSE AND FINE, SCREW LOCKING HELICAL COIL CRES	MILITARY STANDARD MS21209
PROCUREMENT SPECIFICATION MIL- 1 - 8646	SUPERSEDES		SHEET 5 OF 5

DD FORM 672-1

Source: https://assist.dla.mil -- Downloaded: 202610-23T14:28Z
Check the source to verify that this is the current version before use.