
PROJECT NO. 4220-0205


FED. SUP CLASS
4220

USER SYMBOLS:
NAVY - SH, MC
ARMY - AV

REVIEWER SYMBOLS:
ARMY - AV
USAF - 84
DSA - CS

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

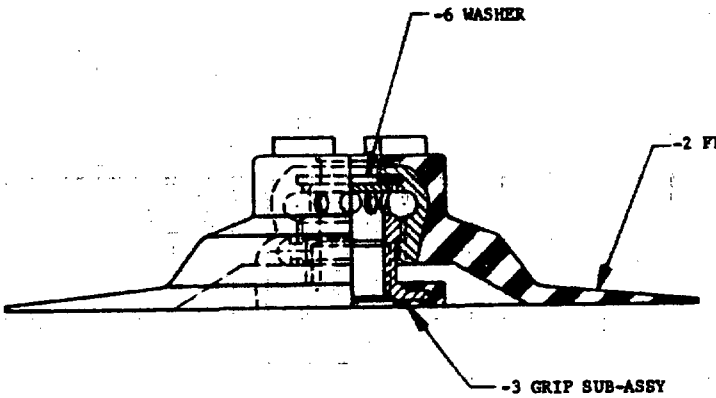

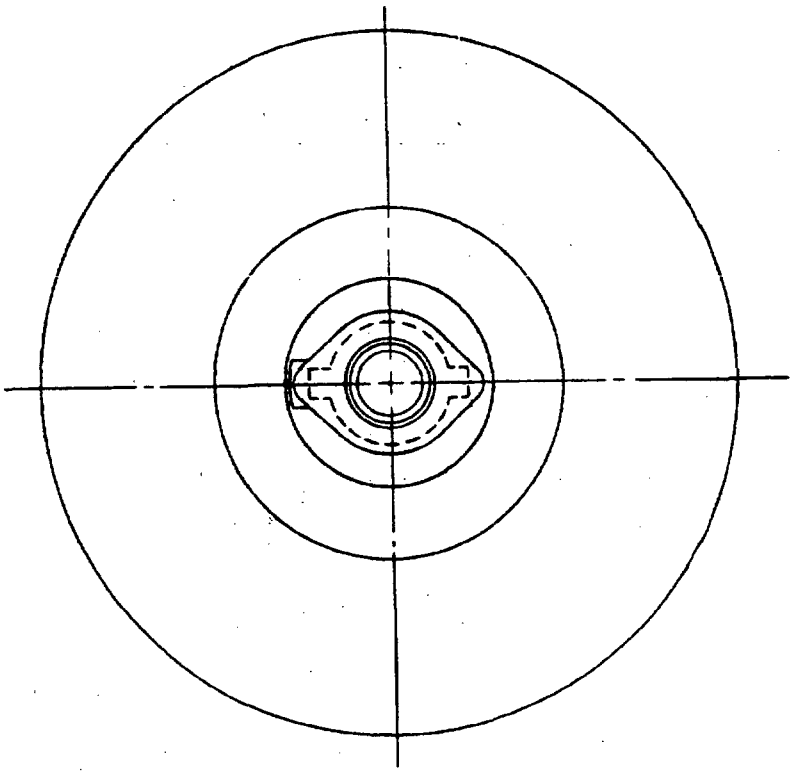

-1 VALVE ASSY

FOR NOTES SEE SHEET 5

FOR DESIGN FEATURE PURPOSES, THIS STANDARD TAKES PRECEDENCE OVER PROCUREMENT DOCUMENTS REFERENCED HEREIN. REFERENCED DOCUMENTS SHALL BE OF THE ISSUE IN EFFECT ON DATE OF INVITATIONS FOR BID.

(A) ENTIRE STANDARD REVISED AND REDRAWN.

APPROVED 17 AUG 1961 REVISED (A) 22 JAN 1975

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. NAVY - AS Other Cust ARMY - ME USAF - 82	TITLE: VALVE, LIFE RAFTS FLUSH TYPE, TOPPING OFF (FOR MULTIPLACE LIFE RAFTS)	MILITARY STANDARD MS22054
PROCUREMENT SPECIFICATION: NONE	SUPERSEDES: MS22054(ASG)	SHEET 1 OF 5

DD FORM 672-1 (Coordinated) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PLATE NO. 23065

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:45Z
Check the source to verify that this is the current version before use.


USER SYMBOLS: NAVY - SH, MC ARMY - AV

REVIEWER SYMBOLS: ARMY - AV USAF - 84 DLA - CS


"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft standardization should be based on the information in the current DODISS."

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

FED. SUP CLASS 4420

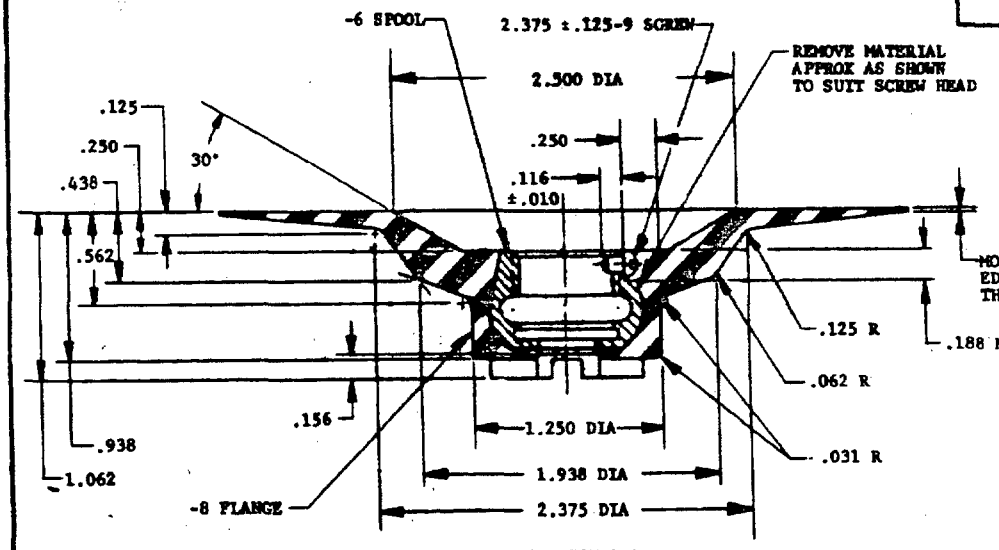

SECTION A-A

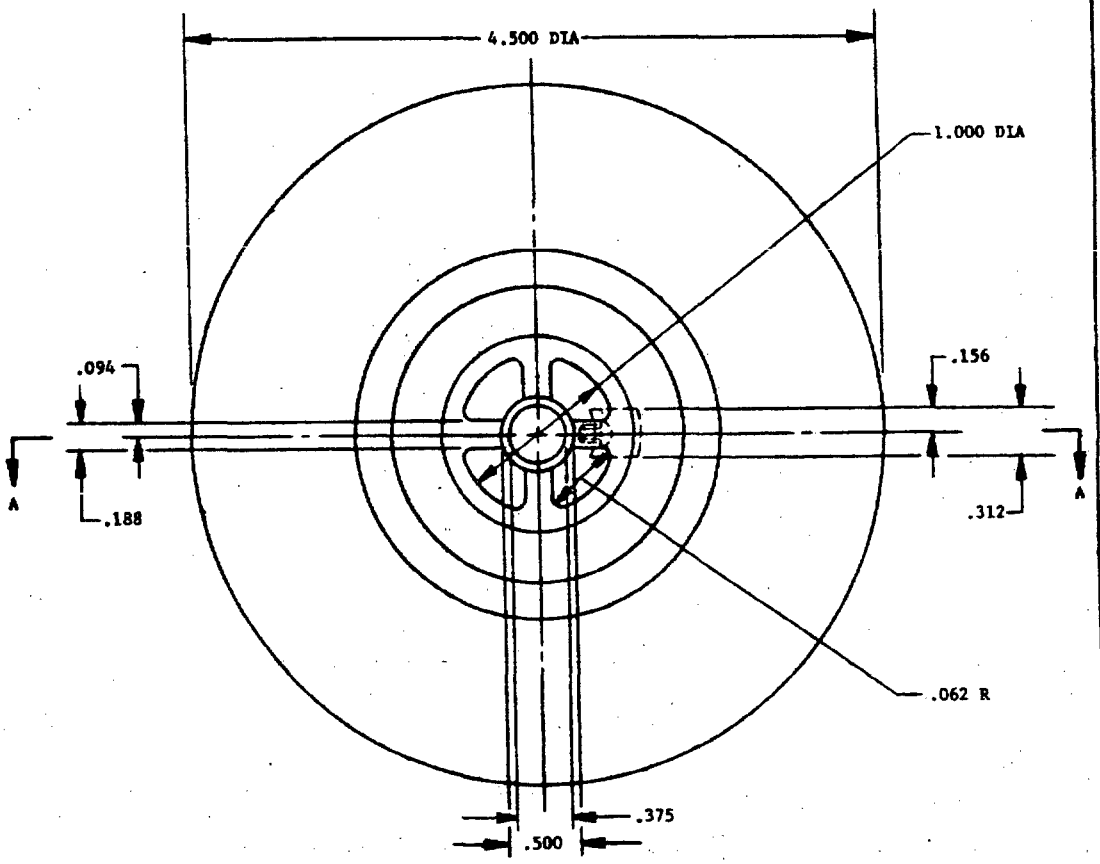

-2 FLANGE SUB-ASSY

APPROVED 17 AUG 1961 REVISED (A) FOR CHANGES SEE SHEETS 1 THRU 5

P.A. NAVY - AS. Other Cust ARMY - ME USAF - 82	TITLE: VALVE, LIFE RAFTS FLUSH TYPE, TOPPING OFF (FOR MULTIPLACE LIFE RAFTS)	MILITARY STANDARD MS22054
PROCUREMENT SPECIFICATION: NONE	SUPERSEDES: MS22054(ASG)	SHEET 2 OF 5

DD FORM 1 MAR 72 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PLATE NO. 22085


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:45Z
Check the source to verify that this is the current version before use.


FED. SUP CLASS
4420

USER SYMBOLS:
NAVY - SH, MC
ARMY - AV

REVIEWER SYMBOLS:
ARMY - AV
USAF - 84
DSA - CS

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

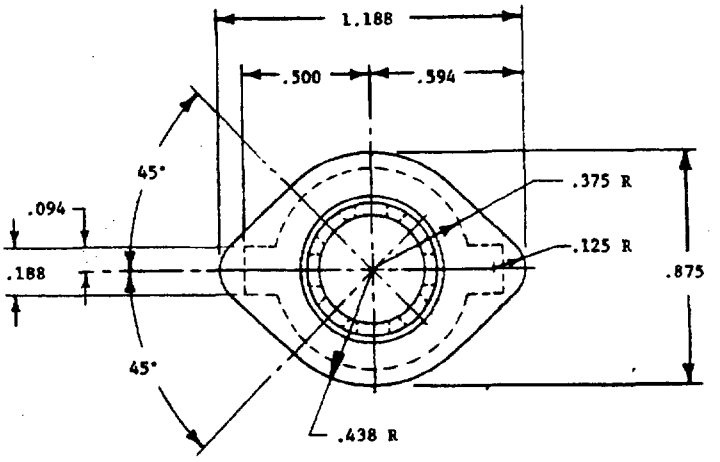

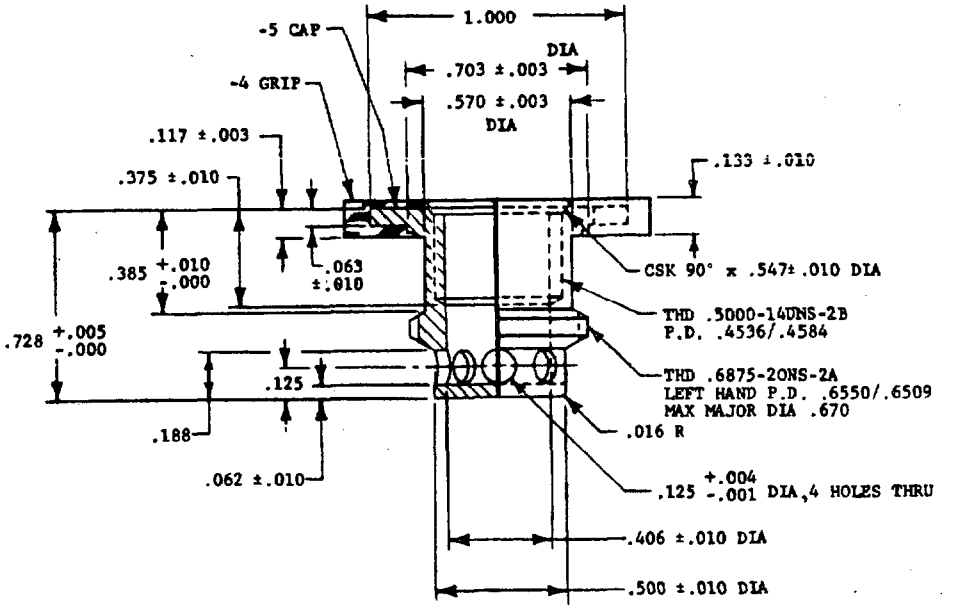

-3 SUB ASSY

APPROVED 17 AUG 1961 REVISED (A) FOR CHANGES SEE SHEETS 1 THRU 5

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. NAVY - AS Other Cust ARMY - ME USAF - 82	TITLE VALVE, LIFE RAFTS FLUSH TYPE, TOPPING OFF (FOR MULTIPLACE LIFE RAFTS)	MILITARY STANDARD MS22054
PROCUREMENT SPECIFICATION NONE	SUPERSEDES: MS22045 (ASG)	SHEET 3 OF 5


DD FORM 1 MAR 72 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.


PLATE NO. 23085

Source: https://assist.dla.mil -- Downloaded: 202610-23T14:45Z
Check the source to verify that this is the current version before use.


FED. SUP CLASS
4420

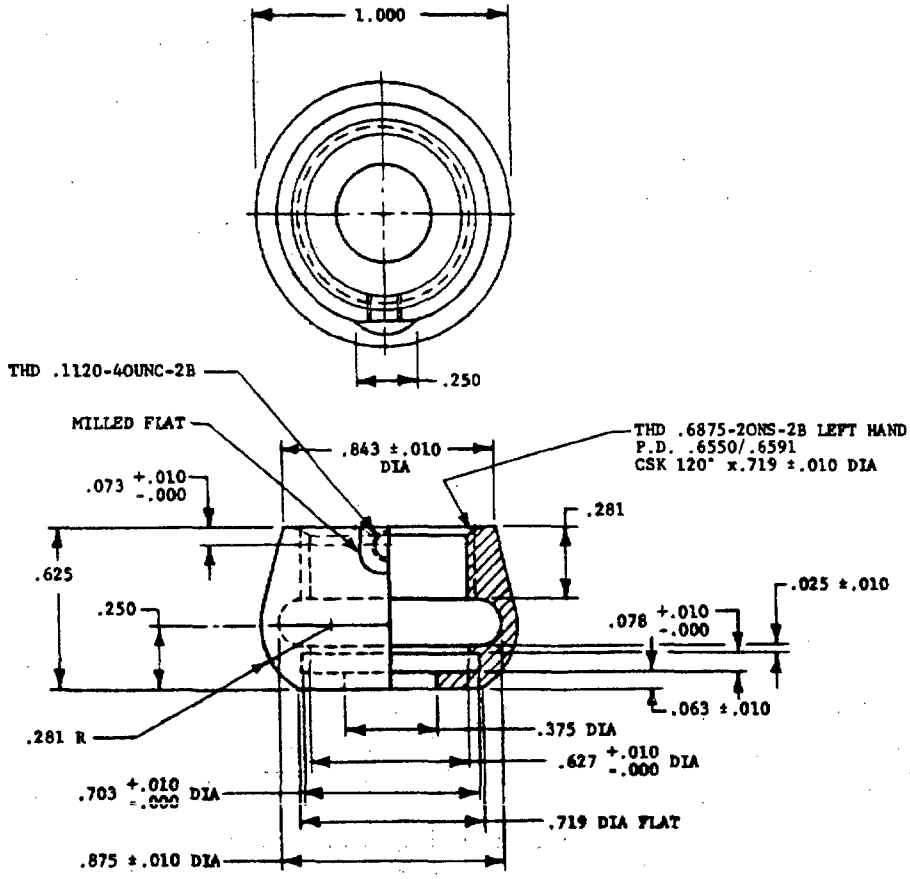

-6 SPOOL

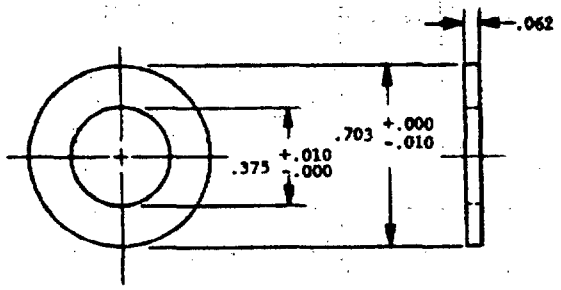

-7 WASHER



-9 SCREW

SELECTED ITEM PART

APPROVED 17 AUG 1961 REVISED (A) FOR CHANGES SEE SHEETS 1 THRU 5

USER SYMBOLS:
NAVY - SH, MC
ARMY - AV

REVIEWER SYMBOLS:
ARMY - AV
USAF - 84
DSA - CS

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. NAVY - AS Other Cust ARMY - ME USAF - 82	TITLE VALVE, LIFE RAFTS FLUSH TYPE, TOPPING OFF (FOR MULTIPLACE LIFE RAFTS)	MILITARY STANDARD MS22054
PROCUREMENT SPECIFICATION NONE	SUPERSEDES: MS22054 (ASG)	SHEET 4 OF 5

DD FORM 1 MAR 72 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PLATE NO. 22088

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:45Z
Check the source to verify that this is the current version before use.

FED. SUP CLASS
4420

USER SYMBOLS:
NAVY - SH, MC
ARMY - AV

REVIEWER SYMBOLS:
ARMY - AV
USAF - 84
DSA - CS

"Review/user information is current as of the date of this document. For future coordination of changes to this document, draft circulation should be based on the information in the current DODISS."

TEST REQUIREMENTS: THE MOLDED RUBBER FLANGE -8 OF -2 SUB ASSY SHALL NOT STRIP AWAY FROM THE BRASS SPOOL -6 OF THE TOPPING OFF VALVE, NOR SHALL THE RUBBER FLANGE (-8) FAIL BELOW 75 LBS., WHEN INSPECTED AS FOLLOWS:
"THE RUBBER FLANGE -8 SHALL BE SLIT INTO SIX EQUAL SEGMENTS. TWO OF THE DIAMETRICAL OPPOSITE SEGMENTS SHALL BE CLAMPED IN THE JAWS OF A SUITABLE INSPECTION APPARATUS OPERATING WITH THE MOVABLE JAW SEPARATING AT A RATE OF 2 ± 1/8 INCHES PER MINUTE UNDER NO LOAD. THE JAWS SHALL BE OPERATED UNTIL FAILURE OCCURS. (THIS INSPECTION SHALL BE REPEATED FOR EACH REMAINING TWO DIAMETRICAL OPPOSITE SEGMENTS.) THE SEGMENTS UNDER TEST SHALL BE OBSERVED FOR CONFORMANCE TO REQUIREMENTS." CERTIFICATE OF COMPLIANCE SHALL BE FURNISHED WHEN REQUIRED.

NOTES:

1. MATERIAL: -6 SPOOL AND -5 CAP SHALL BE BRASS, SPECIFICATION QQ-B-626 COMPOSITION 360, HALF HARD;
   -7 WASHER, -8 FLANGE, AND -4 GRIP SHALL BE SYNTHETIC OR NATURAL RUBBER, COMMERCIAL.
2. THREADS TO BE IN ACCORDANCE WITH HANDBOOK H28.
3. HARDNESS: WASHER, SHORE DUROMETER 65 TO 70; FLANGE AND GRIP, SHORE DUROMETER 50 TO 60.
4. ALL RUBBER SECTIONS SHALL BE MOLDED AND CURED.
5. WASHER SHALL BE SECURELY CEMENTED IN PLACE USING A SUITABLE RUBBER TO METAL CEMENT. CARE MUST BE TAKEN TO KEEP THREADS AND OPENING FREE OF CEMENT.
6. DIMENSIONS IN INCHES. UNLESS OTHERWISE SPECIFIED, TOLERANCES: THREE PLACE DECIMALS ±.016, ANGLES ±1/2°.

APPROVED 17 AUG 1961 REVISED (A) FOR CHANGES SEE SHEETS 1 THRU 5

This military standard is approved for use by all Departments & Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. NAVY - AS Other Cust ARMY - ME USAF - 82	TITLE VALVE, LIFE RAFTS, FLUSH TYPE, TOPPING OFF (FOR MULTIPLACE LIFE RAFTS)	MILITARY STANDARD MS22054
PROCUREMENT SPECIFICATION NONE	SUPERSEDES: MS22054(ASG)	SHEET 5 OF 5

DD FORM 1 MAR 72 672-1 (Coordinated)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE.

PLATE NO. 23085

Source: https://assist.dla.mil -- Downloaded: 202610-23T14:45Z
Check the source to verify that this is the current version before use.