THIS SPECIFICATION IS APPROVED FOR USE BY all Departments and Agencies of the Department of Defense.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION MIL-C-26500

PREPARING ACTIVITY: Air Force - 85
CUSTODIANS: ARMY - ; NAVY - ; AIR FORCE 85 ; DLA - ES
REVIEW: Air Force - 11, 17, 99
USER:
PROJECT NUMBER 5935-F361-01
DISTRIBUTION STATEMENT A. Approved for public release; distribution is unlimited.

MILITARY SPECIFICATION SHEET

TITLE: CONNECTORS, RECEPTACLE, ELECTRICAL, FLANGE MOUNT, MINIATURE

SPECIFICATION SHEET NUMBER: MS24264N(USAF) 7 Sept 90
SUPERSEDING: MS24264N 14 Nov 77
AMSC N/A FSC 5935

Page 1 of 7


DD Form 672, MAY 88

(N) denotes change

SHELL DESIGN FOR CLASSES R, F & G (SEE NOTE 11)

STYLE S (SOCKET INSERT)

STYLE P (PIN INSERT)

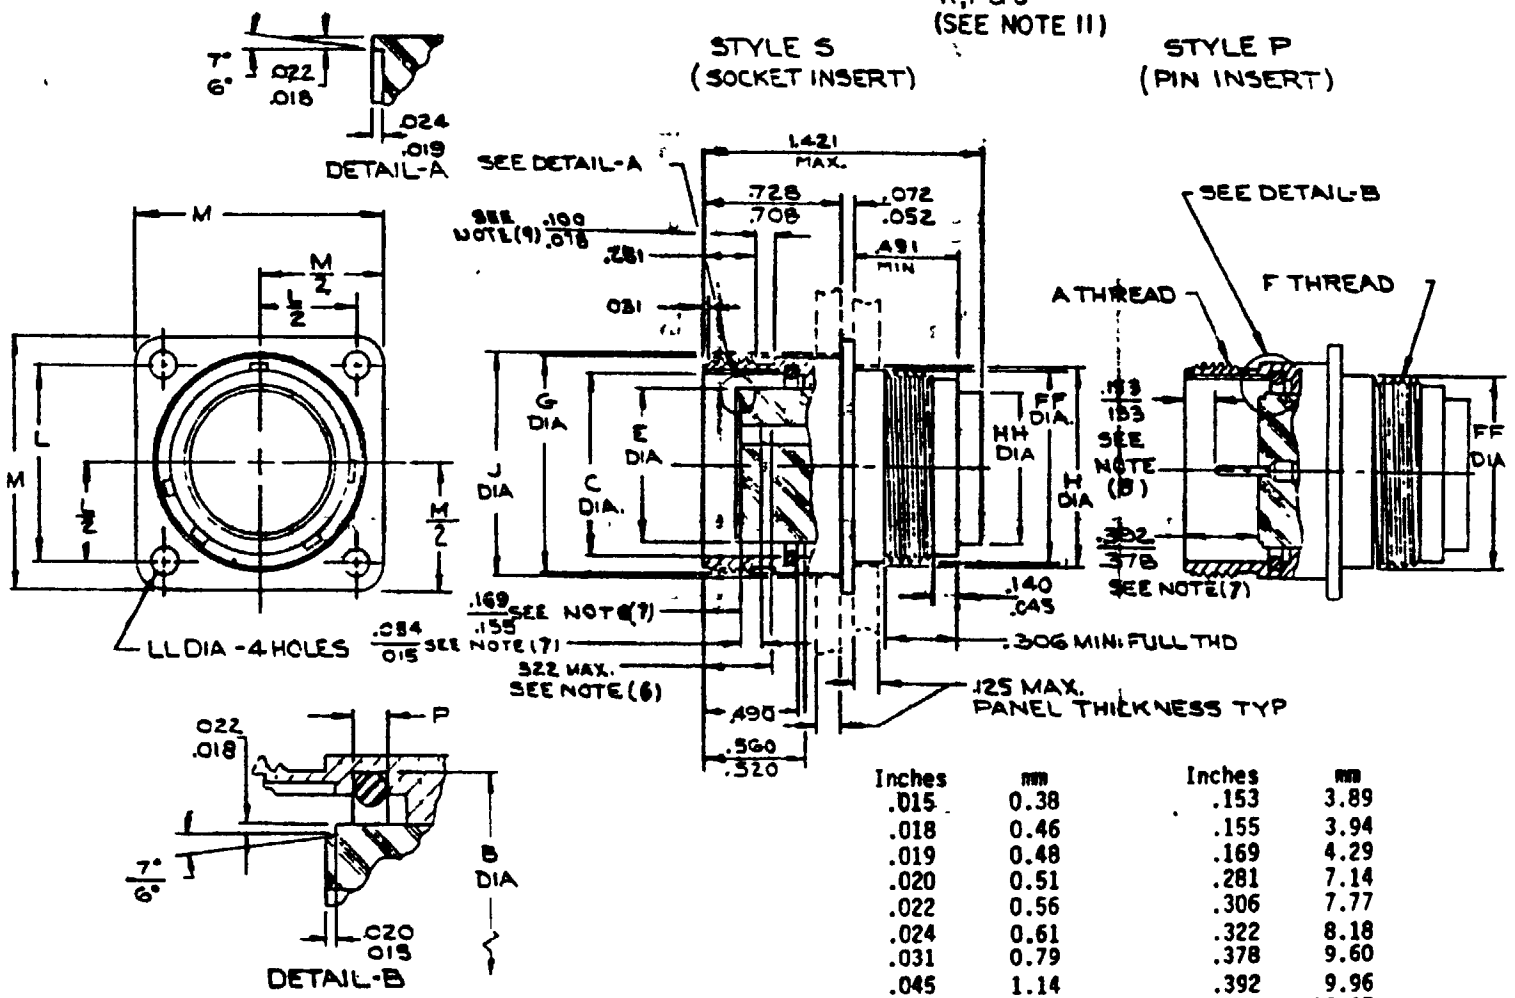

Inches	mm	Inches	mm
.015	0.38	.153	3.89
.018	0.46	.155	3.94
.019	0.48	.169	4.29
.020	0.51	.281	7.14
.022	0.56	.306	7.77
.024	0.61	.322	8.18
.031	0.79	.378	9.60
.045	1.14	.392	9.96
.052	1.32	.490	12.45
.054	1.37	.491	12.47
.072	1.83	.520	13.21
.078	1.98	.560	14.22
.100	2.54	.708	17.98
.125	3.18	.728	18.49
.133	3.38	1.421	36.09
.140	3.56		

INACTIVE FOR AIR FORCE NEW DESIGN EQUIPMENT OR MODIFICATION OF EXISTING EQUIPMENT AFTER 14 NOV 1977.

Use MIL-C-83723, Series III, connector which is interchangeable.


Form Approved OMB No. 0704-0188

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:54:17Z
Check the source to verify that this is the current version before use.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION MIL-C-26500

THIS SPECIFICATION IS APPROVED FOR USE BY all Departments and Agencies of the Department of Defense.

Form Approved
OMB No 0704-0188

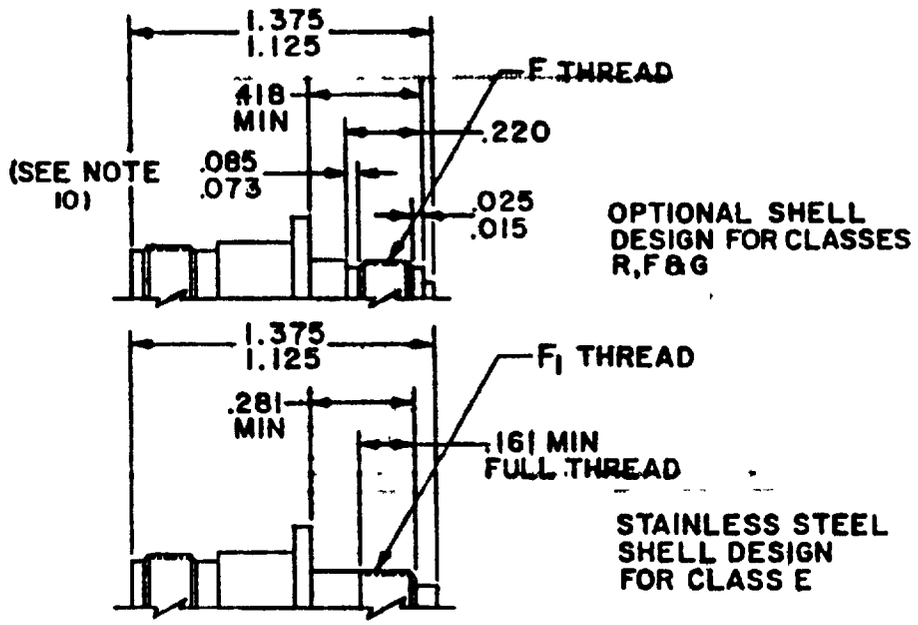

(SEE NOTE 11)

Inches	mm
.015	0.04
.025	0.06
.073	0.18
.085	0.22
.161	0.41
.220	0.56
.281	0.71
.418	1.06
1.125	2.86
1.375	3.49

Ⓝ denotes change

PREPARING ACTIVITY Air Force - 85 CUSTODIANS: ARMY - NAVY - AIR FORCE - 85 DLA - ES REVIEW Air Force - 11, 17, 99 USER: PROJECT NUMBER 5935-F361-01	MILITARY SPECIFICATION SHEET TITLE CONNECTORS, RECEPTACLE, ELECTRICAL, FLANGE MOUNT, MINIATURE	SPECIFICATION SHEET NUMBER MS24264N(USAF) SUPERSEDING MS24264M 14 Nov 77 AMSC N/A FSC 5935
DISTRIBUTION STATEMENT		Page 2 of 7


Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:51Z
Check the source to verify that this is the current version before use.

EQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SI .TION
SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN
THE SOLICITATION MIL-C-26500


THIS SPECIFICATION APPROVED FOR USE BY all Departments
and Agencies of the Department of Defense.

Form Approved
OMB No 0704-0188

SEE PAGE 2 OF 7 FOR
DESIGN VARIATIONS

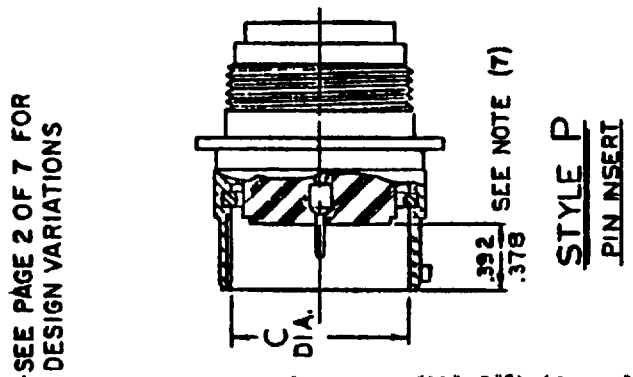


STYLE P
PIN INSERT

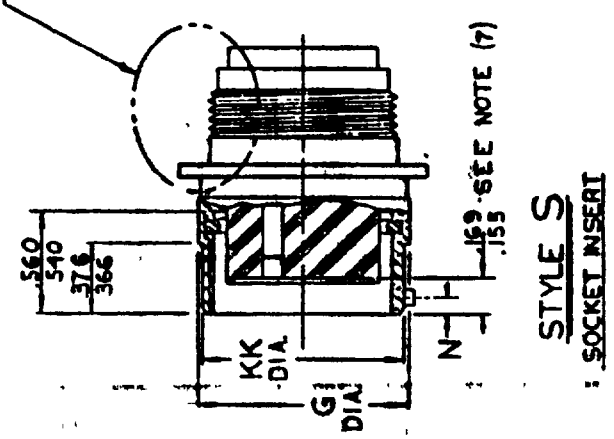

STYLE S
SOCKET INSERT
(SEE NOTE 12)

Inches	mm
.004	0.01
.005	0.01
.010	0.26
.155	0.39
.169	0.43
.366	0.93
.376	0.96
.378	0.96
.392	1.00
.540	1.37
.560	1.42

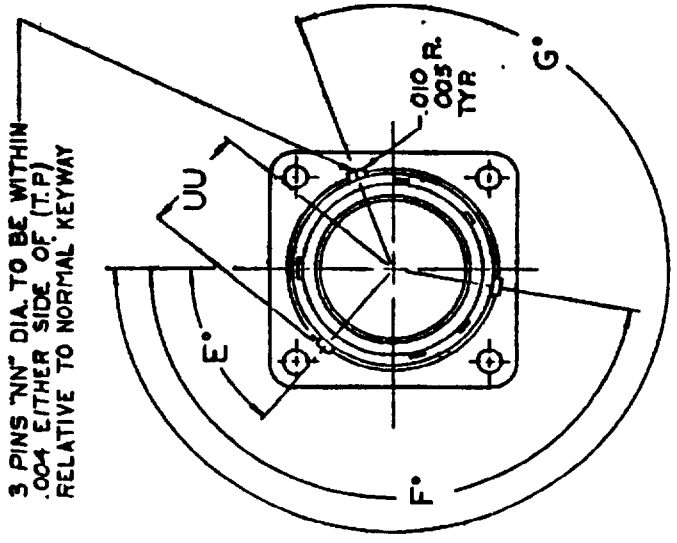

Ⓝ denotes change

PREPARING ACTIVITY Air Force - 85 CUSTODIANS ARMY - NAVY - AIR FORCE - 85 DLA - ES REVIEW Air Force - 11, 17, 99 USER PROJECT NUMBER 5935-F361-0T DISTRIBUTION STATEMENT	MILITARY SPECIFICATION SHEET TITLE CONNECTORS, RECEPTACLE, ELECTRICAL, FLANGE MOUNT, MINIATURE	SPECIFICATION SHEET NUMBER MS24264N(USAF) SUPERSEDING MS24264M 14 Nov 77 AMSC N/A PSC 5935 Page 3 of 7

DD Form 672, MAY 88 Previous editions are obsolete

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:51Z
Check the source to verify that this is the current version before use.

THIS SPECIFICATION IS APPROVED FOR USE BY all Departments and Agencies of the Department of Defense.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION MIL-C-26500

Form Approved
OMB No. 0704-0188

Shell size	A UNEF-2A CPLG.	B dia	C Ⓝ dia +.005 (0.13) -.000 (0.00)	E max insert dia	F UNEF-2A access	F_1 -36NS-2A	F_1 pitch dia	FF max dia	G max dia
8	.562-24 (14.27)	.508 (12.90)	.428 (10.87)	.312 (7.92)	.437-28 (11.10)	.4340 (11.024)	.4151/.4114 (10.544/10.450)	.437 (11.10)	.561 (14.25)
10	.687-24 (17.45)	.636 (16.15)	.530 (13.46)	.388 (9.86)	.562-24 (14.27)	.5634 (14.310)	.5454/.5415 (13.853/13.754)	.562 (14.27)	.696 (17.68)
12	.875-20 (22.22)	.806 (20.47)	.700 (17.78)	.568 (14.17)	.750-20 (19.05)	.7334 (18.628)	.7154/.7115 (18.171/18.072)	.750 (19.50)	.875 (22.22)
14	.937-20 (23.80)	.875 (22.22)	.769 (19.53)	.627 (15.92)	.812-20 (20.62)	.8032 (20.401)	.7841/.7806 (19.961/19.827)	.812 (20.62)	.935 (23.75)
16	1.062-18 (26.97)	1.002 (25.45)	.896 (22.76)	.754 (19.15)	.937-20 (23.80)	.9302 (23.627)	.9110/.9074 (23.134/23.048)	.938 (23.82)	1.062 (26.97)
18	1.187-18 (30.15)	1.108 (28.62)	1.002 (25.45)	.860 (21.84)	1.062-18 (26.97)	1.0362 (26.319)	1.0171/1.0134 (25.834/25.740)	1.062 (26.97)	1.187 (30.15)
20	1.312-18 (33.32)	1.233 (31.32)	1.127 (28.62)	.985 (25.02)	1.187-18 (30.15)	1.1611 (29.492)	1.1431/1.1385 (29.034/28.918)	1.182 (30.02)	1.312 (33.32)
22	1.437-18 (36.50)	1.358 (34.49)	1.252 (31.80)	1.110 (28.19)	1.312-18 (33.32)	1.2862 (32.669)	1.2670/1.2633 (32.182/32.088)	1.312 (33.32)	1.437 (36.50)
24	1.562-18 (39.67)	1.483 (37.67)	1.377 (34.98)	1.235 (31.37)	1.437-18 (36.50)	1.4111 (35.842)	1.3931/1.3885 (35.385/35.268)	1.432 (36.37)	1.562 (39.67)

Ⓝ denotes change

PREPARING ACTIVITY: Air Force - 85
CUSTODIANS: ARMY - ; NAVY - ; AIR FORCE - 85 ; DLA - ES
REVIEW USER: Air Force - 11, 17, 99
PROJECT NUMBER: 5935-F361-01

MILITARY SPECIFICATION SHEET
TITLE: CONNECTORS, RECEPTACLE, ELECTRICAL, FLANGE MOUNT, MINIATURE

SPECIFICATION SHEET NUMBER: MS24264N(USAF)
SUPERSEDING: MS24264M 14 Nov 77
AMSC: N/A FSC: 5935

DISTRIBUTION STATEMENT

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:51Z
Check the source to verify that this is the current version before use.

DD Form 672, MAY 88 Previous editions are obsolete

THIS SPECIFICATION, APPROVED FOR USE BY all Departments and Agencies of the Department of Defense.

REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION MIL-C-26500

Form Approved
OMB No. 0704-0188

Shell size	H min dia front mtg hold	HH max GROM dia	J min dia back mtg hole	KK dia +.000 (0.00) -.005 (0.13)	L mtg hole	LL dia +.000 (0.00) -.009 (0.23)	M length side	N +.000 (0.00) -.004 (0.10)	NN +.000 (0.00) -.003 (0.07)	P +.000 (0.00) -.005 (0.13)	UU +.000 (0.00) +.009 (0.23)
8	.447 (11.35)	.328 (8.33)	.620 (15.75)	.536 (13.61)	.594 (15.09)	.125 (3.18)	.812 (20.62)	.101 (2.56)	.078 (1.98)	.076 (1.93)	.310 (7.87)
10	.572 (14.53)	.420 (10.67)	.748 (19.00)	.659 (16.74)	.719 (18.26)	.125 (3.18)	.937 (23.80)	.094 (2.39)	.093 (2.36)	.089 (2.26)	.374 (9.50)
12	.760 (19.30)	.580 (14.73)	.913 (23.19)	.829 (21.06)	.812 (20.62)	.125 (3.18)	1.031 (26.19)	.094 (2.39)	.093 (2.36)	.089 (2.26)	.459 (11.66)
14	.822 (20.88)	.664 (16.86)	.980 (24.90)	.898 (22.81)	.906 (23.01)	.125 (3.18)	1.125 (28.58)	.094 (2.39)	.093 (2.36)	.089 (2.26)	.494 (12.55)
16	.948 (24.08)	.769 (19.53)	1.107 (28.12)	1.025 (26.03)	.969 (24.61)	.125 (3.18)	1.250 (31.75)	.094 (2.39)	.093 (2.36)	.089 (2.26)	.557 (14.15)
18	1.072 (28.12)	.920 (23.37)	1.209 (30.71)	1.131 (28.73)	1.062 (26.97)	.125 (3.18)	1.343 (34.11)	.094 (2.39)	.093 (2.36)	.089 (2.26)	.610 (15.49)
20	1.192 (30.28)	1.033 (26.24)	1.337 (33.96)	1.256 (31.90)	1.156 (29.36)	.125 (3.18)	1.437 (36.50)	.094 (2.39)	.093 (2.36)	.089 (2.26)	.673 (17.09)
22	1.322 (33.58)	1.152 (29.26)	1.452 (36.89)	1.381 (35.08)	1.250 (31.750)	.125 (3.18)	1.562 (39.67)	.094 (2.39)	.093 (2.36)	.089 (2.26)	.735 (18.67)
24	1.442 (36.63)	1.282 (32.56)	1.577 (40.055)	1.506 (38.25)	1.375 (39.925)	.154 (3.91)	1.703 (43.26)	.094 (2.39)	.093 (2.36)	.089 (2.26)	.798 (20.27)

Position	Shell size 8			Shell size 10			Shell size 12 thru 24		
	E°	F°	G°	E°	F°	G°	E°	F°	G°
Normal	60	180	300	60	180	300	50	170	290
6	46	166	286	46	166	286	50	170	290
7	46	166	286	46	166	286	50	170	290
8	60	180	300	60	180	300	50	170	290
9	89	209	329	89	209	329	50	170	290
(N) Y				60	180	300	50	170	290

(N) denotes change

PREPARING ACTIVITY Air Force - 85 CUSTODIANS ARMY - NAVY - AIR FORCE - 85 DLA - ES REVIEW Air Force - 11, 17, 99 USER PROJECT NUMBER 5935-F367-01 DISTRIBUTION STATEMENT	MILITARY SPECIFICATION SHEET TITLE CONNECTORS, RECEPTACLE, ELECTRICAL, FLANGE MOUNT, MINIATURE	SPECIFICATION SHEET NUMBER MS24264N(USAF) SUPERSEDING MS24264M 14 Nov 77 AMSC N/A FSC 5935

Source: https://assist.dla.mil - Downloaded: 2025-10-23T14:51Z
Check the source to verify that this is the current version before use.

THIS SPECIFICATION IS APPROVED FOR USE BY all Departments and Agencies of the Department of Defense.

THE REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SPECIFICATION SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION MIL-C-26500

Form Approved
OMB No. 0704-0188

Weight chart

Maximum connector weight in pounds

Pin insert			Socket insert		
MS part no.	Less contacts	With contacts	MS part no.	Less contacts	With contacts
MS24264R8T2PN	.023 (0.58)	.025 (0.64)	MS24264R8T2SN	.024 (0.61)	.026 (0.66)
MS24264R10T2PN	.039 (0.99)	.041 (1.04)	MS24264R10T2SN	.040 (1.02)	.042 (1.07)
MS24264R10T5PN	.038 (0.96)	.042 (1.07)	MS24264R10T5SN	.039 (0.99)	.043 (1.09)
MS24264R10T20PN	.038 (0.96)	.042 (1.07)	MS24264R10T20SN	.040 (1.02)	.044 (1.12)
MS24264R12T3PN	.053 (1.35)	.058 (1.47)	MS24264R12T3SN	.055 (1.40)	.060 (1.52)
MS24264R12T12PN	.051 (1.30)	.061 (1.55)	MS24264R12T12SN	.052 (1.32)	.062 (1.57)
MS24264R14T3PN	.057 (1.48)	.067 (1.70)	MS24264R14T3SN	.063 (1.60)	.072 (1.83)
MS24264R14T4PN	.057 (1.48)	.072 (1.83)	MS24264R14T4SN	.059 (1.50)	.074 (1.88)
MS24264R14T7PN	.057 (1.48)	.070 (1.78)	MS24264R14T7SN	.059 (1.50)	.072 (1.83)
MS24264R14T12PN	.057 (1.48)	.070 (1.78)	MS24264R14T12SN	.059 (1.50)	.072 (1.83)
MS24264R14T15PN	.057 (1.48)	.071 (1.80)	MS24264R14T15SN	.059 (1.50)	.072 (1.83)
MS24264R16T10PN	.067 (1.70)	.085 (2.16)	MS24264R16T10SN	.071 (1.80)	.089 (2.60)
MS24264R16T24PN	.067 (1.70)	.087 (2.21)	MS24264R16T24SN	.070 (1.78)	.090 (2.29)
MS24264R18T8PN	.081 (2.06)	.110 (2.79)	MS24264R18T8SN	.084 (2.13)	.112 (2.84)
MS24264R18T11PN	.079 (2.01)	.103 (2.62)	MS24264R18T11SN	.081 (2.06)	.104 (2.64)
MS24264R18T14PN	.080 (2.03)	.105 (2.67)	MS24264R18T14SN	.084 (2.13)	.109 (2.77)
MS24264R18T31PN	.079 (2.01)	.105 (2.67)	MS24264R18T31SN	.083 (2.11)	.108 (2.74)
MS24264R20T16PN	.095 (2.41)	.123 (3.12)	MS24264R20T16SN	.100 (2.54)	.128 (3.25)
MS24264R20T25PN	.092 (2.34)	.130 (3.30)	MS24264R20T25SN	.097 (2.46)	.134 (3.40)
MS24264R20T28PN	.093 (2.36)	.128 (3.25)	MS24264R20T28SN	.097 (2.46)	.131 (3.33)
MS24264R20T39PN	.093 (2.36)	.128 (3.25)	MS24264R20T39SN	.097 (2.46)	.131 (3.33)
MS24264R20T41PN	.093 (2.36)	.127 (3.22)	MS24264R20T41SN	.097 (2.46)	.131 (3.33)
MS24264R22T12PN	.106 (2.69)	.149 (3.78)	MS24264R22T12SN	.111 (2.82)	.153 (3.89)
MS24264R22T19PN	.108 (2.74)	.142 (3.61)	MS24264R22T19SN	.115 (2.92)	.148 (3.76)
MS24264R22T32PN	.109 (2.77)	.152 (3.86)	MS24264R22T32SN	.116 (2.95)	.159 (4.04)
MS24264R22T55PN	.104 (2.64)	.151 (2.16)	MS24264R22T55SN	.110 (2.79)	.155 (3.94)
MS24264R24T43PN	.126 (3.20)	.181 (4.60)	MS24264R24T43SN	.134 (3.40)	.188 (4.78)
MS24264R24T57PN	.125 (3.18)	.178 (4.52)	MS24264R24T57SN	.130 (3.30)	.182 (4.62)
MS24264R24T61PN	.123 (3.12)	.174 (4.42)	MS24264R24T61SN	.128 (3.25)	.178 (4.52)

NOTE: Threaded connectors, classes F, G, and R.

Ⓝ denotes change

PREPARING ACTIVITY Air Force - 85 CUSTODIANS ARMY - NAVY - AIR FORCE - 85 DLA - ES REVIEW Air Force - 11, 17, 99 USER. PROJECT NUMBER 5935-F361-01 DISTRIBUTION STATEMENT	MILITARY SPECIFICATION SHEET TITLE CONNECTORS, RECEPTACLE, ELECTRICAL, FLANGE MOUNT, MINIATURE	SPECIFICATION SHEET NUMBER MS24264N(USAF) SUPERSEDING MS24264M 14 Nov 77 AMSC N/A FSC 5935

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T14:51Z
Check the source to verify that this is the current version before use.


DD Form 672, MAY 88 Previous editions are obsolete

REQUIREMENTS FOR ACQUIRING THE PRODUCT(S) DESCRIBED HEREIN SHALL CONSIST OF THIS SHEET AND THE ISSUE OF THE FOLLOWING SPECIFICATION LISTED IN THAT ISSUE OF THE DODISS SPECIFIED IN THE SOLICITATION MIL-C-26500

THIS SPECIFICATION APPROVED FOR USE BY all Departments and Agencies of the Department of Defense.

Form Approved
OMB No. 0704-0188

NOTES:
1. Dimensions are in inches.
2. Millimeters are in parentheses.
3. Metric equivalents are given for general information only.
4. All diameters to be concentric with each other within .015 T.I.R. All diameters in the same plane to be concentric with each other with .004 T.I.R.
5. Contacts to be in accordance with MIL-C-39029 true position (T.P.) tolerances specified are for maximum material conditions (M.M.C.)
6. Distance between end of shell and the point at which a gauge pin having the same basic diameter as the mating contact and a square face, engages socket contact spring.
7. Dimensions on pin and socket contact locations and end of shells to insert faces apply when contacts are placed in inserts for inspection or application.
8. .133 dimension may reduce to .188 minimum under pressures caused by molded cable assemblies or sharp cable bends. For accessories used with this connector see 3.4.7 of procurement specification. Dimensions in inches unless otherwise specified, tolerances-decimals-±.005. Referenced documents shall be the issue in effect on date of invitations for bid. This standard takes precedence over documents referenced herein. Use tool MS24256A to assemble contacts into this connector, use tool MS24256R to remove contacts from this connector.
9. Thread relief groove is optional on shell. When groove is omitted, the length of full thread from front of shell will be .310 minimum and thread R out .385 maximum.
10. Thread relief groove is optional on shell. When groove is omitted, the length of full thread from rear of shell will be .221 minimum.
11. Environment resistant (classes F and R) receptacles, type T aluminimum shell material. Grounding environment resistant (class G) receptacles, type T aluminimum shell material. Grounding environment resistant (classes G and E) receptacles, type T stainless steel shell material. These receptacles mate with plug MS24266 type T.
12. Environment resistant (classes F and R) receptacles, type B-aluminum shell material. Grounding environment resistant (class G) receptacles, types B-aluminum shell material. Grounding environment resistant (classes G and E) receptacles, types B-stainless steel shell material. This receptacle mates with plug MS 24266 type B.
(N) 13. For insert arrangements and alternate insert keying positions: See MIL-STD-1554.

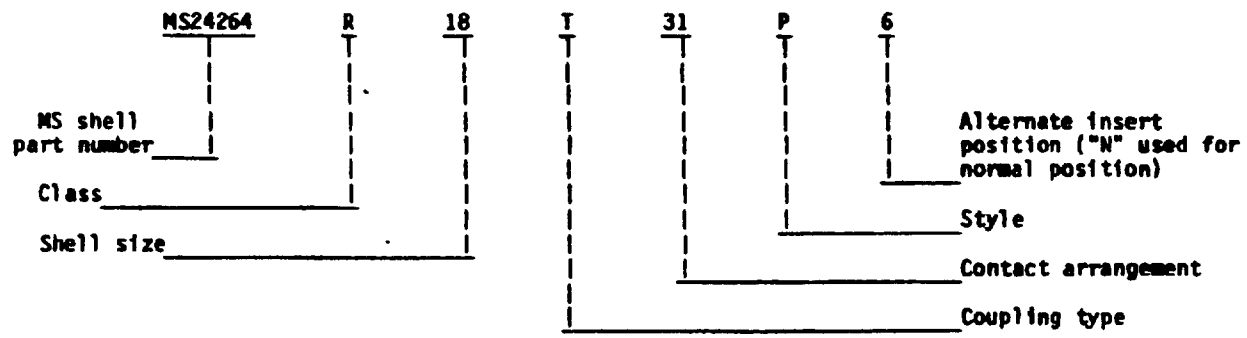

Part number example.

(N) denotes changes

PREPARING ACTIVITY Air Force - 85 CUSTODIANS ARMY - NAVY - AIR FORCE - 85 DLA - ES REVIEW Air Force - 11, 17, 99 USER PROJECT NUMBER 5935-F361-01	MILITARY SPECIFICATION SHEET TITLE CONNECTORS, RECEPTACLE, ELECTRICAL, FLANGE MOUNT, MINIATURE	SPECIFICATION SHEET NUMBER MS24264N(USAF) SUPERSEDING MS24264M 14 Nov 77 AMSC N/A FSC 5935
DISTRIBUTION STATEMENT		Page 7 of 7

Source: https://assist.dla.mil — Downloaded: 2020-10-23T14:51Z
Check the source to verify that this is the current version before use.