FED. SUP CLASS
6130

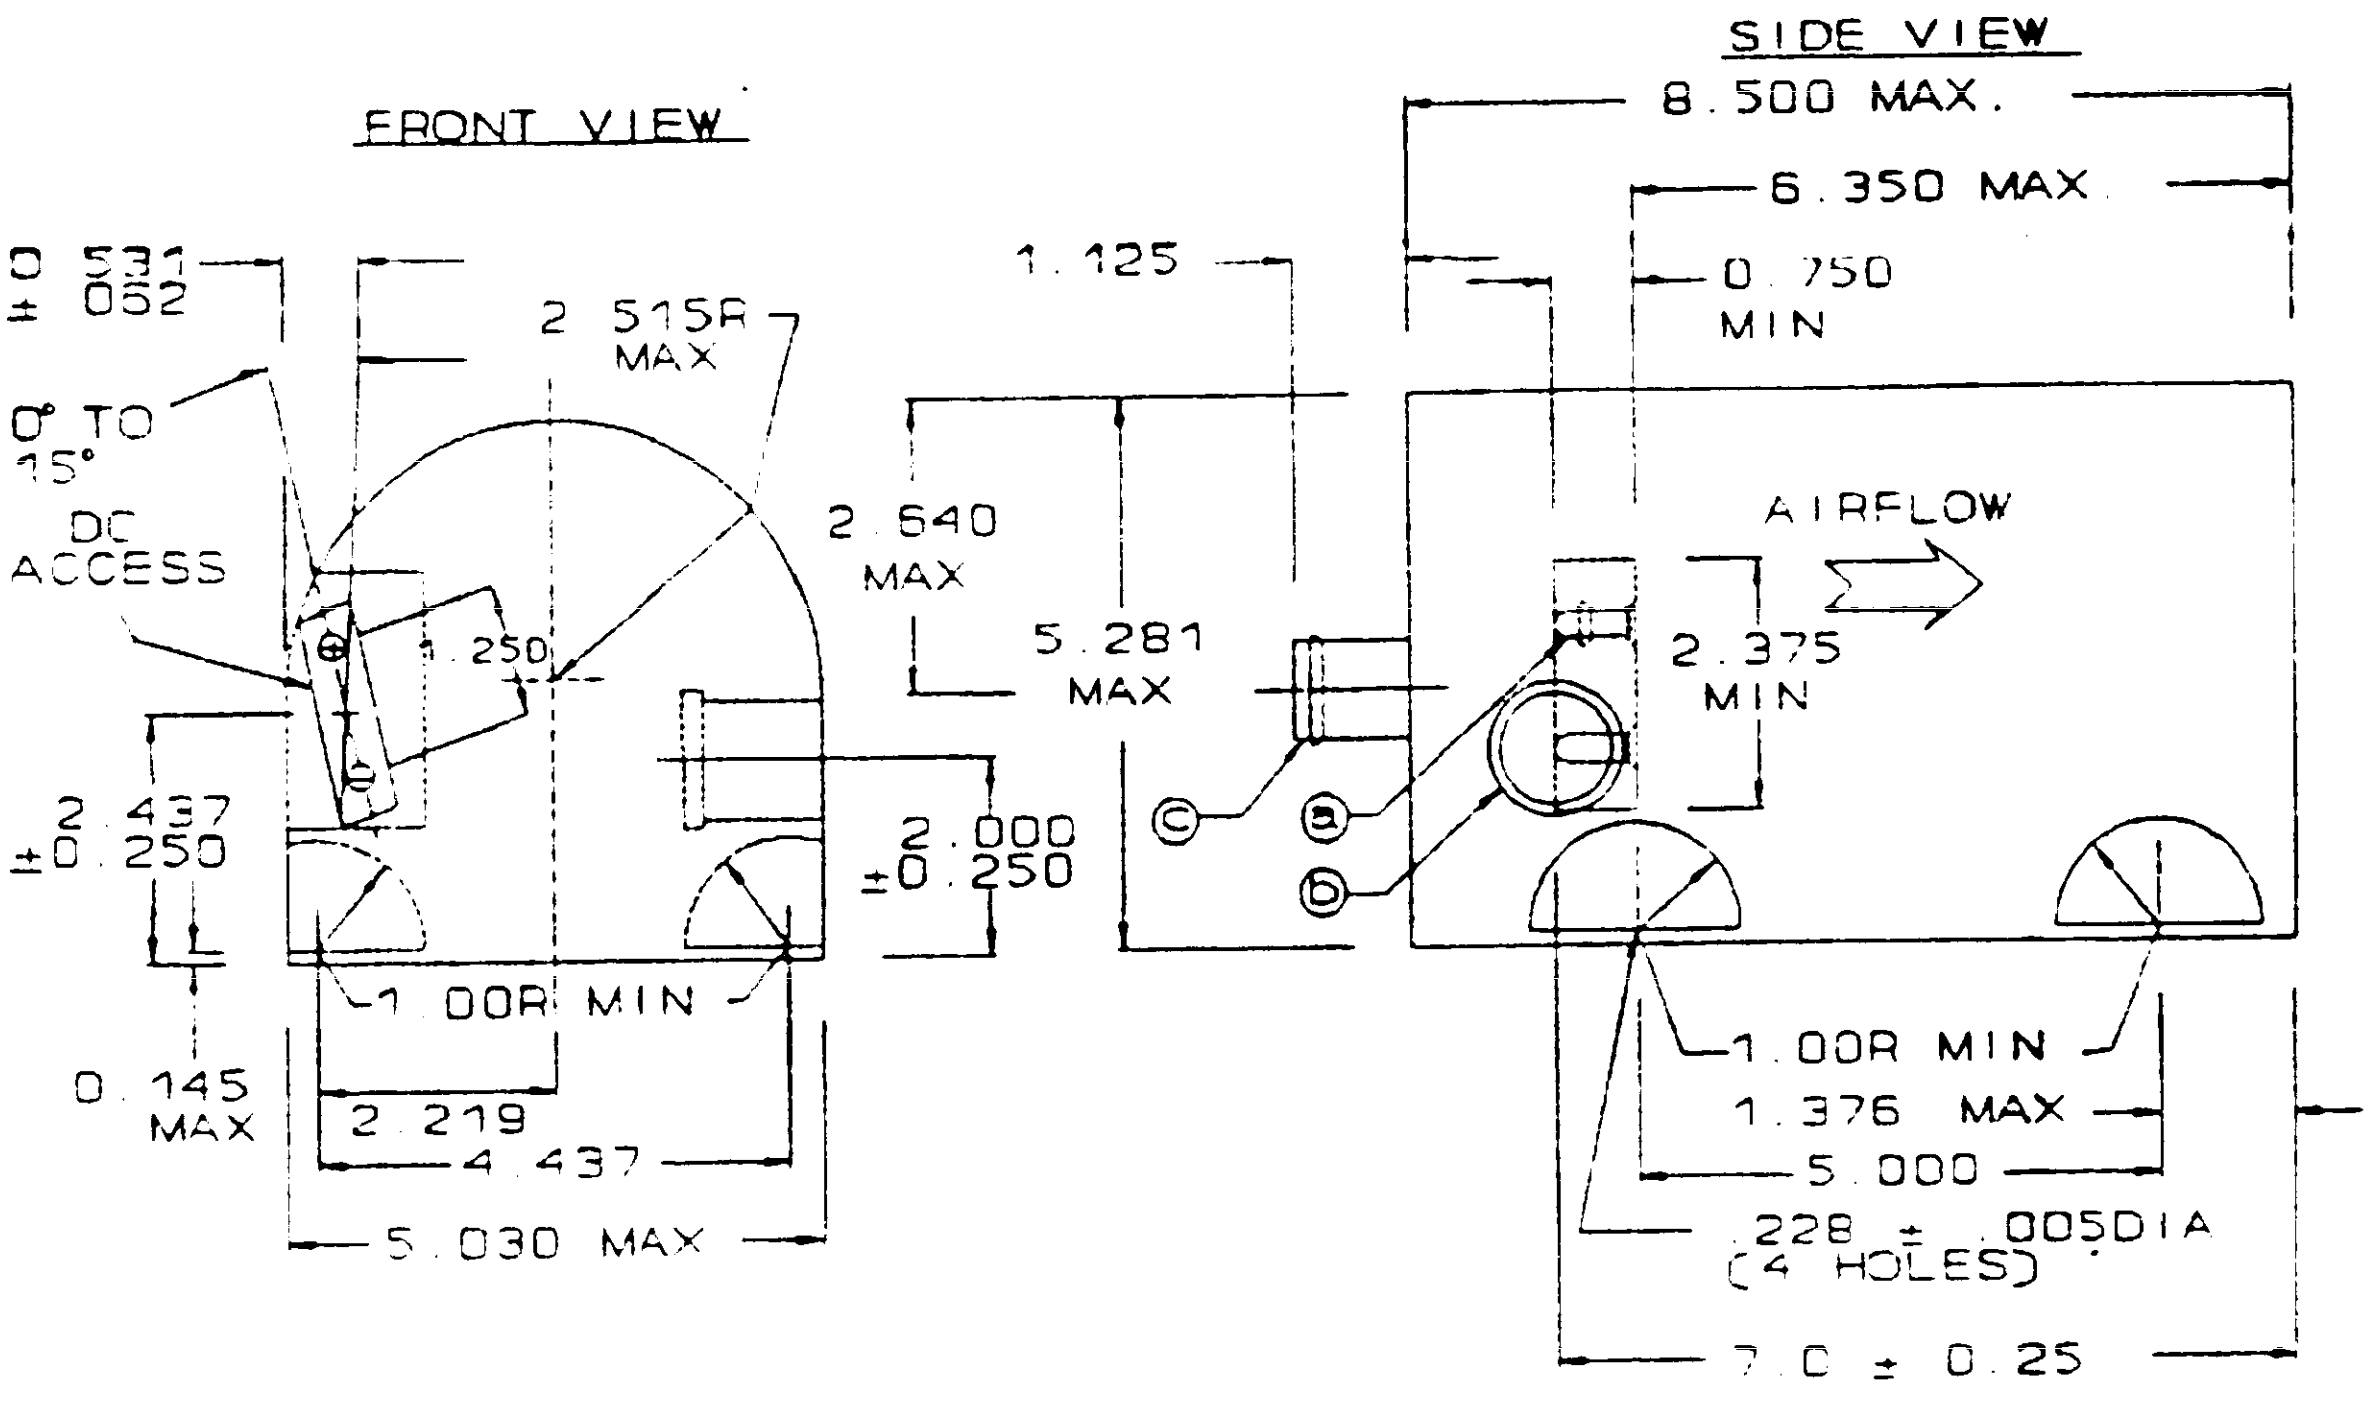

FRONT VIEW
SIDE VIEW
0.531 ±0.052
0° TO 15°
DC ACCESS
2.515R MAX
1.250
2.437 ±0.250
0.145 MAX
1.00R MIN
2.219
4.437
5.030 MAX
1.125
2.640 MAX
5.281 MAX
2.000 ±0.250
ⓒ
ⓐ
ⓑ
8.500 MAX.
6.350 MAX
0.750 MIN
AIRFLOW
2.375 MIN
1.00R MIN
1.376 MAX
5.000
.228 ± .005DIA (4 HOLES)
7.0 ± 0.25

ⓐ 1/4 - 28 UNF-3A TERMINAL STUDS - 9/16 INCH (MIN.) TO SHOULDER (2 REQ'D).

ⓑ RECEPTACLE TO FIT PLUG MS3106R-18-4S OR MS3459W-18-4S.

ⓒ TUBING END MS33660-16.

MS PART NO.
MS3370-1

APPROVED 20 NOVEMBER 1962 REVISED Ⓐ 23 NOVEMBER 1970 Ⓑ 18 November 1991

USER ACTIVITIES

REVIEWER ACTIVITIES

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. NAVY-AS Other Cust ARMY AIR FORCE	INTERNATIONAL INTEREST	TITLE CONVERTER, 100 AMPERE CLASS C, NONREGULATED AIRCRAFT, BLAST COOLED	MILITARY STANDARD MS3370
Procurement Specifications MIL-C-7115	SUPERSEDES:		SHEET 1 OF 5

DD FORM 1 MAY 73 672 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE Project No. 6130-034

FED. SUP CLASS
6130

AC INPUT:

Voltage Range	112.5-117.5 Volts
Frequency Range	380-420 Hertz

DC OUTPUT:

Voltage	See Figure 3
Maximum Load Current	100 Amperes
Minimum Load Current	1.0 Amperes
Weight (lbs)	9.0 (Max)

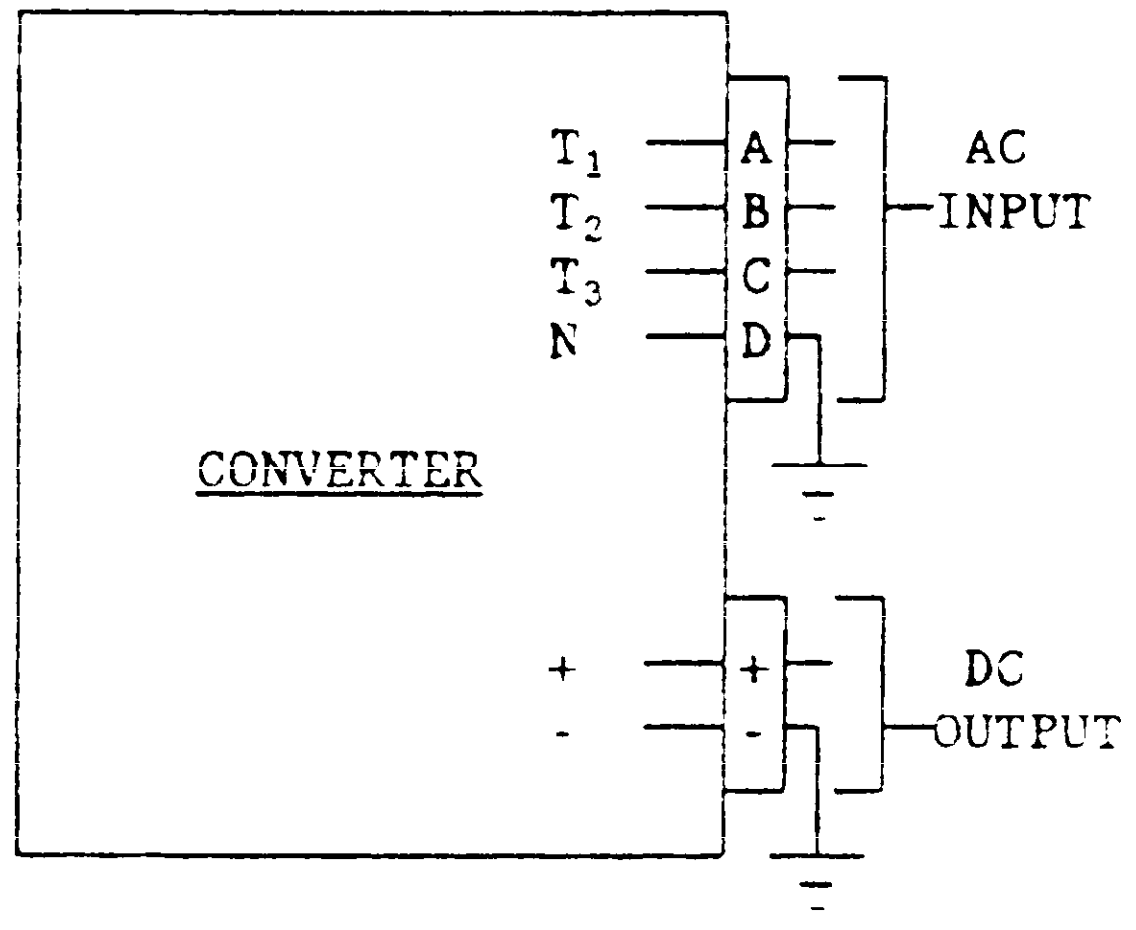

Figure 1. CONNECTION DIAGRAM

APPROVED 20 NOVEMBER 1962 REVISED 23 NOVEMBER 1970 (B) 18 November 1991

USER ACTIVITIES

REVIEWER ACTIVITIES

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

P.A. NAVY-AS Other Cust ARMY AIR FORCE	INTERNATIONAL INTEREST	TITLE CONVERTER, 100 AMPERE CLASS C, NONREGULATED AIRCRAFT, BLAST COOLED	MILITARY STANDARD MS3370
Procurement Specifications MIL-C-7115	SUPERSEDES:		SHEET 2 OF 5

FED. SUP CLASS
6130

REQUIREMENTS:

The converter shall meet the requirements of MIL-C-7115 as modified below: (paragraph numbers refer to MIL-C-7115).

3.4.1.3.3 Color. Delete "color number 17875 (white)" of first sentence and add "color number 37038 (black)."

3.6.2.6 Cooling. The unit shall be cooled by blast air entering the unit at the terminal end and having the following characteristics:

(a) Cooling air temperature may vary between -54°C to 49°C during ground operation and then vary linearly from 27°C at sea level to 0°C at 65,000 feet during flight operation.

(b) Amount of cooling air shall not exceed that shown in figure 2 of this Military Standard.

(c) The converter shall be able to operate continuously at +45°C at sea level with no cooling air and 35 percent rated load.

Loss of Cooling Air. The unit shall not be damaged at the loss of cooling air for a period of 2 minutes while delivering full rated load.

3.7.1.2.3 Output starting voltage. Add to second sentence: "except for the first 5 milliseconds from the onset of the transient, when a maximum voltage of 45 volts shall be allowed."

3.7.1.4.2 Type II, nonregulated converters. Add: "except the conducted emission requirements of CE03, MIL-STD-461 shall be relaxed 15 db and 25 db respectively, for the output positive and negative leads from 150 KHz to 1.0 MHz."

3.7.1.5 Acoustical Noise. Not applicable.

3.7.1.6 Pressure drop (blast cooled converters only). Add:

(a) Pressure drop in the unit shall not exceed 2.0 inches of water at a flow rate of 1.0 pound per minute under normal sea level conditions.

(b) Relative humidity of the cooling air may vary between 0 and 100 percent and each pound of air may contain up to 38 grains of water.

3.7.2.2 Acceleration. Not applicable.

3.7.2.9 Explosive atmosphere. Not applicable.

4.7.2.2.2 Voltage Regulation at maximum temperature-altitude conditions. Add: "Maximum ambient temperature is +71°C."

APPROVED 20 NOVEMBER 1962 REVISED Ⓐ 23 NOVEMBER 1970 Ⓑ 18 November 1991

USER ACTIVITIES

REVIEWER ACTIVITIES

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

P.A. NAVY-AS Other Cust ARMY AIR FORCE	INTERNATIONAL INTEREST	TITLE CONVERTER, 100 AMPERE CLASS C, NONREGULATED AIRCRAFT, BLAST COOLED	MILITARY STANDARD MS3370
Procurement Specifications MIL-C-7115	SUPERSEDES:		SHEET 3 OF 5

DD FORM 1 MAY 73 672 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

FED. SUP CLASS
6130

4.7.2.2.3 Voltage regulation at minimum temperature-altitude conditions. Delete "-30°C" and replace with "-55°C".

4.7.2.15 Acoustical Noise. Not applicable.

4.7.2.18 Acceleration. Not applicable.

4.7.2.25 Explosive atmosphere. Not applicable.

NOTES:

1. Dimensions are in inches. Tolerance is ± 0.015 unless otherwise specified.

2. The complete requirements for procuring the converter described herein shall consist of this document and the latest issue of MIL-C-7115.

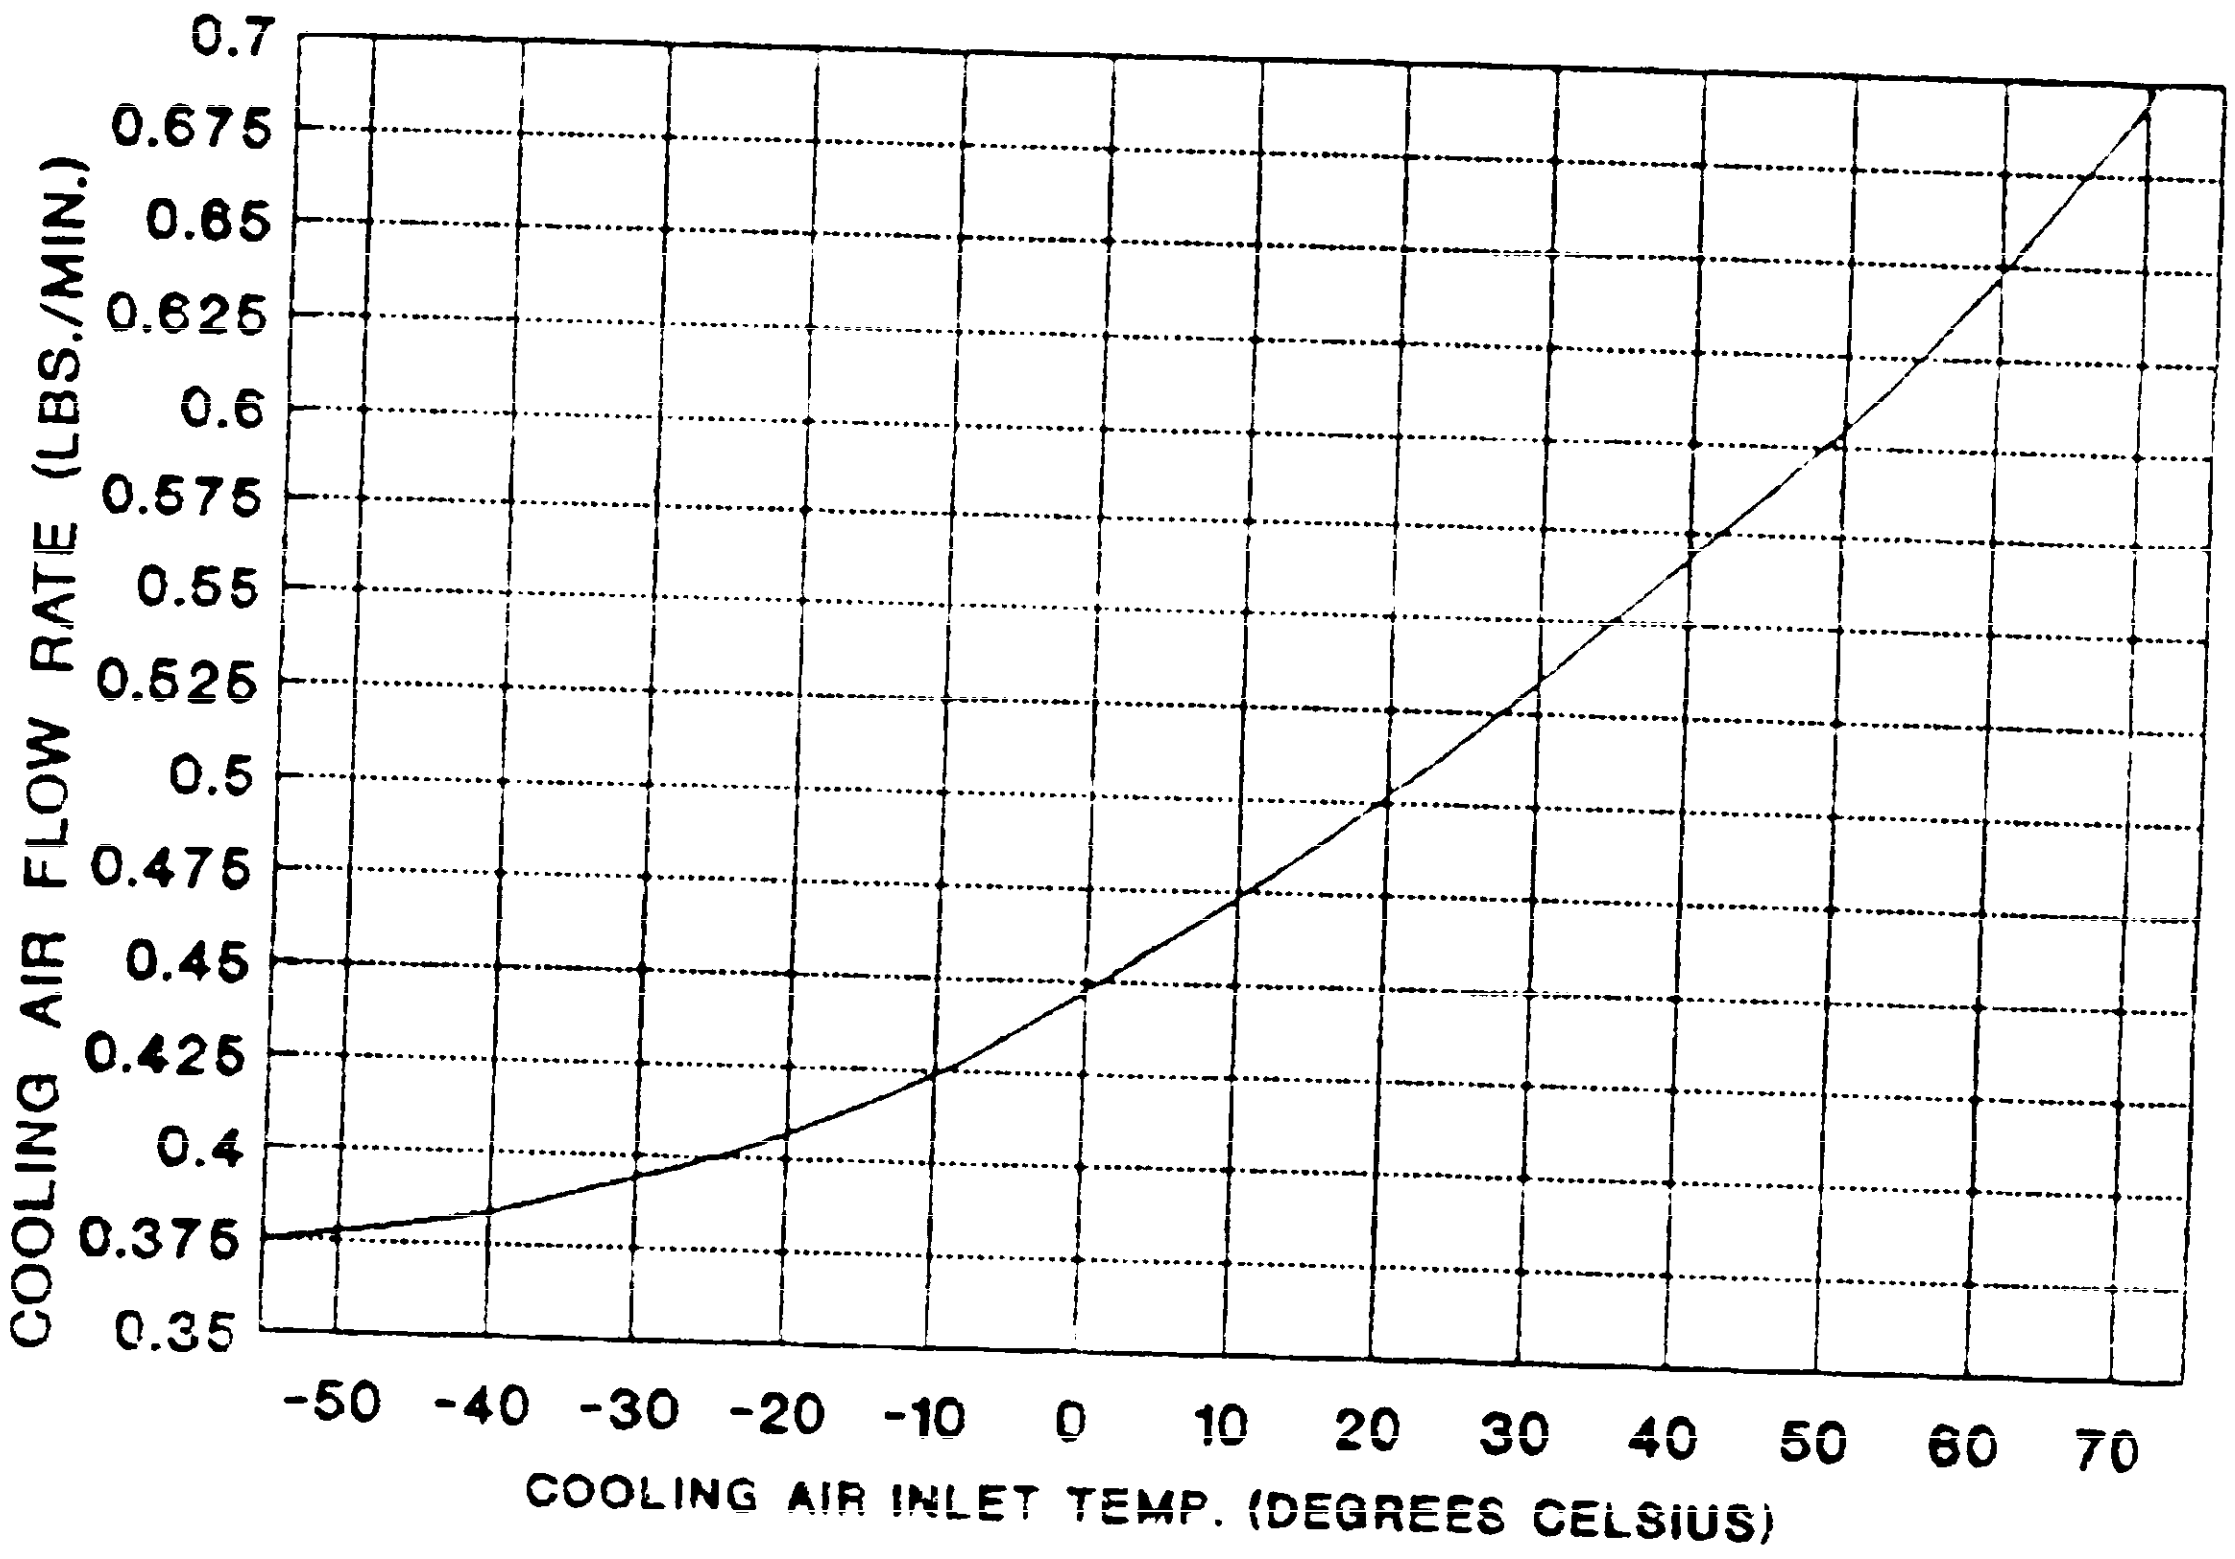

Figure 2. Cooling Air Flow Rate vs Temperature

USER ACTIVITIES

REVIEWER ACTIVITIES

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document

APPROVED 20 NOVEMBER 1962 REVISED Ⓐ 23 NOVEMBER 1970 Ⓑ 18 November 1991

P.A.
NAVY - AS
Other Cust
ARMY
AIR FORCE

INTERNATIONAL INTEREST

TITLE
CONVERTER, 100 AMPERE
CLASS C, NONREGULATED
AIRCRAFT, BLAST COOLED

MILITARY STANDARD
MS3370

Procurement Specifications
MIL-C-7115

SUPERSEDES:

SHEET 4 OF 5

DD FORM 1 MAY 73 672 (COORDINATED) PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE

FED. SUP CLASS
6130

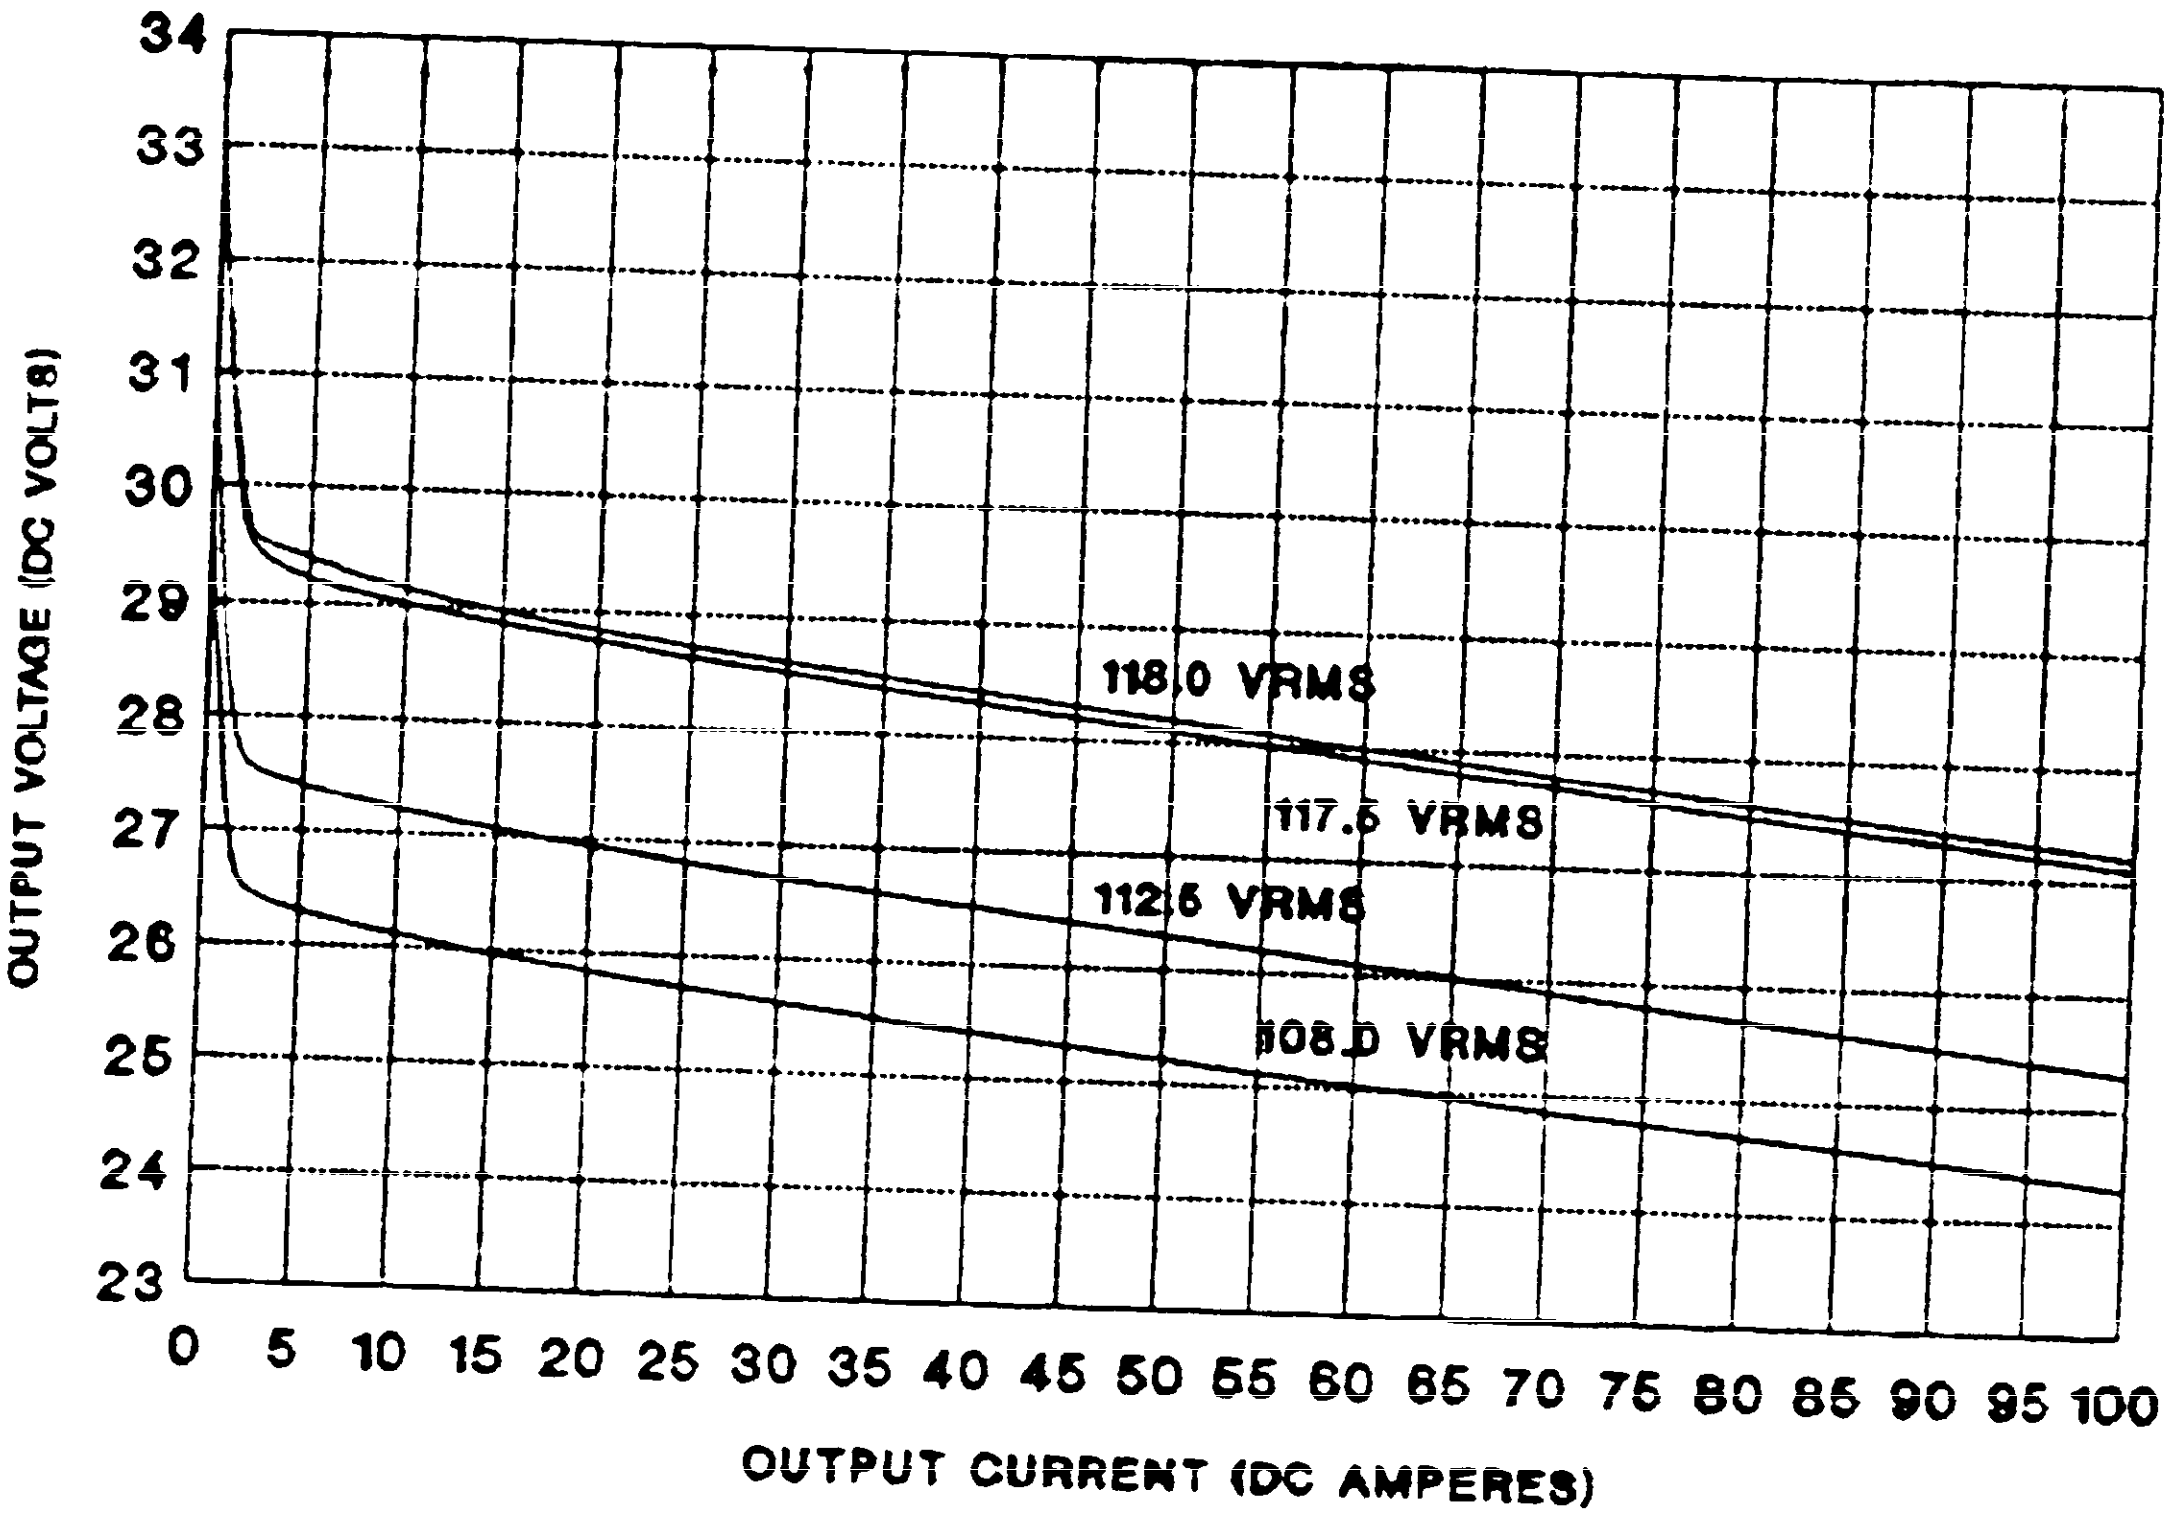

INPUT		108.0 VRMS	112.5 VRMS	117.5 VRMS	118.0 VRMS
OUTPUT	AMPS DC	MIN VDC	MIN VDC	MAX VDC	MAX VDC
	*0.0	29.7	30.9	33.1	33.2
	1.0	27.3	28.4	30.5	30.6
	2.0	26.5	27.6	29.5	29.6
	5.0	26.3	27.4	29.3	29.4
	10.0	26.1	27.2	29.0	29.1
	25.0	25.7	26.8	28.6	28.7
	50.0	25.2	26.3	28.1	28.2
	75.0	24.8	25.8	27.6	27.7
	100.0	24.3	25.3	27.1	27.2

Figure 3. OUTPUT VOLTAGE LIMITS

* ZERO LOAD READINGS FOR INFORMATION ONLY

USER ACTIVITIES

REVIEWER ACTIVITIES

This military standard is approved for use by all Departments and Agencies of the Department of Defense. Selection for all new engineering and design applications and for repetitive use shall be made from this document.

APPROVED 20 NOVEMBER 1962 REVISED Ⓐ 23 NOVEMBER 1970 Ⓑ 18 November 1991

P.A. NAVY - AS Other Cust ARMY AIR FORCE	INTERNATIONAL INTEREST	TITLE CONVERTER, 100 AMPERE CLASS C, NONREGULATED AIRCRAFT, BLAST COOLED	MILITARY STANDARD MS3370
Procurement Specifications MIL-C-7115	SUPERSEDES:		SHEET 5 OF 5

DD FORM 1 MAY 73 672 (COORDINATED)

PREVIOUS EDITIONS OF THIS FORM ARE OBSOLETE