INCH-POUND

MS9381A
15 February 2017
SUPERSEDING
MS9381 (ASG)
03 October 1966


DETAIL SPECIFICATION SHEET

COUPLING, TUBE - BRAZING, SAE AMS5646


Inactive for new design after 14 August 1996.

This specification sheet is approved for use by all Departments and Agencies of the Department of Defense.

The requirements for acquiring the product described herein shall consist of this specification sheet.

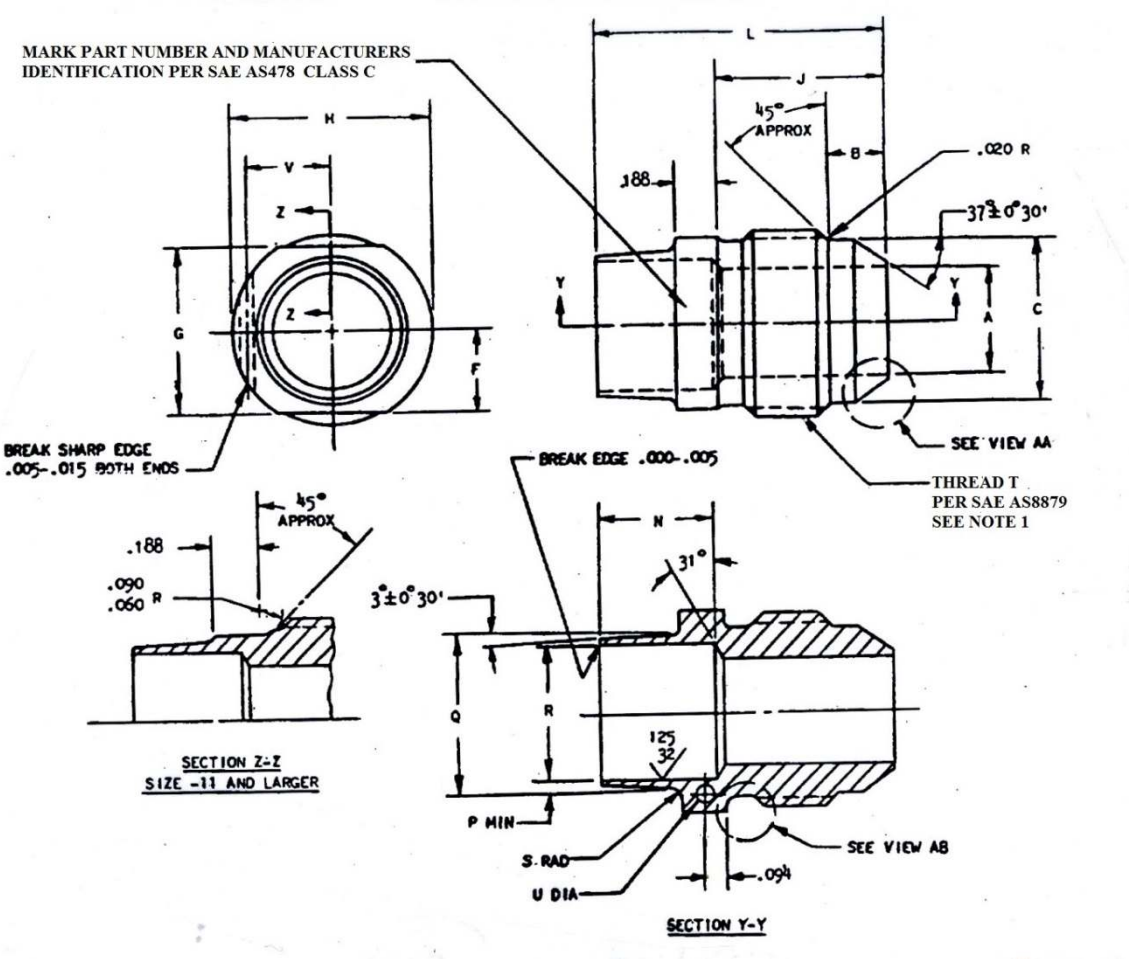

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:16Z
Check the source to verify that this is the current version before use.

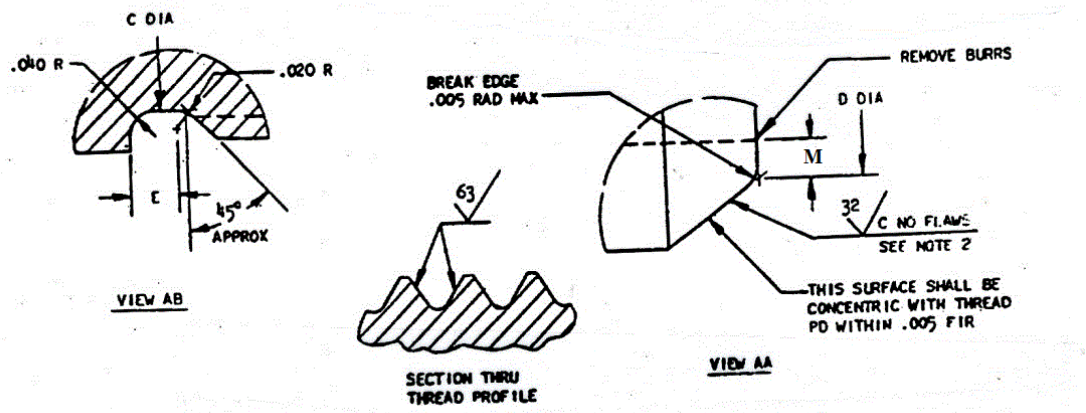

Requirements:

1. Threads on sizes -16 and smaller shall be rolled in accordance with SAE AS7472.
* 2. Conical surface shall be free of nicks, chatter marks or low spots when viewed with the unaided eye.
3. All diameters shall be concentric within .010 FIR unless otherwise specified.
4. Dimensions are to sharp corners, unless otherwise specified.
5. Material: corrosion resistant steel, SAE AMS5646 forging.
* 6. Parts shall be degreased and then passivated in accordance with SAE AMS2700, Method 1, Type 6.
7. Surface roughness: SAE AS291. Unless otherwise specified, surfaces to be 125 microinches.
8. Break sharp edges .003-.015, unless otherwise specified.
9. Dimensions in inches. Unless otherwise specified, tolerances: linear dimensions ±0.010, angular dimensions ±5°.
10. Do not use unassigned part numbers.

Changes from previous issue. The margins of this specification sheet are marked with asterisks to indicate where changes from the previous issue were made. This was done as a convenience only and the Government assumes no liability whatsoever for any inaccuracies in these notations. Bidders and contractors are cautioned to evaluate the requirements of this document based on the entire content irrespective of the marginal notations and relationship to the previous issue.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:16Z
Check the source to verify that this is the current version before use.

Part No.	Nom Tube OD	Thread T					A	B +.015 -.000	C Dia +.000 -.010	D Dia ±.003	E +.015 -.000	F	G ±.005
		Size	Major Dia	Pitch Dia	Minor Dia	Root Rad							
MS9381-02	.125	.3125-24UNJF-3A	.3053-.3125	.2827-.2854	.2591-.2644	.0063-.0075	.058-.065	.144	.245	.132	.063	.125	.250
MS9381-03	.188	.375-24UNJF-3A	.3678-.3750	.3450-.3479	.3214-3268	.0063-.0075	.121-.128	.144	.307	.195	.063	.156	.312
MS9381-04	.250	.4375-20UNJF-3A	.4294-.4375	.4019-.4050	.3736-.3797	.0075-.0090	.168-.175	.160	.359	.242	.075	.188	.375
MS9381-05	.312	.500-20UNJF-3A	.4919-.5000	.4643-.4765	.4360-.4422	.0075-.0090	.230-.237	.160	.421	.304	.075	.219	.438
MS9381-06	.375	.5625-18UNJF-3A	.5538-.5625	.5230-.5264	.4916-.4983	.0083-.0100	.293-.301	.165	.476	.368	.083	.250	.500
MS9381-07	.438	.625-18UNJF-3A	.6163-.6250	.5854-.5889	.5540-.5608	.0083-.0100	.355-.363	.165	.539	.430	.083	.281	.562
MS9381-08	.500	.750-16UNJF-3A	.7406-.7500	.7056-.7094	.6702-.6778	.0094-.0113	.387-.395	.229	.654	.462	.094	.344	.688
MS9381-09	.562	.8125-16UNJ-3A	.8031-.8125	.7683-.7719	.7329-.7403	.0094-.0113	.434-.442	.229	.716	.509	.094	.375	.750
MS9381-10	.625	.875-14UNJF-3A	.8647-.8750	.8245-.8286	.7841-.7925	.0107-.0129	.480-.488	.255	.767	.555	.107	.391	.781
MS9381-11	.688	1.000-12UNJF-3A	.9886-1.0000	.9415-.9459	.8944-.9038	.0125-.0150	.542-.552	.304	.875	.619	.125	.438	.875
MS9381-12	.750	1.0625-12UNJ-3A	1.0511-1.0625	1.0042-1.0084	.9570-.9663	.0125-.0150	.604-.614	.304	.938	.681	.125	.469	.938
MS9381-14	.875	1.1875-12UNJ-3A	1.1761-1.1875	1.1291-1.1334	1.0820-1.0913	.0125-.0150	.729-.739	.304	1.062	.806	.125	.531	1.062
MS9381-16	1.000	1.3125-12UNJ-3A	1.3011-1.3125	1.2541-1.2584	1.2070-1.2163	.0125-.0150	.839-.851	.312	1.188	.918	.125	.594	1.188
MS9381-18	1.125	1.500-12UNJF-3A	1.4886-1.5000	1.4411-1.4459	1.3940-1.4038	.0125-.0150	.948-.960	.312	1.375	1.027	.125	.656	1.312
MS9381-20	1.250	1.625-12UNJ-3A	1.6136-1.6250	1.5665-1.5709	1.5193-1.5288	.0125-.0150	1.073-1.086	.363	1.501	1.153	.125	.719	1.438
MS9381-24	1.500	1.875-12UNJ-3A	1.8636-1.8750	1.8164-1.8209	1.7692-1.7788	.0125-.0150	1.307-1.320	.374	1.750	1.387	.125	.844	1.688
MS9381-28	1.750	2.250-12UNJ-3A	2.2386-2.2500	2.1914-2.1959	2.1442-2.1538	.0125-.0150	1.542-1.557	.447	2.125	1.652	.125	1.000	2.000
MS9381-32	2.000	2.500-12UNJ-3A	2.4886-2.5000	2.4413-2.4459	2.3941-2.4038	.0125-.0150	1.776-1.791	.457	2.375	1.886	.125	1.125	2.250
MS9381-40	2.500	3.000-12UNJ-3A	2.9886-3.0000	2.9412-2.9459	2.8940-2.9038	.0125-.0150	2.276-2.291	.391	2.882	2.386	.125	1.375	2.750
MS9381-48	3.000	3.500-12UNJ-3A	3.4886-3.5000	3.4411-3.4459	3.3940-3.4038	.0125-.0150	2.776-2.791	.391	3.382	2.886	.125	1.625	3.250

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:16Z
Check the source to verify that this is the current version before use.

Part No.	H Dia +.010 -.000	J	L	M Min	N	P Min	Q Dia +.010 -.000	R Dia +.002 -.000	S	U	V	Approx Weight Lb/100
MS9381-02	.344	.415	.841	.030	.346	.022	.170	.115	.031-.062	.045-.050	.102-.112	1.17
MS9381-03	.438	.446	.884	.030	.358	.023	.234	.178	.031-.062	.057-.062	.139-.149	1.50
MS9381-04	.500	.517	.973	.030	.376	.026	.303	.240	.047-078	.057-.062	.170-.180	2.05
MS9381-05	.593	.517	.973	.030	.376	.029	.370	.302	.047-078	.065-.075	.207-.217	2.64
MS9381-06	.656	.523	.979	.030	.376	.029	.433	.365	.047-078	.065-.075	.238-.258	3.12
MS9381-07	.719	.523	1.006	.030	.403	.033	.504	.428	.047-078	.065-.075	.270-.290	3.98
MS9381-08	.781	.633	1.145	.030	.432	.034	.568	.489	.047-078	.065-.075	.300-.320	5.82
MS9381-09	.844	.633	1.164	.030	.451	.038	.637	.551	.047-078	.065-.075	.331-.351	6.66
MS9381-10	.904	.747	1.306	.030	.479	.039	.703	.614	.047-078	.065-.075	.362-.382	8.41
MS9381-11	1.000	.853	1.443	.030	.510	.041	.769	.677	.047-078	.065-.075	.410-.430	11.80
MS9381-12	1.094	.853	1.443	.030	.510	.041	.831	.739	.047-078	.065-.075	.440-.460	13.13
MS9381-14	1.188	.898	1.488	.030	.510	.041	.956	.864	.047-078	.065-.075	.503-.523	15.96
MS9381-16	1.312	.908	1.498	.030	.510	.046	1.091	.989	.078-.109	.065-.075	.565-.585	18.27
MS9381-18	1.500	.954	1.544	.030	.510	.046	1.216	1.114	.078-.109	.065-.075	.644-.664	22.33
MS9381-20	1.625	.954	1.544	.030	.510	.051	1.351	1.239	.078-.109	.065-.075	.706-.726	27.38
MS9381-24	1.875	1.079	1.669	.030	.510	.061	1.616	1.484	.078-.109	.065-.075	.830-.850	38.13
MS9381-28	2.250	1.204	1.794	.044	.510	.071	1.886	1.734	.078-.109	.065-.075	.986-1.006	61.64
MS9381-32	2.500	1.329	1.919	.044	.510	.086	2.166	1.984	.078-.109	.065-.075	1.111-1.131	79.24
MS9381-40	3.000	1.105	1.695	.044	.510	.086	2.666	2.484	.094-.125	.065-.075	1.361-1.381	82.11
MS9381-48	3.500	1.183	1.773	.044	.510	.091	3.176	2.984	.094-.125	.065-.075	1.611-1.631	105.85

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:16Z
Check the source to verify that this is the current version before use.

CONCLUDING MATERIAL

Custodians:
Navy - AS
Air Force - 11

Review activity:
DLA-CC

Preparing activity:
Navy - AS

(Project 4730-2017-028)

NOTE: The activities listed above were interested in this document as of the date of this document. Since organizations and responsibilities can change, you should verify the currency of the information above using the ASSIST Online database at https://assist.dla.mil.

Source: https://assist.dla.mil -- Downloaded: 2026-10-23T13:16Z
Check the source to verify that this is the current version before use.