
MILITARY SPECIFICATION SHEET

DELAY LINE, PULSE, ELECTROMAGNETIC, FIXED

STYLE PA

The complete requirements for procuring the delay line described herein shall consist of this document and the latest issue of Specification MIL-D-23859.

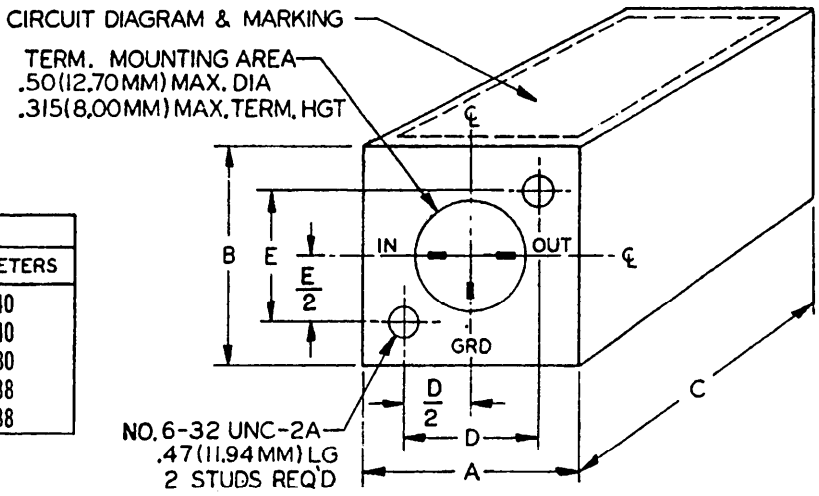

DIMENSIONS		
LTR	INCHES	MILLIMETERS
A	1.00	25.40
B	1.00	25.40
C	2.00	50.80
D	.625	15.88
E	.625	15.88

NOTES:
1. Dimensions are in inches.
2. Metric equivalents (to the nearest .01 mm) are given for general information only and are based upon 1 inch = 25.4 mm.
3. Unless otherwise specified, tolerances are .xx±.03 (.76 mm) and .xxx±.015 (.38 mm).

FIGURE 1. Case and mounting dimensions.

Type designation, terminating impedance, delay time, attenuation and rise time.

Part number	Type designation	Nominal terminating impedance (ohms)	Delay (usec)	Attenuation (db max)	Max rise time (usec)
M23859/01-001	DL101PA2506C	100	0.25	1.0	.045
M23859/01-002	DL201PA2506C	200	0.25	1.0	.045
M23859/01-003	DL501PA2506C	500	0.25	1.0	.045
M23859/01-004	DL102PA2506C	1,000	0.25	1.0	.045
M23859/01-005	DL101PA5006C	100	0.50	1.0	.089
M23859/01-006	DL201PA5006C	200	0.50	1.0	.089
M23859/01-007	DL501PA5006C	500	0.50	1.0	.089
M23859/01-008	DL102PA5006C	1,000	0.50	1.0	.089
M23859/01-009	DL202PA5006C	2,000	0.50	1.0	.089
M23859/01-010	DL201PA1005C	200	1.0	1.0	.178
M23859/01-011	DL501PA1005C	500	1.0	1.0	.178
M23859/01-012	DL102PA1005C	1,000	1.0	1.0	.178
M23859/01-013	DL202PA1005C	2,000	1.0	1.0	.178
M23859/01-014	DL501PA2505C	500	2.5	3.0	.446
M23859/01-015	DL102PA2505C	1,000	2.5	3.0	.446
M23859/01-016	DL202PA2505C	2,000	2.5	3.0	.446
M23859/01-017	DL102PA5005C	1,000	5.0	3.0	.890

FSC 5840

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:06Z
Check the source to verify that this is the current version before use.

ENGINEERING DATA:

Case material: Ferrous type, hot tinned or fuzed electrotinned.

Finish: Grey enamel in accordance with MIL-E-15090, type I, class 2.

Weight: 7 ounces maximum.

Terminals: Three hooked type solder lugs capable of accepting two No. 22 AWG buss leads minimum.

Input pulse:
Peak pulse voltage: 150 volts peak maximum.
Pulse width: Shall be greater than three times the delay line pulse rise time and less than twice the delay.
Pulse rise time: 15 percent to 20 percent of delay line rise time.

Nominal terminating impedance: See table.

Style: PA.

Figure of merit: C.

REQUIREMENTS:

Design and construction: See figure 1.

Enclosure: See figure 1.

Delay time: See table.

Rise time: See table.

Attenuation: See table.

Distortion: ±10 percent at maximum delay.

Dielectric withstanding voltage: Method 301 of MIL-STD-202.

Delay time variation with temperature: ±0.5 percent from -55°C to +95°C.

Insulation resistance: Method 302, test condition A, MIL-STD-202. 1,000 megohms minimum.

Thermal age stability: 3 percent maximum delay change permissible. Rise time, attenuation and distortion shall still meet the requirements of this specification sheet.

Sealing: As specified in 4.7.3.1.

Terminal strength: Method 211 of MIL-STD-202.
Test condition A - Applied force 4-1/2 pounds.
Test condition C - Applied force 5 pounds.

Salt atmosphere: Method 101, test condition B, MIL-STD-202.
Salt solution - 5 percent.
Measurements - Not applicable.

Pressure: Method 105, test condition C, MIL-STD-202. Perform dielectric withstanding voltage test during reduced pressure and at 250 vdc.
Method of mounting - Normal.

Vibration: Method 204, test condition B, MIL-STD-202.
Measurements - Not applicable.

Shock: Method 205, test condition A, MIL-STD-202.

Thermal shock: Method 107, test condition A, MIL-STD-202, except that upper temperature limit is 95°C.
Measurements - Dielectric withstanding voltage and insulation resistance.

Immersion: Method 104, test condition A, MIL-STD-202.
Measurements - Insulation resistance.

Moisture resistance: Method 106 of MIL-STD-202.
Loading voltage - Not applicable.
Polarizing voltage - 100 volts dc.
Measurements - Insulation resistance and dielectric withstanding voltage.

Flammability: Not applicable.

Life: Method 108, test condition D, MIL-STD-202.
Test temperature - 95° ±2°C.
Test voltage - 150 vdc applied.
Measurements - Dielectric withstanding voltage, insulation resistance delay time variation with temperature and thermal age stability.

Source: https://assist.dla.mil -- Downloaded: 20260-19T18:06Z
Check the source to verify that this is the current version before use.

Part number: Consists of the basic number of this specification sheet and a dash number taken from table.

Example: M23859/01-001

Basic document number

Dash number from table.

Custodians:
Army - EL
Navy - SH
Air Force - 80

Review activities:
Army - MU, EL
Navy - SH, AS, OS
Air Force - 80, 17, 85

User activities:
Army - MI
Navy - MC
Air Force -

Preparing activity:
Navy - SH

(Project 5840-0028)

Code "C"

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:06Z
Check the source to verify that this is the current version before use.

Source: https://assist.dla.mil -- Downloaded: 2026-10-19T18:06Z
Check the source to verify that this is the current version before use.